


## Практическая работа №12

### 1. Строим сеть

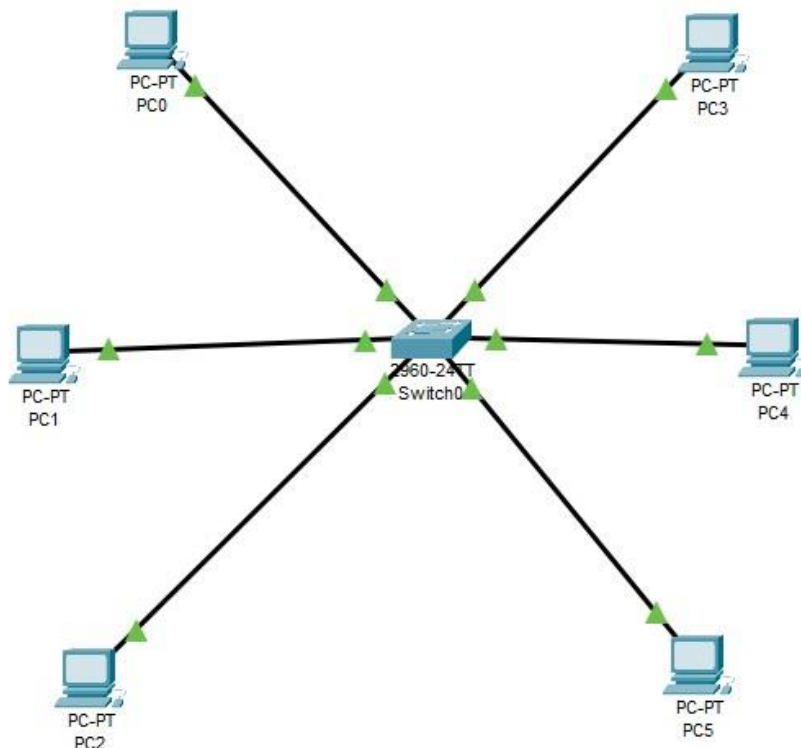

### 2. Пингуем

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 6ms, Average = 1ms


C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
|
```

Пинг проходит успешно с PC3 с ip 192.168.1.1 на 192.168.1.2 но на ip с окончанием 0.2 и 0.3 не получается.

### 3. Настраиваем новую сеть

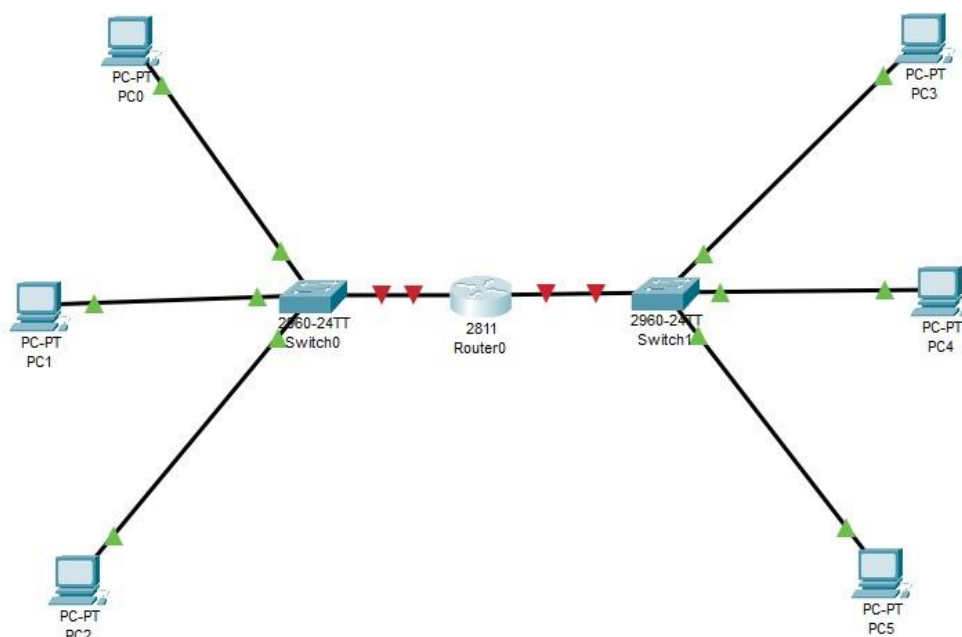

### 4. настраиваем роутер

RIP	MAC Address	00D0.BC5A.1501
<b>SWITCHING</b>		
VLAN Database		
<b>INTERFACE</b>		
FastEthernet0/0		
VLAN Database		
<b>INTERFACE</b>		
FastEthernet0/0		
FastEthernet0/1		
IP Configuration		
IPv4 Address		192.168.0.254
Subnet Mask		255.255.255.0
IP Configuration		
IPv4 Address		192.168.1.254
Subnet Mask		255.255.255.0
Tx Ring Limit		10

### 5. пробуем команду show ip route

```
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set
```

Она позволяет просматривать коды которые могут помочь при работе с роутером

### 6. Настраиваем левую и правую сторону и проверяем командой ping

Gateway/DNS IPv4

☐ DHCP

☒ Static

Default Gateway

DNS Server

Gateway/DNS IPv4

☐ DHCP

☒ Static

Default Gateway

DNS Server

```
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=127
Reply from 192.168.1.1: bytes=32 time<1ms TTL=127
Reply from 192.168.1.1: bytes=32 time<1ms TTL=127
Reply from 192.168.1.1: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```