


1	2	3	4	5	6
A					
B					
C					
D					
1	2	3	4	5	6

01 Descriptions




File: 01 Descriptions.kicad_sch

02 Block Diagram



File: 02 Block Diagram.kicad_sch

03 Main



File: 03 Main.kicad_sch



Seed Studio		
Sheet: /		
File: 1.14 Inch Display for XIAO ESP32-S3 Plus.kicad_sch		
Title: 1.14 Inch Display Powered by XIAO ESP32-S3 Plus		
Size: A4	Date: 2026-04-27	Rev: v1.0
KiCad E.D.A. 10.0.1	Id: 1/4	

CC BY-SA 4.0

REV	Description	DATE	BY
v1.0	First release	2026-04-27	

seeed studio

Seed Studio		
Sheet: /01 Descriptions/		
File: 01 Descriptions.kicad_sch		
Title: 1.14 Inch Display Powered by XIAO ESP32-S3 Plus		
Size: A4	Date: 2026-04-27	Rev: v1.0
KiCad E.D.A. 10.0.1		Id: 2/4

CC BY-SA 4.0

1	2	3	4	5	6
A					A
B					B
C					C
D					D
1	2	3	4	5	6



Seed Studio		
Sheet: /02 Block Diagram/ File: 02 Block Diagram.kicad_sch		
Title: 1.14 Inch Display Powered by XIAO ESP32-S3 Plus		
Size: A4	Date: 2026-04-27	Rev: v1.0
KiCad E.D.A. 10.0.1		Id: 3/4

CC BY-SA 4.0

Battery Input

User Buttons

The diagram shows three independent button inputs. Each input consists of a switch (SW2, SW3, SW4) and a 1K resistor (R3, R4, R6). The switches are TS-10805 (for SW2, SW3) and TS-1084-AR035XX (for SW4). The resistors are 0402. The buttons are connected to TP1, TP2, and TP3 respectively. The switches are connected to GND and the resistors are connected to the microcontroller pins.

 H1
M2.5
 H2
M2.5
 H3
M2.5
 H4
M2.5


TP17 3V3
 TP18 GND
 TP19 D11_I2S_SD
 TP20 D12_I2S_SCK
 TP21 D13_I2S_WS

[illegible]

Pin connection diagram for J2 connector:

Signal	Pin
LEDA	1
GND	2
LCD_RST	3
LCD_DC	4
LCD_MOSI	5
LCD_SCK	6
LCD_CS (3V3)	7
VDD	8
CS	9
MP	10

AFC42-S08FMA-1H

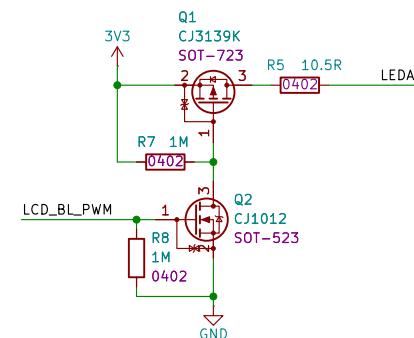

seed studio

Rev: v1.0
Id: 4/4

CC BY-SA 4.0