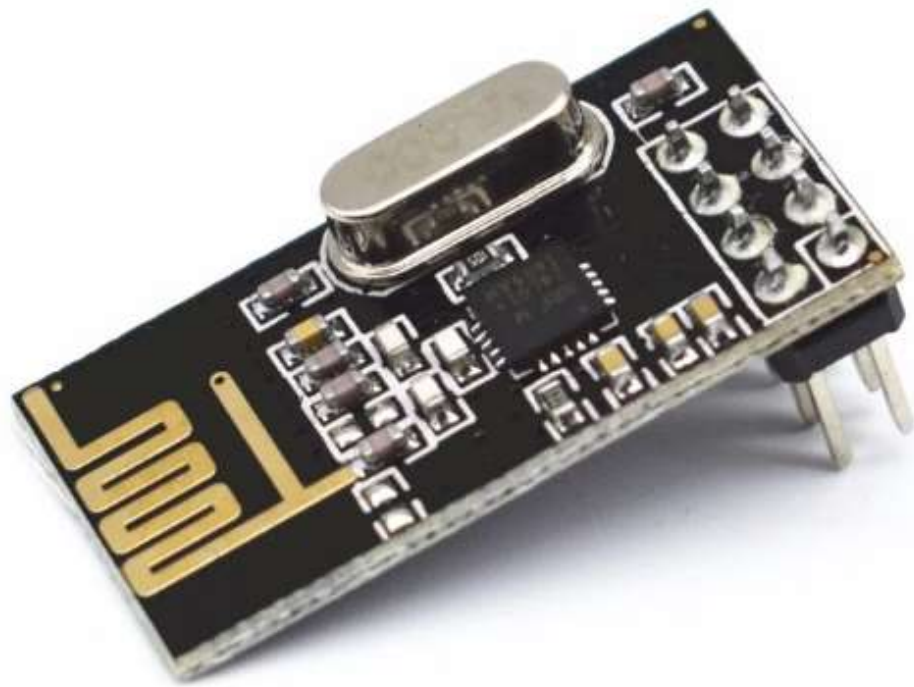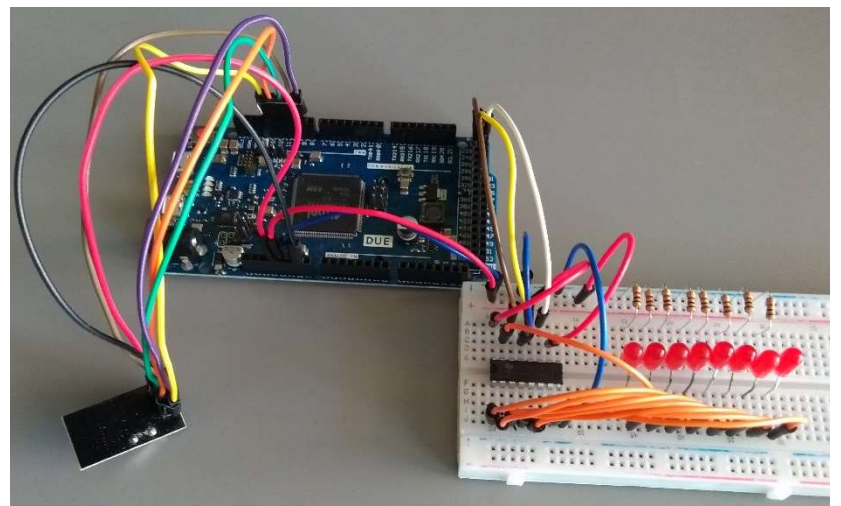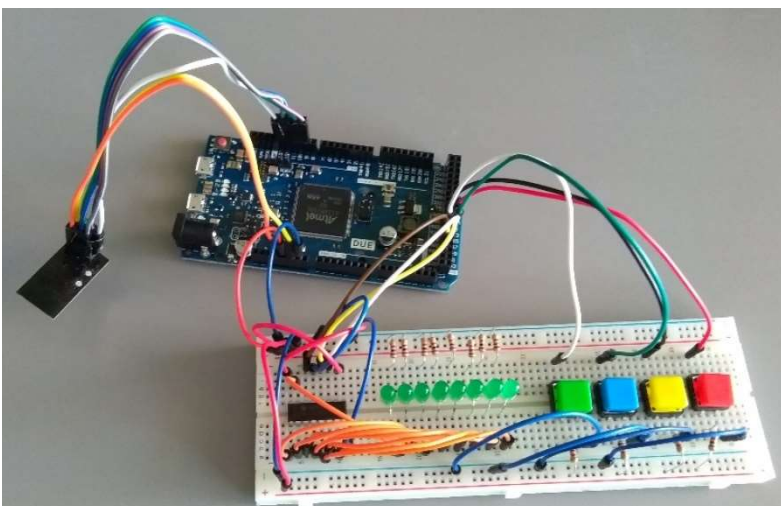# NRF24L01+

Library:
The library for the NRF24L01+ makes it possible to transmit and receive data over a frequency between 2400 Mhz and 2525 Mhz.

Applicatie:
As application I transmit 1 byte that is displayed on the 8 leds (left picture).
On the otherside the NRF24L01+ will receive the byte and display it on the 8 leds that are controlled by a hc595 chip.