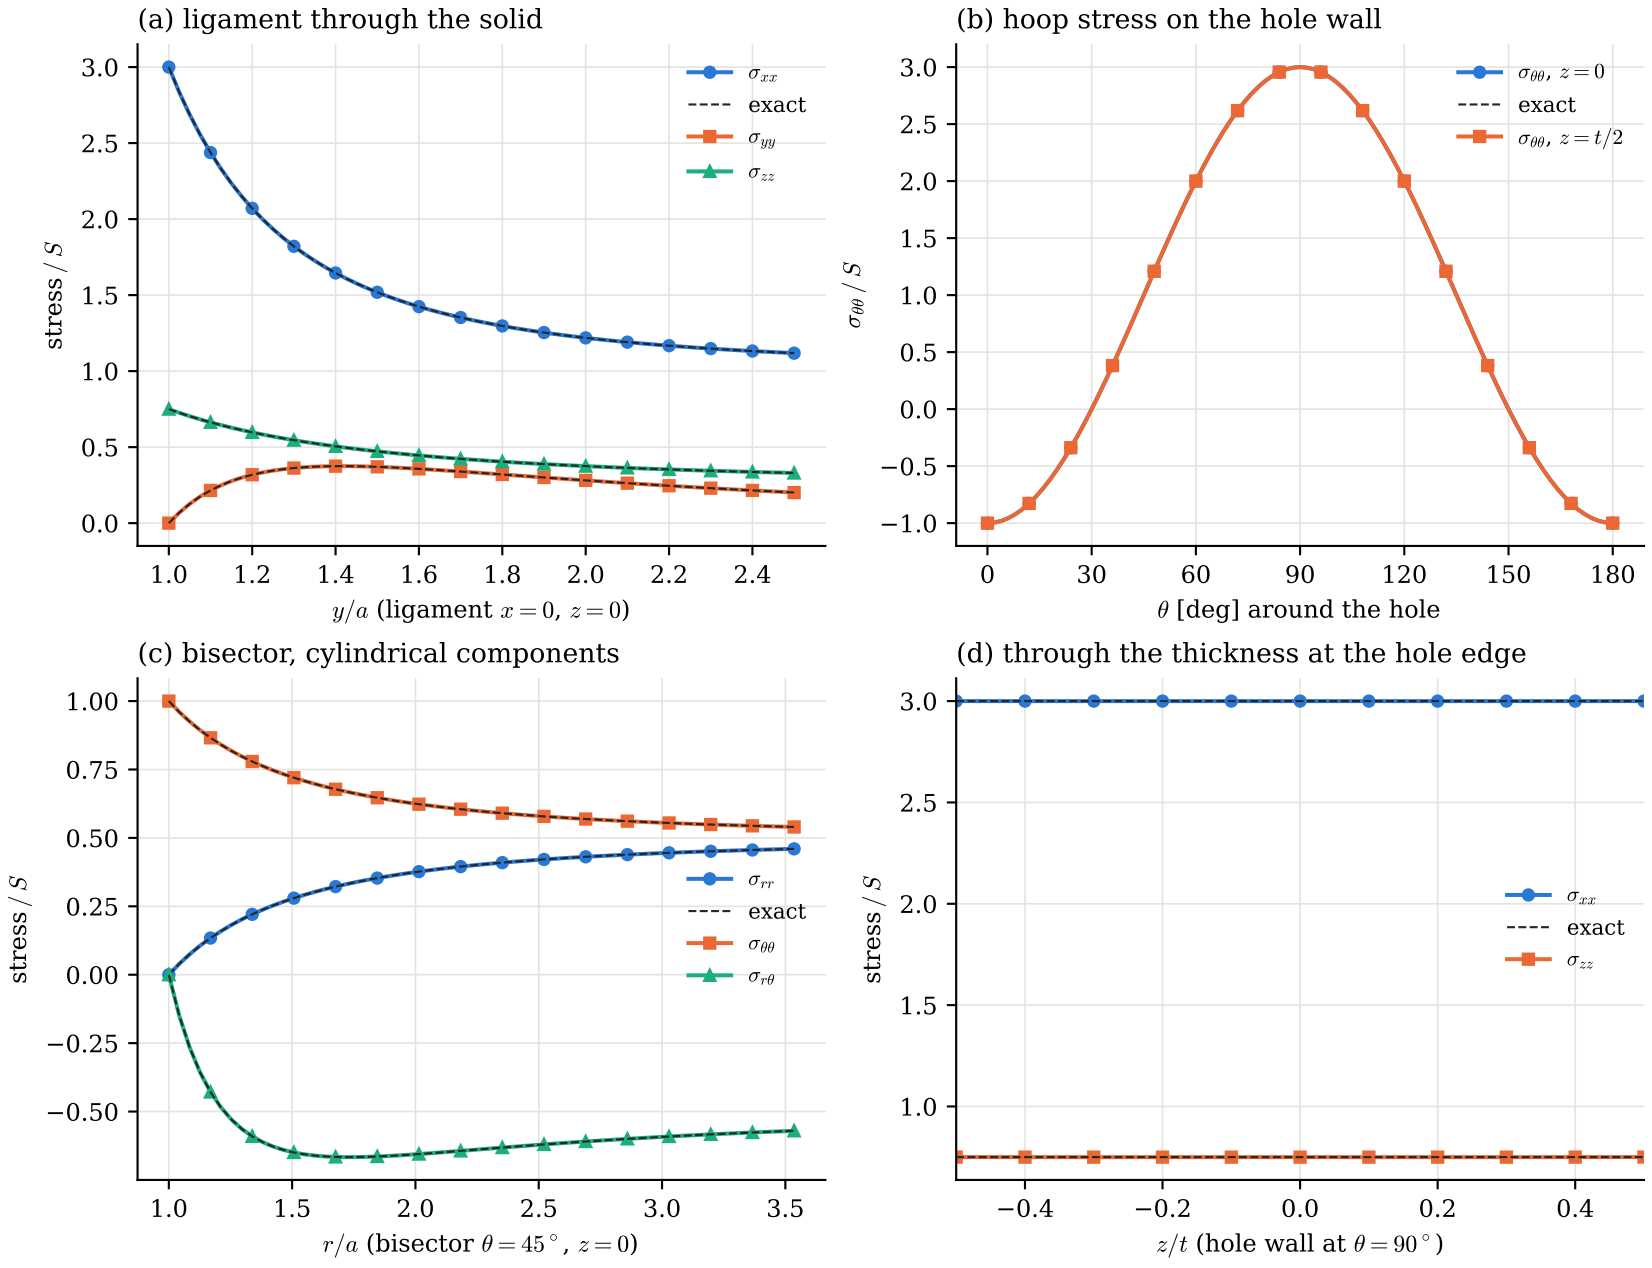
(a) ligament through the solid
stress / S
y/a (ligament x = 0, z = 0)
σxx
exact
σyy
σzz
(b) hoop stress on the hole wall
σθθ / S
θ [deg] around the hole
σθθ, z = 0
exact
σθθ, z = t/2
(c) bisector, cylindrical components
stress / S
r/a (bisector θ = 45°, z = 0)
σrr
exact
σθθ
σrθ
(d) through the thickness at the hole edge
stress / S
z/t (hole wall at θ = 90°)
σxx
exact
σzz