Power

File: power.kicad_sch

MCU

File: mcu.kicad_sch

Sensors

File: sensors.kicad_sch

Video

File: video.kicad_sch

Connectors


File: connectors.kicad_sch

F405-FC

Sheet: /
File: F405FC.kicad_sch

Title: F405-FC flight controller

Size: A4	Date:	**Rev: C**
KiCad E.D.A. 10.0.6		Id: 1/6

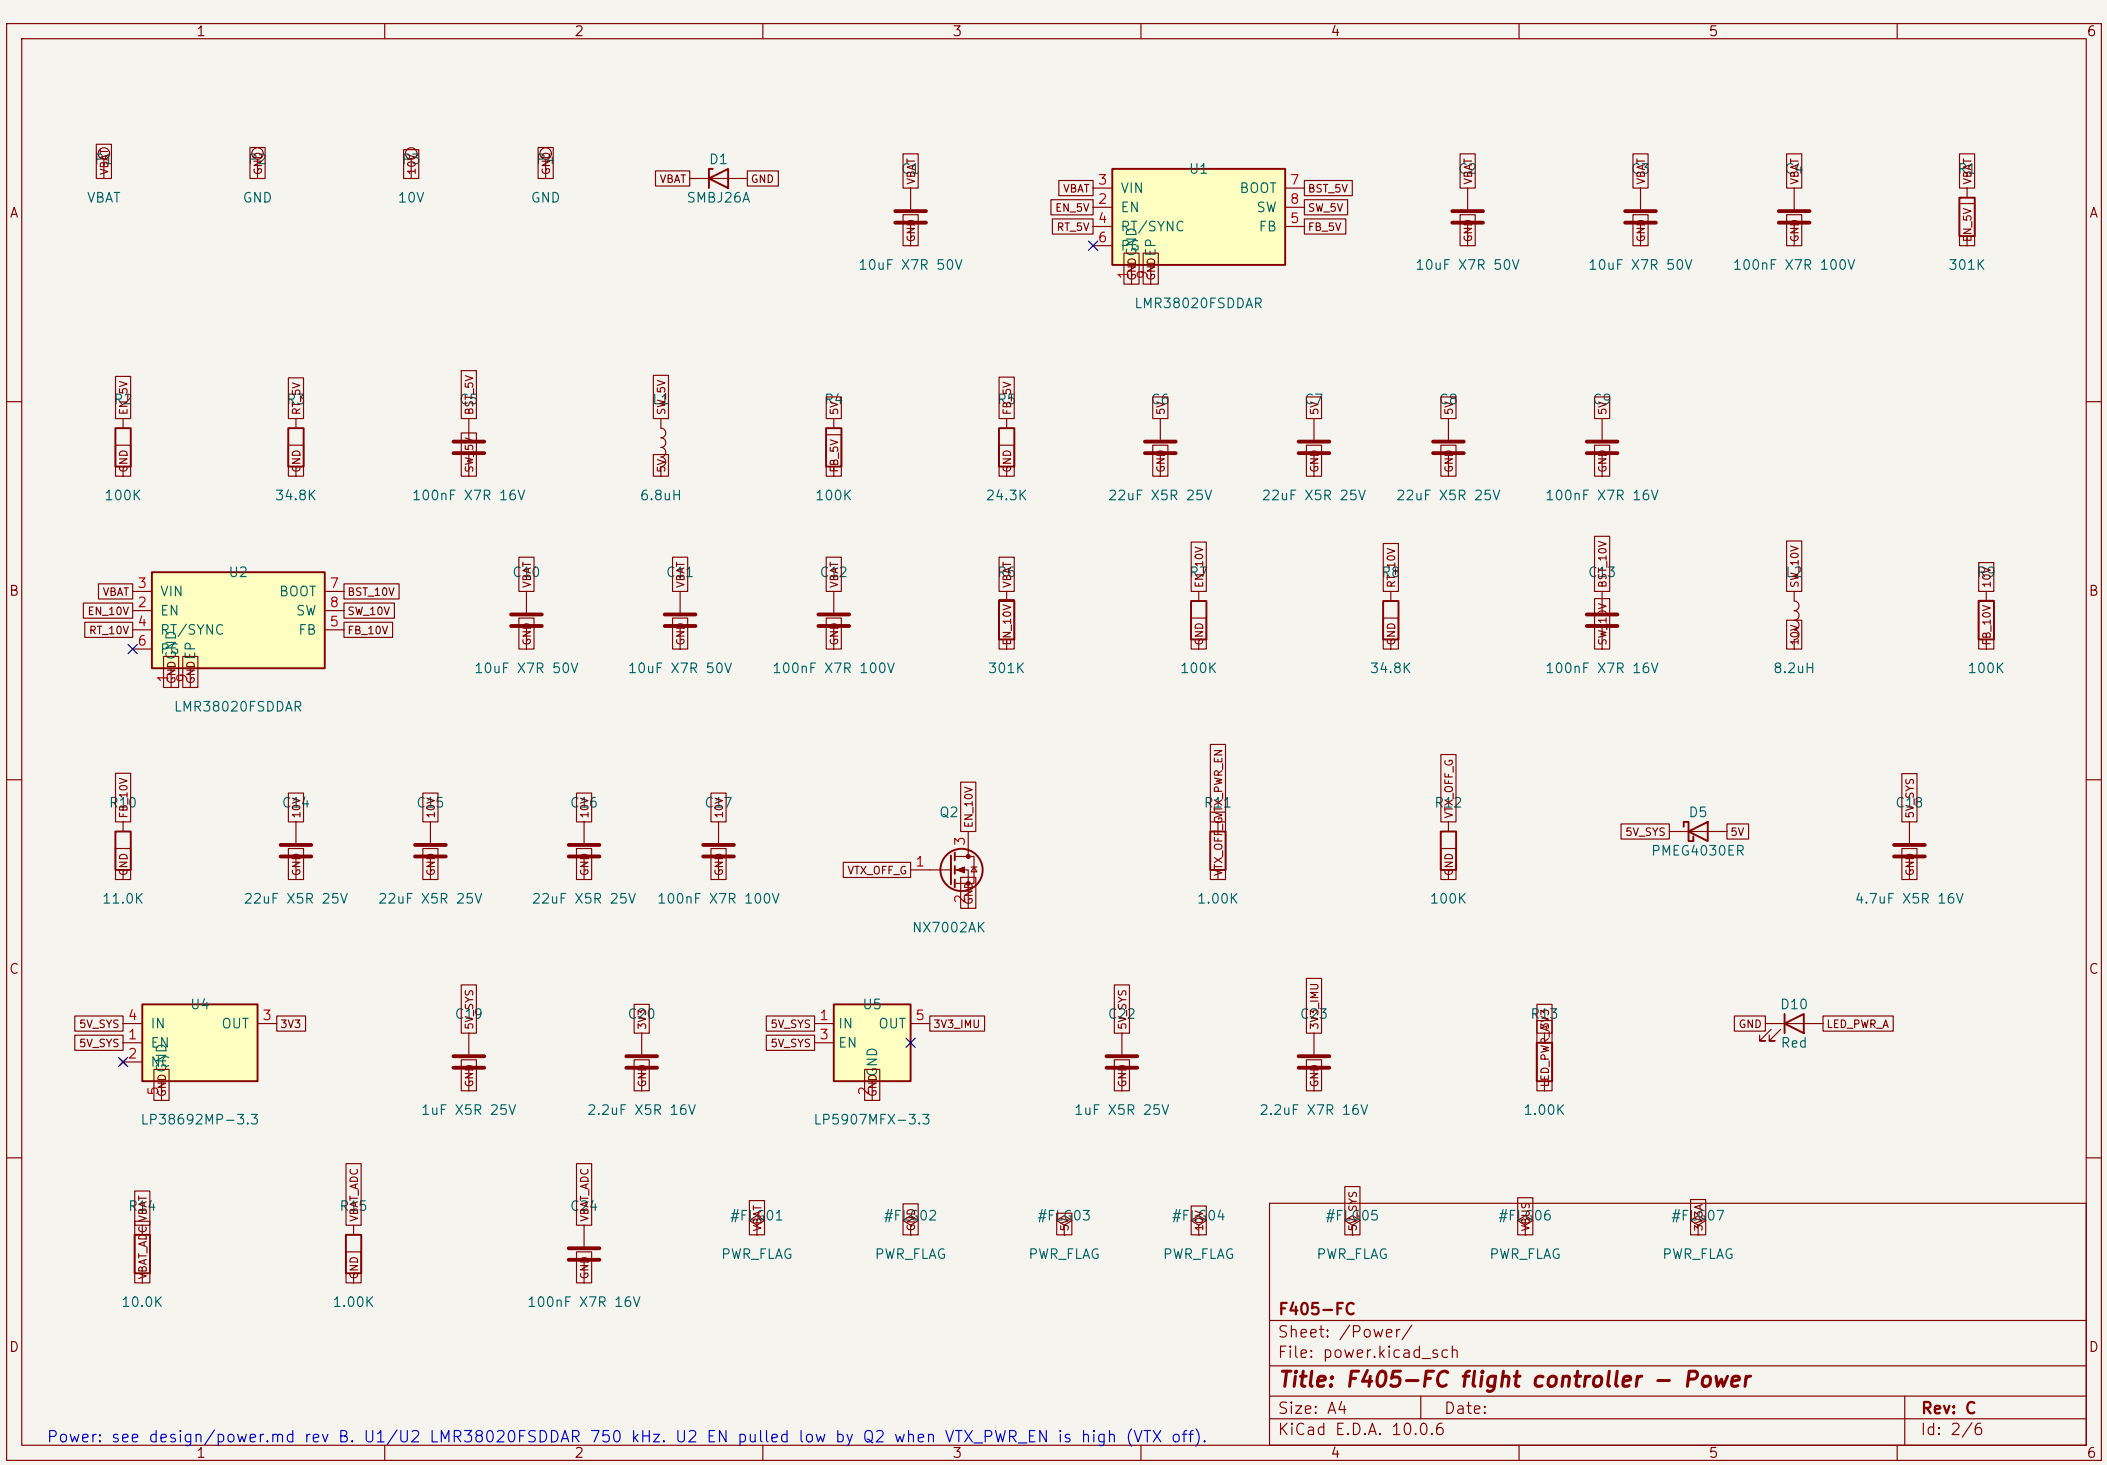


Power: see design/power.md rev B. U1/U2 LMR38020FSDDAR 750 kHz. U2 EN pulled low by Q2 when VTX_PWR_EN is high (VTX off).


F405-FC

Sheet: /Power/
File: power.kicad_sch

Title: F405-FC flight controller — Power


Size: A4	Date:	**Rev: C**
KiCad E.D.A. 10.0.6		Id: 2/6

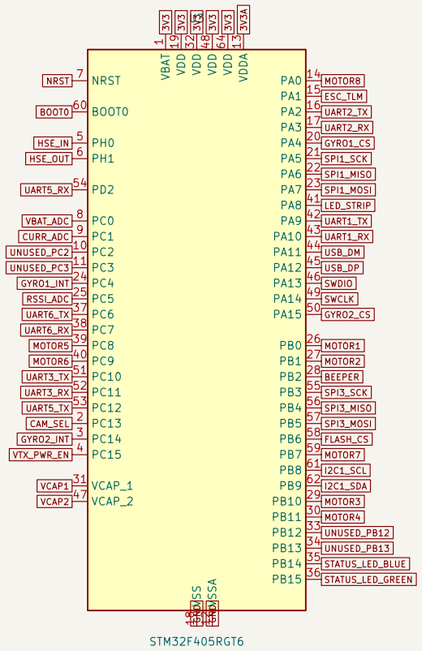

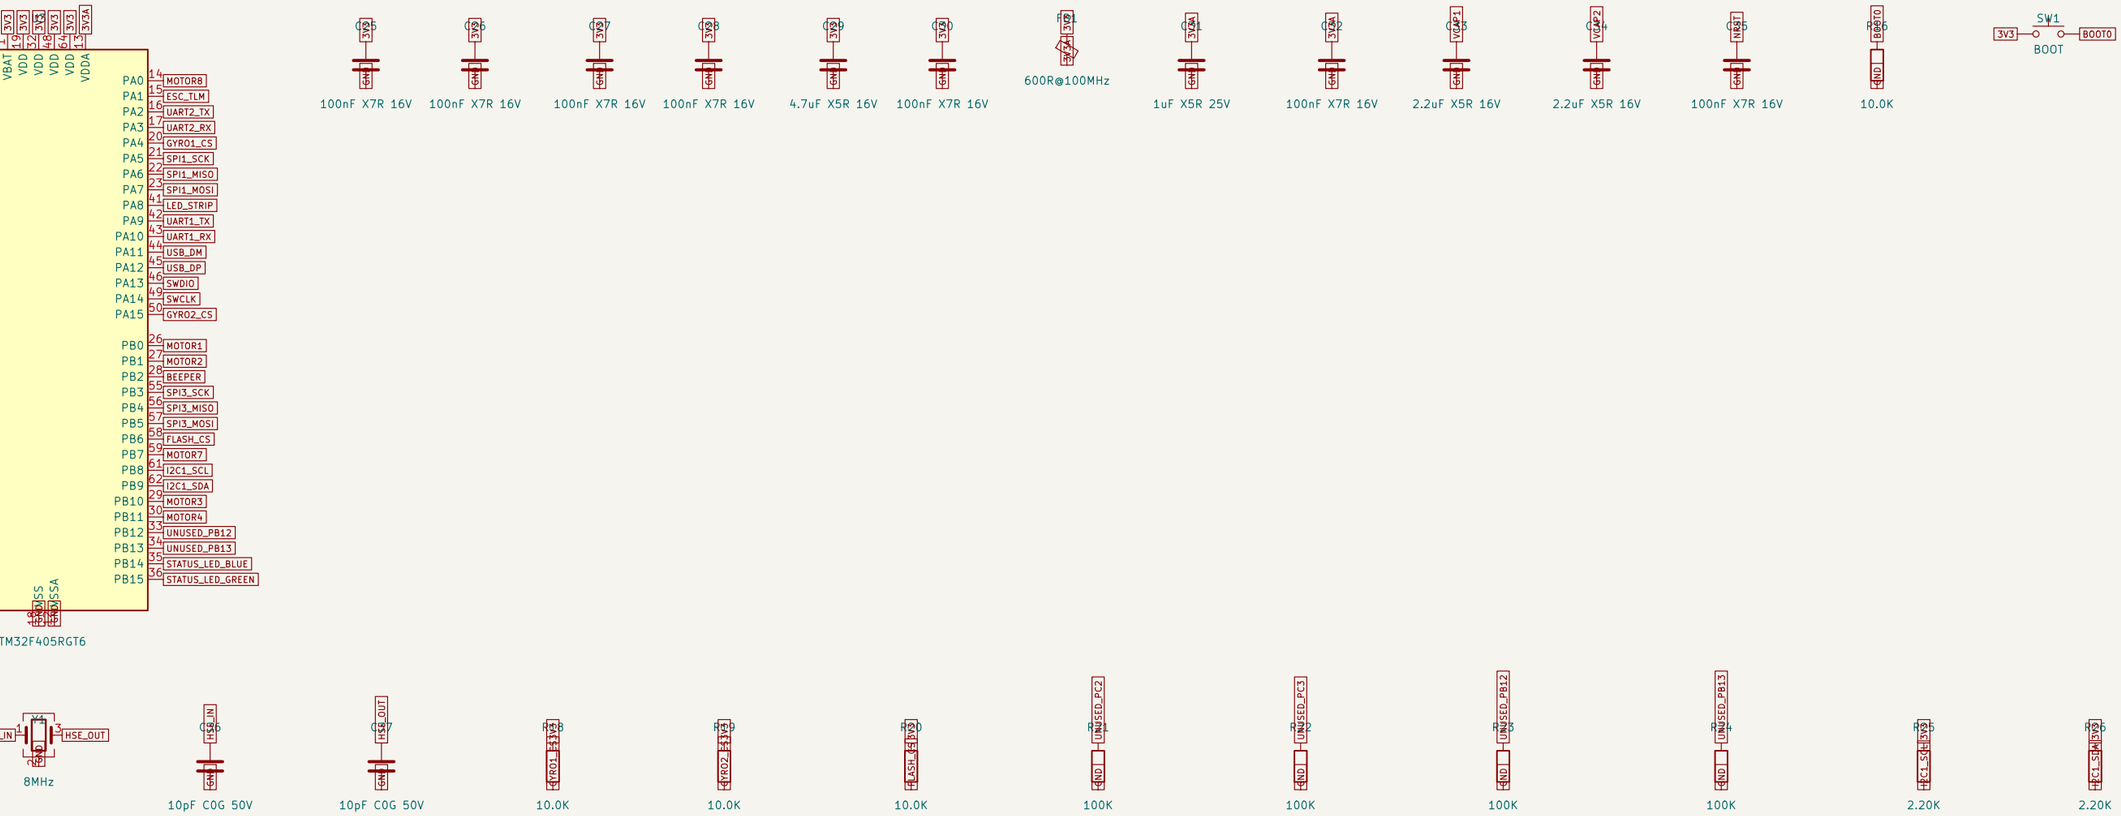


MCU: pin map design/pinmap.md rev C. PC2/PC3/PB12/PB13 unused (OSD removed, D-01).

F405-FC		
Sheet: /MCU/		
File: mcu.kicad_sch		
Title: F405-FC flight controller — MCU		
Size: A3	Date:	**Rev: C**
KiCad E.D.A. 10.0.6		Id: 3/6

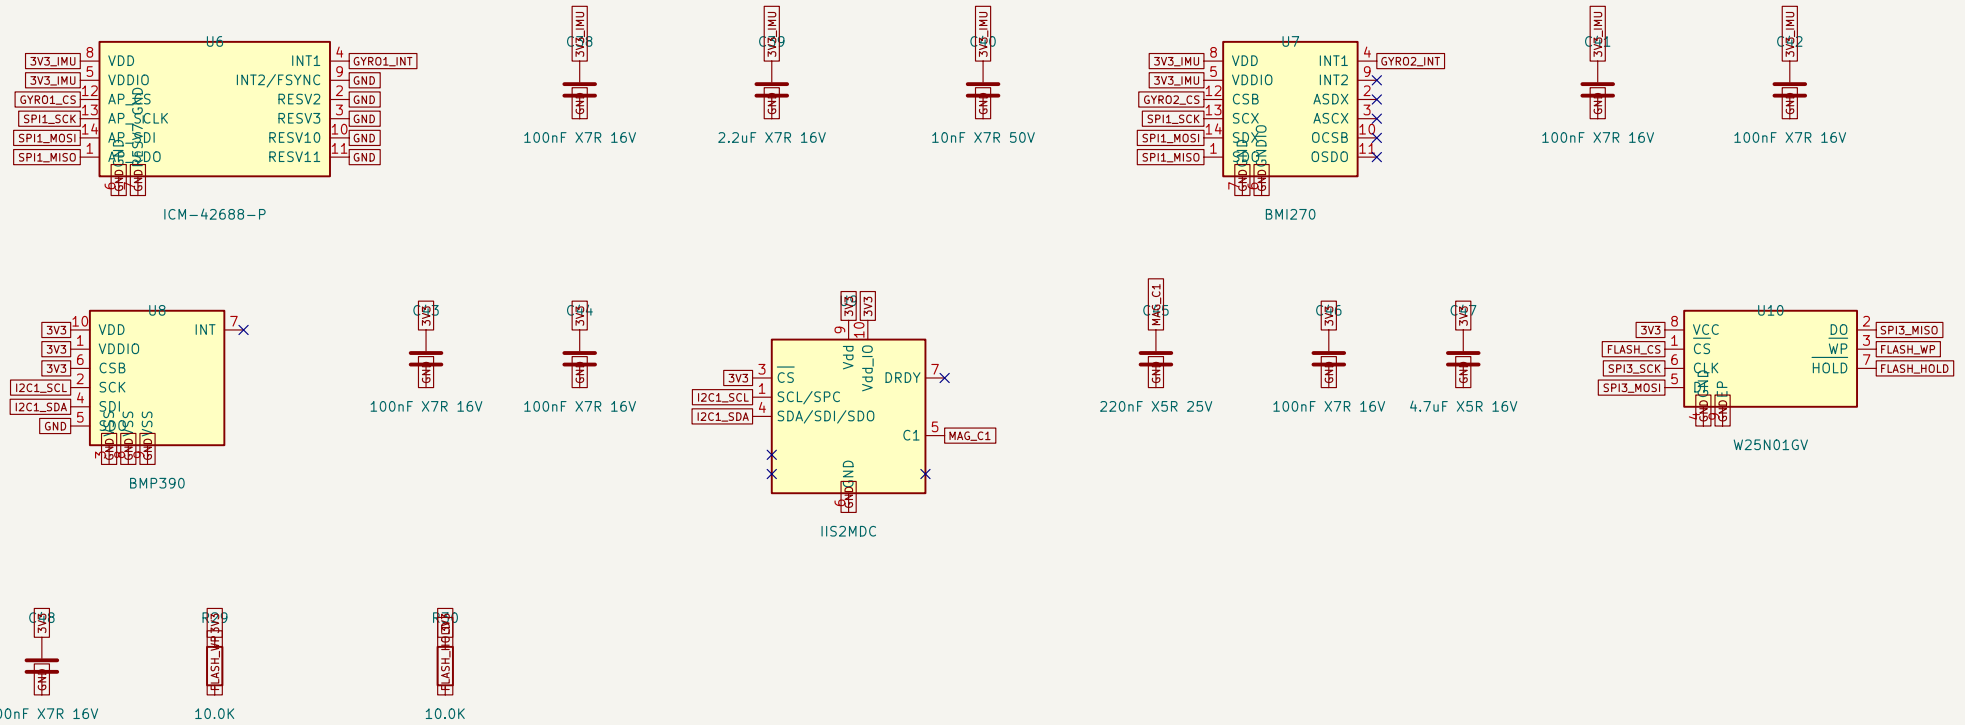


Sensors: IMUs on 3V3_IMU (LP5907), SPI1. Baro 0x76 + mag 0x1E on I2C1. Flash on SPI3.

F405-FC		
Sheet: /Sensors/		
File: sensors.kicad_sch		
Title: F405-FC flight controller – Sensors		
Size: A4	Date:	**Rev: C**
KiCad E.D.A. 10.0.6		Id: 4/6

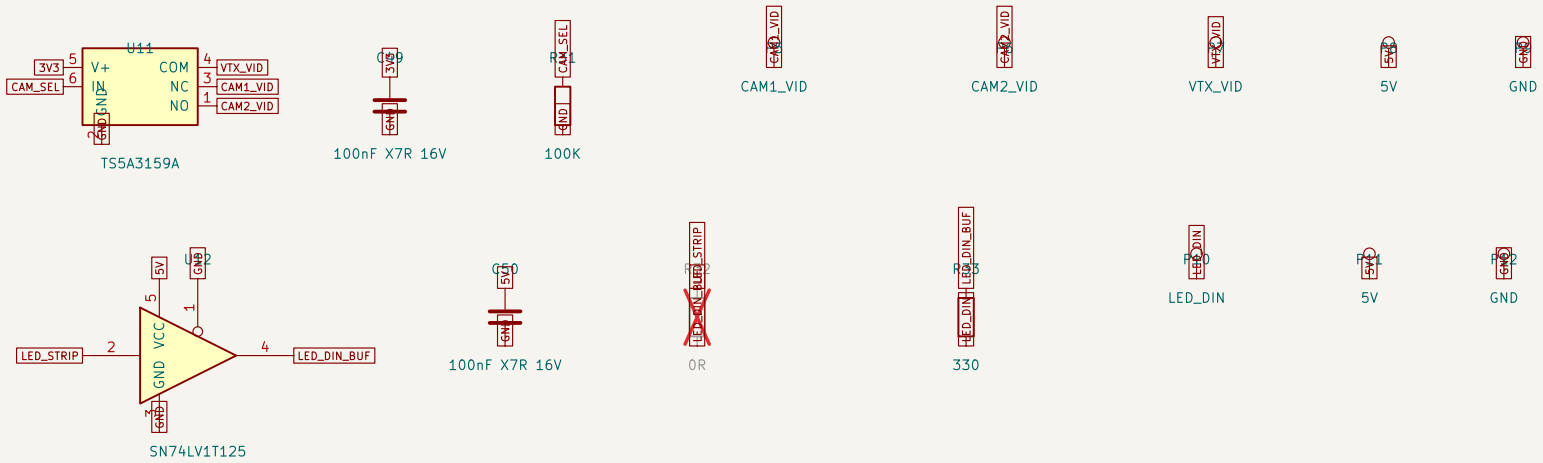

Video: analog camera switch only (no OSD chip, D-01); DC-coupled cameras only (signal must stay 0..3.3 V). LED buffer U12 from 5V; DNP bypass R32 only with U12 removed.

F405-FC		
Sheet: /Video/		
File: video.kicad_sch		
Title: F405-FC flight controller – Video		
Size: A4	Date:	**Rev: C**
KiCad E.D.A. 10.0.6		Id: 5/6

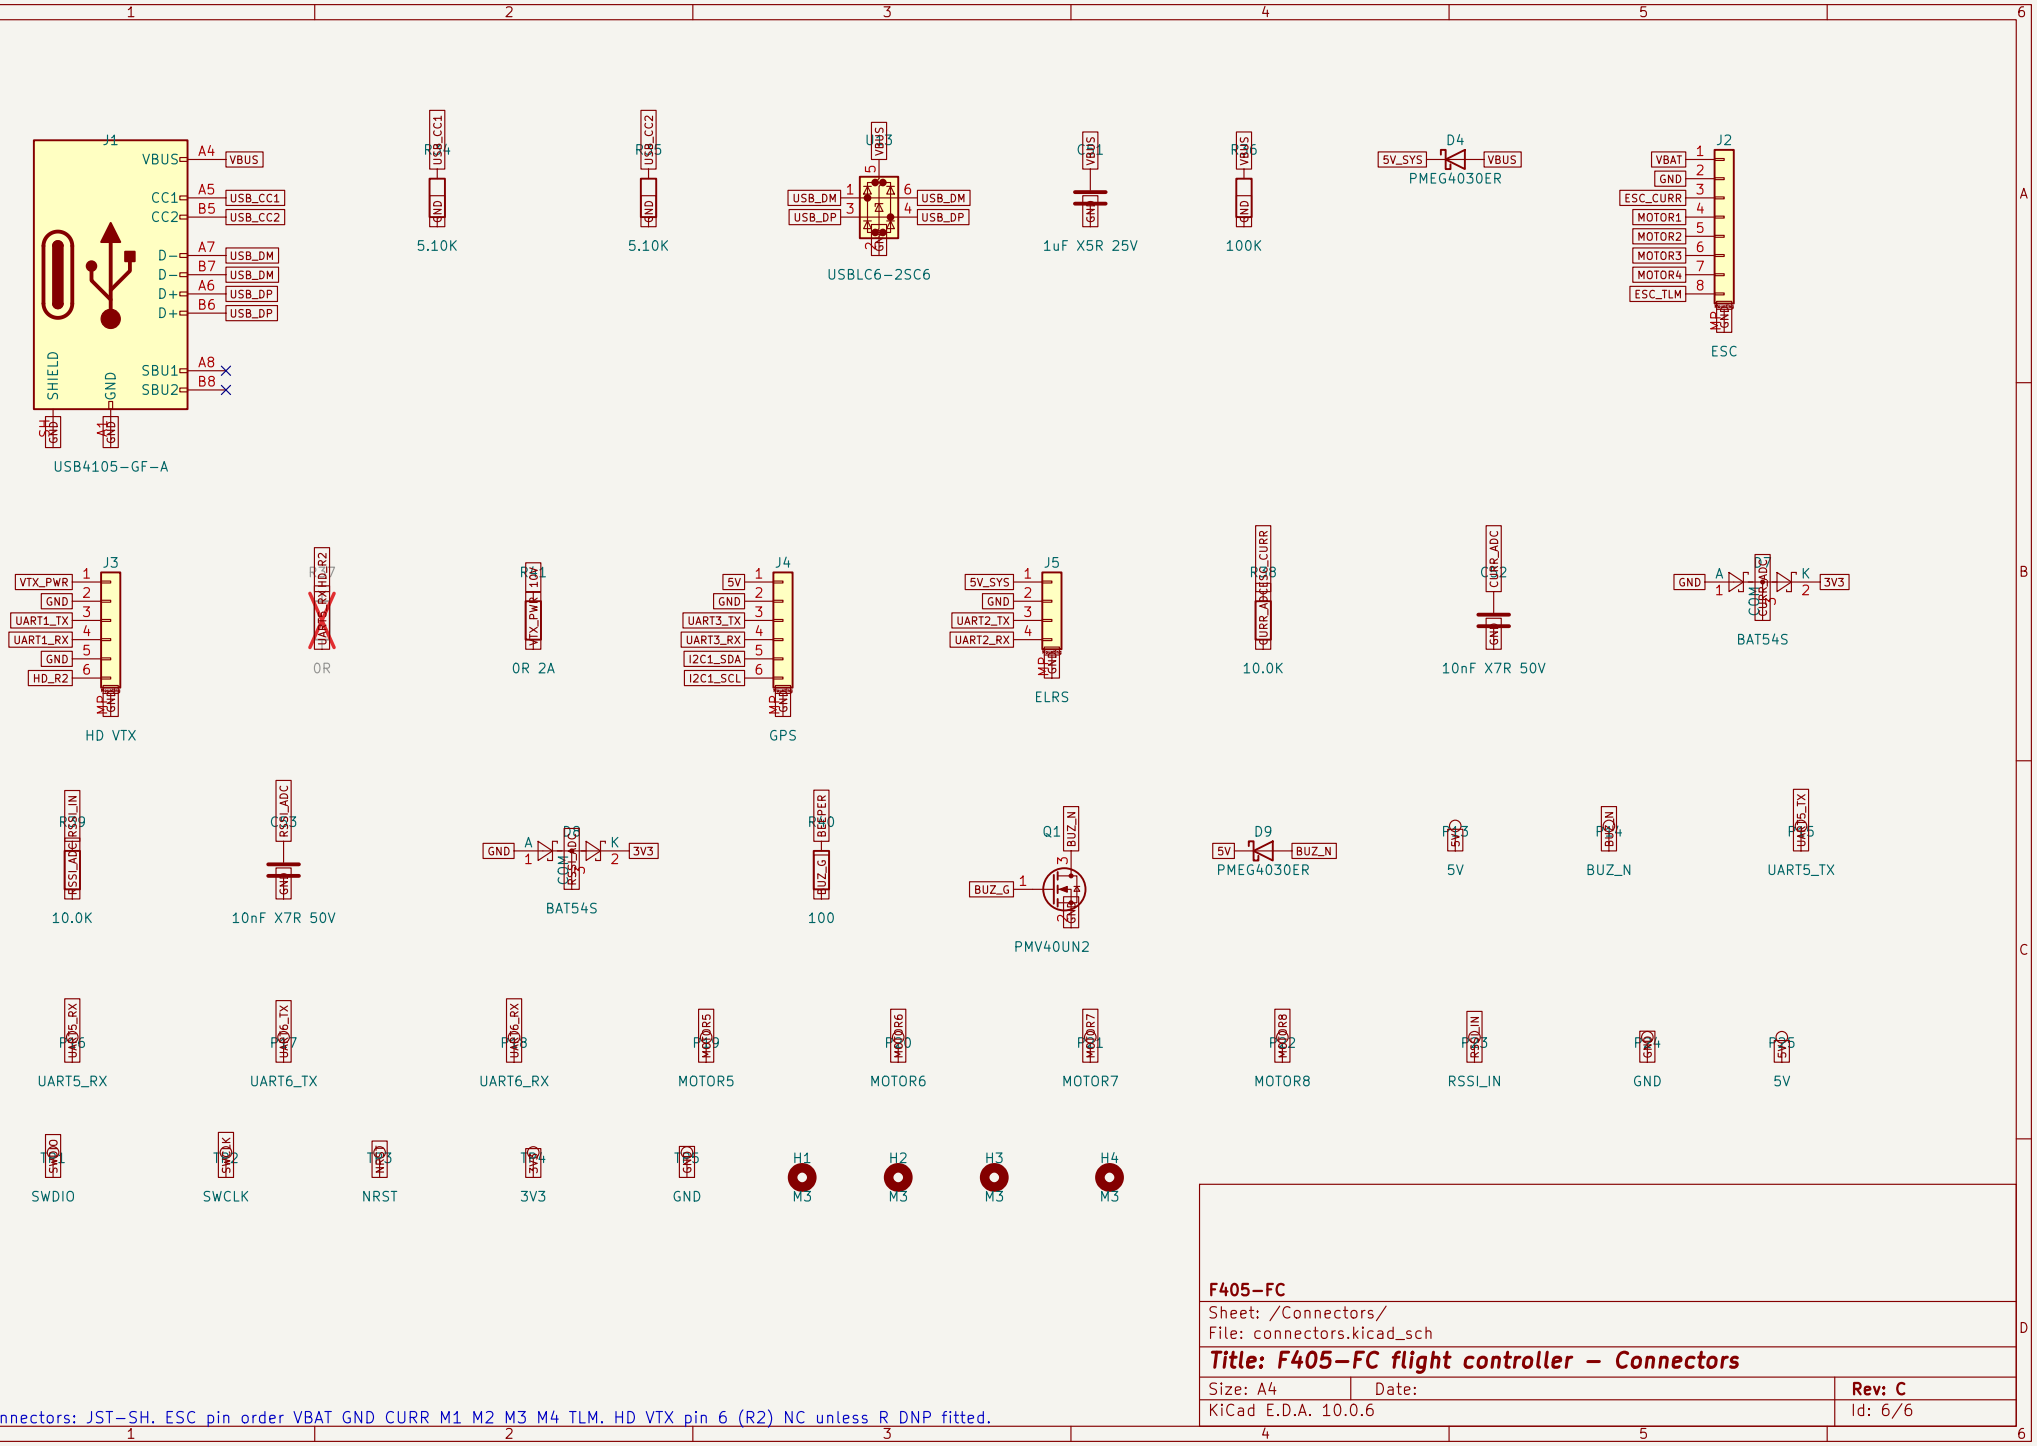

Connectors: JST−SH. ESC pin order VBAT GND CURR M1 M2 M3 M4 TLM. HD VTX pin 6 (R2) NC unless R DNP fitted.

F405−FC

Sheet: /Connectors/

File: connectors.kicad_sch

Title: F405−FC flight controller − Connectors

Size: A4	Date:	**Rev: C**
KiCad E.D.A. 10.0.6		Id: 6/6