




Technical Guide: Johnson Controls Choice AD15 to AD28

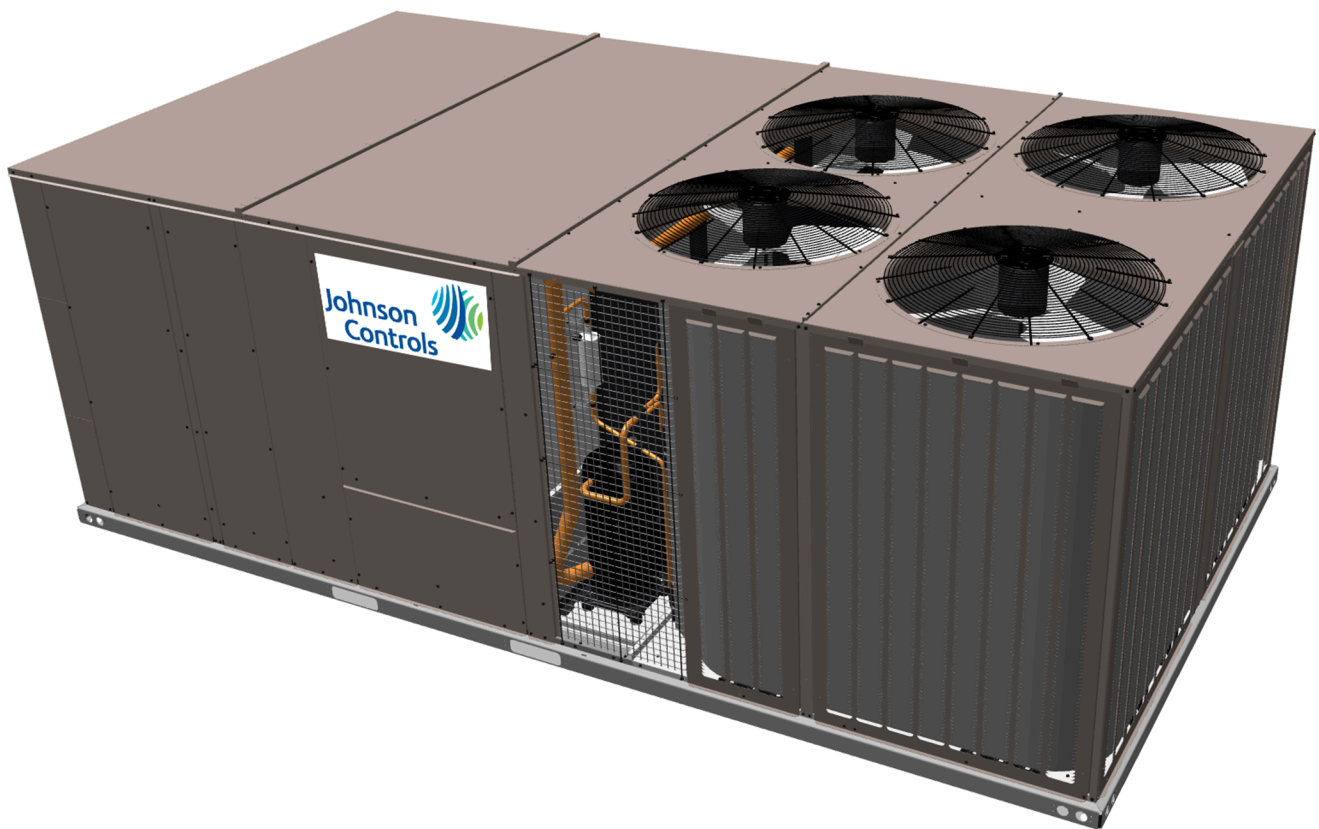

York International Corporation, 5005
York Drive, Norman, OK 73069
www.johnsoncontrols.com

2023-10-05

6411197-JTG-A-1023



Contents

Description.....	5
Product highlights.....	5
Unit components.....	6
Nomenclature.....	7
Features and benefits.....	8
Standard features.....	8
Options and accessories.....	12
Factory and field-installed options.....	14
Physical data.....	21
Unit limitations.....	25
Capacity performance.....	26
Airflow performance.....	56
Airflow specifications.....	60
Sound performance.....	64
Electrical data.....	65
VFD 2 stage standard static.....	66
VFD 2 stage medium static.....	72
VFD 2 stage high static.....	78
VFD 4 stage standard static.....	84
VFD 4 stage medium static.....	90
VFD 4 stage high static.....	96
VFD customer supplied standard static.....	102
VFD customer supplied medium static.....	108
VFD customer supplied high static.....	114
Weights and dimensions.....	120
Rain hood dimensions.....	124
Utilities entry.....	124
Accessory weights.....	125
Supply fan VFD weights.....	125
Roof curbs.....	126
Economizer options.....	130
Typical installation.....	131

Description

The Johnson Controls Choice 15 to 27.5 ton platform is designed with all the flexibility needed for today's applications, while simultaneously meeting tomorrow's efficiency requirements. Realizing that efficiency requirements are continuously pushing the envelope of technology, standard efficiency Choice units meet the latest U.S. Department of Energy (DOE) efficiency requirements where IntelliSpeed and variable air volume (VAV) airflow options deliver energy efficiency exceeding the DOE mandates for 2023. Achieving efficiencies as high as 14.8 IEER (cooling only/electric heat) and 14.6 IEER (gas heat), the standard efficiency Choice product line provides users with significant energy savings alongside impressive flexibility and unparalleled reliability.

All models are available with extensive options and accessories provided both through factory installation and field kits. Airflow requirements are met through IntelliSpeed discrete fan control, and VAV blower configurations. All tonnages can be configured for cooling only, electric heating, staged gas heating, or modulating gas heating. Near limitless flexibility is available with custom modifications provided by the Norman Modification Center located in the HVAC Rooftop Center of Excellence in Norman, Oklahoma.

The units are tested in accordance with the following:



Product highlights

- Smart Equipment™ Controls: streamlines commissioning, integration, and service
- Industry leading standard efficiency, up to 14.8 IEER, designed to meet DOE 2023 efficiency requirements
- Two independent refrigerant circuits
- Two stages of cooling and four stages of cooling (IntelliSpeed and VAV) to meet advanced building code requirements
- Three unique airflow options in each tonnage. 2-stage IntelliSpeed, 4-stage IntelliSpeed, and VAV
- Footprint design allows for direct replacement of multiple competitive models (Carrier and Trane) without a transition curb
- Reliability designed into all products and tested at the component and system level at the Advanced Technology Lab in Norman, Oklahoma
- Factory installed staged gas heat and factory or field installed electric heat
- Optional modulating gas heat furnace with standard stainless steel heat exchanger (cannot be converted to propane)
- Optional modulating hot gas reheat for maximum humidity control. The reheat option added to the base model allows for increased flexibility

Unit components

Figure 1: Component location


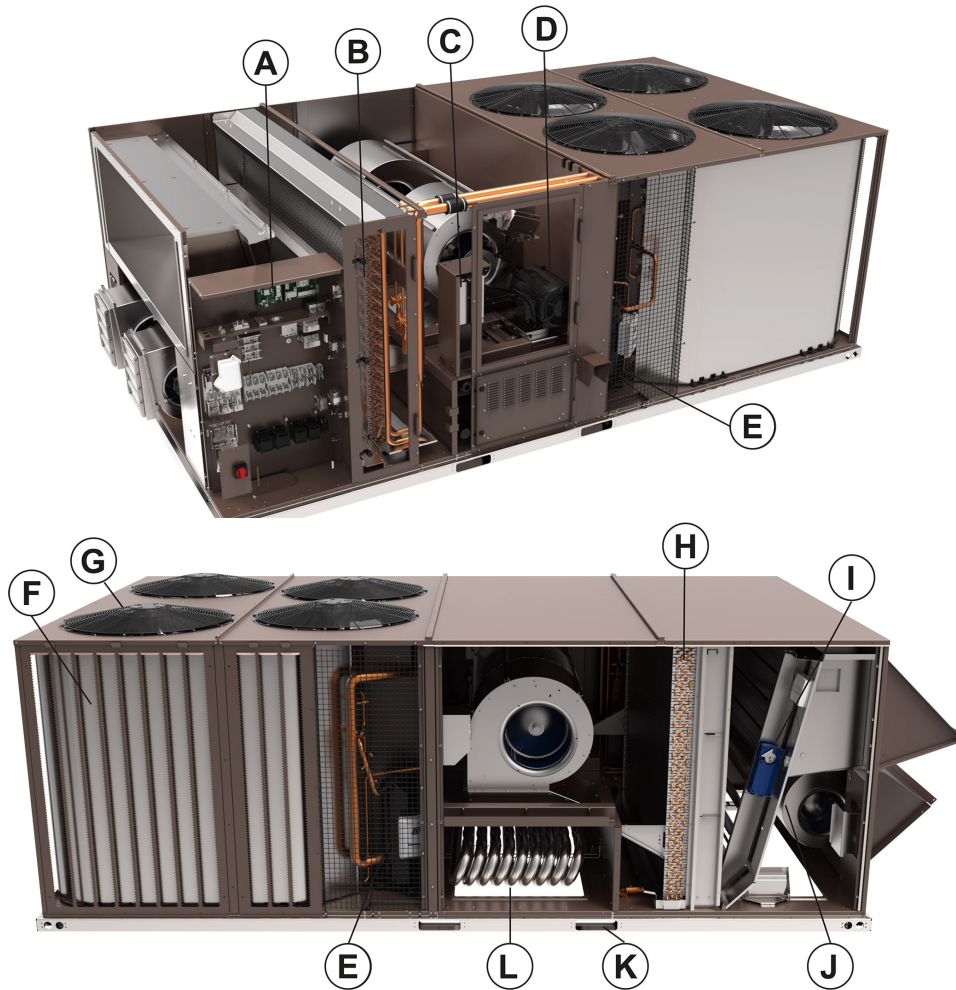


Table 1: Component location table

Item	Description	Item	Description
A	Smart Equipment™ controls	G	Condenser fans
B	Filter access, 2 in. or 4 in. filter options	H	Copper tube/aluminum fin evaporator coil
C	Optional variable frequency drive	I	Optional economizer. Optional manual or motorized outside air dampers not shown.
D	Belt drive blower motor with dual centrifugal fan design	J	Optional powered exhaust. Optional barometric relief not shown.
E	Scroll compressors in various arrangements to produce 2 or 4 stages of cooling depending on the selected model	K	Full perimeter base rails with holes for overhead rigging
F	MicroChannel condenser coils	L	Optional staged or modulating gas heat with aluminized or stainless steel heat exchanger. Optional electric heat not shown.

Nomenclature

Figure 2: Product nomenclature

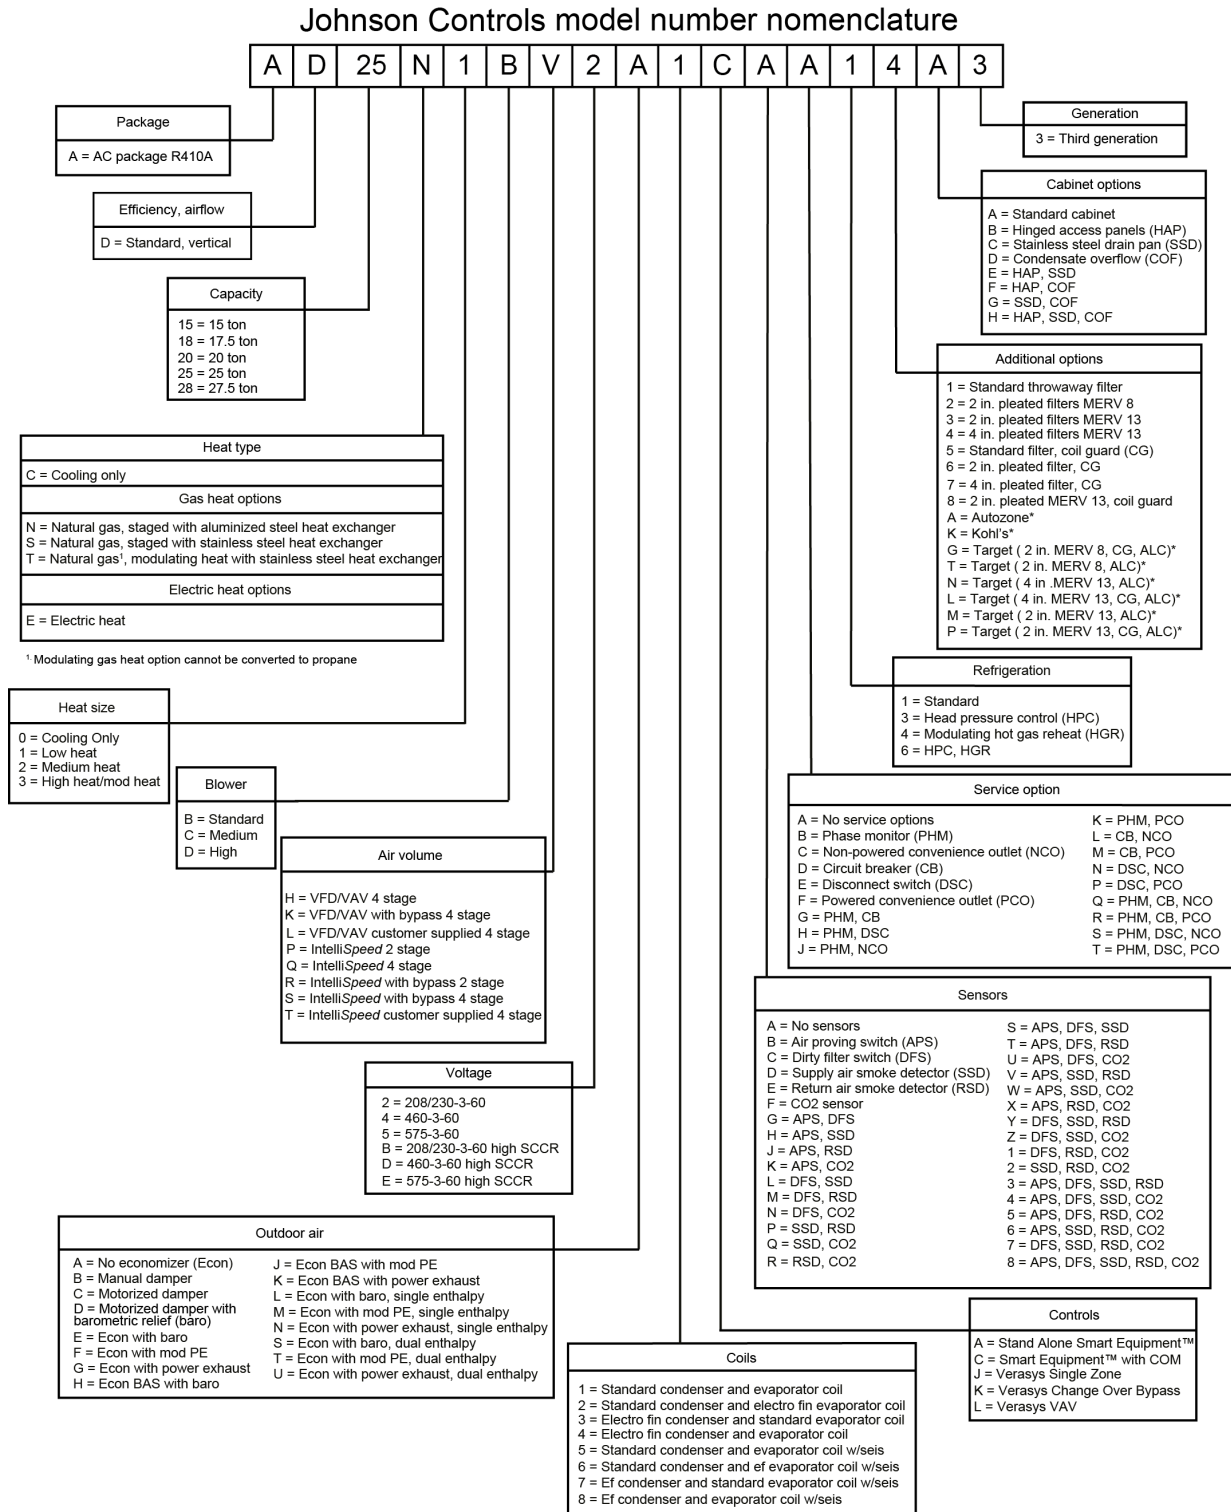

Features and benefits

Standard features

Johnson Controls Choice units have the following standard features.

Efficiency

Available in standard efficiency cooling only, gas heat, or electric heat, Choice units achieve up to 11.1 EER. IEER ratings as high as 14.8 are specific to each model's heat type and indoor airflow selection to provide dialed in efficiencies for every model classification.

Indoor airflow options

Each tonnage has an industry leading four unique indoor airflow options available for maximum customization to meet the needs of each job site. 2-stage IntelliSpeed, 4-stage IntelliSpeed, and variable air volume (VAV) configurations each have a dedicated airflow and compressor staging algorithm designed to maximize efficiency and reliability. Variable airflow models, IntelliSpeed or VAV, include a factory installed variable frequency drive (VFD) to modulate the blower airflow.

Refrigerant circuits

All models contain a dual circuit refrigeration design with multiple compressor staging options dependent on the selected airflow option. The 2-stage IntelliSpeed models have two stages of cooling operation, and 4-stage IntelliSpeed and VAV models have four stages of cooling operation.

Variable frequency drive

Factory-installed variable frequency drives (VFD) provide higher efficiency through both IntelliSpeed and variable air volume (VAV) operation. All factory-installed VFDs come with a 5-year manufacturer warranty and provide ease of commissioning with operation through the standard Smart Equipment™ control board and soft start capabilities for improved motor and belt life.

Indoor blower

The indoor blower is a single shaft, dual blower, forward curve centrifugal wheel design. All tonnages use a belt drive motor configuration with options for multiple levels of static resistance. The blower motor is mounted on a motor sled (patent pending) with multidirectional movement for simplified precise adjustments to belt tension and easier belt replacement.



Evaporator coils

All units come with copper tube/aluminum fin evaporator coils.

Condenser coils

All units come with microchannel condenser coils.

Balanced staged heating

All gas heat units are of a tubular design with in-shot burners and induced draft. Standard controls provide two stages of capacity control with an additional option for modulating gas heat. Each section includes a durable heat exchanger with aluminized steel or optional stainless steel tubes, a redundant gas valve, spark ignition, power venting, an ignition module for 100% shut-off, and all of the safety controls required to meet the latest ANSI standards. You can route the gas supply piping into the heating compartment through a hole in the base pan of the unit or through a hole in the piping panel on the front of the unit.

All electric heat models (factory or field installed) include a bank of nickel chromium elements mounted at the discharge of the supply air blower to provide a high velocity and uniform distribution of air across the heating elements. Each element bank is fully protected against excessive current and temperature by fuses and two thermal limit switches.

Advanced, versatile controls

Smart Equipment™ control boards have standardized a number of features previously available only as options or by using additional controls.



All units are factory commissioned, configured, and run tested.

You can configure the Smart Equipment™ control for use with a standard thermostat using the convenient screw terminals or for use with a zone sensor. You can also configure the control to communicate with multiple BAS communication protocols to integrate with building automation systems.

On-board USB port

The Smart Equipment™ control comes standard with an on-board USB port that accepts a common flash drive. You can use the port for features like data logging, listing current and previous system faults, and backing up or updating the software version. Self-test and start up reports are also available through the USB port.

Built-in LCD

The Smart Equipment™ control board has an easy to read, built-in LCD and easy to use navigation joystick and buttons. Users can quickly navigate the menus to view unit status, options, current function, supply, return and outdoor temperatures, fault codes, and other information.

NOTICE

The Smart Equipment™ control board used in this product can effectively operate the cooling system down to 0°F when this product is applied in a comfort cooling application for people. An economizer is typically included in this type of application. When you apply this product for process cooling applications, such as computer rooms or switchgear, call the applications department for Ducted Systems at 1-877-874-SERV for guidance. Additional accessories may be needed for stable operation at temperatures below 30°F.

Reduced field installed complexity


Each unit comes equipped with factory-installed supply air, return air, and outdoor air temperature sensors to provide key temperature readings and reduce field installed complexity.

Standard factory warranty

All models include a 1-year limited warranty on the complete unit. Compressors and electric heater elements each have a 5-year warranty. Aluminized steel heat exchangers have a 10-year warranty and stainless steel heat exchangers have a 15-year warranty.

Replacement opportunity with footprint

All tonnages have a meticulously designed footprint providing the unique ability to directly replace, without the need for a transition curb, existing 15 ton to 27.5 ton units from select competitive manufacturers (Carrier and Trane). Airflow testing was conducted on each competitive footprint to ensure full unit performance and operation in these applications. Some utilities may require relocation with guidance from competitive replacement literature.

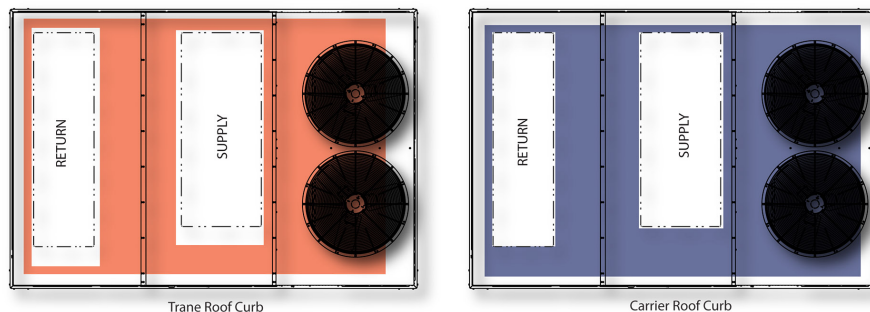

Dedicated duct configuration

All models are manufactured with a dedicated duct configuration for downflow operation allowing for quick and easy installation without removing or relocating panels.

Utility connections

Gas and electrical utility entries are supplied in the unit underside as well as the side of the unit. You can make utility connections quickly and with a minimum amount of field labor.

Sloped drain pan

All units are provided with a multidirectional sloped condensate drain pan with 1 in. I.D. female connection. Drain pans are sloped in accordance with ASHRAE 62 and are available in composite or stainless steel configurations.

Color-coded and numbered wiring

Wiring is color coded and numbered to match the provided unit wiring diagram to make for easy troubleshooting and field installation.

Convertible filter rack

Units are provided with the selected 2 in. or 4 in. filter. With a simple conversion in the field, units can accept either size filter in the standard filter rack.

Full perimeter base rails

The permanently attached base rails provide a solid foundation for the entire unit and protect the unit during shipment. The rails offer rigging holes so that you can use an overhead crane to place the units on a roof.

Operating conditions

The units are capable of starting and running at 125°F outdoor temperature, exceeding the maximum load criteria of AHRI Standard 340/360. The compressor, with standard controls, is capable of operation down to 45°F outdoor temperature in all installations and as low as 0°F outdoor temperature with cyclic cooling cycles in certain applications. The addition of a low ambient kit allows for cooling operation down to -10°F outdoor temperature. Gas heat is rated to operate in outdoor temperatures down to -40°F.

Safety monitoring

The control monitors the outdoor, supply, and return air temperatures and the high and low pressure switch status on the independent refrigerant circuits. On units with heating, the gas valve and high temperature limit switches are monitored on gas and electric heating units. The control also monitors the voltage supplied to the unit and protects the unit if low voltage occurs due to a brown out, or if other electrical issues occur.

Anti-short cycle protection

To aid compressor life, an anti-short cycle delay is incorporated into the standard control. Compressor reliability is further ensured by programmable minimum run times. For testing, you can temporarily override the anti-short cycle delay with the push of a button.

Fan delays

Fan on and fan off delays are fully programmable. Furthermore, the heating and cooling fan delay times are independent of one another. All units are programmed with default values based on their configuration of cooling and heating capacity.

Nuisance trip protection and three strikes

To prevent nuisance calls, the control board uses a three times, you're out philosophy. The high-pressure switch, low-pressure switch, antifreeze protection, or low voltage, detection must trip three times within two hours before the unit control board locks out the associated compressor. Similarly, the heating high limit switch must trip three times within one hour before the unit control board locks out heating operation. An alarm message appears on the LCD.

Low limit control

When there is a demand for cooling during cold outside conditions the low limit control (LLC) prevents the supply air from dropping below a specified setpoint. This is a programmable setpoint.

Options and accessories

Non-electrical option or accessory	Factory option	Field-installed option
Roof curb, 14 in. or 24 in. height		✓
Burglar bars		✓
Coil/hail guard	✓	✓
Hinged and toolless access panels	✓	
Magna-Dry modulating hot gas reheat dehumidification	✓	
Aluminized steel gas heat exchanger	✓	
Stainless steel gas heat exchanger	✓	
Modulating gas heat (cannot be converted to propane)	✓	
Flue exhaust extension		✓
Propane conversion (not for modulating furnaces)		✓
High altitude kit for propane (not for modulating furnaces)		✓
High altitude kit for natural gas		✓
Stainless steel drain pan	✓	
E-Coat coil coating	✓	
MERV 8, 2 in. filter	✓	
MERV 13, 2 in. filter	✓	
MERV 13, 4 in. filter	✓	

Electrical option or accessory	Factory option	Field-installed option
IntelliSpeed discrete fan control	✓	
Multi-zone variable air volume (VAV)	✓	
CRSZ control single zone VAV	✓	
Standard, medium, or high static indoor blower motor	✓	
Non-fused disconnect switch	✓	
Circuit breaker	✓	
Powered convenience outlet	✓	
Non-powered convenience outlet	✓	✓
65 kA high SCCR	✓	
Phase monitor	✓	
Electric heat	✓	✓

Fresh air option or accessory	Factory option	Field-installed option
Manual outside air damper	✓	✓
Motorized outside air damper	✓	✓
Low leak economizer	✓	✓
Single or dual enthalpy economizer control	✓	✓
Barometric relief damper	✓	✓
Constant volume power exhaust	✓	✓
Modulating power exhaust	✓	✓
Bolt on energy recovery ventilator (ERV)		✓

Controls option or accessory	Factory option	Field-installed option
Air proving switch	✓	✓
Dirty filter switch	✓	✓
CO ² sensor	✓	✓
Condensate overflow switch	✓	✓
Low ambient head pressure control	✓	✓
Supply and return air smoke detectors	✓	✓

Controls option or accessory	Factory option	Field-installed option
Smart Equipment™ control communication card	✓	✓
MAP (Mobile Access Portal) Gateway for use with Smart Equipment™ control		✓
Verasys	✓	✓

Factory and field-installed options

Johnson Controls Choice units have many factory options and field-installed accessories available for a wide range of application needs.

IntelliSpeed discrete fan control with VFD

Factory option

The IntelliSpeed blower control method uses a variable frequency drive (VFD) to control staged modulation of the supply fan airflow in what is called multispeed fan control or discrete fan control. The VFD runs the supply fan at predetermined speeds set at the factory based on the number of cooling stages engaged by the cooling demand. This feature allows for higher part load efficiency and meets all requirements of ASHRAE 90.1 2013/2016 and 2015 IECC.

Multi-zone variable air volume (VAV)

Factory option

Intended for job applications where multiple zones are serviced by a single rooftop with zone dampers in the ductwork to control airflow to each zone. Similar to the IntelliSpeed blower control method, the VAV blower control option uses a VFD to control modulation of the supply fan airflow. Unlike IntelliSpeed, VAV operation provides full modulation of the supply fan speed to provide both a constant supply air temperature and a constant duct static pressure. This modulation is controlled by the VFD based on readings from a pressure transducer mounted in the unit supply duct.

CRSZ control single zone VAV

Factory option

A proprietary control logic for single-zone VAV applications, the continuous reset single zone control (CRSZ control) option provides the industry's best temperature control of a single-zone VAV system. The CRSZ control airflow option uses compressor staging and fan speed, along with programmatic resetting of the supply air temperature setpoint, to deliver stable zone temperature and humidity control.

High static indoor blower motor

Factory option

For applications with high static restrictions, units are offered with optional indoor motors that provide higher static output to varying degrees based on the application requirements.

MagnaDry modulating hot gas reheat dehumidification

Factory option


Units optioned with reheat coils provide superior dehumidification at a wide range of outdoor temperatures to provide maximum comfort without overcooling the space. Unlike traditional on and off reheat systems, this system modulates dehumidification to more accurately meet the humidity and temperature setpoints.

Low leak economizer with fresh air hood

Factory or field-installed option

All units offer a variety of optional factory-installed or field-installed economizers that are shipped, installed, and wired with low leak dampers. The dampers are designed to meet ASHRAE 90.1, AMCA 511 Class 1A damper, and the International Energy Conservation Code (IECC) certification requirements by achieving leakage rates of 3 CFM/sq. ft. at 1-inch of static pressure. Each economizer goes through a rigorous 60,000 cycle test. You can select dry bulb, single enthalpy, or dual enthalpy economizer control as either a factory option or field-installed accessory. The economizer has spring return, fully modulating damper actuators and it is capable of introducing

up to 100% outdoor air. As the outdoor air intake dampers open, the return air dampers close. The changeover from mechanical refrigeration to economizer operation is regulated by the outdoor air dry bulb temperature or the outdoor air enthalpy input.

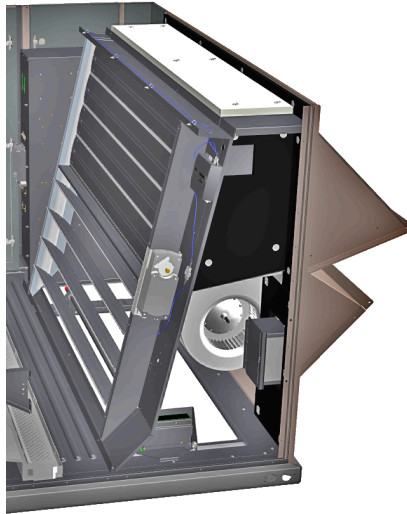

Single or dual enthalpy control

Factory or field-installed option

Low leak economizers are available with standard dry bulb sensing. You can select the following configurations for true enthalpy control of the unit economizer.

- Single enthalpy control to monitor outdoor air humidity and temperature
 - Dual enthalpy control to monitor outdoor air and return air humidity and temperature
- Single or dual enthalpy sensors are available factory installed or as field-installed accessories.

Manual outside air damper

Factory or field-installed option

The manual outdoor air damper includes a slide-in assembly with a manually adjustable opening for fresh air entry. The factory installed damper has an opening range of 0% to 100%. The field-installed accessory is available with two options for opening range, 0% to 25% or 0% to 100%.

Motorized outside air damper

Factory or field-installed option

The motorized outdoor air damper includes a slide-in and plug-in damper assembly with a 2-position, spring return motor actuator. The damper opens to a preset position whenever the supply air blower is operating and drives fully closed when the blower motor shuts down. The factory installed damper has an opening range of 0% to 100%. The field-installed accessory is available with two options for opening range, 0% to 25% or 0% to 100%.

Barometric relief damper

Factory or field-installed option

You can use this damper option to relieve internal building air pressure on units with an economizer or motorized damper without a power exhaust. This accessory includes a rain hood, a bird screen, and a fully assembled damper.

Constant volume power exhaust

Factory or field-installed option

Units with an economizer are available with constant volume power exhaust. Whenever the outdoor air intake dampers are opened for free cooling, the exhaust fan is energized to prevent the conditioned space from being over-pressurized during economizer operation. The factory-installed version has an incorporated fold-out hood design for easy setup and operation. There are two options for the field-installed constant volume power exhaust. The standard CFM exhaust provides the same operational parameters as the factory-installed power exhaust while the high CFM exhaust provides expanded air movement capabilities.



Modulating power exhaust

Factory or field-installed option

For more precise control over a unit's exhaust performance, you can select a modulating power exhaust as a factory or field-installed option. The modulating power exhaust monitors fluctuations to the static pressure in the duct and works in conjunction with the unit economizer to equalize pressure changes caused by bringing in fresh air. There are two options for the field-installed constant volume power exhaust. The standard CFM exhaust provides the same operational parameters as the factory-installed power exhaust while the high CFM exhaust provides expanded air movement capabilities.

Staged electric heat

Factory or field-installed option

Electric heat is available as a factory or field-installed option in 25 kW, 50 kW, and 75 kW and is available in all voltage options of the base units. All heaters are single point power and all field-installed electric heat accessories require a supplemental single point power kit based on the unit specifications.

Staged gas heat

Factory option in aluminized steel or stainless steel

Staged gas heating is available in two sizes, each with two stages of operation. The standard gas heat exchanger comes in aluminized steel for applications in non-corrosive environments with an optional stainless steel gas heat exchanger available for application in corrosive environments.

Modulating gas heat

Factory option

For improved temperature control and to provide more exact heating operation, select a modulating gas heat furnace. With the same maximum heating capacity as the high-heat staged

gas heat and a 2.85 to 1 turndown ratio, the modulating gas heat option provides the same full load heating capabilities as the staged heating option and can also adjust the input rate to reflect the heating call. All modulating gas heat furnaces are equipped with stainless steel heat exchangers.

❗ **Note:** Modulating furnaces are not certified for use with propane and cannot be converted from the factory.

Flue exhaust extension

Field-installed option

In locations with wind or weather conditions that may interfere with the correct exhausting of furnace combustion products, this accessory can prevent the flue exhaust from entering nearby fresh air intakes.

Propane conversion kit

Field-installed option

Use this kit to convert a gas-fired heater from natural gas to propane. It contains the main burner orifices and gas valve replacement springs.

❗ **Note:** Modulating furnaces are not certified for use with propane and cannot be converted from the factory.

Gas heat high altitude kit

Field-installed option

Use this kit to convert a gas heat unit to operate at high altitudes from 2,000 to 10,000 feet. Conversion kits are available for natural gas and propane.

Hinged and toolless access panels

Factory option

To reduce service time, hinged and toolless access panels provide quick and easy access to frequently inspected or service components and areas of the unit. Hinged panels provide access to the control box, filters, gas and electric heat controls, and indoor blower section.

Coil guard and hail guard

Factory or field-installed option

A louvered panel design combination coil guard and hail guard protects the unit condenser coils and outdoor condenser area from a wide range of damage caused by events such as hail, tampering, and animal entry.



Stainless steel drain pan

Factory option

An optional rust-proof stainless steel drain pan is available to provide years of trouble-free operation in corrosive environments.

Circuit breaker

Factory option

A factory-installed circuit breaker provides both easy access to shut off power to the unit for safe servicing and also protects the unit from a short-circuit or overload condition.

Non-fused disconnect switch

Factory option

A factory-mounted service disconnect switch provides easy access to shut off power to the unit for safe servicing of the product.

Powered convenience outlet

Factory option

The powered convenience outlet option provides a 120V single-phase GFCI outlet with a cover on the unit exterior. The outlet is powered by a stepdown transformer in the unit.

Non-powered convenience outlet

Factory or field-installed option

The non-powered convenience outlet option provides a 120V single-phase GFCI outlet with a cover on the exterior of the unit. The outlet requires the installer to provide the 120V single-phase power source and wiring. The outlet is available factory installed or as a field-installed accessory.

65 kA high SCCR

Factory option

The HIGH SCCR electrical option replaces all necessary electrical components and wiring with higher rated components and larger gauge wiring to increase the short-circuit current rating to 65 kA from the standard unit 5 kA rating. This provides additional protection to the unit in the event of a short-circuit condition. 208V/230 V and 460 V units have a high SCCR rating of 65 kA. 575 V units have a high SCCR rating of 25 kA.

Supply and return air smoke detectors

Factory or field-installed option

The smoke detectors stop operation of the unit and provide a fault message to the control board. Smoke detectors are available for supply and/or return air configurations.

WARNING

Factory-installed smoke detectors may be subjected to extreme temperatures during off times due to outside air infiltration. These smoke detectors have an operational limit of -4°F to 158°F. Smoke detectors installed in areas that could be outside this range must be relocated to prevent false alarms.

Phase monitor

Factory option

Monitors the electrical phase to the unit to prevent damage from out of phase conditions.

Air proving switch

Factory or field-installed option

To ensure correct indoor blower operation, you can use an optional air proving switch to monitor whether supply air airflow is present when a cooling or heating cycle initiates. If correct airflow is not detected at the beginning of a cycle or throughout operation, the call for heating or cooling is cancelled and a unit alarm registered.

Dirty filter switch

Factory or field-installed option

This option includes a differential pressure switch that energizes the fault light on the unit thermostat, indicating that there is an abnormally high pressure drop across the filters.

CO₂ sensor

Factory or field-installed option

The provided CO₂ sensor detects CO₂ levels and automatically overrides the economizer when levels rise above the preset limits.

Condensate overflow switch

Factory or field-installed option

Mounted to the unit drain pan, the condensate overflow switch is a float switch that monitors the level of water in the drain pan to shut down unit operation and prevent drain pan overflow within the unit.

Low ambient head pressure control

Factory or field-installed option

An integrated low-ambient control allows units to operate in the cooling mode down to 0°F outdoor ambient without additional components or intervention. The option includes a divider panel for the condenser section to isolate airflow through the condenser coils. Optionally, you can program the control board to lock out the compressors when the outdoor air temperature is low or when free cooling is available.

E-coat evaporator and condenser

Factory option

The evaporator and/or condenser coils are coated with an epoxy polymer coating to protect against corrosion.

Filters

Factory option

Two-inch pleated MERV 8 or 4-inch pleated MERV 13 are available to meet LEED requirements. A 2-inch throwaway is shipped as standard.

Burglar bars

Field-installed option

Mount in the supply and return openings to prevent entry into the duct work.

Smart Equipment™ control with communication

Factory or field-installed option

The communication option for the Smart Equipment™ control is a factory installed add-on card to expand the capabilities with a gateway to BACnet MS/TP (programmable to Modbus or N2 protocols).

Mobile Access Portal gateway for use with Smart Equipment™ control

Field-installed option

You can use the Mobile Access Portal (MAP) gateway to provide a wireless connection to any Smart Equipment™ enabled product or system. The MAP gateway generates a Wi-Fi signal for connection with any electronic device with Wi-Fi capabilities and a web browser. Used in conjunction with the Smart Equipment™ communication card and daisy chained network wiring, a single MAP gateway can provide single point access to an entire network of rooftop units through the unit control board, a Smart Equipment™ enabled zone sensor, or Smart Equipment™ enabled thermostat.

Verasys

Factory or field-installed option

Verasys provides a simple user experience with configurable self-recognizing controllers without the need for any additional tools. Verasys creates enhanced integration of HVACR equipment, zoning, and controls. Contractors are able to offer a complete bundled solution of equipment and controls to serve the light commercial market.

Physical data

Table 2: AD15 to AD18 physical data

Component	Models					
	AD15			AD18		
Nominal tonnage	15			17.5		
ARI cooling performance	2 stage		4 stage	2 stage		4 stage
Gross capacity @ ARI A point (BTU)	176,000		177,000	204,000		204,000
ARI net capacity (BTU)	172,000		174,000	198,000		198,000
EER	11.1 ¹ / 10.9 ²		11.0 ¹ / 10.8 ²	11.0 ¹ / 10.8 ²		11.0 ¹ / 10.8 ²
IEER CV	13.0 ¹ / 12.8 ²		NA	12.6 ¹ / 12.4 ²		NA
IEER with IntelliSpeed	14.2 ¹ / 14.0 ²		14.8 ¹ / 14.6 ²	14.2 ¹ / 14.0 ²		14.6 ¹ / 14.4 ²
IEER with VAV	NA		14.6 ¹ / 14.4 ²	NA		14.4 ¹ / 14.2 ²
CFM	4,800		4,570	5,400		5,780
System power (kW)	15.78		16.11	18.33		18.33
Refrigerant type	R-410A		R-410A	R-410A		R-410A
Refrigerant charge (lb-oz)						
System 1	7-10		7-12	10-0		9-12
System 2	8-2		8-0	10-4		10-0
ARI heating performance						
Heating model	N(S)1	N(S)3	T3	N(S)1	N(S)3	T3
Heating type	Stg. low	Stg. high	Mod. high	Stg. low	Stg. high	Mod. high
1st stage heat input (kBTU)	165	300	140	165	300	140
2nd stage heat input (kBTU)	220	400	400	220	400	400
1st stage heat input (kBTU)	134	243	113	134	243	113
2nd stage heat input (kBTU)	178	324	324	178	324	324
Steady state efficiency (%)	81	81	81	81	81	81
No. of burners	5	9	9	5	9	9
No. of stages / turn down	2	2	2.85 to 1	2	2	2.85 to 1
Temperature rise range (°F)	15-45	35-65	35-65	15-45	30-65	30-65
Gas limit setting (°F)	130	130	135	130	130	135
Gas piping connection (in.)	3/4	3/4	3/4	3/4	3/4	3/4
Dimensions (in.)						
Length (in.)	129-3/4					
Width (in.)	88-3/4					
Height (in.)	48-9/16					
Operating weight (lb.)	1,750			1,830		
Compressors	2 stage		4 stage	2 stage		4 stage
Type	Scroll		Scroll	Scroll		Scroll
Quantity	2		2	2		2
Unit capacity steps (%)	50 / 100		34/50/84/100	50/100		31/47/85/100
Condenser coil data						
Face area (sq. ft.)	22.1			22.1		
Type	MCHX			MCHX		
Thickness (mm)	20			25		
FPI	23			23		
Circuitry type	2 pass			2 pass		
Evaporator coil data						
Face area (sq. ft.)	22.0			22.0		
Rows	3			4		
Fins per in.	17			15		
Tube diameter (in.)	3/8			3/8		
Circuitry type	Intertwined			Intertwined		
Refrigerant control	TXV			TXV		

Table 2: AD15 to AD18 physical data

Component	Models					
	AD15			AD18		
Nominal tonnage	15			17.5		
Condenser fan data						
Quantity	2			2		
Fan diameter (in.)	30			30		
Type	Prop			Prop		
Drive type	Direct			Direct		
No. of motors	2			2		
Motor HP each	1/2			1/2		
RPM	850			850		
Nominal total CFM	10,800			10,700		
Belt drive evaporator fan data						
Quantity	2			2		
Fan size (in.)	15x15			15x15		
Type	Centrifugal			Centrifugal		
Static range	Standard	Medium	High	Standard	Medium	High
Motor sheave	1VL44	1VL44	1VM50	1VL44	1VM50	1VP60
Blower sheave	1B5V90	1B5V74	1B5V66	1B5V86	1B5V74	1B5V74
Belt	AX41	AX41	BX40	AX41	BX43	BX43
Motor HP each	2.9	3.7	5.25	3.7	5.25	7.5
RPM	1,745	1,750	1,750	1,750	1,750	1,760
Frame size	56	56	145T	56	145T	213T
Filters						
Quantity - size	6 - (20 x 25 x 2) ^{3, 4, 5}			6 - (20 x 25 x 2) ^{3, 4, 5}		
	6 - (20 x 25 x 4) ⁶			6 - (20 x 25 x 4) ⁶		
 						

Table 3: AD20 to AD28 physical data

Component	Models					
	AD20		AD25		AD28	
Nominal tonnage	20		25		27.5	
ARI cooling performance	2 stage	4 stage	2 stage	4 stage	2 stage	4 stage
Gross capacity @ ARI A point (BTU)	244,000	240,000	297,000	291,000	332,000	335,000
ARI net capacity (BTU)	238,000	234,000	286,000	280,000	320,000	320,000
EER	11.0 ¹ / 10.8 ²	11.0 ¹ / 10.8 ²	10.2 ¹ / 10.0 ²	10.2 ¹ / 10.0 ²	10.4 ¹ / 10.2 ²	10.2 ¹ / 10.0 ²
IEER CV	12.4 ¹ / 12.2 ²	NA	11.6 ¹ / 11.4 ²	NA	11.6 ¹ / 11.4 ²	NA
IEER with IntelliSpeed	14.2 ¹ / 14.0 ²	14.4 ¹ / 14.2 ²	14.0 ¹ / 13.8 ²	14.4 ¹ / 14.2 ²	13.4 ¹ / 13.2 ²	14.4 ¹ / 14.2 ²
IEER with VAV	NA	14.2 ¹ / 14.0 ²	NA	14.2 ¹ / 14.0 ²	NA	14.2 ¹ / 14.0 ²
CFM	6,000	6,090	8,000	7,800	9,050	9,350
System power (kW)	22.04	21.67	28.60	28.00	31.37	32.00
Refrigerant type	R-410A	R-410A	R-410A	R-410A	R-410A	R-410A
Refrigerant charge (lb-oz)						
System 1	10-14	10-10	14-12	15-4	16-8	16-8
System 2	11-4	11-10	15-4	16-0	17-4	17-4
ARI heating performance						
Heating model	N(S)1	N(S)3	T3	N(S)1	N(S)3	T3
Heating type	Stg. low	Stg. high	Mod. high	Stg. low	Stg. high	Mod. high
1st stage heat input (kBtu)	165	300	140	165	300	140
2nd stage heat input (kBtu)	220	400	400	220	400	400
1st stage heat output (kBtu)	134	243	113	134	243	113
2nd stage heat output (kBtu)	178	324	324	178	324	324
Steady state efficiency (%)	81	81	81	81	81	81
No. of burners	5	9	9	5	9	9
No. of stages / turn down	2	2	2.85 to 1	2	2	2.85 to 1
Temperature rise range (°F)	15-45	30-65	30-65	10-40	20-55	20-55
Gas limit setting (°F)	130	130	135	130	130	135
Gas piping connection (in.)	3/4	3/4	3/4	3/4	3/4	3/4
Dimensions (in.)						
Length (in.)	143-13/16		143-13/16		160-1/16	
Width (in.)	88-3/4		88-3/4		88-3/4	
Height (in.)	48-9/16		56-9/16		56-9/16	
Operating wt. (lb.)	1,930		2,090		2,170	
Compressors	2 stage	4 stage	2 stage	4 stage	2 stage	4 stage
Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
Quantity	2	2	2	3	2	3
Unit capacity steps (%)	46 / 100	31/46/85/100	50/100	25/50/75/100	50/100	25/50/75/100
Condenser coil data						
Face area (sq. ft.)	25.1		30.8		35.4	
Type	MCHX		MCHX		MCHX	
Thickness (mm)	25		25		25	
FPI	23		23		23	
Circuitry type	2 pass		2 pass		2 pass	
Evaporator coil data						
Face area (sq. ft.)	22.0		26.0		26.0	
Rows	4		4		4	
Fins per in.	15		15		15	
Tube diameter (in.)	3/8		3/8		3/8	
Circuitry type	Intertwined		Intertwined		Intertwined	
Refrigerant control	TXV		TXV		TXV	
Condenser fan data						
Quantity	4		4		4	

Table 3: AD20 to AD28 physical data

Component	Models								
	AD20			AD25			AD28		
Nominal tonnage	20			25			27.5		
Fan diameter (in.)	24			24			30		
Type	Prop			Prop			Prop		
Drive type	Direct			Direct			Direct		
Number of motors	4			4			4		
Motor HP each	1/2			1/2			1/2		
RPM	1120			1120			850		
Nominal total CFM	15,800			16,900			21,400		
Belt drive evaporator fan data									
Quantity	2			2			2		
Fan size (in.)	15x15			15x15			15x15		
Type	Centrifugal			Centrifugal			Centrifugal		
Static range	Standard	Medium	High	Standard	Medium	High	Standard	Medium	High
Motor sheave	1VM50	1VM50	1VP60	1VM50	1VP60	1VP60	1VP71	1VP65	1VP71
Blower sheave	1B5V90	1B5V74	1B5V80	1B5V80	1B5V80	1B5V70	1B5V110	1B5V86	1B5V86
Belt	BX43	BX40	BX43	BX43	BX43	5VX450	BX50	BX43	5VX450
Motor HP each	5.25	5.3	7.5	5.25	7.5	10	7.5	10	12
RPM	1,750	1,750	1,760	1,750	1,760	1,765	1,760	1,765	1,765
Frame size	145T	145T	213T	145T	213T	215T	213T	215T	215T
Filters									
Quantity - size	6 - (20 x 25 x 2) ^{3, 4, 5}			9 - (16 x 25 x 2) ^{3, 4, 5}			9 - (16 x 25 x 2) ^{3, 4, 5}		
	6 - (20 x 25 x 4) ⁶			9 - (16 x 25 x 4) ⁶			9 - (16 x 25 x 4) ⁶		
</									

Unit limitations

Table 4: AD15 to AD28 unit limitations

Unit voltage	Applied voltage		Outdoor DB temperature
	Minimum	Maximum	Maximum (°F)
208/230-3-60	180	254	125
460-3-60	416	508	125
575-3-60	520	635	125

Capacity performance

The following tables show the capacity performance for the units. The total capacities (TC) and sensible capacities (SC) are gross ratings. For net capacity, deduct air blower motor, MBH = 3.415 x kW. See the appropriate blower performance table for the kW of the supply air blower motor.

① Note:

- TC = Total capacity
- SC = Sensible capacity

AD15 cooling capacity performance

Table 5: AD15 cooling performance, 75°F to 85°F

Air on evap. coil		Temperature of air on condenser coil																							
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)											
		90		85		80		75		70		65		90		85		80		75		70		65	
		TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC
CFM	WB (°F)	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH
		75°F												85.0°F											
3750	77	216.8	114.7	216.5	97.5	216.1	80.3	-	-	-	-	-	-	211.2	112.7	210.8	95.2	210.5	77.6	-	-	-	-	-	-
	72	198.4	131.9	198.3	114.9	198.1	97.7	197.7	80.5	-	-	-	-	192.8	130.1	192.6	112.7	192.4	95.2	192.1	77.6	-	-	-	-
	67	180.9	148.7	180.7	131.7	180.6	114.7	180.4	97.5	180.1	80.3	-	-	175.2	147.1	175.1	129.7	175.0	112.3	174.9	94.8	174.5	77.2	-	-
	62	163.7	163.7	164.0	147.9	163.8	130.9	163.5	113.9	163.3	96.7	163.0	79.4	159.5	159.5	158.5	146.2	158.4	128.9	158.1	111.4	157.8	93.9	157.6	76.3
	57	162.4	162.4	154.1	154.1	146.9	146.3	147.6	129.4	147.3	112.4	147.1	95.3	158.8	158.8	150.6	150.6	142.4	142.4	127.5	142.3	110.0	142.0	92.6	
4500	77	227.0	124.2	226.9	104.2	226.4	83.9	-	-	-	-	-	-	220.8	122.5	220.5	101.8	220.3	81.2	-	-	-	-	-	-
	72	207.7	144.4	207.6	124.4	207.6	104.3	207.3	84.1	-	-	-	-	201.6	142.8	201.4	122.3	201.4	101.8	201.0	81.1	-	-	-	-
	67	189.8	164.3	189.6	144.2	189.6	124.4	189.1	104.2	189.0	84.0	-	-	183.5	163.0	183.4	142.5	183.2	122.0	183.0	101.5	182.5	80.6	-	-
	62	176.0	176.0	172.0	163.7	172.4	143.8	172.2	123.8	171.9	103.7	171.7	83.4	172.0	172.0	165.4	162.1	166.1	141.8	166.1	121.4	165.7	100.8	165.6	80.1
	57	175.2	175.2	166.4	166.4	157.4	157.4	155.6	142.5	155.3	122.4	155.0	102.4	171.1	171.1	162.2	162.2	153.3	153.3	149.6	140.5	149.7	120.1	149.3	99.5
5250	77	234.7	133.2	234.7	110.2	234.2	86.9	-	-	-	-	-	-	228.0	131.3	228.0	107.9	227.2	84.0	-	-	-	-	-	-
	72	215.3	156.2	215.2	133.3	215.1	110.4	214.8	87.3	-	-	-	-	208.7	154.8	208.5	131.3	208.3	107.9	208.1	84.1	-	-	-	-
	67	196.7	178.9	196.6	156.1	196.4	133.2	196.2	110.3	195.8	87.1	-	-	189.3	178.0	189.8	154.5	189.5	131.0	189.3	107.5	189.1	83.7	-	-
	62	186.7	186.7	178.3	177.5	178.8	155.6	178.7	132.8	178.3	109.8	178.3	86.7	182.3	182.3	172.7	172.7	172.0	153.8	171.8	130.3	171.5	106.8	171.3	83.1
	57	185.8	185.8	176.3	176.3	166.9	166.9	161.2	154.6	161.7	131.7	161.3	108.7	181.4	181.4	171.8	171.8	162.2	162.2	154.3	153.0	155.1	129.2	154.8	105.7
6000	77	240.7	141.3	240.9	115.7	240.5	89.7	-	-	-	-	-	-	233.5	139.6	233.8	113.4	233.2	86.6	-	-	-	-	-	-
	72	221.3	167.3	221.2	141.6	221.0	116.0	220.6	89.9	-	-	-	-	214.2	166.1	214.2	139.9	213.9	113.4	213.3	86.8	-	-	-	-
	67	201.3	193.0	202.4	167.3	202.1	141.5	201.8	115.9	201.6	90.0	-	-	194.1	191.4	195.1	165.8	194.9	139.5	194.6	113.1	194.3	86.5	-	-
	62	195.7	195.7	185.9	185.9	183.8	166.7	183.6	141.0	183.4	115.4	183.1	89.4	191.0	191.0	180.9	180.9	176.3	165.2	176.5	138.7	176.1	112.3	175.7	85.8
	57	194.6	194.6	184.8	184.8	174.9	174.9	165.9	165.6	166.4	140.1	166.1	114.4	189.9	189.9	179.8	179.8	169.8	169.8	159.8	159.8	159.2	137.6	159.0	111.2
6750	77	245.8	149.2	246.1	120.9	245.4	92.1	-	-	-	-	-	-	238.2	147.5	238.4	118.5	238.2	89.2	-	-	-	-	-	-
	72	226.0	177.8	225.8	149.3	225.8	121.1	225.6	92.5	-	-	-	-	218.4	176.8	218.5	147.8	218.2	118.6	217.9	89.2	-	-	-	-
	67	206.3	204.3	206.9	178.0	206.9	149.6	206.6	121.2	206.3	92.6	-	-	199.9	199.9	199.1	176.6	199.1	147.5	198.7	118.3	198.4	89.0	-	-
	62	203.6	203.6	193.2	193.2	187.5	177.6	188.0	149.0	187.6	120.6	187.4	92.0	198.5	198.5	188.0	188.0	179.3	176.2	180.4	146.9	180.0	117.5	179.5	88.2
	57	202.3	202.3	191.9	191.9	181.7	181.7	171.3	171.3	170.2	148.0	169.9	119.6	197.3	197.3	186.7	186.7	176.2	176.2	165.7	165.7	162.6	145.6	162.2	116.3
7500	77	249.9	156.6	250.4	125.8	250.2	94.5	-	-	-	-	-	-	242.1	155.2	242.4	123.4	242.3	91.4	-	-	-	-	-	-
	72	229.8	187.9	229.9	156.9	230.1	126.2	229.7	94.8	-	-	-	-	221.8	187.2	221.9	155.3	221.9	123.5	221.7	91.5	-	-	-	-
	67	211.9	211.9	210.5	188.0	210.7	157.1	210.3	126.1	210.1	94.9	-	-	206.5	206.5	201.6	187.1	202.5	155.1	202.1	123.2	201.7	91.1	-	-
	62	210.4	210.4	199.6	199.6	190.6	187.5	191.7	156.7	191.3	125.6	190.9	94.4	205.0	205.0	193.9	193.9	183.0	183.0	183.6	154.5	183.2	122.5	182.7	90.5
	57	209.0	209.0	198.2	198.2	187.5	187.5	176.7	176.7	173.4	155.7	172.9	124.5	203.5	203.5	192.5	192.5	181.3	181.3	170.9	170.9	165.2	153.5	164.9	121.2

Table 6: AD15 cooling performance, 95°F to 105°F

Air on evap. coil		Temperature of air on condenser coil																							
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)											
		90				85				80				75				70				65			
		TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC
CFM	WB (°F)	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH
95°F														105°F											
3750	77	203.4	109.9	203.1	92.1	202.8	74.2	-	-	-	-	-	-	194.5	105.8	194.3	88.1	194.3	70.4	-	-	-	-	-	-
	72	185.2	127.4	185.1	109.7	184.9	92.0	184.6	74.1	-	-	-	-	176.8	123.2	176.6	105.5	176.5	87.8	176.3	69.9	-	-	-	-
	67	167.9	144.6	167.8	126.8	167.7	109.2	167.5	91.4	167.2	73.5	-	-	159.7	140.1	159.5	122.4	159.4	104.7	159.2	87.0	158.8	69.0	-	-
	62	154.5	154.5	151.2	143.4	151.4	126.0	151.2	108.2	150.9	90.4	150.6	72.5	148.4	148.4	142.8	139.0	143.4	121.4	143.2	103.6	142.8	85.8	142.6	67.9
	57	153.8	153.8	145.6	145.6	137.5	137.5	136.0	124.6	135.7	106.8	135.4	89.0	147.7	147.7	139.5	139.5	131.4	131.4	128.2	119.9	128.1	102.1	127.7	84.3
4500	77	212.3	119.6	212.1	98.7	211.8	77.6	-	-	-	-	-	-	203.0	115.4	202.9	94.5	202.6	73.5	-	-	-	-	-	-
	72	193.4	140.2	193.1	119.3	193.0	98.4	192.7	77.3	-	-	-	-	184.3	135.8	183.9	114.8	183.9	94.0	183.5	72.9	-	-	-	-
	67	177.5	162.5	177.3	141.7	177.1	120.8	176.9	99.9	176.6	78.6	-	-	166.0	156.3	166.6	135.1	166.3	114.2	166.2	93.3	166.0	72.2	-	-
	62	166.4	166.4	157.4	157.4	158.3	138.8	158.2	118.0	157.9	97.0	157.6	76.0	159.8	159.8	150.9	150.9	149.8	134.0	149.7	113.2	149.4	92.3	149.1	71.1
	57	165.6	165.6	156.6	156.6	147.7	147.7	141.7	137.9	142.3	116.8	141.8	95.7	159.0	159.0	150.0	150.0	141.1	141.1	133.1	133.0	134.1	111.7	133.6	90.7
5250	77	218.9	128.5	218.7	104.5	218.4	80.4	-	-	-	-	-	-	209.4	124.2	209.2	100.3	208.8	76.1	-	-	-	-	-	-
	72	199.8	152.2	199.7	128.4	199.5	104.5	199.2	80.3	-	-	-	-	190.3	147.6	190.2	123.7	189.8	99.8	189.3	75.6	-	-	-	-
	67	180.1	175.9	181.3	151.8	180.9	127.8	180.6	103.8	180.3	79.7	-	-	171.0	170.2	171.8	146.8	171.6	122.9	171.2	98.9	170.9	74.8	-	-
	62	176.3	176.3	166.6	166.6	163.5	150.9	163.4	126.9	163.0	103.0	162.7	78.8	169.3	169.3	159.7	159.7	154.0	146.4	154.4	121.9	154.1	97.9	153.7	73.8
	57	175.3	175.3	165.7	165.7	156.1	156.1	146.7	146.7	146.8	125.7	146.6	101.6	168.3	168.3	158.7	158.7	149.1	149.1	139.7	139.7	138.2	120.4	138.1	96.5
6000	77	223.9	136.8	224.0	110.0	223.9	83.1	-	-	-	-	-	-	214.2	132.4	213.9	105.3	213.6	78.4	-	-	-	-	-	-
	72	204.7	163.6	204.6	136.8	204.2	109.9	203.9	82.8	-	-	-	-	195.0	158.9	194.8	132.0	194.5	105.1	194.0	78.0	-	-	-	-
	67	185.8	185.8	185.8	163.3	185.7	136.3	185.3	109.4	184.9	82.3	-	-	178.4	178.4	175.9	158.5	176.0	131.1	175.4	104.1	175.1	77.2	-	-
	62	184.5	184.5	174.3	174.3	166.8	162.9	167.6	135.5	167.0	108.4	166.6	81.3	177.2	177.2	167.0	167.0	157.1	157.1	158.2	130.2	157.6	103.1	157.1	76.0
	57	183.4	183.4	173.2	173.2	163.1	163.1	153.1	153.1	150.5	134.2	150.1	107.2	176.1	176.1	165.9	165.9	155.7	155.7	145.7	145.7	141.6	129.0	141.2	101.8
6750	77	228.0	144.8	228.2	115.2	227.8	85.2	-	-	-	-	-	-	218.0	140.2	217.9	110.5	217.5	80.6	-	-	-	-	-	-
	72	208.4	174.5	208.4	144.8	208.2	115.0	207.8	85.0	-	-	-	-	198.4	169.7	198.6	139.9	198.1	110.0	197.5	80.1	-	-	-	-
	67	192.9	192.9	188.7	174.4	189.4	144.4	189.0	114.5	188.4	84.6	-	-	185.2	185.2	178.4	170.0	179.4	139.1	179.1	109.3	178.4	79.3	-	-
	62	191.5	191.5	180.8	180.8	170.2	170.2	170.9	143.6	170.5	113.6	169.9	83.7	183.8	183.8	173.1	173.1	162.6	162.6	161.3	138.1	160.7	108.1	159.9	78.1
	57	190.2	190.2	179.6	179.6	169.0	169.0	158.5	158.5	153.1	142.4	153.0	112.2	182.5	182.5	172.0	172.0	161.3	161.3	150.9	150.9	143.4	137.5	143.6	106.6
7500	77	231.6	152.5	231.6	119.9	231.6	87.4	-	-	-	-	-	-	221.2	147.7	221.0	115.1	220.8	82.5	-	-	-	-	-	-
	72	211.3	184.9	211.4	152.4	211.4	119.9	211.1	87.2	-	-	-	-	200.7	180.0	201.3	147.4	201.0	114.7	200.4	82.0	-	-	-	-
	67	199.0	199.0	191.0	185.5	192.2	152.0	191.9	119.3	191.2	86.6	-	-	191.2	191.2	180.9	179.4	182.0	146.6	181.8	114.0	180.9	81.2	-	-
	62	197.6	197.6	186.6	186.6	175.4	175.4	173.7	151.3	173.2	118.4	172.5	85.7	189.6	189.6	178.6	178.6	167.5	167.5	163.3	146.0	163.1	112.7	162.4	79.9
	57	196.1	196.1	185.1	185.1	174.0	174.0	163.1	163.1	154.9	150.9	155.3	117.1	188.2	188.2	177.3	177.3	166.1	166.1	155.2	155.2	144.9	144.9	145.8	111.3

Table 7: AD15 cooling performance, 115°F to 125°F

Air on evap. coil		Temperature of air on condenser coil																							
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)											
		115°F												125°F											
3750	77	184.4	101.5	184.1	83.7	184.1	66.0	-	-	-	-	-	-	171.2	96.1	171.0	78.3	171.0	60.6	-	-	-	-	-	-
	72	166.8	118.6	166.5	100.9	166.4	83.1	166.1	65.2	-	-	-	-	154.2	112.8	154.0	95.2	153.8	77.5	153.5	59.6	-	-	-	-
	67	149.9	135.4	150.0	117.6	149.7	99.9	149.2	82.0	149.0	64.1	-	-	136.4	129.7	137.3	111.4	137.4	93.9	136.6	75.9	136.3	58.1	-	-
	62	141.3	141.3	133.1	133.1	134.1	116.3	133.8	98.5	133.2	80.6	133.0	62.7	132.0	132.0	123.9	123.9	121.6	110.5	121.6	92.2	121.1	74.3	120.7	56.4
	57	140.6	140.6	132.4	132.4	124.3	124.3	118.5	115.3	119.1	96.9	118.5	78.9	131.3	131.3	123.2	123.2	115.2	115.2	107.2	107.2	107.5	90.5	106.8	72.4
4500	77	191.8	110.7	191.5	89.6	191.4	68.8	-	-	-	-	-	-	177.9	105.0	177.7	84.1	177.3	63.2	-	-	-	-	-	-
	72	173.6	130.9	173.3	110.0	173.0	89.0	172.7	68.0	-	-	-	-	160.3	124.9	159.8	104.0	159.5	83.1	159.3	62.2	-	-	-	-
	67	155.5	150.9	156.2	130.0	155.9	109.0	155.6	88.1	155.2	67.0	-	-	143.1	143.1	143.0	123.9	143.0	102.9	142.2	81.8	141.7	60.7	-	-
	62	152.1	152.1	143.1	143.1	139.4	128.6	139.4	107.7	139.1	86.8	138.6	65.7	142.2	142.2	133.0	133.0	125.8	122.6	126.5	101.1	125.9	80.1	125.1	58.9
	57	151.2	151.2	142.2	142.2	133.4	133.4	124.6	124.6	124.2	106.1	123.6	85.1	141.3	141.3	132.2	132.2	123.4	123.4	114.7	114.7	111.4	99.9	111.1	78.2
5250	77	197.6	119.3	197.4	95.3	196.9	71.2	-	-	-	-	-	-	183.0	113.1	182.7	89.5	182.2	65.5	-	-	-	-	-	-
	72	179.1	142.6	178.7	118.6	178.1	94.5	177.8	70.4	-	-	-	-	165.0	136.4	164.6	112.4	164.1	88.4	163.2	64.3	-	-	-	-
	67	162.0	162.0	160.9	141.7	160.5	117.4	159.9	93.5	159.4	69.3	-	-	151.4	151.4	146.1	136.0	146.5	110.9	145.8	86.8	145.6	62.9	-	-
	62	160.9	160.9	151.3	151.3	142.9	140.9	143.8	116.3	143.2	92.2	142.7	68.1	150.4	150.4	140.6	140.6	131.0	131.0	129.9	109.5	129.3	85.2	128.4	61.0
	57	160.0	160.0	150.4	150.4	140.7	140.7	131.3	131.3	127.6	114.8	127.4	90.6	149.4	149.4	139.6	139.6	129.9	129.9	120.6	120.6	113.9	108.5	114.1	83.4
6000	77	202.2	127.3	201.8	100.5	201.2	73.4	-	-	-	-	-	-	187.1	121.2	186.6	94.4	185.8	67.3	-	-	-	-	-	-
	72	183.2	153.7	182.9	126.8	182.4	99.7	181.4	72.5	-	-	-	-	168.1	147.2	168.4	120.3	167.7	93.3	166.2	66.1	-	-	-	-
	67	169.5	169.5	163.9	153.6	164.3	125.7	163.6	98.6	162.9	71.5	-	-	158.3	158.3	149.9	144.9	150.7	119.1	149.6	92.0	147.7	64.4	-	-
	62	168.3	168.3	158.0	158.0	148.0	148.0	147.0	124.4	146.1	97.2	145.2	70.0	157.0	157.0	147.0	147.0	136.9	136.9	131.8	118.1	131.8	89.9	130.3	62.7
	57	167.0	167.0	157.0	157.0	146.7	146.7	136.9	136.9	129.5	123.1	130.1	95.6	156.1	156.1	145.9	145.9	135.8	135.8	125.6	125.6	115.8	115.8	116.1	88.0
6750	77	205.5	135.0	205.2	105.2	204.6	75.3	-	-	-	-	-	-	190.1	128.7	189.9	99.0	188.6	69.0	-	-	-	-	-	-
	72	185.8	164.4	186.3	134.5	185.8	104.6	184.9	74.5	-	-	-	-	170.1	158.8	171.3	127.9	170.6	97.9	169.1	67.8	-	-	-	-
	67	176.0	176.0	166.2	164.3	167.4	133.4	166.8	103.4	165.5	73.2	-	-	164.2	164.2	153.7	153.7	152.7	126.7	152.1	96.6	150.6	66.4	-	-
	62	174.5	174.5	163.9	163.9	153.3	153.3	149.0	132.2	148.8	101.9	147.6	71.8	162.8	162.8	152.3	152.3	141.8	141.8	133.7	126.6	134.0	94.6	132.2	64.3
	57	173.3	173.3	162.5	162.5	152.0	152.0	141.5	141.5	131.4	131.4	132.2	100.2	161.6	161.6	151.0	151.0	140.1	140.1	129.6	129.6	119.3	119.3	117.6	92.5
7500	77	208.1	142.3	208.7	109.8	207.4	77.0	-	-	-	-	-	-	192.2	135.9	192.3	103.3	190.1	71.0	-	-	-	-	-	-
	72	187.4	175.8	188.8	141.8	188.3	109.1	187.4	76.2	-	-	-	-	171.5	169.1	173.3	135.0	172.9	102.3	171.2	69.3	-	-	-	-
	67	181.5	181.5	170.4	170.4	169.8	140.9	169.3	108.0	168.2	75.1	-	-	169.3	169.3	158.2	158.2	153.8	134.4	154.1	100.9	152.5	68.1	-	-
	62	179.9	179.9	168.8	168.8	157.7	157.7	150.7	140.8	150.8	106.4	149.4	73.4	167.7	167.7	156.7	156.7	145.8	145.8	134.6	134.3	135.8	98.9	133.4	65.6
	57	178.6	178.6	167.5	167.5	156.3	156.3	145.5	145.5	134.7	134.7	133.8	104.7	166.3	166.3	155.3	155.3	144.5	144.5	133.1	133.1	122.4	122.4	118.7	96.9

AD18 cooling capacity performance

Table 8: AD18 cooling performance, 75°F to 85°F

Air on evap. coil		Temperature of air on condenser coil																							
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)											
		90				85				80				75				70				65			
		TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC
CFM	WB (°F)	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH
		75°F												85°F											
4375	77	252.0	138.3	253.1	115.8	254.1	93.4	-	-	-	-	-	-	240.2	132.4	241.3	109.9	241.6	87.4	-	-	-	-	-	-
	72	229.6	161.6	230.8	139.1	232.1	116.4	232.8	93.7	-	-	-	-	218.7	155.6	219.7	133.1	221.3	110.5	222.3	88.1	-	-	-	-
	67	209.6	184.4	209.9	162.0	210.8	139.3	211.8	116.8	212.8	94.1	-	-	199.3	178.5	199.6	156.0	200.7	133.5	201.9	110.7	202.6	88.1	-	-
	62	194.7	194.7	191.0	183.9	191.4	161.6	191.8	139.2	192.9	116.7	194.1	94.1	186.7	186.7	181.6	177.7	182.3	156.0	182.7	133.5	183.8	110.9	184.7	88.2
	57	192.5	192.5	183.8	183.8	174.6	174.6	173.9	161.5	174.2	138.8	175.1	116.2	184.5	184.5	175.9	175.9	167.7	167.7	165.1	155.7	165.5	133.0	165.8	110.1
5250	77	263.8	151.8	265.4	125.0	266.8	98.5	-	-	-	-	-	-	250.9	145.7	252.4	119.0	253.9	92.5	-	-	-	-	-	-
	72	240.3	179.8	242.2	152.6	243.6	125.6	244.7	98.9	-	-	-	-	228.4	173.6	230.3	146.4	231.6	119.5	233.0	92.9	-	-	-	-
	67	219.8	206.9	220.5	180.3	221.4	153.2	222.5	125.8	224.3	99.3	-	-	208.5	199.8	209.2	174.2	210.4	147.0	212.1	119.9	213.8	93.5	-	-
	62	210.4	210.4	201.3	201.3	201.3	180.4	201.8	153.5	203.9	126.5	205.3	99.6	201.6	201.6	192.3	192.3	190.7	174.2	192.0	147.5	194.0	120.5	194.9	93.4
	57	208.2	208.2	198.7	198.7	189.2	189.2	183.6	179.0	184.2	153.3	185.5	126.4	199.4	199.4	190.1	190.1	181.0	181.0	174.2	172.5	174.9	147.2	175.7	120.0
6125	77	272.7	164.4	274.6	133.6	276.2	102.9	-	-	-	-	-	-	259.0	158.1	260.6	127.2	262.5	96.7	-	-	-	-	-	-
	72	248.9	197.1	250.8	165.6	252.5	134.3	254.2	103.5	-	-	-	-	236.1	190.7	237.9	159.1	240.1	128.0	242.1	97.5	-	-	-	-
	67	228.4	224.5	228.6	197.7	229.6	166.2	231.4	134.7	233.3	104.0	-	-	216.0	216.0	216.5	191.5	218.0	159.8	219.9	128.5	222.2	98.0	-	-
	62	223.3	223.3	213.1	213.1	218.0	188.7	209.4	166.6	211.7	135.3	213.5	104.2	213.7	213.7	203.7	203.7	198.3	190.7	199.2	160.5	201.0	128.9	202.6	97.9
	57	221.1	221.1	210.9	210.9	200.7	200.7	191.4	191.4	191.7	166.8	193.1	135.5	211.4	211.4	201.6	201.6	191.7	191.7	182.8	182.8	181.5	160.4	182.8	128.9
7000	77	279.0	176.4	281.1	141.4	282.7	106.5	-	-	-	-	-	-	264.9	169.8	266.5	134.8	269.2	100.4	-	-	-	-	-	-
	72	255.2	213.8	257.6	177.8	259.4	142.3	261.5	107.5	-	-	-	-	241.9	206.9	244.4	171.2	246.2	135.8	248.2	101.2	-	-	-	-
	67	236.5	236.5	234.8	214.2	235.7	179.1	238.1	142.8	240.4	108.1	-	-	226.1	226.1	222.0	207.4	223.6	172.5	226.3	136.5	228.6	101.9	-	-
	62	234.2	234.2	223.4	223.4	215.6	211.2	215.5	179.5	218.2	143.4	219.8	108.3	223.7	223.7	213.3	213.3	203.5	203.5	204.7	173.1	206.7	136.9	208.4	101.8
	57	231.9	231.9	221.2	221.2	210.4	210.4	199.5	199.5	197.5	179.5	198.9	143.8	221.5	221.5	211.1	211.1	200.8	200.8	190.8	190.8	186.8	172.8	188.2	137.1
7875	77	284.3	188.1	286.7	148.9	288.9	110.1	-	-	-	-	-	-	268.7	181.4	273.0	142.6	274.8	103.9	-	-	-	-	-	-
	72	260.2	229.3	262.1	189.6	264.5	149.8	266.8	111.0	-	-	-	-	245.1	222.4	248.2	183.4	251.1	143.2	253.7	104.7	-	-	-	-
	67	245.7	245.7	239.8	227.9	240.9	191.2	243.6	150.7	245.9	111.8	-	-	234.6	234.6	226.5	220.2	228.3	184.4	231.8	144.3	233.7	105.4	-	-
	62	243.1	243.1	232.1	232.1	220.9	220.9	220.3	191.4	223.5	151.4	225.4	112.1	232.3	232.3	221.5	221.5	210.7	210.7	209.2	185.3	211.8	144.6	213.4	105.5
	57	241.1	241.1	229.9	229.9	218.8	218.8	207.6	207.6	202.2	191.3	203.9	151.7	230.0	230.0	219.2	219.2	208.3	208.3	198.1	198.1	191.3	183.9	192.6	145.1
8750	77	288.2	199.4	291.2	156.1	293.8	113.4	-	-	-	-	-	-	271.7	192.8	275.5	149.2	279.5	107.2	-	-	-	-	-	-
	72	263.6	243.8	266.4	201.2	269.0	157.1	271.3	114.3	-	-	-	-	249.2	235.8	252.0	194.2	255.2	150.3	257.8	107.9	-	-	-	-
	67	253.7	253.7	243.9	240.2	245.2	203.0	248.0	158.1	250.4	115.2	-	-	242.0	242.0	230.9	230.9	232.0	195.7	235.6	151.5	237.6	108.7	-	-
	62	251.2	251.2	239.6	239.6	228.0	228.0	224.5	203.2	227.7	158.9	230.0	115.7	239.6	239.6	228.5	228.5	217.5	217.5	212.9	196.8	215.5	152.2	217.5	108.9
	57	248.9	248.9	237.5	237.5	225.8	225.8	214.2	214.2	206.7	200.8	207.7	159.8	237.4	237.4	226.2	226.2	215.1	215.1	203.3	203.3	195.0	194.1	178.5	126.6

Air on evap. coil		Temperature of air on condenser coil																							
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)											
CFM	WB (°F)	90		85		80		75		70		65		90		85		80		75		70		65	
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		95°F												105°F											
4375	77	231.8	127.8	233.8	105.8	235.7	84.0	-	-	-	-	-	-	216.1	121.7	217.9	99.1	219.3	76.7	-	-	-	-	-	-
	72	210.0	150.5	211.8	128.1	213.1	105.9	215.1	84.0	-	-	-	-	196.2	145.2	197.7	122.3	198.5	99.3	201.2	77.1	-	-	-	-
	67	190.5	173.1	191.2	150.8	192.7	128.3	194.2	106.0	195.4	83.8	-	-	177.4	168.3	178.1	145.6	179.8	122.5	181.4	99.7	182.3	76.8	-	-
	62	179.2	179.2	173.2	171.1	173.6	150.2	174.1	127.9	175.4	105.3	175.8	82.8	170.7	170.7	162.6	162.6	161.5	145.1	162.4	122.3	163.5	99.3	164.2	76.1
	57	177.0	177.0	168.7	168.7	160.4	156.2	149.4	156.7	126.9	157.3	104.1	-	168.6	168.6	160.4	160.4	152.0	152.0	145.1	144.0	145.6	121.3	146.5	98.1
5250	77	241.2	140.5	244.8	114.7	247.5	89.0	-	-	-	-	-	-	225.1	134.7	227.2	107.8	230.7	81.6	-	-	-	-	-	-
	72	219.1	168.1	221.9	141.2	223.9	115.0	225.9	88.9	-	-	-	-	204.1	163.4	206.4	135.6	208.4	108.4	210.1	81.4	-	-	-	-
	67	199.6	193.2	200.4	168.4	202.0	141.6	203.7	114.8	205.2	88.6	-	-	186.6	186.6	186.2	163.5	188.4	136.1	189.9	108.5	191.3	81.3	-	-
	62	193.6	193.6	184.6	184.6	182.5	168.3	183.2	141.7	184.8	114.5	185.5	87.9	184.1	184.1	175.2	175.2	169.5	163.2	170.4	136.4	171.7	108.3	173.6	81.1
	57	191.3	191.3	182.3	182.3	173.2	173.2	165.1	165.1	165.4	140.7	166.2	113.7	181.9	181.9	173.1	173.1	164.1	164.1	155.1	155.1	153.4	135.4	154.5	107.6
6125	77	249.9	153.0	252.6	122.7	256.1	93.1	-	-	-	-	-	-	231.7	147.0	233.9	115.8	237.5	85.4	-	-	-	-	-	-
	72	226.4	184.9	229.2	153.8	223.0	123.1	233.8	93.0	-	-	-	-	210.5	180.3	212.9	148.0	216.0	116.7	217.3	85.5	-	-	-	-
	67	207.9	207.9	207.3	185.3	209.1	154.3	211.4	123.1	212.4	92.7	-	-	197.3	197.3	192.2	180.5	194.4	149.1	196.7	116.8	198.5	85.6	-	-
	62	205.1	205.1	195.7	195.7	189.3	183.4	189.9	154.5	191.8	122.8	192.1	91.9	194.8	194.8	185.4	185.4	176.1	176.1	176.2	149.7	178.7	117.2	179.6	85.1
	57	203.0	203.0	193.6	193.6	183.6	183.6	173.4	173.4	171.6	153.9	172.8	122.3	192.6	192.6	183.3	183.3	173.9	173.9	164.4	164.4	159.1	149.0	160.5	116.4
7000	77	256.9	164.9	259.5	130.3	262.3	96.6	-	-	-	-	-	-	236.7	159.0	239.2	123.5	242.4	88.7	-	-				

Table 10: AD18 cooling performance, 115°F to 125°F

Air on evap. coil		Temperature of air on condenser coil																							
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)											
		90				85				80				75				70				65			
CFM	WB (°F)	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC
		MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH
		115°F												125°F											
4375	77	206.6	118.3	208.5	95.6	210.2	73.0	-	-	-	-	-	-	197.3	114.6	199.5	91.9	201.2	69.2	-	-	-	-	-	-
	72	186.9	141.3	188.1	118.3	189.3	95.6	190.6	72.7	-	-	-	-	176.1	137.2	178.0	114.1	179.9	91.2	180.9	68.2	-	-	-	-
	67	168.8	163.6	169.3	141.7	170.0	118.4	170.6	95.4	172.1	72.3	-	-	156.8	156.8	158.4	136.0	159.6	113.2	160.9	90.0	161.2	66.7	-	-
	62	163.6	163.6	155.2	155.2	151.9	141.0	152.4	117.9	153.1	94.6	153.9	71.2	154.7	154.7	146.0	146.0	140.8	134.6	144.0	113.0	142.5	88.2	142.2	64.5
	57	161.2	161.2	152.9	152.9	144.2	144.2	135.3	135.3	135.5	116.5	135.7	92.0	152.5	152.5	143.7	143.7	134.9	134.9	138.0	125.9	124.7	109.7	124.9	85.8
5250	77	214.7	131.7	217.2	104.2	219.9	77.1	-	-	-	-	-	-	205.8	128.3	208.2	101.1	207.0	120.0	-	-	-	-	-	-
	72	199.7	159.5	196.1	132.0	197.9	104.6	200.0	77.0	-	-	-	-	184.5	155.4	186.3	127.9	187.6	100.5	188.0	77.0	-	-	-	-
	67	179.3	179.3	177.2	159.6	177.9	132.2	178.7	104.4	180.6	76.7	-	-	170.2	170.2	165.6	154.4	167.4	126.9	168.6	99.4	168.9	75.7	-	-
	62	176.7	176.7	167.7	167.7	158.9	158.9	159.6	132.0	159.9	103.7	161.1	75.5	167.7	167.7	158.4	158.4	148.9	148.9	149.1	125.6	149.9	97.7	148.9	74.4
	57	174.5	174.5	165.4	165.4	156.3	156.3	146.9	143.0	130.7	143.1	101.5	165.4	165.4	156.2	156.2	146.6	146.6	136.9	136.9	130.9	123.9	131.7	95.4	-
6125	77	220.7	144.5	223.9	112.5	226.0	80.8	-	-	-	-	-	-	211.8	141.2	214.2	109.6	214.0	129.0	-	-	-	-	-	-
	72	200.8	176.5	202.1	145.1	205.3	113.0	206.9	81.0	-	-	-	-	189.4	172.6	192.3	141.1	194.4	109.1	194.0	86.1	-	-	-	-
	67	189.8	189.8	182.0	176.7	183.9	145.8	185.5	112.9	187.1	80.4	-	-	180.7	180.7	170.8	170.8	173.1	140.2	174.2	108.1	174.3	84.4	-	-
	62	187.1	187.1	177.5	177.5	168.2	168.2	166.1	145.4	166.7	112.7	168.3	79.8	178.2	178.2	168.4	168.4	158.4	158.4	154.2	139.0	155.3	106.4	153.9	83.2
	57	185.1	185.1	175.6	175.6	165.8	165.8	156.0	156.0	148.3	143.6	148.6	110.3	176.2	176.2	166.2	166.2	156.1	156.1	145.7	145.7	136.3	136.3	136.7	104.2
7000	77	228.1	157.6	228.7	120.3	232.1	84.5	-	-	-	-	-	-	216.8	153.6	219.2	117.8	218.0	137.0	-	-	-	-	-	-
	72	203.9	193.7	207.3	158.1	209.6	120.9	211.7	84.5	-	-	-	-	192.1	189.9	196.9	153.6	198.7	117.4	198.0	94.4	-	-	-	-
	67	198.7	198.7	189.2	189.2	188.5	158.5	190.6	121.2	192.2	84.2	-	-	189.4	189.4	179.7	179.7	177.4	153.1	178.8	116.4	178.2	92.6	-	-
	62	196.0	196.0	186.4	186.4	176.1	176.1	169.5	159.0	171.6	120.9	172.9	83.5	186.9	186.9	176.8	176.8	166.2	166.2	158.6	151.1	159.2	114.6	157.5	91.4
	57	193.7	193.7	184.6	184.6	173.8	173.8	163.6	163.6	153.1	153.1	153.3	121.0	184.7	184.7	174.6	174.6	164.0	164.0	153.9	153.9	142.2	142.2	140.2	112.4
7875	77	231.5	169.6	233.3	128.0	236.4	87.9	-	-	-	-	-	-	219.2	165.9	225.0	125.0	222.0	145.0	-	-	-	-	-	-
	72	208.5	207.0	210.7	170.4	213.0	128.4	216.4	88.0	-	-	-	-	199.6	198.5	201.0	166.7	202.3	125.1	202.0	102.0	-	-	-	-
	67	205.7	205.7	195.5	195.5	192.6	170.9	194.2	129.0	196.3	87.6	-	-	196.9	196.9	186.3	186.3	180.6	165.4	182.5	124.3	181.3	100.7	-	-
	62	203.3	203.3	192.4	192.4	182.7	182.7	172.7	171.3	175.7	129.6	176.8	86.9	194.4	194.4	183.8	183.8	172.9	172.9	161.8	161.8	162.3	122.7	160.3	98.6
	57	201.0	201.0	191.4	191.4	180.6	180.6	169.8	169.8	159.0	159.0	155.9	126.3	192.2	192.2	181.6	181.6	170.6	170.6	159.5	159.5	147.8	147.8	143.0	119.6
8750	77	234.0	180.0	235.7	135.1	239.6	90.9	-	-	-	-	-	-	222.4	178.6	230.0	130.0	226.0	152.0	-	-	-	-	-	-
	72	214.6	213.2	213.1	181.4	217.0	135.0	219.3	91.0	-	-	-	-	206.0	204.9	202.6	178.3	206.0	132.0	204.0	109.8	-	-	-	-
	67	211.9	211.9	201.8	201.8	205.1	179.5	197.3	136.8	200.0	91.0	-	-	203.5	203.5	192.4	192.4	183.8	176.1	184.5	131.8	183.6	107.7	-	-
	62	209.6	209.6	199.9	199.9	188.4	188.4	177.5	177.5	178.0	137.5	179.7	90.0	200.9	200.9	190.0	190.0	178.6	178.6	167.0	167.0	164.6	129.7	162.4	103.7
	57	207.4	207.4	196.1	196.1	186.2	186.2	175.2	175.2	164.1	164.1	162.3	137.8	198.9	198.9	187.7	187.7	176.4	176.4	164.7	164.7	152.7	152.7	145.1	124.7

AD20 cooling capacity performance

Table 11: AD20 cooling performance, 75°F to 85°F

Air on evap. coil		Temperature of air on condenser coil																							
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)											
		90		85		80		75		70		65		90		85		80		75		70		65	
CFM	WB (°F)	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		75°F												85°F											
5000	77	301.6	161.6	317.9	142.7	249.2	97.2	-	-	-	-	-	-	291.0	156.4	291.2	131.4	291.2	106.3	-	-	-	-	-	-
	72	276.4	187.2	276.6	162.2	276.7	137.1	276.8	111.8	-	-	-	-	265.6	181.6	265.7	156.6	265.5	131.5	265.5	106.3	-	-	-	-
	67	251.7	212.3	252.1	187.4	252.2	162.2	252.4	137.1	252.3	111.8	-	-	240.8	206.1	241.0	181.2	241.1	156.2	241.1	131.2	241.0	105.9	-	-
	62	229.5	229.5	228.6	211.8	228.7	186.6	228.9	161.6	228.9	136.4	228.7	111.1	219.9	219.9	217.5	205.5	217.8	180.4	217.6	155.2	217.4	130.0	217.1	104.7
	57	227.1	227.1	216.5	216.5	205.9	205.9	206.8	185.5	206.8	160.3	206.6	135.0	217.5	217.5	207.3	207.3	196.4	196.4	195.8	178.7	195.7	153.5	195.6	128.5
6000	77	313.7	175.1	329.9	150.6	315.6	116.4	-	-	-	-	-	-	303.2	170.0	303.5	140.6	303.5	110.9	-	-	-	-	-	-
	72	288.1	205.6	288.8	176.2	289.1	146.6	289.4	116.9	-	-	-	-	276.8	199.7	277.5	170.4	277.5	140.9	277.5	111.2	-	-	-	-
	67	263.3	235.6	263.6	206.0	264.0	176.4	264.4	146.9	264.5	117.1	-	-	251.7	229.0	252.4	199.8	252.4	170.2	252.5	140.7	252.3	111.0	-	-
	62	247.1	247.1	238.7	235.0	240.2	205.9	240.4	176.2	240.5	146.5	240.2	116.6	237.2	237.2	226.9	226.9	228.5	199.1	228.4	169.4	228.3	139.8	227.9	110.0
	57	244.6	244.6	233.0	233.0	221.4	221.4	217.2	204.7	217.4	175.0	217.1	145.1	234.7	234.7	223.1	223.1	211.4	211.4	205.3	197.6	205.4	167.9	205.1	138.1
7000	77	323.6	188.3	332.8	154.5	326.2	120.9	-	-	-	-	-	-	313.0	182.9	313.4	149.2	313.4	115.2	-	-	-	-	-	-
	72	297.9	223.4	298.1	189.2	298.6	155.3	299.1	121.3	-	-	-	-	285.4	216.8	285.9	183.1	286.5	149.4	286.5	115.4	-	-	-	-
	67	271.3	257.1	272.3	223.5	272.8	189.6	273.4	155.7	273.7	121.6	-	-	258.5	251.0	260.3	216.9	260.8	183.2	261.1	149.3	260.9	115.3	-	-
	62	261.6	261.6	249.1	249.1	248.5	223.5	248.9	189.6	249.4	155.6	248.9	121.2	251.2	251.2	238.7	238.7	236.1	216.3	236.7	182.7	236.5	148.6	236.0	114.4
	57	259.0	259.0	246.5	246.5	234.2	234.2	224.4	223.0	225.6	188.6	225.5	154.4	248.6	248.6	236.0	236.0	223.7	223.7	211.8	211.8	213.1	181.2	212.8	147.0
8000	77	331.8	200.7	347.5	164.4	333.1	124.4	-	-	-	-	-	-	319.9	195.0	320.6	157.1	320.9	119.0	-	-	-	-	-	-
	72	309.0	216.9	305.6	201.7	306.3	163.5	308.2	125.9	-	-	-	-	292.6	233.5	293.2	195.4	293.9	157.5	294.2	119.4	-	-	-	-
	67	276.8	276.8	294.4	231.4	280.7	202.5	280.7	163.9	280.8	125.6	-	-	265.8	265.8	266.8	233.3	267.2	195.3	267.8	157.3	267.8	119.2	-	-
	62	273.6	273.6	260.7	260.7	254.5	240.3	255.4	202.1	255.9	163.8	255.8	125.4	262.9	262.9	249.7	249.7	241.2	233.5	242.7	194.9	242.7	156.6	242.4	118.4
	57	271.0	271.0	257.6	257.6	244.5	244.5	232.1	232.1	232.1	201.4	231.9	162.9	260.0	260.0	247.0	247.0	233.9	233.9	220.8	220.8	219.1	193.7	218.6	155.2
9000	77	349.9	215.6	339.9	170.6	339.5	128.0	-	-	-	-	-	-	326.5	206.7	326.4	164.5	326.9	122.4	-	-	-	-	-	-
	72	310.7	256.0	311.4	213.6	312.1	171.2	312.9	128.9	-	-	-	-	298.2	249.2	299.0	207.2	299.9	165.1	300.1	122.9	-	-	-	-
	67	287.5	287.5	284.9	256.7	246.6	165.3	286.5	171.7	286.9	129.3	-	-	275.9	275.9	271.8	249.5	272.6	207.0	273.1	164.8	273.4	122.7	-	-
	62	292.0	292.0	270.6	270.6	258.2	257.3	260.8	214.1	261.2	171.5	261.3	129.0	272.9	272.9	259.2	259.2	245.8	245.8	247.5	206.6	247.8	164.2	247.6	121.9
	57	282.0	282.0	267.8	267.8	254.3	254.3	240.7	240.7	236.9	213.5	237.0	170.7	270.0	270.0	256.4	256.4	242.7	242.7	229.0	229.0	223.4	205.4	223.6	163.0
10000	77	341.5	223.7	341.1	176.7	344.8	131.3	-	-	-	-	-	-	336.2	201.8	331.5	171.7	332.4	125.7	-	-	-	-	-	-
	72	315.6	271.7	316.2	225.1	317.0	178.5	317.9	132.2	-	-	-	-	302.7	264.6	303.4	218.3	304.1	172.0	304.9	126.1	-	-	-	-
	67	297.3	297.3	288.9	272.4	247.1	167.4	291.2	179.1	292.0	132.8	-	-	284.6	284.6	275.1	265.5	277.4	218.5	278.0	172.2	278.2	126.0	-	-
	62	304.9	304.9	279.0	279.0	265.4	265.4	265.4	225.7	265.9	179.0	266.0	132.5	281.3	281.3	267.4	267.4	253.1	253.1	251.8	217.9	251.7	171.4	251.9	125.2
	57	290.7	290.7	276.1	276.1	261.8	261.8	248.1	248.1	240.7	225.1	241.0	178.1	278.5	278.5	264.5	264.5	250.2	250.2	236.1	236.1	226.5	217.2	227.3	170.3

Table 12: AD20 cooling performance, 95°F to 105°F

Air on evap. coil		Temperature of air on condenser coil																							
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)											
CFM	WB (°F)	90		85		80		75		70		65		90		85		80		75		70		65	
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		95°F												105°F											
5000	77	277.4	150.0	277.5	125.3	277.2	100.2	-	-	-	-	-	-	263.9	143.5	263.9	118.5	263.6	93.3	-	-	-	-	-	-
	72	251.9	174.7	252.0	149.9	251.9	125.0	251.6	99.9	-	-	-	-	239.1	168.0	239.2	143.0	238.9	117.9	238.6	92.7	-	-	-	-
	67	227.5	199.0	227.4	173.9	227.4	149.0	227.1	124.1	226.8	98.9	-	-	215.1	192.4	215.4	167.0	215.2	141.9	215.1	116.9	214.6	91.6	-	-
	62	209.3	209.3	203.8	197.9	204.4	172.7	204.2	147.7	204.0	122.8	203.7	97.6	200.6	200.6	192.5	190.9	193.0	165.9	192.9	140.6	192.5	115.3	192.0	90.1
	57	206.9	206.9	196.2	196.2	185.6	185.6	182.8	171.1	183.0	146.0	182.8	121.1	198.3	198.3	187.7	187.7	177.3	177.3	172.4	164.5	172.5	139.0	172.3	113.8
6000	77	288.6	163.3	289.0	134.2	288.8	104.7	-	-	-	-	-	-	274.2	156.5	274.4	127.2	274.3	97.6	-	-	-	-	-	-
	72	262.7	192.5	262.8	163.2	262.7	134.0	262.5	104.4	-	-	-	-	248.7	185.6	248.9	156.1	249.0	126.7	248.5	97.0	-	-	-	-
	67	239.0	224.1	240.0	193.8	240.0	164.1	240.0	134.5	239.0	104.5	-	-	223.2	214.8	224.7	185.0	224.8	155.4	224.6	125.8	223.9	96.0	-	-
	62	225.2	225.2	213.7	213.7	213.6	190.9	214.0	161.5	213.7	132.0	213.1	102.4	215.7	215.7	204.1	204.1	201.5	183.9	201.6	154.0	201.2	124.3	200.6	94.6
	57	222.9	222.9	211.0	211.0	199.4	199.4	190.9	189.7	191.5	159.8	191.0	130.1	213.3	213.3	201.6	201.6	190.1	190.1	179.8	179.8	180.1	152.3	179.6	122.5
7000	77	297.1	175.7	297.8	142.4	297.9	108.8	-	-	-	-	-	-	282.3	168.9	282.6	135.3	282.6	101.4	-	-	-	-	-	-
	72	270.5	209.3	271.0	175.7	271.2	142.2	270.9	108.5	-	-	-	-	256.1	202.4	256.1	168.4	256.4	134.7	256.1	100.8	-	-	-	-
	67	244.4	241.6	245.5	209.0	245.6	175.3	245.6	141.7	245.2	107.8	-	-	231.1	231.1	231.3	201.8	231.6	167.8	231.5	133.9	230.9	99.8	-	-
	62	238.5	238.5	226.0	226.0	220.6	208.6	221.4	174.3	221.2	140.5	220.5	106.6	228.2	228.2	215.7	215.7	207.0	201.4	208.2	166.5	207.8	132.5	207.0	98.4
	57	236.0	236.0	223.4	223.4	210.8	210.8	198.4	198.4	198.3	172.6	197.8	138.7	225.6	225.6	213.2	213.2	200.9	200.9	188.6	188.6	185.9	164.9	185.5	130.7
8000	77	304.3	187.7	305.0	150.2	305.1	112.4	-	-	-	-	-	-	288.6	180.7	289.4	142.9	289.2	104.9	-	-	-	-	-	-
	72	277.1	225.5	277.3	187.6	277.7	149.9	277.4	112.0	-	-	-	-	262.1	218.3	262.3	180.4	262.5	142.3	262.1	104.2	-	-	-	-
	67	252.6	252.6	250.7	225.3	251.5	187.1	251.6	149.3	251.5	111.5	-	-	241.6	241.6	235.7	218.6	236.8	179.5	236.8	141.3	236.4	103.2	-	-
	62	249.6	249.6	236.4	236.4	225.8	224.4	227.2	186.3	226.8	148.3	226.1	110.2	238.5	238.5	225.5	225.5	212.5	212.5	212.9	178.4	212.8	140.0	212.0	101.8
	57	246.7	246.7	233.7	233.7	220.4	220.4	207.3	207.3	203.5	184.7	203.1	146.6	235.9	235.9	222.8	222.8	209.7	209.7	196.7	196.7	190.0	177.3	190.2	138.3
9000	77	309.4	198.9	310.6	157.4	310.6	115.6	-	-	-	-	-	-	293.4	191.9	294.1	150.0	294.2	108.0	-	-	-	-	-	-
	72	282.2	241.1	282.6	199.1	283.2	157.3	283.3	115.5	-	-	-	-	265.9	234.6	267.3	191.8	267.6	149.7	267.2	107.5	-	-	-	-
	67	262.2	262.2	254.8	241.7	256.3	198.5	256.4	156.6	257.2	115.2	-	-	250.6	250.6	240.0	233.3	241.4	190.9	241.2	148.5	240.7	106.3	-	-
	62	259.1	259.1	245.4	245.4	231.4	231.4	231.5	197.8	231.3	155.6	230.7	113.6	247.6	247.6	233.8	233.8	220.2	220.2	216.7	189.6	216.7	147.2	216.0	104.9
	57	256.2	256.2	242.5	242.5	228.6	228.6	214.9	214.9	207.0	196.9	207.4	154.0	244.7	244.7	231.0	231.0	217.3	217.3	203.8	203.8	192.9	189.3	193.6	145.5
10000	77	313.8	209.9	314.9	164.3	315.3	118.7	-	-	-	-	-	-	297.6	202.9	298.2	156.9	299.7	111.3	-	-	-	-	-	-
	72	284.9	256.9	287.3	210.1	288.3	164.4	287.7	118.6	-	-	-	-	268.5	250.5	271.3	202.7	271.3	156.4	271.2	110.3	-	-	-	-
	67	270.5	270.5	259.1	255.2	260.6	209.6	260.7	163.7	260.5	117.9	-	-	258.4	258.4	244.4	244.4	245.3	201.9	245.1	155.5	244.7	109.3	-	-
	62	267.2	267.2	253.1	253.1	238.7	238.7	235.0	208.6	234.9	162.6	234.5	116.6	255.3	255.3	241.3	241.3	226.8	226.8	219.4	201.6	219.8	153.9	219.2	107.7
	57	264.3	264.3	250.1	250.1	235.8	235.8	221.5	221.5	209.9	208.6	210.8	161.0	252.4	252.4	238.0	238.0	224.0	224.0	209.7	209.7	196.0	196.0	196.6	152.3

Table 13: AD20 cooling performance, 115°F to 125°F

Air on evap. coil		Temperature of air on condenser coil																									
CFM	WB (°F)	Return dry bulb temperature (°F)												Return dry bulb temperature (°F)													
		90		85		80		75		70		65		90		85		80		75		70		65			
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH		
		115°F												125°F													
5000	77	248.6	136.9	248.3	111.6	247.9	86.2	-	-	-	-	-	-	228.0	128.3	227.8	103.0	227.5	77.6	-	-	-	-	-	-	-	
	72	224.3	161.4	224.0	135.9	223.6	110.7	223.1	85.2	-	-	-	-	205.1	152.8	205.2	127.4	204.7	101.9	204.2	76.4	-	-	-	-	-	
	67	200.6	185.9	201.1	160.3	200.9	134.8	200.4	109.4	199.8	83.9	-	-	182.8	177.5	183.8	151.9	183.7	126.4	183.2	100.7	182.5	75.1	-	-	-	
	62	190.5	190.5	180.0	180.0	179.5	159.0	179.5	133.4	179.0	107.9	178.3	82.3	177.5	177.5	167.7	167.7	164.0	151.2	164.3	125.2	163.8	99.6	163.2	74.0		
	57	188.2	188.2	177.7	177.7	167.5	167.5	160.0	157.9	160.3	132.0	159.9	106.4	175.3	175.3	165.4	165.4	156.0	156.0	147.8	147.8	147.8	124.9	147.6	99.0		
6000	77	258.1	149.9	257.8	120.2	257.2	90.1	-	-	-	-	-	-	236.3	141.1	236.1	111.3	235.7	81.2	-	-	-	-	-	-	-	
	72	232.6	178.9	232.6	148.9	232.3	119.1	231.7	89.1	-	-	-	-	212.3	170.1	212.3	140.1	211.9	110.1	211.2	79.9	-	-	-	-	-	
	67	208.6	207.2	209.0	177.9	209.0	147.9	208.5	117.9	207.6	87.8	-	-	192.7	192.7	189.7	169.3	190.0	139.0	189.8	108.8	188.8	78.6	-	-		
	62	204.7	204.7	192.8	192.8	186.3	177.0	186.8	146.5	186.3	116.4	185.4	86.2	190.1	190.1	178.9	178.9	169.2	168.6	169.9	137.9	169.6	107.6	168.6	77.3		
	57	202.2	202.2	190.5	190.5	179.1	179.1	168.1	168.1	166.5	145.1	166.1	114.7	187.6	187.6	176.4	176.4	165.6	165.6	155.7	155.7	151.9	137.3	152.0	106.7		
7000	77	265.4	162.3	265.3	128.2	264.6	93.8	-	-	-	-	-	-	242.5	153.4	242.8	119.1	241.0	84.3	-	-	-	-	-	-	-	
	72	239.6	195.6	239.2	161.3	239.0	127.0	238.1	92.6	-	-	-	-	217.8	187.1	218.0	152.3	217.7	117.7	216.7	83.2	-	-	-	-	-	
	67	219.2	219.2	214.2	195.1	214.6	160.0	214.3	125.7	213.5	91.2	-	-	203.3	203.3	194.2	186.4	194.9	151.0	194.4	116.3	193.4	81.6	-	-		
	62	216.1	216.1	203.7	203.7	191.7	191.7	192.1	158.8	191.7	124.3	190.6	89.6	200.4	200.4	188.4	188.4	176.7	176.7	173.5	149.7	173.6	115.0	172.6	80.3		
	57	213.7	213.7	201.1	201.1	188.7	188.7	176.7	176.7	170.9	157.7	170.8	122.5	197.9	197.9	185.7	185.7	174.1	174.1	163.1	163.1	155.0	149.5	155.3	113.9		
8000	77	270.8	174.1	270.7	135.6	269.9	96.9	-	-	-	-	-	-	247.0	165.0	247.5	126.2	246.3	87.4	-	-	-	-	-	-	-	
	72	244.4	212.3	244.7	173.3	244.3	134.5	243.4	95.8	-	-	-	-	221.2	203.7	222.2	163.9	222.2	125.1	221.1	86.1	-	-	-	-	-	
	67	229.1	229.1	218.6	211.6	219.5	172.0	219.0	133.1	217.8	94.2	-	-	212.0	212.0	199.2	199.2	199.1	162.7	198.4	123.6	197.2	84.5	-	-	-	
	62	226.1	226.1	212.4	212.4	199.5	199.5	195.9	170.4	195.6	131.6	194.5	92.7	209.2	209.2	196.2	196.2	183.7	183.7	176.7	162.0	176.6	122.0	175.6	82.9		
	57	223.4	223.4	210.1	210.1	196.9	196.9	184.0	184.0	174.0	169.9	174.5	129.9	206.4	206.4	193.5	193.5	181.1	181.1	169.0	169.0	157.8	157.8	157.8	120.8		
9000	77	275.2	185.4	275.0	142.6	274.6	99.9	-	-	-	-	-	-	250.9	176.3	250.9	133.1	250.2	90.3	-	-	-	-	-	-	-	
	72	247.4	228.9	249.0	184.8	248.4	141.6	247.4	98.7	-	-	-	-	224.3	219.3	226.2	175.3	225.4	131.9	224.3	88.8	-	-	-	-	-	
	67	237.6	237.6	223.7	223.7	223.5	183.3	222.9	140.3	221.7	97.2	-	-	219.5	219.5	206.1	206.1	188.1	170.7	201.7	130.6	200.0	87.1	-	-	-	
	62	234.5	234.5	220.5	220.5	206.5	206.5	198.9	182.6	198.8	138.6	197.8	95.5	216.4	216.4	202.9	202.9	189.8	189.8	179.0	173.9	179.3	128.8	177.7	85.4		
	57	231.7	231.7	217.7	217.7	203.7	203.7	190.1	190.1	177.2	177.2	177.1	136.8	213.7	213.7	200.2	200.2	187.0	187.0	174.2	174.2	162.1	162.1	159.4	127.4		
10000	77	278.7	196.5	278.9	149.5	278.2	102.7	-	-	-	-	-	-	253.9	187.2	254.1	139.9	254.3	93.5	-	-	-	-	-	-	-	
	72	251.1	242.9	252.1	195.6	251.8	148.5	250.6	101.4	-	-	-	-	229.6	228.0	228.3	186.3	228.4	138.7	227.0	91.4	-	-	-	-	-	
	67	244.7	244.7	230.2	230.2	226.3	194.7	226.1	147.1	224.9	100.0	-	-	226.1	226.1	212.0	212.0	203.4	186.2	204.2	137.2	202.8	89.7	-	-	-	
	62	241.7	241.7	227.2	227.2	212.7	212.7	201.3	194.3	201.6	145.4	200.6	98.2	222.8	222.8	208.8	208.8	195.1	195.1	181.7	181.7	168.9	131.1	179.8	87.8		
	57	238.8	238.8	224.1	224.1	209.8	209.8	195.6	195.6	181.8	181.8	179.2	143.5	220.0	220.0	205.8	205.8	192.2	192.2	178.8	178.8	165.9	165.9	161.0	134.0		

AD25 cooling capacity performance

Table 14: AD25 cooling performance, 75°F to 85°F

Air on evap. coil		Temperature of air on condenser coil																							
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)											
		90				85				80				75				70				65			
CFM	WB (°F)	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
75°F														85°F											
6250	77	362.2	197.1	362.8	165.3	362.9	133.2	-	-	-	-	-	-	350.5	190.6	351.2	159.1	352.1	127.3	-	-	-	-	-	-
	72	332.0	229.7	332.5	198.0	332.9	166.2	332.9	134.1	-	-	-	-	321.0	223.2	321.8	191.6	321.9	159.9	322.0	127.6	-	-	-	-
	67	303.5	262.0	303.8	230.4	304.2	198.6	304.5	166.8	304.3	134.5	-	-	293.1	255.5	293.6	223.9	294.0	192.1	294.4	160.3	294.1	128.1	-	-
	62	280.4	280.4	276.4	262.3	277.4	230.7	277.5	198.7	277.7	166.8	277.7	134.6	272.2	272.2	266.8	255.5	267.8	224.2	267.7	192.1	267.7	160.1	267.4	127.8
	57	277.1	277.1	264.6	264.6	252.7	252.7	252.2	230.0	252.6	198.3	252.7	166.3	268.8	268.8	256.6	256.6	244.3	244.3	242.5	223.1	242.8	191.3	242.5	159.2
7500	77	375.4	213.8	376.4	176.7	376.4	138.8	-	-	-	-	-	-	363.4	207.8	363.2	169.9	364.7	132.6	-	-	-	-	-	-
	72	345.2	252.7	346.0	215.3	346.6	177.9	347.0	140.1	-	-	-	-	334.6	246.5	334.0	208.6	335.1	171.5	335.1	133.5	-	-	-	-
	67	315.6	290.8	316.6	253.6	317.0	216.0	317.2	178.4	317.3	140.5	-	-	304.0	283.8	305.8	246.9	306.1	209.4	306.5	171.9	306.7	134.1	-	-
	62	300.7	300.7	289.8	288.0	289.3	253.8	289.7	216.4	290.2	178.8	290.7	141.2	291.8	291.8	279.8	279.8	279.0	247.0	279.9	209.8	279.7	172.0	279.6	134.2
	57	297.3	297.3	283.9	283.9	270.4	270.4	263.4	253.6	264.7	216.5	264.8	178.7	287.4	287.4	275.0	275.0	262.0	262.0	253.2	246.7	254.2	209.3	254.0	171.3
8750	77	385.5	229.9	386.5	187.3	387.1	144.0	-	-	-	-	-	-	372.4	223.4	374.3	180.7	374.1	137.4	-	-	-	-	-	-
	72	354.7	274.3	355.8	231.4	356.5	188.5	356.7	145.2	-	-	-	-	341.7	267.4	342.8	224.5	344.3	181.7	345.0	138.7	-	-	-	-
	67	325.6	315.8	326.5	275.4	327.0	232.6	327.5	189.4	327.3	145.9	-	-	314.2	307.6	315.1	268.6	315.7	225.8	316.2	182.7	316.4	139.5	-	-
	62	317.0	317.0	302.9	302.9	298.2	275.8	299.0	232.8	299.6	189.7	300.2	146.7	307.2	307.2	293.4	293.4	287.2	269.1	288.1	225.9	288.4	182.7	289.1	139.8
	57	313.6	313.6	299.5	299.5	285.2	285.2	273.1	273.0	273.1	232.9	273.8	189.8	303.9	303.9	290.0	290.0	276.1	276.1	262.8	262.8	225.6	262.6	182.5	-
10000	77	393.4	245.4	394.7	197.0	395.5	148.6	-	-	-	-	-	-	379.8	238.6	380.8	190.2	382.2	142.1	-	-	-	-	-	-
	72	362.1	295.0	363.3	246.6	364.1	198.3	365.0	150.0	-	-	-	-	349.2	288.0	350.4	239.8	352.2	191.9	352.5	143.3	-	-	-	-
	67	334.3	334.3	333.7	296.0	334.1	247.9	334.7	199.3	335.7	151.0	-	-	323.8	323.8	321.5	289.3	322.2	241.0	323.1	192.6	323.4	144.1	-	-
	62	330.6	330.6	315.8	315.8	305.2	296.1	306.5	248.6	307.4	200.2	308.2	151.8	320.2	320.2	305.6	305.6	294.5	288.0	295.4	241.6	295.8	193.0	296.0	144.5
	57	327.2	327.2	312.3	312.3	297.4	297.4	282.4	282.4	280.1	248.6	280.7	200.1	317.0	317.0	302.3	302.3	287.4	287.4	273.1	273.1	268.9	241.1	269.2	192.6
11250	77	398.3	259.6	400.5	206.3	402.1	153.0	-	-	-	-	-	-	385.0	253.0	386.4	199.4	388.5	146.3	-	-	-	-	-	-
	72	367.6	314.6	369.2	261.4	370.6	208.0	371.3	154.3	-	-	-	-	354.1	307.6	356.1	254.5	357.3	200.9	358.7	147.6	-	-	-	-
	67	345.8	345.8	338.1	316.3	340.3	262.7	341.0	208.9	341.9	155.4	-	-	335.1	335.1	326.2	308.5	328.0	255.7	328.8	201.9	329.2	148.3	-	-
	62	341.9	341.9	326.5	326.5	312.6	311.8	312.5	263.5	313.1	209.8	314.1	156.2	331.5	331.5	316.0	316.0	301.4	301.4	301.1	256.5	301.2	202.5	301.9	148.9
	57	338.6	338.6	323.4	323.4	307.8	307.8	292.2	292.2	285.6	263.8	286.6	210.0	328.1	328.1	312.9	312.9	297.7	297.7	282.5	282.5	273.9	256.5	274.6	202.4
12500	77	403.1	273.7	405.9	215.4	407.5	157.0	-	-	-	-	-	-	389.7	267.1	392.8	208.8	393.5	150.2	-	-	-	-	-	-
	72	371.7	334.3	374.4	275.9	375.7	217.0	376.7	158.4	-	-	-	-	358.2	327.1	360.9	268.8	362.4	210.0	363.8	151.6	-	-	-	-
	67	355.0	355.0	343.9	332.4	344.9	276.7	346.0	218.0	347.2	159.5	-	-	344.5	344.5	331.3	323.7	332.8	269.8	333.6	211.1	334.5	152.5	-	-
	62	351.8	351.8	336.1	336.1	320.0	320.0	316.6	277.7	317.7	218.8	318.9	160.3	341.0	341.0	325.4	325.4	309.5	309.5	305.0	270.4	305.6	211.5	306.3	152.8
	57	348.5	348.5	332.7	332.7	316.7	316.7	300.6	300.6	289.7	278.3	291.6	219.5	337.7	337.7	321.3	321.3	306.3	306.3	290.6	278.3	270.4	279.4	211.7	-

Table 15: AD25 cooling performance, 95°F to 105°F

Air on evap. coil		Temperature of air on condenser coil																									
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)													
CFM	WB (°F)	90		85		80		75		70		65		90		85		80		75		70		65			
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH		
		95°F												105°F													
6250	77	337.7	184.4	338.1	152.6	338.3	120.5	-	-	-	-	-	-	324.5	177.2	324.7	145.3	324.6	113.2	-	-	-	-	-	-		
	72	308.8	216.8	309.2	184.9	309.4	153.1	309.3	121.0	-	-	-	-	295.7	209.2	296.0	177.3	295.9	145.4	295.7	113.1	-	-	-	-		
	67	281.3	248.6	281.5	217.0	281.8	185.2	281.8	153.2	281.7	121.0	-	-	268.4	240.6	268.6	209.0	268.6	177.1	268.4	145.0	268.2	112.8	-	-		
	62	262.7	262.7	255.1	248.2	255.8	216.8	255.8	184.9	255.5	152.7	255.3	120.4	252.6	252.6	243.1	239.0	243.0	208.3	242.8	176.4	242.4	144.2	241.9	111.8		
	57	259.4	259.4	247.1	247.1	234.7	234.7	230.8	215.7	230.9	183.7	230.6	151.5	249.3	249.3	236.8	236.8	224.3	224.3	217.9	206.9	218.1	174.9	217.7	142.6		
7500	77	349.2	201.0	350.4	163.8	350.5	126.0	-	-	-	-	-	-	335.3	193.5	335.7	156.1	335.8	118.3	-	-	-	-	-	-		
	72	320.6	239.6	321.1	202.0	321.7	164.6	321.3	126.7	-	-	-	-	306.9	231.7	306.9	194.1	307.4	156.5	307.3	118.8	-	-	-	-		
	67	289.0	274.8	290.5	237.4	290.7	199.9	290.8	162.2	290.7	124.4	-	-	278.7	268.4	279.9	231.9	279.4	194.1	279.2	156.3	278.9	118.3	-	-		
	62	281.5	281.5	268.3	268.3	266.5	239.6	266.5	202.2	266.6	164.5	266.4	126.6	270.8	270.8	257.4	257.4	252.8	230.9	252.8	193.5	252.6	155.6	252.3	117.7		
	57	278.1	278.1	264.9	264.9	251.6	251.6	241.3	238.6	241.7	201.6	241.3	163.5	267.4	267.4	254.0	254.0	240.5	240.5	228.7	228.2	228.0	192.3	227.4	154.3		
8750	77	358.0	217.1	359.1	174.2	360.0	131.2	-	-	-	-	-	-	343.5	209.3	344.2	166.3	344.7	123.2	-	-	-	-	-	-		
	72	328.6	260.7	329.7	218.1	330.3	175.1	330.5	131.8	-	-	-	-	314.5	252.7	314.9	209.7	315.3	166.7	315.4	123.4	-	-	-	-		
	67	301.8	300.0	301.8	261.6	302.1	218.8	302.5	175.6	302.5	132.3	-	-	289.1	289.1	287.5	253.1	287.6	210.1	287.5	166.8	287.3	123.5	-	-		
	62	296.6	296.6	282.7	282.7	274.3	261.9	274.9	218.7	274.9	175.3	274.7	131.9	285.4	285.4	271.0	271.0	260.2	252.4	260.5	209.5	260.3	166.1	259.7	122.6		
	57	293.4	293.4	279.3	279.3	265.3	265.3	251.1	251.1	249.3	217.8	249.3	174.7	282.0	282.0	267.7	267.7	253.6	253.6	239.4	239.4	235.1	208.3	234.8	165.0		
10000	77	365.0	232.4	366.4	184.2	367.4	135.9	-	-	-	-	-	-	350.1	224.2	351.1	176.0	351.5	127.6	-	-	-	-	-	-		
	72	335.4	281.5	336.4	233.5	337.3	185.2	337.8	136.7	-	-	-	-	320.6	273.1	321.5	225.0	321.9	176.4	321.9	127.8	-	-	-	-		
	67	312.7	312.7	307.3	282.7	308.2	234.1	308.2	185.4	308.9	137.0	-	-	301.3	301.3	292.7	273.9	292.9	224.9	293.3	176.4	293.0	127.7	-	-		
	62	309.1	309.1	294.7	294.7	281.7	279.8	281.6	234.3	281.9	185.7	281.7	137.0	297.2	297.2	282.9	282.9	267.8	267.8	266.9	224.9	266.6	176.1	266.0	127.3		
	57	306.0	306.0	291.3	291.3	276.7	276.7	261.8	261.8	255.9	233.6	255.4	184.9	294.2	294.2	279.4	279.4	264.5	264.5	249.7	249.7	240.4	224.3	240.5	175.0		
11250	77	369.8	246.9	371.5	193.5	373.5	140.4	-	-	-	-	-	-	354.4	238.4	355.6	184.9	356.5	131.5	-	-	-	-	-	-		
	72	339.7	301.4	341.8	248.4	342.6	194.7	343.4	141.1	-	-	-	-	325.6	293.1	326.3	239.5	326.9	185.5	326.9	132.0	-	-	-	-		
	67	323.4	323.4	312.5	301.5	313.8	249.2	314.1	195.2	314.4	141.5	-	-	311.4	311.4	298.4	290.5	298.7	239.7	298.6	185.8	298.4	131.9	-	-		
	62	319.7	319.7	304.7	304.7	289.4	289.4	286.9	249.3	286.8	195.3	286.8	141.5	307.8	307.8	292.4	292.4	277.0	277.0	271.6	239.6	271.3	185.4	270.8	131.4		
	57	316.3	316.3	301.2	301.2	286.1	286.1	270.7	270.7	260.0	249.2	260.5	194.8	304.5	304.5	289.1	289.1	273.5	273.5	258.1	258.1	245.2	238.9	245.2	184.3		
12500	77	374.0	261.1	375.2	202.5	376.3	144.0	-	-	-	-	-	-	358.3	252.3	360.9	193.9	360.6	135.2	-	-	-	-	-	-		
	72	343.4	320.6	345.7	262.6	347.4	204.1	347.5	145.2	-	-	-	-	328.9	311.1	330.4	253.3	331.5	194.6	332.1	136.0	-	-	-	-		
	67	332.6	332.6	317.5	317.0	318.0	263.3	318.7	204.7	319.0	145.8	-	-	320.0	320.0	304.3	303.6	302.3	253.7	302.6	194.7	302.2	135.6	-	-		
	62	328.5	328.5	313.3	313.3	297.5	297.5	290.4	264.0	290.8	204.5	290.9	145.7	316.4	316.4	300.6	300.6	284.8	284.8	274.7	253.7	275.0	194.3	274.4	135.1		
	57	325.4	325.4	309.9	309.9	294.2	294.2	278.4	264.6	262.2	264.9	204.4	313.2	313.2	297.3	297.3	281.4	281.4	265.3	265.3	249.8	249.8	249.0	193.4			

Table 16: AD25 cooling performance, 115°F to 125°F

Air on evap. coil		Temperature of air on condenser coil																							
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)											
		90				85				80				75				70				65			
CFM	WB (°F)	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		115°F												125°F											
6250	77	306.5	169.2	306.5	137.4	306.2	105.1	-	-	-	-	-	-	287.0	160.6	286.8	128.7	286.5	96.5	-	-	-	-	-	-
	72	278.4	201.0	278.4	168.9	277.8	136.9	277.7	104.8	-	-	-	-	259.6	192.0	259.5	160.0	259.0	128.0	258.8	95.8	-	-	-	-
	67	251.2	232.2	251.5	200.4	251.3	168.4	251.1	136.3	250.7	104.0	-	-	232.9	222.8	233.2	191.0	232.9	158.9	232.6	126.9	232.2	94.7	-	-
	62	238.9	238.9	227.4	227.4	226.1	199.2	226.0	167.3	225.5	135.1	224.7	102.7	224.5	224.5	211.9	211.9	208.5	189.7	208.3	157.7	207.8	125.4	206.9	93.0
	57	235.6	235.6	223.1	223.1	210.5	210.5	201.6	197.6	201.8	165.5	201.2	133.2	221.1	221.1	208.6	208.6	196.1	196.1	185.8	185.8	184.7	155.6	184.2	123.3
7500	77	316.7	185.6	316.8	148.1	316.6	110.2	-	-	-	-	-	-	296.2	176.8	296.1	139.1	295.6	101.3	-	-	-	-	-	-
	72	288.6	223.4	288.7	185.7	288.5	147.9	288.2	110.1	-	-	-	-	268.9	214.1	268.7	176.5	268.5	138.7	268.2	100.9	-	-	-	-
	67	262.3	257.8	261.6	222.9	261.3	185.0	260.9	147.3	260.3	109.3	-	-	244.6	244.6	242.3	213.2	242.2	175.7	242.0	137.9	241.1	100.0	-	-
	62	256.3	256.3	242.7	242.7	234.9	222.0	235.2	184.2	234.7	146.3	234.1	108.3	240.9	240.9	227.4	227.4	216.8	211.6	216.4	174.2	216.0	136.2	215.4	98.4
	57	253.0	253.0	239.4	239.4	225.9	225.9	212.5	212.5	210.6	182.6	210.1	144.6	237.5	237.5	224.0	224.0	210.6	210.6	197.2	197.2	192.7	172.3	192.2	134.5
8750	77	324.1	201.0	324.5	158.0	324.5	114.8	-	-	-	-	-	-	302.9	192.0	302.9	149.0	302.8	105.8	-	-	-	-	-	-
	72	295.8	244.2	295.9	201.3	295.9	158.0	295.4	114.7	-	-	-	-	275.3	234.9	275.4	192.0	275.0	148.4	274.8	105.4	-	-	-	-
	67	274.1	274.1	268.4	244.5	268.9	201.2	268.5	157.7	267.9	114.3	-	-	257.6	257.6	248.6	234.7	248.8	191.4	248.5	147.9	247.8	104.6	-	-
	62	270.2	270.2	256.0	256.0	243.3	241.3	242.3	200.1	241.7	156.6	240.8	113.0	254.0	254.0	239.8	239.8	225.5	225.5	223.1	190.1	222.7	146.7	221.7	103.1
	57	266.9	266.9	252.6	252.6	238.3	238.3	224.0	224.0	217.1	198.6	216.5	154.9	250.6	250.6	236.3	236.3	222.1	222.1	208.0	208.0	198.2	188.7	198.0	144.6
10000	77	329.9	215.9	330.8	167.6	330.6	119.1	-	-	-	-	-	-	308.4	207.0	308.6	158.5	308.6	110.0	-	-	-	-	-	-
	72	301.1	264.6	301.8	216.2	301.8	167.6	301.2	118.9	-	-	-	-	279.9	255.4	280.4	206.5	280.4	158.0	280.1	109.5	-	-	-	-
	67	285.4	285.4	274.1	263.9	274.0	215.9	273.8	167.2	273.1	118.4	-	-	268.5	268.5	254.7	252.3	253.6	206.0	253.2	157.3	251.7	108.3	-	-
	62	281.8	281.8	266.9	266.9	252.0	252.0	247.6	215.3	247.6	166.6	246.6	117.4	264.9	264.9	250.0	250.0	235.0	235.0	227.5	205.6	227.8	156.3	226.8	107.4
	57	278.5	278.5	263.5	263.5	248.5	248.5	233.6	233.6	222.0	214.2	221.7	164.8	261.5	261.5	246.5	246.5	231.6	231.6	216.7	216.7	203.8	202.5	203.0	154.5
11250	77	334.0	230.0	334.9	176.5	335.0	122.8	-	-	-	-	-	-	311.9	221.0	312.2	167.1	312.6	113.7	-	-	-	-	-	-
	72	305.0	284.0	306.2	230.6	306.1	176.6	306.0	122.9	-	-	-	-	284.5	272.6	285.0	220.6	284.7	167.2	284.1	113.4	-	-	-	-
	67	295.7	295.7	279.8	279.8	278.8	230.5	278.6	176.4	277.7	122.4	-	-	277.6	277.6	262.1	262.1	257.6	220.6	257.5	166.4	257.6	112.9	-	-
	62	291.8	291.8	276.1	276.1	260.5	260.5	252.1	230.5	251.7	175.7	250.6	121.4	273.9	273.9	258.4	258.4	243.0	243.0	231.2	219.9	231.5	165.3	230.0	111.0
	57	288.3	288.3	272.7	272.7	257.2	257.2	241.5	241.5	227.2	226.7	225.9	174.1	270.6	270.6	255.0	255.0	239.7	239.7	224.2	224.2	209.0	209.0	206.9	163.7
12500	77	337.7	243.9	338.5	185.1	338.7	126.5	-	-	-	-	-	-	315.3	234.5	316.0	175.8	315.9	117.2	-	-	-	-	-	-
	72	309.6	300.0	310.0	244.2	310.3	185.4	309.7	126.5	-	-	-	-	289.3	287.5	287.7	235.0	288.4	175.5	288.1	117.2	-	-	-	-
	67	303.4	303.4	287.5	287.5	282.2	244.5	282.0	185.1	281.3	126.1	-	-	285.0	285.0	269.5	269.5	260.4	235.1	260.8	175.1	260.2	116.2	-	-
	62	299.7	299.7	283.7	283.7	267.8	267.8	255.4	244.2	255.2	184.4	253.9	125.0	281.6	281.6	265.7	265.7	249.8	249.8	235.4	232.3	234.5	174.0	233.4	114.7
	57	296.4	296.4	280.5	280.5	264.4	264.4	248.2	248.2	232.3	232.3	229.7	183.3	278.1	278.1	262.3	262.3	246.4	246.4	230.5	230.5	214.9	214.9	210.0	172.2

AD28 cooling capacity performance

Table 17: AD28 cooling performance, 75°F to 85°F

Air on evap. coil		Temperature of air on condenser coil																							
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)											
		90		85		80		75		70		65		90		85		80		75		70		65	
CFM	WB (°F)	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		75°F												85°F											
6875	77	409.3	219.4	409.1	185.2	408.8	150.5	-	-	-	-	-	-	395.5	212.1	395.1	177.8	394.4	143.0	-	-	-	-	-	-
	72	374.4	254.3	374.5	220.0	374.2	185.7	373.8	151.0	-	-	-	-	361.1	246.7	361.2	212.3	360.4	177.9	359.9	143.2	-	-	-	-
	67	341.5	288.7	341.6	254.5	341.4	220.0	340.8	185.6	340.4	150.8	-	-	328.4	280.8	328.1	246.2	328.1	212.0	327.6	177.6	326.9	142.8	-	-
	62	312.5	312.5	310.8	288.2	310.4	254.0	310.0	219.4	309.1	184.7	308.5	149.9	302.3	302.3	298.0	279.8	297.6	245.7	297.1	211.1	296.4	176.4	295.5	141.6
	57	309.0	309.0	294.3	294.3	281.6	281.6	280.9	252.5	280.4	217.9	279.8	183.3	298.7	298.7	284.2	284.2	269.9	269.9	268.6	243.9	268.0	209.4	267.2	174.7
8250	77	426.3	238.3	426.8	198.2	426.2	157.3	-	-	-	-	-	-	411.8	230.9	411.4	190.4	410.9	149.7	-	-	-	-	-	-
	72	391.2	279.7	391.4	239.3	391.2	198.8	390.6	158.0	-	-	-	-	376.9	271.9	377.1	231.4	376.5	190.8	375.7	150.0	-	-	-	-
	67	357.8	320.4	357.7	280.2	357.5	239.6	357.0	198.9	356.2	158.0	-	-	343.9	312.3	343.8	272.1	343.2	231.2	342.7	190.6	341.6	149.6	-	-
	62	336.8	336.8	325.7	319.6	324.9	279.7	325.5	239.3	324.9	198.5	323.9	157.5	325.9	325.9	312.7	310.5	311.9	271.3	311.7	230.8	311.0	189.9	309.8	148.9
	57	333.3	333.3	317.6	317.6	301.7	301.7	295.5	278.6	295.1	238.2	294.2	197.1	322.2	322.2	306.5	306.5	290.8	290.8	282.5	270.0	281.9	229.4	280.9	188.4
9625	77	438.7	255.8	439.3	209.7	439.0	163.1	-	-	-	-	-	-	423.8	248.4	423.6	202.0	422.9	155.3	-	-	-	-	-	-
	72	403.5	303.6	403.7	257.1	403.8	210.6	403.1	163.9	-	-	-	-	388.6	295.6	388.6	249.1	388.2	202.6	387.3	155.8	-	-	-	-
	67	369.5	350.2	369.6	304.3	369.8	257.7	369.4	211.0	368.4	164.2	-	-	355.1	341.5	355.5	296.1	355.1	249.4	354.5	202.6	352.9	155.6	-	-
	62	356.6	356.6	340.0	340.0	337.0	303.8	337.0	257.6	336.4	210.7	335.3	163.8	345.2	345.2	328.4	328.4	323.1	295.3	322.6	248.8	321.7	201.9	320.2	154.8
	57	353.1	353.1	336.4	336.4	319.6	319.6	306.4	302.7	306.1	256.6	305.5	209.7	341.6	341.6	324.8	324.8	308.0	308.0	292.9	292.9	292.1	247.6	291.3	200.7
11000	77	448.9	272.6	449.3	220.5	448.8	168.2	-	-	-	-	-	-	432.9	264.9	433.1	212.7	432.1	160.3	-	-	-	-	-	-
	72	413.0	326.2	413.3	273.8	413.7	221.7	412.7	169.2	-	-	-	-	397.5	317.9	397.9	265.8	397.4	213.3	396.1	160.8	-	-	-	-
	67	379.6	375.6	379.0	326.6	378.8	274.5	378.6	222.0	377.7	169.6	-	-	365.9	365.5	363.9	318.4	363.6	266.1	363.1	213.5	361.8	160.9	-	-
	62	373.3	373.3	355.6	355.6	346.6	327.2	346.5	274.8	345.6	222.0	344.2	169.3	361.0	361.0	343.4	343.4	331.9	317.8	331.4	265.9	330.7	213.2	328.7	160.3
	57	369.7	369.7	352.0	352.0	334.3	334.3	316.7	316.7	314.5	273.6	314.0	221.2	357.6	357.6	339.8	339.8	322.2	322.2	304.4	304.4	300.1	264.5	299.1	211.8
12375	77	456.3	288.3	457.1	230.7	456.9	173.0	-	-	-	-	-	-	439.8	280.4	440.2	222.6	439.7	165.0	-	-	-	-	-	-
	72	420.4	347.4	421.2	289.8	421.2	231.9	420.3	173.9	-	-	-	-	405.2	339.3	405.4	281.6	404.8	223.3	403.4	165.5	-	-	-	-
	67	391.2	391.2	386.7	348.6	386.8	290.8	386.4	232.6	385.1	174.5	-	-	378.7	378.7	370.8	340.1	370.9	282.1	370.2	223.7	368.8	165.7	-	-
	62	387.2	387.2	368.6	368.6	354.0	347.9	353.4	291.0	352.8	232.5	351.4	174.3	374.8	374.8	356.2	356.2	339.4	337.5	338.1	281.9	337.1	223.4	335.1	165.0
	57	383.7	383.7	365.2	365.2	347.0	347.0	328.4	328.4	322.1	290.4	320.9	231.8	371.2	371.2	352.6	352.6	334.2	334.2	315.8	315.8	306.7	280.8	305.8	222.4
13750	77	462.5	303.4	463.4	240.4	463.5	177.4	-	-	-	-	-	-	446.1	295.7	446.3	232.1	445.6	169.2	-	-	-	-	-	-
	72	426.5	368.1	427.4	305.2	427.7	241.7	426.6	178.3	-	-	-	-	410.5	360.2	411.1	296.9	410.8	233.2	409.3	169.8	-	-	-	-
	67	403.3	403.3	392.5	369.0	392.9	306.2	392.4	242.3	391.1	178.9	-	-	390.3	390.3	376.5	360.5	376.6	297.4	376.1	233.6	373.9	170.0	-	-
	62	399.2	399.2	380.2	380.2	361.2	361.2	359.4	306.1	358.6	242.4	357.1	178.7	386.3	386.3	367.1	367.1	348.0	348.0	343.7	297.2	342.6	233.3	340.5	169.4
	57	395.5	395.5	376.6	376.6	357.6	357.6	338.5	338.5	327.5	306.2	327.0	242.0	382.8	382.8	363.6	363.6	344.4	344.4	325.4	325.4	312.2	296.5	311.3	232.4

Table 18: AD28 cooling performance, 95°F to 105°F

Air on evap. coil		Temperature of air on condenser coil																							
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)											
		90				85				80				75				70				65			
CFM	WB (°F)	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
95°F														105°F											
6875	77	379.4	204.0	378.7	169.7	378.2	134.9	-	-	-	-	-	-	361.6	195.2	360.8	160.8	360.0	126.1	-	-	-	-	-	-
	72	345.7	238.3	345.4	203.9	344.5	169.4	343.8	134.6	-	-	-	-	328.7	229.2	328.3	194.8	327.3	160.3	326.5	125.5	-	-	-	-
	67	313.7	272.0	313.5	237.9	313.0	203.2	312.2	168.7	311.5	134.0	-	-	297.9	262.8	297.3	228.4	296.9	194.0	296.1	159.4	295.0	124.6	-	-
	62	290.7	290.7	283.6	270.9	283.4	236.8	282.7	202.2	281.8	167.4	280.8	132.6	278.2	278.2	268.3	261.3	267.6	227.1	267.2	192.6	266.2	157.8	265.2	123.0
	57	287.1	287.1	272.7	272.7	258.2	258.2	255.2	235.0	254.3	200.3	253.4	165.6	274.6	274.6	260.3	260.3	246.1	246.1	240.3	225.1	239.7	190.7	238.7	155.8
8250	77	394.5	222.5	393.9	182.1	393.3	141.2	-	-	-	-	-	-	375.7	213.5	374.7	172.9	373.5	132.1	-	-	-	-	-	-
	72	360.5	263.3	360.3	222.7	359.7	182.2	358.5	141.1	-	-	-	-	342.4	254.0	342.3	213.6	341.3	172.7	339.8	131.7	-	-	-	-
	67	328.4	303.4	327.9	263.2	327.3	222.4	326.5	181.6	325.3	140.6	-	-	310.9	293.5	310.5	253.6	310.0	212.8	309.0	171.9	307.5	130.9	-	-
	62	313.4	313.4	298.6	298.6	296.8	262.0	296.0	221.4	295.4	180.6	294.0	139.5	299.9	299.9	284.3	284.3	280.4	252.3	279.6	211.5	278.8	170.7	277.2	129.6
	57	309.9	309.9	294.1	294.1	278.4	267.4	260.2	267.2	220.0	265.9	178.8	296.3	296.3	280.6	280.6	264.9	264.9	252.0	249.8	251.4	209.8	250.2	168.7	
9625	77	405.6	239.8	405.7	193.5	404.2	146.7	-	-	-	-	-	-	385.7	230.6	385.0	184.0	383.3	137.3	-	-	-	-	-	-
	72	371.4	286.9	371.1	240.1	370.6	193.6	369.1	146.7	-	-	-	-	352.4	277.3	351.9	230.5	351.1	183.8	349.4	137.1	-	-	-	-
	67	339.1	331.7	339.1	286.9	338.3	240.3	337.4	193.4	335.7	146.4	-	-	322.5	320.0	320.8	277.0	320.0	230.3	318.9	183.4	316.8	136.3	-	-
	62	331.8	331.8	315.0	315.0	307.0	286.0	306.2	239.1	305.3	192.3	303.5	145.3	317.4	317.4	300.7	300.7	289.7	275.6	289.1	229.2	287.8	182.2	285.6	135.0
	57	328.2	328.2	311.5	311.5	294.8	278.4	278.4	276.4	237.7	275.6	190.9	313.8	313.8	297.1	297.1	280.6	280.6	264.1	264.1	260.0	227.3	258.9	180.4	
11000	77	414.4	256.3	414.2	203.9	412.5	151.5	-	-	-	-	-	-	394.1	247.0	393.2	194.4	391.1	141.9	-	-	-	-	-	-
	72	380.1	309.1	379.7	256.7	379.1	204.3	377.4	151.7	-	-	-	-	360.4	299.2	360.0	247.0	359.0	194.4	356.9	141.8	-	-	-	-
	67	351.2	351.2	346.5	309.1	346.2	256.7	345.1	203.9	343.2	151.2	-	-	335.9	335.9	327.7	299.2	327.2	246.6	326.0	193.9	323.6	141.1	-	-
	62	347.0	347.0	329.7	329.7	315.2	307.9	314.6	256.2	313.7	203.5	311.1	150.4	331.9	331.9	314.4	314.4	298.3	296.3	296.7	245.8	295.4	193.1	292.7	140.1
	57	343.5	343.5	325.8	325.8	308.3	308.3	290.7	290.7	284.0	254.7	282.8	201.8	328.3	328.3	310.8	310.8	293.3	293.3	276.0	266.9	244.3	265.4	191.2	
12375	77	420.7	271.5	420.7	213.7	419.4	156.0	-	-	-	-	-	-	399.8	262.3	399.3	204.3	397.3	146.3	-	-	-	-	-	-
	72	386.6	330.5	386.4	272.4	386.1	214.3	384.1	156.1	-	-	-	-	366.4	320.5	366.3	262.6	365.1	204.3	362.7	146.2	-	-	-	-
	67	364.2	364.2	353.1	330.4	352.9	272.6	352.0	214.3	349.8	156.0	-	-	348.2	348.2	334.0	319.6	333.5	262.5	332.4	204.0	329.5	145.6	-	-
	62	360.1	360.1	341.7	341.7	323.3	323.3	321.0	272.0	319.5	213.5	317.2	155.1	344.2	344.2	325.9	325.9	307.6	307.6	302.3	261.6	300.6	202.9	298.1	144.5
	57	356.5	356.5	338.1	338.1	319.7	319.7	301.4	301.4	290.1	271.2	289.0	212.3	340.6	340.6	322.4	322.4	304.0	304.0	285.8	285.8	272.6	260.1	271.1	201.4
13750	77	426.2	286.8	426.1	223.3	424.7	160.1	-	-	-	-	-	-	404.9	277.3	404.4	213.6	402.1	150.3	-	-	-	-	-	-
	72	391.5	351.0	392.0	287.4	391.4	223.9	389.0	160.3	-	-	-	-	371.1	340.7	371.3	277.6	370.1	213.7	367.4	150.2	-	-	-	-
	67	375.1	375.1	358.8	349.4	358.3	287.8	357.3	223.9	354.8	160.1	-	-	358.6	358.6	340.6	337.6	338.4	277.1	336.8	213.3	334.0	149.6	-	-
	62	371.2	371.2	352.2	352.2	333.0	333.0	325.7	287.3	324.5	223.2	321.9	159.2	354.7	354.7	335.5	335.5	316.8	316.8	306.8	276.8	305.3	212.5	302.1	148.4
	57	367.6	367.6	348.4	348.4	329.5	329.5	310.3	310.3	295.1	286.6	294.1	222.1	350.9	350.9	332.1	332.1	313.3	313.3	294.5	294.5	277.5	274.4	275.9	211.1

Table 19: AD28 cooling performance, 115°F to 125°F

Air on evap. coil		Temperature of air on condenser coil																							
		Return dry bulb temperature (°F)												Return dry bulb temperature (°F)											
CFM	WB (°F)	90		85		80		75		70		65		90		85		80		75		70		65	
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		115°F												125°F											
6875	77	339.5	185.5	338.4	151.1	337.4	116.4	-	-	-	-	-	-	317.1	175.7	315.9	141.3	314.9	106.7	-	-	-	-	-	-
	72	307.9	219.3	307.3	184.9	306.2	150.4	305.3	115.7	-	-	-	-	286.8	209.2	286.4	174.9	285.2	140.3	284.2	105.8	-	-	-	-
	67	277.8	252.4	277.4	218.4	276.8	183.8	275.9	149.3	274.6	114.5	-	-	257.1	242.0	257.3	208.0	256.8	173.5	256.0	139.0	254.7	104.4	-	-
	62	262.5	262.5	250.1	249.8	249.1	216.9	248.3	182.4	247.3	147.6	245.8	112.8	246.4	246.4	232.6	232.6	230.2	206.5	229.5	172.0	228.5	137.3	226.8	102.4
	57	258.8	258.8	244.6	244.6	230.6	230.6	221.9	214.7	221.6	180.2	220.5	145.4	242.8	242.8	229.1	229.1	215.4	215.4	204.0	204.0	203.9	169.7	202.6	134.9
8250	77	352.3	203.6	351.2	163.0	349.9	122.3	-	-	-	-	-	-	328.7	193.5	327.8	153.0	326.2	112.3	-	-	-	-	-	-
	72	320.4	243.8	319.8	203.1	318.7	162.5	317.1	121.6	-	-	-	-	298.1	233.6	297.3	192.8	296.8	152.3	294.9	111.5	-	-	-	-
	67	290.0	282.9	289.8	243.1	288.9	202.4	287.9	161.6	286.0	120.6	-	-	270.3	270.3	268.6	232.5	267.9	191.8	267.0	151.1	264.9	110.3	-	-
	62	282.7	282.7	267.3	267.3	260.3	241.5	259.5	201.0	258.5	160.1	256.7	119.0	265.2	265.2	250.2	250.2	240.1	230.8	239.3	190.2	238.5	149.4	236.6	108.4
	57	279.1	279.1	263.8	263.8	248.5	248.5	233.8	233.8	232.2	199.0	231.1	158.1	261.7	261.7	246.5	246.5	231.9	231.9	217.2	217.2	213.3	188.1	212.0	147.1
9625	77	361.7	220.5	360.7	173.9	358.4	127.1	-	-	-	-	-	-	336.9	210.2	336.2	163.6	334.5	117.2	-	-	-	-	-	-
	72	329.7	266.7	329.1	220.3	327.8	173.5	325.8	126.7	-	-	-	-	306.3	256.4	305.9	209.8	305.0	163.1	302.8	116.5	-	-	-	-
	67	303.2	303.2	298.9	266.2	298.0	219.7	296.7	172.8	294.3	125.8	-	-	284.7	284.7	276.6	255.5	275.7	208.7	274.7	162.0	272.5	115.3	-	-
	62	299.2	299.2	282.8	282.8	269.1	264.6	268.0	218.3	266.6	171.2	264.5	124.3	280.8	280.8	264.8	264.8	248.8	248.8	247.5	207.4	246.2	160.6	243.7	113.5
	57	295.7	295.7	279.3	279.3	262.9	262.9	246.8	246.8	239.9	216.3	238.9	169.5	277.2	277.2	261.1	261.1	245.2	245.2	229.5	229.5	220.1	205.3	219.0	158.3
11000	77	369.1	236.8	368.0	184.1	365.3	131.7	-	-	-	-	-	-	343.8	226.0	343.3	173.9	340.6	121.7	-	-	-	-	-	-
	72	336.5	288.9	336.1	236.4	334.8	183.8	332.3	131.2	-	-	-	-	312.3	278.1	312.2	225.8	311.0	173.1	308.5	120.8	-	-	-	-
	67	316.9	316.9	305.3	288.0	304.3	235.7	303.1	183.0	300.5	130.4	-	-	297.1	297.1	283.0	276.7	282.0	224.9	280.8	172.3	278.0	119.7	-	-
	62	312.9	312.9	295.6	295.6	278.4	278.4	275.2	234.7	273.3	181.7	270.9	129.1	293.2	293.2	276.5	276.5	260.0	260.0	253.7	224.1	252.2	171.0	249.3	118.1
	57	309.3	309.3	292.1	292.1	274.7	274.7	257.7	257.7	246.1	233.0	244.9	180.0	289.7	289.7	273.0	273.0	256.3	256.3	239.8	239.8	225.8	222.0	224.6	168.7
12375	77	374.2	251.9	373.4	193.7	370.9	135.9	-	-	-	-	-	-	348.3	241.1	347.8	183.3	345.8	125.7	-	-	-	-	-	-
	72	342.5	310.1	341.9	252.1	340.8	193.7	338.0	135.6	-	-	-	-	317.3	298.8	317.4	241.1	316.3	182.8	313.6	124.9	-	-	-	-
	67	328.1	328.1	311.8	307.3	310.4	251.3	308.9	193.0	306.0	134.8	-	-	307.9	307.9	290.5	290.5	286.8	240.6	286.0	182.0	282.8	123.9	-	-
	62	324.2	324.2	306.2	306.2	288.5	288.5	280.1	250.6	278.3	191.8	275.7	133.4	304.0	304.0	286.5	286.5	269.2	269.2	258.1	239.5	256.4	180.6	252.9	122.0
	57	320.7	320.7	302.7	302.7	284.8	284.8	267.0	267.0	251.3	248.6	250.1	190.1	300.4	300.4	282.9	282.9	265.5	265.5	248.2	248.2	231.3	231.3	229.3	178.6
13750	77	379.0	266.7	378.3	203.0	375.3	139.7	-	-	-	-	-	-	352.9	256.0	351.9	192.3	349.7	129.6	-	-	-	-	-	-
	72	346.7	329.8	346.5	266.8	345.2	203.0	342.0	139.4	-	-	-	-	322.1	317.1	321.2	255.9	320.6	192.2	317.3	128.9	-	-	-	-
	67	338.1	338.1	319.5	319.5	314.3	266.5	313.1	202.3	309.8	138.6	-	-	316.9	316.9	298.9	298.9	290.8	255.1	289.5	191.0	286.2	127.6	-	-
	62	334.3	334.3	315.6	315.6	297.0	297.0	284.0	265.6	282.5	200.9	279.3	137.3	313.0	313.0	294.9	294.9	276.9	276.9	261.6	254.3	260.4	189.9	256.5	125.8
	57	330.6	330.6	312.0	312.0	293.4	293.4	274.9	274.9	256.7	256.7	254.2	199.6	309.1	309.1	291.3	291.3	273.3	273.3	255.5	255.5	237.9	237.9	232.9	188.1

AD15 hot gas reheat capacity performance

Table 20: AD15 HGRH capacity performance, 35°F to 45°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
		85		80		75		70		65		85		80		75		70		65	
CFM	WB (°F)	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
35°F											45°F										
4500	72	121.5	35.7	122.2	12.4	-	-	-	-	-	-	118.2	33.8	118.4	10.5	-	-	-	-	-	-
	67	112.8	65.7	74.3	13.2	113.1	19.8	-	-	-	-	109.4	63.7	90.1	26.0	109.6	17.8	-	-	-	-
	62	103.4	94.8	104.1	72.1	104.0	48.9	104.1	26.5	103.9	3.9	100.4	92.8	100.8	70.1	100.9	47.2	100.8	24.5	100.6	1.8
	57	100.3	98.6	95.9	94.3	95.9	78.4	96.4	56.0	96.3	33.4	97.6	95.9	93.1	91.3	92.8	76.3	93.0	53.9	92.9	31.1
5250	72	126.9	42.1	127.6	18.4	-	-	-	-	-	-	123.3	40.8	123.6	15.5	-	-	-	-	-	-
	67	118.2	75.4	117.9	49.3	117.5	23.0	-	-	-	-	114.4	73.6	114.3	47.3	114.2	21.0	-	-	-	-
	62	106.9	105.0	108.7	83.0	108.4	56.7	108.4	30.6	108.6	5.2	104.2	102.2	105.3	81.0	105.3	54.9	105.4	28.7	105.0	3.0
	57	107.0	105.2	102.2	100.3	100.5	89.6	100.8	64.0	100.6	37.6	104.2	102.4	99.4	97.6	97.0	87.3	97.3	61.7	97.0	35.5
6000	72	131.8	50.3	131.4	22.2	-	-	-	-	-	-	127.6	48.5	127.4	19.6	-	-	-	-	-	-
	67	121.4	86.6	122.0	57.1	121.9	27.4	-	-	-	-	117.7	84.4	118.1	54.9	118.1	25.3	-	-	-	-
	62	112.7	109.5	113.1	94.0	112.9	64.7	112.2	34.8	111.5	5.9	109.8	107.1	109.3	91.9	109.3	62.6	108.9	32.9	108.1	3.9
	57	112.8	111.0	107.6	105.6	103.8	101.9	104.3	71.3	104.2	42.2	109.8	107.9	104.7	102.8	100.2	98.3	100.7	69.1	100.5	39.8
6750	72	134.5	57.7	134.5	25.1	-	-	-	-	-	-	130.5	55.8	130.5	23.1	-	-	-	-	-	-
	67	124.4	97.1	124.6	64.7	124.3	31.3	-	-	-	-	120.7	95.1	120.9	62.4	120.8	29.4	-	-	-	-
	62	117.6	114.6	115.8	103.0	115.9	70.6	116.3	39.4	114.9	7.6	114.6	111.6	112.0	100.7	112.3	68.5	112.4	37.2	110.9	5.3
	57	117.6	114.3	112.7	110.6	106.8	104.7	107.1	78.6	107.0	46.4	114.6	111.6	109.5	107.5	103.9	101.9	103.5	76.5	103.2	44.1
7500	72	137.0	64.9	137.3	29.1	-	-	-	-	-	-	133.1	63.0	133.3	27.2	-	-	-	-	-	-
	67	127.4	107.5	128.1	73.2	127.6	35.8	127.0	1.4	-	-	123.3	105.3	124.0	69.7	123.7	33.7	-	-	-	-
	62	121.9	119.5	117.8	116.0	118.6	78.0	118.6	42.4	117.2	10.2	118.9	116.5	114.0	112.0	114.8	75.9	114.8	40.2	113.3	6.7
	57	122.0	119.6	117.0	114.9	110.4	108.5	109.2	85.6	109.2	50.5	118.8	116.6	113.6	111.5	107.5	105.5	105.8	83.4	105.6	48.2

Table 21: AD15 HGRH capacity performance, 55°F to 65°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
CFM	WB (°F)	85		80		75		70		65		85		80		75		70		65	
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		55°F										65°F									
4500	72	114.8	31.8	114.7	8.6	-	-	-	-	-	-	110.3	29.5	110.5	6.4	-	-	-	-	-	-
	67	106.0	61.7	106.0	38.7	106.2	15.8	-	-	-	-	101.7	59.3	101.8	36.4	101.8	13.4	-	-	-	-
	62	97.4	90.8	97.5	68.1	97.8	45.5	97.5	22.5	-	-	93.4	88.3	93.8	65.9	93.9	43.1	93.7	20.2	-	-
	57	95.0	93.1	90.2	88.4	89.6	74.2	89.6	51.7	89.4	28.7	92.0	89.7	87.4	85.6	86.0	71.8	85.9	49.3	85.5	26.4
5250	72	119.6	39.4	119.5	12.7	-	-	-	-	-	-	114.9	36.9	115.0	10.5	-	-	-	-	-	-
	67	110.6	71.7	110.7	45.4	110.9	19.1	-	-	-	-	106.2	69.4	106.4	43.1	106.2	16.7	-	-	-	-
	62	101.5	99.4	101.9	79.0	102.3	53.1	102.3	26.9	101.4	0.9	97.9	95.9	97.9	76.6	98.1	50.6	97.9	24.4	-	-
	57	101.4	99.6	96.6	94.8	93.5	85.1	93.8	59.3	93.5	33.3	97.9	96.1	93.3	91.4	89.9	82.6	89.9	56.8	89.8	30.9
6000	72	123.4	46.7	123.4	17.0	-	-	-	-	-	-	118.4	44.2	118.6	14.5	-	-	-	-	-	-
	67	114.0	82.3	114.2	52.8	114.3	23.2	-	-	-	-	109.2	79.9	109.8	50.4	109.8	20.9	-	-	-	-
	62	106.9	104.8	105.5	89.8	105.7	60.4	105.6	31.0	104.6	2.0	103.2	101.2	101.2	87.2	101.5	57.9	101.7	28.5	-	-
	57	106.8	104.9	101.8	99.9	96.5	94.7	97.1	66.9	96.8	37.5	103.2	101.2	98.2	96.3	93.4	91.4	93.2	64.7	92.9	35.1
6750	72	126.5	53.9	126.5	21.0	-	-	-	-	-	-	121.5	51.4	121.7	18.6	-	-	-	-	-	-
	67	117.0	93.1	117.2	60.0	117.4	27.5	-	-	-	-	112.3	90.4	112.7	57.7	112.5	24.9	-	-	-	-
	62	111.6	108.7	108.3	98.4	108.7	66.5	108.5	35.0	106.9	3.0	107.7	104.9	103.7	95.8	104.3	63.9	104.0	31.2	102.5	0.5
	57	111.5	108.8	106.3	104.3	101.0	99.0	99.9	74.4	99.5	41.8	107.6	104.9	102.5	100.6	97.4	95.3	64.6	51.1	95.3	39.1
7500	72	129.1	61.1	129.2	25.2	-	-	-	-	-	-	124.0	58.5	124.3	22.7	-	-	-	-	-	-
	67	119.3	103.0	119.9	66.2	119.9	31.6	-	-	-	-	114.4	100.4	115.4	65.2	115.1	29.0	-	-	-	-
	62	115.8	113.6	110.2	108.0	111.1	73.7	111.0	38.0	109.3	3.2	111.7	109.4	106.4	104.3	106.5	71.0	106.2	35.3	104.1	0.4
	57	115.6	113.6	110.2	108.1	104.6	102.6	102.4	81.2	102.0	45.9	111.6	109.4	106.2	104.3	100.9	98.8	98.2	78.8	97.9	43.5

Table 22: AD15 HGRH capacity performance, 75°F to 85°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
		85		80		75		70		65		85		80		75		70		65	
CFM	WB (°F)	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
75°F												85°F									
4500	72	105.1	26.8	105.1	3.6	-	-	-	-	-	-	106.6	30.5	106.4	7.7	-	-	-	-	-	-
	67	96.7	56.5	97.1	33.7	96.9	10.6	-	-	-	-	98.0	59.5	98.2	36.5	98.0	13.4	-	-	-	-
	62	88.5	85.7	89.2	63.2	89.0	40.3	89.0	17.4	-	-	89.9	88.5	90.3	66.2	90.4	43.4	90.2	20.6	-	-
	57	87.9	86.1	83.8	82.0	82.0	69.3	82.0	46.8	81.4	23.8	89.9	88.1	85.6	83.8	82.9	71.8	77.5	46.7	82.6	26.5
5250	72	109.4	34.2	109.5	7.7	-	-	-	-	-	-	110.8	38.6	110.8	11.9	-	-	-	-	-	-
	67	101.1	66.5	101.3	40.3	101.2	13.7	-	-	-	-	102.3	70.3	102.5	44.6	102.2	17.5	-	-	-	-
	62	93.9	91.9	93.2	73.8	93.3	47.7	93.1	21.5	-	-	96.0	93.9	94.0	77.0	94.2	50.9	94.2	24.7	-	-
	57	93.8	92.0	89.4	87.5	85.2	80.0	85.7	54.3	85.4	28.1	95.9	94.1	91.2	89.4	86.3	82.6	86.6	57.0	86.2	30.8
6000	72	112.9	41.3	113.0	11.6	-	-	-	-	-	-	114.4	45.8	114.2	15.9	-	-	-	-	-	-
	67	104.3	76.8	104.5	47.6	104.4	17.8	-	-	-	-	105.6	80.8	105.6	51.4	105.4	21.7	-	-	-	-
	62	98.9	96.8	96.2	84.2	96.5	55.0	96.2	25.5	-	-	100.7	97.7	96.9	87.1	97.4	58.1	97.0	28.5	-	-
	57	98.8	96.9	94.2	92.2	89.4	87.4	88.5	61.6	88.3	32.2	100.6	99.2	95.8	93.9	90.6	88.9	89.3	64.2	89.1	34.9
6750	72	116.0	48.3	115.8	15.6	-	-	-	-	-	-	116.8	52.8	116.7	19.7	-	-	-	-	-	-
	67	106.6	86.6	107.3	54.8	107.1	22.0	-	-	-	-	107.5	90.9	107.6	58.5	108.0	25.6	-	-	-	-
	62	103.2	100.6	98.2	93.3	99.1	60.9	98.7	28.3	-	-	104.9	102.5	99.9	95.6	99.8	64.1	99.4	31.2	97.2	0.2
	57	103.1	100.6	98.1	96.2	93.2	91.1	91.2	69.0	90.8	36.4	104.9	102.7	99.7	97.8	94.6	92.6	91.4	71.1	91.0	38.8
7500	72	118.5	55.5	118.3	20.4	-	-	-	-	-	-	119.3	59.7	118.9	24.5	-	-	-	-	-	-
	67	109.0	97.1	109.7	61.9	109.4	25.9	-	-	-	-	109.4	101.2	110.2	65.3	109.9	27.7	-	-	-	-
	62	107.0	105.1	101.8	98.4	101.3	68.1	101.0	32.2	-	-	108.5	106.9	103.0	100.0	101.8	71.1	101.2	35.2	-	-
	57	107.0	105.2	101.8	98.5	96.5	94.6	93.0	76.1	92.9	40.4	108.4	106.9	103.0	100.1	97.6	95.7	93.5	77.9	93.0	42.7

AD18 hot gas reheat capacity performance

Table 23: AD18 HGRH capacity performance, 35°F to 45°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
		85		80		75		70		65		85		80		75		70		65	
CFM	WB (°F)	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
35°F												45°F									
5250	72	129.8	45.7	129.1	18.0	-	-	-	-	-	-	123.0	42.9	122.8	14.4	-	-	-	-	-	-
	67	118.0	83.6	119.5	52.9	119.0	24.1	-	-	-	-	112.7	79.4	113.5	49.4	113.3	20.6	-	-	-	-
	62	108.2	110.6	110.2	89.7	110.1	59.7	109.8	31.5	109.4	3.2	103.0	103.8	104.7	86.3	104.7	56.3	104.6	28.1	104.3	0.2
	57	107.4	105.6	102.2	99.9	101.7	92.5	101.3	65.7	100.9	37.7	102.5	100.5	97.5	95.3	96.2	88.7	96.3	62.4	96.1	34.5
6125	72	134.9	57.3	134.3	23.2	-	-	-	-	-	-	127.6	53.3	127.9	19.2	-	-	-	-	-	-
	67	124.6	97.5	124.3	61.9	124.2	28.1	-	-	-	-	118.2	93.7	118.2	58.3	118.3	24.9	-	-	-	-
	62	114.5	112.9	114.2	99.8	115.2	69.5	114.6	36.5	114.1	4.3	109.2	106.7	108.5	96.3	109.3	65.6	109.2	32.9	108.9	1.3
	57	114.5	112.1	108.7	106.5	103.9	102.0	105.5	75.6	105.5	42.9	109.1	106.9	103.7	101.5	99.0	97.6	100.3	72.0	100.5	39.6
7000	72	138.2	65.1	138.4	25.7	-	-	-	-	-	-	131.3	61.2	131.7	22.8	-	-	-	-	-	-
	67	127.5	105.7	127.9	70.9	128.2	33.8	-	-	-	-	121.0	103.3	121.6	67.0	122.1	30.0	-	-	-	-
	62	120.2	116.5	117.7	110.0	118.3	77.6	118.4	41.1	118.1	6.0	114.6	111.5	111.3	105.3	112.6	73.4	112.9	37.5	112.4	2.7
	57	119.8	117.5	114.1	111.6	108.3	109.6	109.0	84.2	109.5	47.1	114.4	112.0	108.9	106.5	103.4	102.8	103.7	80.6	104.2	44.0
7875	72	141.3	73.3	141.3	32.1	-	-	-	-	-	-	134.3	69.4	134.8	28.0	-	-	-	-	-	-
	67	130.2	117.3	131.1	79.7	131.5	36.8	-	-	-	-	123.4	113.1	124.7	75.9	125.2	33.7	-	-	-	-
	62	125.0	122.2	119.0	115.9	121.2	84.7	121.4	44.1	120.9	5.8	119.2	116.7	113.5	111.0	115.3	81.0	115.7	40.6	115.1	2.4
	57	124.9	122.5	118.6	114.9	112.4	110.2	111.7	92.8	112.0	52.3	119.2	116.9	113.2	109.6	107.4	105.0	106.2	89.2	106.7	48.9
8750	72	143.5	81.7	144.1	36.1	-	-	-	-	-	-	136.6	77.5	137.5	32.2	-	-	-	-	-	-
	67	131.6	125.9	133.8	86.8	133.7	44.4	132.9	0.6	-	-	124.6	121.3	127.1	83.0	127.4	39.8	-	-	-	-
	62	129.1	127.0	122.6	121.1	123.4	93.2	124.0	48.4	122.8	7.3	123.1	121.3	117.1	115.6	117.4	89.6	118.0	45.1	116.9	3.5
	57	129.0	127.3	122.5	119.3	116.2	112.3	114.3	101.5	114.2	56.9	123.1	121.5	116.9	113.8	111.0	107.6	108.6	97.8	108.9	53.3

Table 24: AD18 HGRH capacity performance, 55°F to 65°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
		85		80		75		70		65		85		80		75		70		65	
CFM	WB (°F)	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
55°F												65°F									
5250	72	116.3	40.2	116.4	10.8	-	-	-	-	-	-	109.6	36.3	109.9	7.0	-	-	-	-	-	-
	67	107.3	75.1	107.5	45.9	107.6	17.1	-	-	-	-	101.0	71.2	101.4	42.0	101.7	13.3	-	-	-	-
	62	97.7	97.0	99.2	83.0	99.3	52.9	99.4	24.7	-	-	92.5	90.1	93.2	79.3	93.6	49.3	93.9	21.2	-	-
	57	97.6	95.4	92.9	90.8	90.8	84.9	91.4	59.1	91.4	31.4	92.4	90.3	88.0	85.8	85.3	81.2	86.3	55.7	86.4	28.0
6125	72	120.3	49.3	121.4	15.3	-	-	-	-	-	-	113.7	44.9	114.6	11.5	-	-	-	-	-	-
	67	111.8	89.8	112.0	54.7	112.4	21.7	-	-	-	-	105.0	85.7	105.6	50.8	106.2	18.0	-	-	-	-
	62	103.8	100.5	102.8	92.9	103.4	61.7	103.8	29.2	-	-	98.3	95.2	96.6	89.0	97.5	57.9	98.1	25.9	-	-
	57	103.6	101.7	98.8	96.6	94.0	93.1	95.2	68.3	95.6	36.3	98.3	95.0	93.6	91.4	89.0	88.2	90.1	64.7	90.4	32.8
7000	72	124.5	57.3	125.0	20.0	-	-	-	-	-	-	117.3	53.5	118.2	15.8	-	-	-	-	-	-
	67	114.5	100.8	115.4	63.1	116.0	26.1	-	-	-	-	107.7	95.9	108.7	59.2	109.7	22.5	-	-	-	-
	62	109.0	106.5	104.9	100.7	107.0	69.1	107.3	33.9	-	-	103.3	100.6	98.5	95.8	100.8	65.3	101.4	29.1	-	-
	57	109.1	106.4	103.7	101.4	98.5	95.9	98.3	77.0	98.9	40.9	103.2	100.8	98.2	95.9	93.3	91.0	92.8	73.4	93.5	37.5
7875	72	127.4	65.4	128.3	24.0	-	-	-	-	-	-	120.0	61.3	121.2	20.1	-	-	-	-	-	-
	67	116.5	108.8	118.2	72.0	119.0	30.7	-	-	-	-	109.2	104.5	111.5	67.6	112.6	26.8	-	-	-	-
	62	113.5	111.1	108.0	106.2	109.3	77.4	110.0	37.1	-	-	107.5	105.4	102.5	100.2	103.1	73.6	104.2	33.5	-	-
	57	113.4	111.3	107.8	104.3	102.4	99.8	100.8	85.6	101.5	45.4	107.3	105.6	102.2	98.9	97.0	94.5	95.4	81.6	96.1	41.8
8750	72	129.7	73.4	130.8	28.2	-	-	-	-	-	-	122.2	69.3	123.7	24.1	-	-	-	-	-	-
	67	117.7	116.6	120.4	79.2	121.1	35.2	-	-	-	-	111.2	111.0	113.5	75.5	115.0	31.1	-	-	-	-
	62	117.1	115.5	111.6	110.1	111.4	86.0	112.0	41.8	-	-	111.0	109.5	105.5	102.5	105.1	81.8	106.3	37.8	-	-
	57	117.1	115.6	111.4	108.4	105.8	102.9	102.8	94.1	103.6	49.8	110.9	109.6	105.5	102.5	100.2	97.6	96.9	90.1	98.0	46.1

Table 25: AD18 HGRH capacity performance, 75°F to 85°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
CFM	WB (°F)	85		80		75		70		65		85		80		75		70		65	
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		75°F										85°F									
5250	72	102.4	32.2	103.0	3.0	-	-	-	-	-	-	94.8	27.8	-	-	-	-	-	-	-	-
	67	94.2	67.1	94.7	38.1	95.3	9.4	-	-	-	-	87.0	62.6	87.8	34.0	88.9	6.1	-	-	-	-
	62	86.9	84.6	87.0	75.2	87.7	45.5	88.1	17.5	-	-	81.0	78.6	80.5	70.8	81.3	41.4	82.1	13.6	-	-
	57	86.8	84.8	82.8	80.6	79.3	77.4	80.9	52.1	81.2	24.4	80.9	78.8	77.2	75.0	73.5	72.6	75.1	48.2	75.7	20.7
6125	72	106.4	40.7	107.6	7.4	-	-	-	-	-	-	98.6	36.3	100.1	3.2	-	-	-	-	-	-
	67	97.9	81.5	98.9	46.8	99.7	14.1	-	-	-	-	91.0	77.6	91.5	43.0	93.0	10.1	-	-	-	-
	62	92.4	91.0	90.1	84.6	91.4	54.1	92.2	22.2	-	-	86.1	83.3	82.8	80.3	84.8	50.0	85.9	17.8	-	-
	57	92.3	89.4	88.1	85.8	83.8	83.1	84.4	61.0	85.1	29.2	86.1	82.9	82.1	79.9	78.2	75.9	78.3	57.0	79.4	25.2
7000	72	109.7	49.0	111.0	11.7	-	-	-	-	-	-	101.4	44.2	103.7	7.9	-	-	-	-	-	-
	67	100.3	91.6	101.5	55.1	103.1	19.0	-	-	-	-	92.4	87.0	94.4	50.3	96.3	14.5	-	-	-	-
	62	97.0	94.6	92.5	90.2	94.4	61.5	95.1	26.4	-	-	90.5	88.3	86.3	84.3	87.7	57.2	89.3	22.3	-	-
	57	97.1	96.3	92.4	90.1	87.9	85.9	87.0	69.5	88.0	33.8	90.4	88.3	86.2	82.8	82.0	79.7	81.0	65.4	82.2	29.8
7875	72	112.3	57.0	114.0	15.9	-	-	-	-	-	-	104.1	52.5	106.0	11.7	-	-	-	-	-	-
	67	101.4	100.1	104.6	63.4	105.8	21.6	-	-	-	-	94.2	93.9	96.9	59.1	98.7	18.4	-	-	-	-
	62	101.0	99.1	96.2	95.3	96.8	69.5	98.0	29.5	-	-	94.1	92.5	89.7	86.7	90.0	65.3	91.5	25.6	-	-
	57	100.9	99.3	96.1	93.1	91.3	88.8	89.4	77.6	91.0	38.3	94.1	92.4	89.7	86.7	85.3	82.9	82.7	73.7	84.6	34.1
8750	72	114.4	65.0	116.3	19.7	-	-	-	-	-	-	106.2	60.4	108.1	15.3	-	-	-	-	-	-
	67	104.4	104.4	106.3	71.3	108.0	27.1	-	-	-	-	97.3	97.3	98.7	67.1	100.9	22.5	-	-	-	-
	62	104.2	101.6	99.4	96.2	98.6	77.7	100.0	33.8	-	-	97.2	96.0	92.7	91.5	91.7	73.4	93.5	29.5	-	-
	57	104.2	102.9	99.2	96.5	94.3	90.2	90.7	86.1	92.5	42.1	97.2	96.2	92.6	91.5	88.1	84.2	84.5	82.0	86.4	38.1

AD20 hot gas reheat capacity performance

Table 26: AD20 HGRH capacity performance, 35°F to 45°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
		85		80		75		70		65		85		80		75		70		65	
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		35°F										45°F									
6000	72	156.1	45.4	156.1	15.3	-	-	-	-	-	-	151.1	43.3	150.9	12.3	-	-	-	-	-	-
	67	147.4	87.7	148.5	54.6	144.6	24.6	-	-	-	-	141.7	84.2	142.5	51.7	140.0	21.8	-	-	-	-
	62	135.8	124.7	134.3	95.9	138.2	67.4	133.6	33.6	132.5	2.6	130.6	121.1	130.2	93.2	132.3	63.5	129.2	30.8	-	-
	57	130.9	128.6	123.7	121.0	124.5	105.2	124.2	73.0	123.2	42.5	126.4	123.9	119.8	117.1	120.3	102.4	119.9	70.2	119.0	39.5
7000	72	162.6	56.8	162.7	20.9	-	-	-	-	-	-	157.4	53.9	157.3	17.8	-	-	-	-	-	-
	67	154.0	102.2	152.8	65.9	150.8	29.0	-	-	-	-	148.0	98.9	147.1	62.5	146.1	26.2	-	-	-	-
	62	140.0	138.8	140.4	110.2	142.1	76.1	140.3	39.5	138.5	3.5	135.1	134.0	135.9	107.2	136.8	72.7	135.1	36.5	133.7	0.6
	57	139.7	136.4	131.4	128.6	129.3	118.5	130.7	84.2	129.6	48.4	134.8	131.8	127.7	124.8	125.1	115.4	125.8	80.9	125.0	45.4
8000	72	167.6	66.7	167.7	26.3	-	-	-	-	-	-	162.4	63.7	162.4	23.2	-	-	-	-	-	-
	67	156.4	114.1	156.5	76.6	155.6	34.5	-	-	-	-	151.3	111.8	151.4	72.7	150.9	31.7	-	-	-	-
	62	148.7	143.8	146.4	127.5	144.9	84.8	144.4	44.7	143.5	5.0	143.0	138.3	141.0	123.9	140.4	81.8	140.0	41.9	138.4	1.9
	57	147.0	142.3	137.9	135.1	133.4	128.7	133.8	93.4	134.0	54.3	141.8	137.3	134.1	131.2	128.8	125.4	129.4	90.6	129.1	51.2
9000	72	171.2	76.0	172.4	30.8	-	-	-	-	-	-	166.1	72.9	166.7	27.9	-	-	-	-	-	-
	67	161.7	128.4	160.4	84.6	159.6	38.9	-	-	-	-	155.7	126.2	155.1	81.4	154.7	36.5	-	-	-	-
	62	152.5	148.8	148.8	135.1	148.8	92.9	148.1	49.0	146.2	4.5	147.3	143.6	143.7	131.9	144.0	89.8	143.5	45.9	141.2	1.4
	57	150.6	147.4	143.9	141.0	136.8	135.6	136.4	103.8	137.2	59.2	146.4	143.0	139.8	136.8	132.9	131.8	132.5	100.6	132.4	56.2
10000	72	174.7	84.6	174.9	34.4	-	-	-	-	-	-	169.3	81.7	169.5	32.1	-	-	-	-	-	-
	67	165.2	144.5	163.7	96.3	163.4	44.9	-	-	-	-	158.8	140.8	158.2	91.8	157.9	42.1	-	-	-	-
	62	155.7	152.6	150.7	144.4	151.8	102.6	151.0	53.9	149.2	6.2	151.3	148.1	145.7	140.9	146.9	99.5	146.2	50.9	143.9	3.0
	57	157.6	154.5	148.8	144.4	140.8	139.8	140.2	112.4	139.8	64.6	152.2	149.2	144.3	139.9	136.9	135.9	135.7	109.4	135.1	61.3

Table 27: AD20 HGRH capacity performance, 55°F to 65°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
CFM	WB (°F)	85		80		75		70		65		85		80		75		70		65	
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		55°F										65°F									
6000	72	146.2	41.2	145.7	9.3	-	-	-	-	-	-	140.1	36.2	140.0	6.1	-	-	-	-	-	-
	67	136.1	80.8	136.4	48.8	135.4	19.1	-	-	-	-	130.4	77.4	130.3	45.9	129.9	15.8	-	-	-	-
	62	125.3	117.4	126.0	90.5	126.5	59.7	124.9	28.0	-	-	120.0	113.8	121.0	87.2	120.6	55.9	120.0	24.8	-	-
	57	121.9	119.3	115.9	113.2	116.1	99.7	115.6	67.3	114.9	36.5	117.4	114.6	112.0	109.3	111.3	96.1	110.9	63.9	110.5	33.2
7000	72	152.3	51.1	152.0	14.7	-	-	-	-	-	-	146.1	47.6	146.3	11.6	-	-	-	-	-	-
	67	142.0	95.5	141.5	59.1	141.4	23.4	-	-	-	-	136.0	92.1	135.9	55.7	135.6	20.1	-	-	-	-
	62	130.3	129.1	131.4	104.3	131.4	69.3	130.0	33.5	-	-	125.4	124.3	126.1	101.6	126.1	65.9	125.4	30.4	-	-
	57	130.0	127.2	123.9	121.0	120.9	112.3	120.9	77.7	120.3	42.4	125.1	122.5	119.3	116.6	116.4	109.2	116.0	74.4	115.5	39.1
8000	72	157.2	60.6	157.1	20.0	-	-	-	-	-	-	150.7	56.9	151.1	16.5	-	-	-	-	-	-
	67	146.2	109.6	146.2	68.9	146.2	28.9	-	-	-	-	140.2	105.9	140.4	65.6	140.1	25.3	-	-	-	-
	62	137.3	132.8	135.6	120.3	135.8	78.9	135.5	39.2	-	-	131.6	127.3	130.2	116.7	130.3	75.4	129.6	34.0	-	-
	57	136.6	132.4	130.2	127.4	124.1	122.1	125.0	87.7	124.2	48.1	131.4	127.5	125.3	123.0	119.7	118.4	120.3	84.5	119.4	44.5
9000	72	160.9	69.8	161.0	25.0	-	-	-	-	-	-	154.3	66.1	154.7	21.6	-	-	-	-	-	-
	67	149.6	124.0	149.7	78.3	149.8	34.0	-	-	-	-	143.6	121.8	143.9	74.8	143.4	30.4	-	-	-	-
	62	142.1	138.5	138.7	128.7	139.2	86.8	138.9	42.8	-	-	136.9	133.3	132.8	125.0	133.6	83.4	133.0	39.1	-	-
	57	142.1	138.6	135.7	132.5	129.0	128.0	128.6	97.3	127.7	53.2	136.9	133.4	130.3	127.4	124.2	123.2	123.5	93.9	122.5	49.5
10000	72	163.9	78.7	164.1	29.8	-	-	-	-	-	-	157.3	75.0	157.4	26.3	-	-	-	-	-	-
	67	152.4	137.2	152.7	87.4	152.3	39.2	-	-	-	-	146.0	133.5	146.7	83.9	146.4	35.2	-	-	-	-
	62	146.9	143.6	140.8	137.3	142.0	96.4	141.5	48.0	-	-	141.4	138.5	135.1	132.4	136.2	92.8	135.5	44.2	-	-
	57	146.8	143.9	139.9	135.4	133.0	132.0	131.1	106.4	130.3	58.0	141.4	138.6	134.6	130.0	128.1	124.9	125.9	102.8	124.9	54.5

Table 28: AD20 HGRH capacity performance, 75°F to 85°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
		85		80		75		70		65		85		80		75		70		65	
CFM	WB (°F)	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
75°F												85°F									
6000	72	133.1	34.5	133.3	2.3	-	-	-	-	-	-	126.2	29.8	-	-	-	-	-	-	-	-
	67	124.1	73.6	124.2	43.0	123.5	11.9	-	-	-	-	117.3	69.5	117.1	37.8	116.6	6.6	-	-	-	-
	62	113.9	109.8	115.1	83.5	114.7	52.1	114.2	21.1	-	-	107.1	105.4	108.6	79.4	126.5	59.7	107.6	16.9	-	-
	57	112.3	109.6	107.1	104.5	106.5	92.6	105.7	60.7	104.8	29.7	106.5	103.9	101.7	99.1	101.6	89.1	99.7	56.5	99.0	25.8
7000	72	139.3	43.7	139.5	7.5	-	-	-	-	-	-	131.8	39.5	131.5	3.2	-	-	-	-	-	-
	67	129.4	88.1	129.5	51.8	129.1	16.1	-	-	-	-	122.3	83.9	122.4	48.4	122.0	11.9	-	-	-	-
	62	119.9	118.9	119.9	97.6	119.9	62.1	119.4	26.5	-	-	113.7	110.9	113.2	93.4	113.2	57.7	112.8	22.3	-	-
	57	119.7	117.0	114.1	111.4	110.6	105.3	110.6	70.8	109.9	35.4	113.7	110.8	108.5	105.9	104.2	101.1	105.2	67.2	103.6	31.4
8000	72	143.7	53.0	143.8	12.5	-	-	-	-	-	-	136.0	48.7	135.9	8.2	-	-	-	-	-	-
	67	133.2	102.0	133.7	61.7	133.5	21.3	-	-	-	-	125.8	97.8	126.4	57.3	126.0	16.9	-	-	-	-
	62	125.9	121.8	124.0	112.7	123.9	70.0	123.3	30.2	-	-	119.6	115.7	117.0	107.9	117.1	65.6	116.4	25.9	-	-
	57	125.9	121.9	120.0	117.2	114.3	113.2	114.4	80.7	113.7	40.8	119.5	115.8	114.0	111.2	108.4	107.3	108.0	76.3	107.0	36.5
9000	72	147.3	62.2	147.3	17.4	-	-	-	-	-	-	139.4	57.7	139.5	13.0	-	-	-	-	-	-
	67	136.6	116.5	137.2	70.8	136.8	26.1	-	-	-	-	129.1	111.6	129.6	66.5	129.3	22.0	-	-	-	-
	62	131.0	127.7	126.3	120.9	127.1	79.4	126.6	34.9	-	-	124.4	121.2	119.1	115.8	120.1	75.0	119.2	31.0	-	-
	57	131.0	127.8	124.9	121.9	118.6	117.7	117.3	89.9	116.4	45.5	124.4	121.3	118.5	114.0	112.6	109.5	110.5	85.3	109.8	41.2
10000	72	150.1	70.9	150.1	22.0	-	-	-	-	-	-	142.1	66.5	142.0	17.9	-	-	-	-	-	-
	67	138.8	129.1	139.9	79.9	139.4	28.9	-	-	-	-	131.0	124.1	132.1	75.6	131.8	26.7	-	-	-	-
	62	135.3	132.7	129.1	126.7	129.6	88.8	128.9	40.0	-	-	128.6	126.0	122.6	120.4	122.4	84.3	121.2	36.1	-	-
	57	135.3	132.8	128.8	124.8	122.4	119.3	119.9	98.7	118.3	48.9	128.5	126.1	122.5	118.4	116.2	113.0	113.0	94.3	111.6	44.5

AD25 hot gas reheat capacity performance

Table 29: AD25 HGRH capacity performance, 35°F to 45°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
CFM	WB (°F)	85		80		75		70		65		85		80		75		70		65	
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		35°F										45°F									
7500	72	199.8	60.7	199.4	22.5	-	-	-	-	-	-	194.2	57.9	194.0	19.8	-	-	-	-	-	-
	67	184.9	110.2	184.6	71.8	184.1	34.0	-	-	-	-	179.8	107.4	179.6	69.3	179.3	31.3	-	-	-	-
	62	170.4	160.2	170.9	121.2	171.3	83.5	170.1	44.8	170.2	7.2	165.6	157.1	166.0	118.2	166.3	80.5	165.4	42.1	165.4	4.3
	57	166.1	164.4	158.3	156.5	157.4	131.5	157.3	93.9	157.1	55.6	162.1	160.2	154.3	152.4	152.8	128.6	152.7	90.8	152.3	52.7
8750	72	207.7	74.0	207.5	30.6	-	-	-	-	-	-	202.0	71.4	202.0	27.6	-	-	-	-	-	-
	67	193.1	127.9	192.6	84.1	192.5	40.0	-	-	-	-	187.5	125.0	187.4	81.3	187.2	37.4	-	-	-	-
	62	177.3	175.3	178.0	139.9	178.6	96.7	178.8	52.6	178.4	9.3	173.0	170.8	173.2	137.2	173.5	93.8	173.5	49.9	173.1	6.3
	57	177.6	175.2	167.9	166.9	164.6	151.2	164.7	107.5	164.0	63.5	173.0	170.9	164.4	162.7	159.6	148.1	159.8	104.5	159.3	60.7
10000	72	214.7	87.5	214.2	38.1	-	-	-	-	-	-	209.0	85.0	208.7	35.4	-	-	-	-	-	-
	67	199.4	146.3	199.3	96.7	199.3	48.1	-	-	-	-	193.7	143.8	193.9	94.5	193.9	45.4	-	-	-	-
	62	187.4	185.2	184.7	157.1	185.1	110.1	185.3	61.4	184.6	11.7	182.5	180.3	179.7	154.5	179.9	107.2	179.8	58.2	179.1	8.7
	57	187.1	185.0	177.8	175.9	169.3	169.9	171.5	121.6	170.6	72.2	182.3	180.3	173.6	171.6	165.2	164.3	166.0	118.4	165.6	69.1
11250	72	220.9	101.7	220.5	46.7	-	-	-	-	-	-	214.8	98.8	214.7	43.8	-	-	-	-	-	-
	67	205.5	166.3	205.1	111.6	204.9	55.9	205.0	2.4	-	-	199.6	163.2	199.6	108.6	199.2	53.6	-	-	-	-
	62	195.6	192.2	190.2	179.5	190.6	122.1	190.9	67.5	189.9	12.6	190.7	187.2	184.7	176.5	185.2	119.0	185.1	64.4	184.3	9.5
	57	195.4	192.1	186.2	184.0	177.4	175.0	175.9	134.9	175.7	80.7	190.6	187.3	181.6	179.4	172.8	170.5	171.0	131.9	170.8	77.6
12500	72	228.8	117.5	226.1	54.9	-	-	-	-	-	-	221.4	113.6	220.0	52.1	-	-	-	-	-	-
	67	73.1	90.5	210.3	126.5	209.8	65.0	209.9	5.1	-	-	135.9	135.9	204.7	122.2	204.3	62.3	204.1	2.1	-	-
	62	203.7	201.8	194.4	191.9	195.1	136.1	196.0	75.9	195.0	16.1	198.4	195.8	189.3	185.9	189.7	133.1	190.1	72.9	189.2	13.0
	57	203.4	202.0	193.5	189.2	184.0	182.4	181.5	149.2	180.5	88.9	198.3	195.9	188.8	184.7	179.5	177.6	176.2	145.9	175.6	86.1

Table 30: AD25 HGRH capacity performance, 55°F to 65°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
CFM	WB (°F)	85		80		75		70		65		85		80		75		70		65	
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		55°F										65°F									
7500	72	188.5	55.1	188.6	17.1	-	-	-	-	-	-	181.9	52.3	181.8	13.5	-	-	-	-	-	-
	67	174.6	104.6	174.6	66.9	174.6	28.5	-	-	-	-	168.2	100.9	168.3	63.3	167.9	25.2	-	-	-	-
	62	160.8	154.1	161.2	115.3	161.2	77.5	160.8	39.5	160.5	1.4	154.8	150.6	155.1	112.1	155.0	73.8	154.9	36.0	-	-
	57	158.0	155.9	150.3	148.3	148.3	125.6	148.1	87.8	147.5	49.7	153.0	151.5	145.7	143.7	142.9	122.3	142.7	84.6	142.0	46.3
8750	72	196.4	68.7	196.5	24.6	-	-	-	-	-	-	189.5	65.5	189.5	21.6	-	-	-	-	-	-
	67	182.0	122.1	182.2	78.6	182.0	34.7	-	-	-	-	175.6	118.8	175.6	75.1	175.1	31.3	-	-	-	-
	62	168.7	166.3	168.5	134.4	168.4	90.9	168.1	47.2	167.7	3.2	163.5	161.1	162.2	130.9	162.0	87.3	161.8	43.6	-	-
	57	168.5	166.5	160.8	158.6	154.6	145.0	154.9	101.4	154.6	58.0	163.2	161.2	155.3	153.3	148.9	141.6	149.3	98.0	148.9	54.4
10000	72	203.2	82.4	203.2	32.8	-	-	-	-	-	-	196.0	78.9	196.1	29.5	-	-	-	-	-	-
	67	188.0	141.2	188.5	92.2	188.4	42.6	-	-	-	-	181.6	137.8	181.6	88.4	181.1	38.8	-	-	-	-
	62	177.6	175.4	174.7	152.0	174.7	104.3	174.3	55.1	173.6	5.8	172.3	170.0	168.0	147.7	168.0	100.6	167.7	51.5	166.9	1.8
	57	177.5	175.5	169.4	167.2	161.0	158.7	160.5	115.3	160.5	66.0	172.2	170.2	163.9	161.8	155.5	153.3	154.5	111.6	154.4	62.4
11250	72	208.7	95.8	208.9	40.9	-	-	-	-	-	-	202.0	92.5	202.1	37.2	-	-	-	-	-	-
	67	193.7	160.2	194.1	105.7	193.6	51.3	-	-	-	-	187.0	156.4	187.0	101.9	186.8	47.4	-	-	-	-
	62	185.9	182.3	179.3	173.4	179.8	115.9	179.3	61.2	178.6	6.4	180.3	177.0	172.5	169.5	173.0	112.2	172.8	57.6	171.7	2.7
	57	185.7	182.5	177.1	174.8	168.3	166.0	166.1	128.9	165.9	74.5	180.1	177.1	171.4	169.2	162.7	160.2	159.9	125.4	159.0	70.6
12500	72	214.0	109.6	214.0	49.2	-	-	-	-	-	-	206.8	106.2	206.8	45.8	-	-	-	-	-	-
	67	198.7	181.2	199.0	117.9	198.8	59.7	-	-	-	-	191.3	177.7	191.8	116.9	191.8	55.8	-	-	-	-
	62	193.2	189.8	184.2	179.8	184.4	130.1	184.1	69.9	183.4	9.9	187.5	185.4	178.4	174.3	177.5	126.1	177.5	66.4	176.2	6.1
	57	193.1	189.8	184.0	180.3	175.1	172.9	170.9	142.6	170.6	83.2	187.2	185.5	178.2	174.3	169.0	167.0	164.4	138.8	163.9	79.2

Table 31: AD25 HGRH capacity performance, 75°F to 85°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
CFM	WB (°F)	85		80		75		70		65		85		80		75		70		65	
		TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC	TC	SC
		MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH	MBH
		75°F										85°F									
7500	72	174.1	47.7	173.8	9.8	-	-	-	-	-	-	165.2	44.0	165.5	5.2	-	-	-	-	-	-
	67	160.7	95.5	160.7	59.1	160.5	21.1	-	-	-	-	152.6	92.4	152.4	53.4	152.3	16.8	-	-	-	-
	62	147.9	145.9	147.9	107.8	148.1	70.0	147.9	31.9	-	-	140.7	138.4	140.4	103.3	140.3	65.8	140.1	27.5	-	-
	57	147.3	145.0	139.9	138.2	136.5	118.4	136.1	80.4	135.6	42.5	140.5	138.2	133.7	131.8	129.4	113.8	129.1	76.0	128.6	38.1
8750	72	181.5	61.5	181.2	17.6	-	-	-	-	-	-	172.1	57.4	172.0	13.2	-	-	-	-	-	-
	67	167.7	114.9	167.8	71.0	167.7	27.2	-	-	-	-	159.2	110.4	159.3	66.5	159.0	22.7	-	-	-	-
	62	157.2	154.9	155.0	126.8	154.8	83.2	154.4	39.5	-	-	150.2	148.0	147.0	122.4	146.8	78.7	146.3	35.0	-	-
	57	157.0	155.0	149.4	147.1	142.3	137.8	142.5	93.9	142.0	50.2	150.1	148.1	142.7	140.6	135.4	133.2	135.0	89.4	134.3	45.6
10000	72	187.6	75.0	187.4	25.3	-	-	-	-	-	-	178.1	70.5	178.0	20.9	-	-	-	-	-	-
	67	173.8	133.5	173.4	84.2	173.5	35.0	-	-	-	-	164.5	129.0	164.8	79.7	164.4	30.4	-	-	-	-
	62	165.8	163.5	160.3	143.4	160.7	96.7	160.3	47.4	-	-	158.3	154.4	151.9	138.6	152.2	91.7	151.9	42.8	-	-
	57	165.6	163.7	157.5	155.4	149.4	147.4	147.5	107.3	146.9	58.3	158.2	154.6	150.5	148.2	142.7	140.2	140.0	102.8	139.5	53.7
11250	72	193.0	88.5	192.8	33.5	-	-	-	-	-	-	183.1	83.8	183.1	28.7	-	-	-	-	-	-
	67	178.8	151.3	178.5	98.2	178.3	43.7	-	-	-	-	169.4	148.0	170.0	93.4	169.7	39.0	-	-	-	-
	62	173.6	170.4	165.3	163.9	165.2	108.1	165.1	53.4	-	-	165.7	163.1	157.5	155.0	156.8	103.3	156.5	48.5	-	-
	57	173.5	170.3	164.8	163.0	156.3	154.1	152.6	121.3	152.0	66.5	165.5	163.2	157.2	155.0	149.2	147.0	144.6	116.5	144.0	61.9
12500	72	198.0	102.2	197.8	41.5	-	-	-	-	-	-	188.1	97.4	187.8	36.8	-	-	-	-	-	-
	67	182.9	173.6	183.5	111.9	183.6	51.8	-	-	-	-	173.5	168.5	174.2	107.2	174.1	44.3	-	-	-	-
	62	180.4	178.3	171.3	167.7	169.8	121.6	169.4	62.0	168.0	1.8	172.6	170.9	163.8	159.9	161.3	117.4	160.5	57.3	-	-
	57	180.2	178.7	171.3	167.1	162.5	160.3	157.1	134.5	156.6	74.9	172.3	170.8	163.6	159.9	155.3	153.1	148.6	129.8	148.4	70.2

AD28 hot gas reheat capacity performance

Table 32: AD28 HGRH capacity performance, 35°F to 45°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
		85		80		75		70		65		85		80		75		70		65	
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		35°F										45°F									
8250	72	237.0	88.7	236.9	47.3	236.5	4.2	-	-	-	-	235.3	87.9	235.2	46.5	234.9	4.2	-	-	-	-
	67	220.5	140.1	220.0	100.3	220.0	59.4	220.5	18.0	-	-	218.9	139.3	218.6	99.4	218.4	58.4	218.4	16.9	-	-
	62	203.6	194.4	205.0	153.1	204.9	111.9	204.4	70.3	203.9	28.7	202.1	193.4	203.0	151.9	202.8	110.6	202.4	69.2	201.8	27.6
	57	201.3	199.1	192.4	190.3	189.0	162.9	188.9	122.0	188.8	80.9	200.0	197.9	190.8	188.6	186.9	161.7	186.8	120.7	186.5	79.3
9625	72	243.7	101.7	243.5	54.8	242.9	6.6	-	-	-	-	242.1	101.0	241.9	53.8	241.4	5.9	-	-	-	-
	67	227.4	159.7	227.0	113.9	227.4	65.0	227.3	17.2	-	-	225.7	158.9	225.4	112.2	225.4	64.0	225.1	16.2	-	-
	62	212.9	210.8	210.9	172.5	212.2	125.5	211.0	77.7	211.0	30.0	211.0	209.0	209.2	171.4	209.6	124.2	209.0	76.6	208.7	29.0
	57	244.2	240.5	202.9	200.7	194.8	183.6	195.2	135.9	195.5	88.5	226.8	224.0	201.1	199.0	192.9	182.5	193.2	134.7	192.9	87.1
11000	72	249.2	117.7	248.5	61.3	248.6	8.0	-	-	-	-	247.7	115.6	247.4	60.8	247.1	7.4	-	-	-	-
	67	232.6	179.8	232.8	126.2	232.7	72.8	232.8	19.4	-	-	231.0	178.7	231.1	125.4	230.9	71.9	230.7	18.4	-	-
	62	221.7	219.5	216.9	192.1	217.1	137.1	217.0	85.8	216.1	29.8	220.3	217.9	215.0	190.6	215.0	135.8	214.8	84.4	213.9	28.8
	57	221.7	219.7	211.2	209.1	201.1	198.2	200.4	149.6	200.6	96.6	220.2	218.2	209.9	207.6	199.5	197.0	198.6	148.5	198.3	95.3
12375	72	254.4	127.1	253.9	69.9	253.4	10.5	-	-	-	-	252.7	127.2	252.6	69.1	252.0	9.8	-	-	-	-
	67	163.1	165.7	238.0	140.3	237.4	81.0	237.3	22.1	-	-	199.0	181.8	236.3	139.5	235.9	80.1	235.5	21.0	-	-
	62	230.4	230.3	221.2	211.9	222.4	151.5	222.1	92.4	221.2	33.0	228.7	227.0	219.4	210.8	220.1	150.2	219.8	91.0	219.0	31.8
	57	230.3	224.8	219.4	217.2	209.4	206.9	205.3	164.1	205.5	105.3	228.6	225.3	217.9	215.6	207.2	205.0	203.5	163.0	203.2	103.8
13750	72	324.9	330.9	258.6	78.0	257.9	14.0	-	-	-	-	290.4	236.2	257.3	77.5	256.7	12.8	-	-	-	-
	67	241.6	221.7	242.7	155.0	223.1	178.3	242.3	24.9	-	-	240.1	220.9	241.0	154.7	231.0	133.1	240.1	23.9	-	-
	62	238.5	233.9	226.8	222.4	226.9	166.0	226.6	101.1	226.1	36.3	236.3	233.4	225.3	220.9	224.6	164.7	224.4	99.8	223.3	34.9
	57	237.8	233.6	226.5	222.4	216.7	214.3	210.6	177.0	209.7	116.0	236.1	233.3	225.1	221.0	214.6	212.1	208.4	175.8	207.7	112.4

Table 33: AD28 HGRH capacity performance, 55°F to 65°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
CFM	WB (°F)	85		80		75		70		65		85		80		75		70		65	
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		55°F										65°F									
8250	72	233.6	87.1	233.5	45.7	233.3	4.2	-	-	-	-	229.0	84.8	228.6	43.3	228.4	1.9	-	-	-	-
	67	217.3	138.5	217.2	98.5	216.8	57.3	216.3	15.8	-	-	212.5	136.0	212.5	94.6	212.2	53.5	211.5	13.3	-	-
	62	200.7	192.5	200.9	150.8	200.8	109.4	200.4	68.1	199.7	26.4	196.6	189.7	196.5	148.3	196.1	106.8	195.9	65.2	195.0	23.6
	57	198.6	196.7	189.2	186.9	184.8	160.5	184.7	119.4	184.2	77.6	195.0	192.9	185.6	183.6	180.7	158.0	180.5	116.8	180.1	75.1
9625	72	240.5	100.4	240.4	52.8	240.0	5.3	-	-	-	-	235.6	98.1	235.4	50.5	235.0	2.8	-	-	-	-
	67	223.9	158.1	223.9	110.5	223.4	62.9	222.9	15.3	-	-	219.0	155.5	218.9	107.9	218.6	60.5	217.9	12.7	-	-
	62	209.0	207.3	207.4	170.2	207.0	122.9	207.0	75.4	206.3	28.0	205.4	203.0	203.0	167.6	202.7	120.2	202.2	72.6	201.1	25.1
	57	209.5	207.5	199.3	197.4	191.1	181.3	191.2	133.4	190.4	85.6	205.4	203.3	195.6	193.3	186.8	178.5	186.4	130.5	186.1	83.0
11000	72	246.1	113.6	246.3	60.2	245.6	6.8	-	-	-	-	241.3	111.5	241.0	57.8	240.4	4.4	-	-	-	-
	67	229.3	177.6	229.5	124.5	229.1	71.1	228.5	17.3	-	-	224.5	175.1	224.5	122.0	224.0	68.5	223.3	14.7	-	-
	62	218.9	216.4	213.0	189.1	212.9	134.5	212.6	83.0	211.6	27.9	214.7	210.3	208.2	186.4	208.2	132.0	207.5	78.5	206.3	25.0
	57	218.7	216.6	208.5	206.1	197.9	195.8	196.8	147.4	196.0	94.0	214.6	210.5	204.3	201.9	193.9	191.6	191.9	144.6	191.2	90.8
12375	72	251.1	127.4	251.2	68.4	250.5	9.2	-	-	-	-	246.5	125.4	246.1	66.1	245.6	6.5	-	-	-	-
	67	234.8	198.0	234.6	138.7	234.4	79.2	233.8	19.9	-	-	229.7	195.3	229.5	136.1	229.2	76.7	228.2	17.3	-	-
	62	227.0	223.6	217.7	209.7	217.8	148.9	217.5	89.5	216.7	30.6	223.0	219.6	212.7	206.9	212.9	146.3	212.2	86.8	211.1	27.7
	57	226.9	225.8	216.3	214.0	205.1	203.0	201.6	161.9	201.0	102.4	222.8	219.8	212.0	210.0	201.4	199.1	196.7	158.8	196.0	99.6
13750	72	255.8	141.6	256.0	76.9	255.5	11.5	-	-	-	-	250.9	139.8	250.9	74.6	249.9	9.6	-	-	-	-
	67	238.7	220.1	239.4	154.4	238.9	88.0	237.9	22.9	-	-	233.5	218.0	234.2	150.0	233.7	85.4	232.4	20.3	-	-
	62	234.1	232.9	223.8	219.3	222.3	163.5	222.2	98.6	220.6	33.6	230.6	228.3	219.3	215.2	217.2	160.9	216.9	95.9	215.5	30.7
	57	234.5	233.1	223.7	219.6	212.4	210.0	206.3	174.5	205.7	108.8	230.4	228.6	219.2	215.2	208.1	205.9	201.1	171.5	200.6	108.6

Table 34: AD28 HGRH capacity performance, 75°F to 85°F

Air on evap. coil		Temperature of air on condenser coil																			
		Return dry bulb temperature (°F)										Return dry bulb temperature (°F)									
CFM	WB (°F)	85		80		75		70		65		85		80		75		70		65	
		TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH	TC MBH	SC MBH
		75°F										85°F									
8250	72	222.1	81.4	221.7	40.0	-	-	-	-	-	-	213.6	77.1	213.3	35.9	-	-	-	-	-	-
	67	206.1	132.6	205.9	91.2	205.3	49.6	204.6	9.6	-	-	198.2	128.6	197.9	87.1	197.1	45.5	196.5	4.2	-	-
	62	190.0	185.9	190.0	144.4	189.8	103.1	189.2	61.8	188.4	19.8	183.5	180.5	182.1	140.0	182.0	98.7	181.7	57.5	181.0	15.6
	57	189.8	187.8	180.5	178.2	174.3	154.2	174.4	113.0	173.8	71.6	183.4	181.2	174.2	172.1	167.1	150.1	167.3	108.8	166.6	67.1
9625	72	228.5	94.5	228.5	47.1	-	-	-	-	-	-	220.0	90.6	219.8	42.8	-	-	-	-	-	-
	67	212.3	151.9	212.1	104.5	211.6	56.9	210.8	8.9	-	-	203.8	147.8	203.9	100.2	203.2	52.8	202.0	5.1	-	-
	62	200.2	197.7	196.5	164.0	196.0	116.7	195.4	68.9	194.2	21.3	193.4	191.0	188.5	159.6	188.1	112.2	187.4	64.4	186.2	16.7
	57	200.0	198.0	190.1	187.9	180.4	174.6	180.2	126.8	179.6	79.3	193.3	191.3	183.5	181.3	174.0	169.4	172.8	122.2	172.2	74.6
11000	72	233.5	108.1	233.7	54.6	233.0	0.9	-	-	-	-	225.2	103.9	224.8	50.3	-	-	-	-	-	-
	67	217.6	171.7	217.5	118.5	216.9	64.9	216.1	11.1	-	-	209.1	167.5	208.8	114.1	208.3	60.5	207.1	6.8	-	-
	62	209.0	204.6	201.5	182.6	201.5	128.3	200.5	74.6	199.2	21.3	202.0	198.0	193.2	178.3	193.3	123.8	192.6	70.3	191.0	16.7
	57	208.9	204.8	198.6	196.4	188.3	185.8	184.8	140.7	184.6	87.4	201.9	198.2	191.8	189.4	181.4	179.2	177.3	136.1	176.6	82.7
12375	72	238.9	121.9	238.7	62.6	238.0	3.4	-	-	-	-	230.0	117.8	229.5	58.5	-	-	-	-	-	-
	67	222.2	191.8	222.4	132.4	221.9	73.0	220.4	13.6	-	-	213.6	187.8	213.7	128.2	213.0	68.7	211.8	9.2	-	-
	62	217.0	214.0	206.4	202.6	205.8	142.6	205.1	83.1	203.9	23.9	209.7	206.9	199.1	198.3	197.3	138.0	196.9	78.8	195.3	19.5
	57	216.9	214.2	206.3	204.1	195.4	193.2	190.1	155.0	189.2	95.6	209.6	207.0	198.9	196.8	188.4	186.2	182.0	150.8	181.3	91.0
13750	72	243.3	136.2	243.4	71.0	242.3	6.2	-	-	-	-	234.3	131.9	233.6	67.4	232.9	1.9	-	-	-	-
	67	226.3	213.6	227.0	146.8	226.3	81.5	225.1	16.7	-	-	218.0	208.7	218.0	142.5	217.2	75.3	216.0	12.4	-	-
	62	224.3	222.2	213.3	209.2	210.1	157.0	209.6	92.1	208.2	27.3	216.9	215.1	206.0	201.9	201.5	152.4	201.1	87.6	199.3	22.1
	57	224.1	222.5	213.2	209.4	202.1	199.9	194.3	167.7	193.5	104.2	216.6	215.2	205.9	202.0	194.9	192.5	185.8	165.9	185.2	99.9

Airflow performance

Table 35: AD15 bottom duct application

Air flow (CFM)	Available external static pressure - IWG																			
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Standard 2 HP and drive								Medium static 3 HP and drive								High static 5 HP and drive			
3900	557	0.51	618	0.84	680	1.16	742	1.48	803	1.79	864	2.07	923	2.33	981	2.55	1036	2.72	1089	2.85
4200	566	0.63	626	0.95	688	1.28	750	1.59	811	1.90	872	2.19	931	2.44	989	2.66	1044	2.84	1097	2.96
4500	575	0.74	636	1.07	697	1.39	759	1.71	821	2.02	881	2.30	941	2.56	998	2.78	1054	2.95	1106	3.08
4800	586	0.87	647	1.19	708	1.51	770	1.83	831	2.14	892	2.42	951	2.68	1009	2.90	1064	3.08	1117	3.20
5100	597	1.00	658	1.32	720	1.65	781	1.97	843	2.27	904	2.56	963	2.81	1021	3.03	1076	3.21	1129	3.33
5400	610	1.14	671	1.47	732	1.79	794	2.11	856	2.42	916	2.70	976	2.96	1033	3.18	1089	3.35	1141	3.48
5700	624	1.30	684	1.62	746	1.95	808	2.26	869	2.57	930	2.86	989	3.11	1047	3.33	1102	3.51	1155	3.63
6000	638	1.47	699	1.79	760	2.11	822	2.43	884	2.74	944	3.02	1004	3.28	1061	3.50	1117	3.68	1169	3.80
6300	653	1.65	714	1.97	776	2.30	837	2.61	899	2.92	960	3.21	1019	3.46	1077	3.68	1132	3.86	1185	3.98
6600	669	1.84	730	2.17	792	2.49	854	2.81	915	3.12	976	3.40	1035	3.66	1093	3.88	1148	4.05	1201	4.18
6900	686	2.05	747	2.38	809	2.70	870	3.02	932	3.33	992	3.61	1052	3.87	1109	4.09	1165	4.26	1218	4.39
7200	704	2.28	764	2.60	826	2.92	888	3.24	949	3.55	1010	3.83	1069	4.09	1127	4.31	1182	4.49	1235	4.61
7500	722	2.51	783	2.84	844	3.16	906	3.48	967	3.79	1028	4.07	1087	4.33	1145	4.55	1200	4.72	1253	4.85
	Note: 1. Blower performance includes gas heat exchangers and 2 in. filters. See STATIC RESISTANCE table for additional applications. 2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP. 3. kW = BHP x 0.968																			

Table 36: AD18 bottom duct application

Air flow (CFM)	Available external static pressure - IWG																			
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Standard static 3 HP and drive								Med static 5 HP and drive								High static 7.5 HP and drive			
4600	625	0.59	679	1.00	735	1.37	790	1.70	845	2.00	900	2.28	954	2.56	1008	2.83	1062	3.11	1114	3.41
5000	635	0.78	690	1.19	745	1.56	801	1.89	856	2.19	911	2.47	965	2.75	1019	3.02	1072	3.30	1125	3.60
5400	648	1.00	703	1.41	758	1.77	813	2.10	868	2.40	923	2.69	977	2.96	1031	3.24	1085	3.52	1137	3.82
5800	662	1.24	716	1.65	771	2.01	827	2.34	882	2.64	937	2.93	991	3.20	1045	3.47	1099	3.76	1151	4.06
6200	677	1.50	732	1.91	787	2.27	842	2.60	897	2.91	952	3.19	1007	3.46	1061	3.74	1114	4.02	1167	4.32
6600	695	1.79	749	2.20	804	2.56	860	2.89	915	3.19	970	3.48	1024	3.75	1078	4.02	1131	4.31	1184	4.61
7000	714	2.10	768	2.51	824	2.87	879	3.20	934	3.50	989	3.79	1043	4.06	1097	4.34	1151	4.62	1203	4.92
7400	735	2.43	789	2.84	844	3.21	900	3.54	955	3.84	1010	4.12	1064	4.40	1118	4.67	1172	4.95	1224	5.25
7800	757	2.79	812	3.20	867	3.57	922	3.89	977	4.20	1032	4.48	1087	4.75	1141	5.03	1194	5.31	1247	5.61
8200	782	3.17	836	3.58	891	3.95	947	4.27	1002	4.58	1057	4.86	1111	5.13	1165	5.41	1219	5.69	1271	5.99
8600	808	3.57	862	3.98	918	4.35	973	4.67	1028	4.98	1083	5.26	1137	5.53	1191	5.81	1245	6.09	1297	6.39
9000	835	3.99	890	4.40	945	4.77	1000	5.10	1056	5.40	1111	5.68	1165	5.96	1219	6.23	1272	6.51	1325	6.81
Note: 1. Blower performance includes gas heat exchangers and 2 in. filters. See STATIC RESISTANCE table for additional applications. 2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP. 3. kW = BHP x 0.929																				

Table 37: AD20 bottom duct application

Air Flow (CFM)	Available external static pressure - IWG																			
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Standard static 5 HP and drive								Medium static 5 HP and drive											
5000	672	0.85	719	1.24	767	1.61	816	1.95	865	2.27	915	2.56	965	2.84	1016	3.09	1066	3.33	1117	3.55
5500	686	1.10	734	1.49	782	1.86	831	2.20	880	2.52	930	2.81	980	3.09	1030	3.34	1081	3.58	1132	3.80
6000	703	1.38	751	1.78	799	2.15	848	2.49	897	2.81	947	3.10	997	3.37	1047	3.63	1098	3.86	1149	4.09
6500	723	1.71	770	2.11	819	2.47	867	2.82	917	3.13	966	3.43	1017	3.70	1067	3.95	1118	4.19	1168	4.41
7000	745	2.08	792	2.47	841	2.84	889	3.19	939	3.50	988	3.79	1039	4.07	1089	4.32	1140	4.56	1190	4.78
7500	769	2.49	817	2.89	865	3.26	914	3.60	963	3.91	1013	4.21	1063	4.48	1113	4.73	1164	4.97	1215	5.20
8000	796	2.94	843	3.34	891	3.71	940	4.05	990	4.37	1039	4.66	1089	4.94	1140	5.19	1190	5.43	1241	5.65
8500	825	3.44	872	3.84	920	4.21	969	4.55	1018	4.87	1068	5.16	1118	5.44	1169	5.69	1219	5.93	1270	6.15
9000	855	3.99	903	4.39	951	4.75	1000	5.10	1049	5.41	1099	5.71	1149	5.98	1199	6.23	1250	6.47	1301	6.69
9500	888	4.57	936	4.97	984	5.34	1033	5.68	1082	6.00	1132	6.29	1182	6.56	1232	6.82	1283	7.05	1334	7.28

Table 37: AD20 bottom duct application

Air Flow (CFM)	Available external static pressure - IWG																			
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
10000	923	5.20	971	5.59	1019	5.96	1068	6.30	1117	6.62	1167	6.91	1217	7.19	1267	7.44	1318	7.68	1368	7.90
					High Static 7.5 HP & Drive															
	Note: 1. Blower performance includes gas heat exchangers and 2 in. filters. See STATIC RESISTANCE table for additional applications. 2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP. 3. kW = BHP x 0.929																			

Table 38: AD25 bottom duct application

Air flow (CFM)	Available external static pressure - IWG																					
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0			
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP		
			Standard static 5 HP and drive								Medium static 7.5 HP and drive						High static 10 HP and drive					
6500	733	1.71	785	2.13	837	2.52	890	2.89	943	3.25	996	3.59	1048	3.92	1100	4.24	1151	4.56	1201	4.88		
7000	756	2.10	808	2.52	860	2.91	913	3.29	965	3.64	1018	3.99	1071	4.32	1123	4.64	1174	4.96	1224	5.27		
7500	780	2.53	832	2.95	884	3.34	937	3.72	990	4.07	1043	4.41	1095	4.75	1147	5.07	1198	5.39	1248	5.70		
8000	807	2.99	858	3.41	911	3.80	963	4.17	1016	4.53	1069	4.87	1121	5.20	1173	5.53	1224	5.84	1274	6.16		
8500	835	3.48	886	3.89	938	4.29	991	4.66	1044	5.02	1097	5.36	1149	5.69	1201	6.01	1252	6.33	1302	6.65		
9000	864	3.99	916	4.41	968	4.80	1021	5.18	1074	5.53	1126	5.87	1179	6.20	1231	6.53	1282	6.85	1332	7.16		
9500	895	4.53	947	4.95	999	5.34	1052	5.72	1105	6.07	1158	6.41	1210	6.75	1262	7.07	1313	7.39	1363	7.70		
10000	928	5.10	980	5.52	1032	5.91	1085	6.28	1138	6.64	1190	6.98	1243	7.31	1295	7.64	1346	7.95	1396	8.27		
10500	962	5.69	1014	6.11	1066	6.50	1119	6.87	1172	7.23	1225	7.57	1277	7.90	1329	8.23	1380	8.54	1430	8.86		
11000	998	6.30	1050	6.72	1102	7.11	1155	7.49	1208	7.84	1260	8.18	1313	8.52	1365	8.84	1416	9.16	1466	9.47		
11500	1035	6.94	1087	7.36	1139	7.75	1192	8.12	1245	8.48	1298	8.82	1350	9.15	1402	9.47	1453	9.79	1503	10.11		
12000	1074	7.60	1125	8.01	1178	8.41	1230	8.78	1283	9.14	1336	9.48	1389	9.81	1440	10.13	1492	10.45	1542	10.77		
12500	1114	8.27	1165	8.69	1218	9.08	1270	9.46	1323	9.81	1376	10.15	1428	10.49	1480	10.81	1531	11.13	-	-		
Note: 1. Blower performance includes gas heat exchangers and 2 in. filters. See STATIC RESISTANCE table for additional applications. 2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP. 3. kW = BHP x 0.929																						

Table 39: AD28 bottom duct application

Air flow (CFM)	Available external static pressure - IWG																			
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Standard static 7.5 HP and drive										Medium static 10 HP and drive									
7000	789	1.54	836	2.17	883	2.76	931	3.31	980	3.81	1029	4.28	1078	4.72	1126	5.12	1175	5.49	1222	5.83
7500	812	2.05	859	2.69	906	3.27	954	3.82	1003	4.33	1052	4.79	1101	5.23	1149	5.63	1197	6.00	1245	6.34
8000	836	2.61	883	3.24	930	3.83	979	4.37	1027	4.88	1076	5.35	1125	5.78	1174	6.18	1222	6.55	1269	6.90
8500	862	3.21	909	3.84	956	4.43	1005	4.97	1053	5.48	1102	5.95	1151	6.38	1200	6.78	1248	7.15	1295	7.50
9000	890	3.85	936	4.48	984	5.07	1032	5.62	1081	6.12	1130	6.59	1178	7.02	1227	7.42	1275	7.79	1323	8.14
9500	918	4.53	965	5.16	1013	5.75	1061	6.30	1109	6.80	1158	7.27	1207	7.70	1256	8.11	1304	8.48	1352	8.82
10000	949	5.25	995	5.89	1043	6.47	1091	7.02	1140	7.52	1189	7.99	1237	8.43	1286	8.83	1334	9.20	1382	9.54
10500	980	6.01	1027	6.65	1074	7.23	1123	7.78	1171	8.28	1220	8.75	1269	9.19	1318	9.59	1366	9.96	1413	10.30
11000	1013	6.81	1060	7.44	1107	8.03	1155	8.58	1204	9.08	1253	9.55	1302	9.98	1350	10.38	1399	10.75	1446	11.10
11500	1047	7.64	1094	8.27	1141	8.86	1189	9.41	1238	9.91	1287	10.38	1336	10.81	1384	11.21	1433	11.59	1480	11.93
12000	1082	8.51	1129	9.14	1177	9.73	1225	10.27	1273	10.78	1322	11.25	1371	11.68	1420	12.08	1468	12.45	1515	12.79
12500	1119	9.40	1165	10.04	1213	10.62	1261	11.17	1310	11.68	1359	12.14	1407	12.58	1456	12.98	1504	13.35	-	-
13000	1156	10.33	1203	10.97	1250	11.55	1299	12.10	1347	12.61	1396	13.07	1445	13.51	-	-	-	-	-	-
13500	1195	11.29	1241	11.93	1289	12.51	1337	13.06	1386	13.57	-	-	-	-	-	-	-	-	-	-
14000	1234	12.28	1281	12.92	1328	13.50	-	-	-	-	-	-	-	-	-	-	-	-	-	-
High Static 12 HP & Drive																				
①	Note: 1. Blower performance includes gas heat exchangers and 2 in. filters. See STATIC RESISTANCE table for additional applications. 2. See RPM SELECTION table to determine desired motor sheave setting and to determine the maximum continuous BHP. 3. kW = BHP x 0.819																			

RPM selection and static resistance

Table 40: RPM selection

Model	HP	Max BHP	Motor sheave	Blower sheave	6 turns open	5 turns open	4 turns open	3 turns open	2 turns open	1 turn open	Fully closed
AD15	2.0	2.30	1VL44	1B5V90	NA	596	636	676	716	756	796
	3.0	3.45	1VL44	1B5V74	NA	729	778	826	875	923	972
	5.0	5.75	1VM50	1B5V66	964	1015	1065	1116	1166	1217	NA
AD18	3.0	3.45	1VL44	1B5V86	NA	625	667	709	750	792	834
	5.0	5.75	1VM50	1B5V74	822	865	908	952	995	1038	NA
	7.5	8.63	1VP60	1B5V74	1068	1114	1159	1205	1250	1296	1341
AD20	5.0	5.75	1VM50	1B5V66	723	761	799	837	875	913	NA
	5.0	5.75	1VM50	1B5V74	924	973	1021	1070	1118	1167	NA
	7.5	8.63	1VP60	1B5V80	1056	1101	1146	1191	1236	1281	1326
AD25	5.0	5.75	1VM50	1B5V80	801	843	885	927	969	1011	NA
	7.5	8.63	1VP60	1B5V80	933	973	1013	1053	1092	1132	1172
	10.0	11.50	1VP60	1B5V70	1158	1207	1257	1306	1355	1405	1454
AD28	7.5	8.63	1VP71	1B5V110	902	941	979	1018	1056	1095	1133
	10.0	11.50	1VP65	1B5V86	1046	1086	1126	1167	1207	1247	1287
	12.0	13.80	1VP71	1B5V86	1167	1207	1247	1288	1328	1368	1408

- ① **Note:**
- For cooling only models, add the cooling only value to the available static resistance in the respective blower performance tables.
 - For models with electric heat, add the electric heat value for your heater size to the available static resistance in the respective blower performance tables.
 - If the unit contains a reheat coil or economizer, deduct the corresponding value from the available external static pressure shown in the respective blower performance tables.

- The pressure drop through the economizer is greater for 100% outdoor air than for 100% return air. If the resistance of the return air duct is less than 0.25 IWG, the unit delivers less CFM during full economizer operation.

Table 41: Additional static resistance

Model	CFM	Cooling only	Reheat coil	Economizer	Electric heat kW			4 in. MERV 13	2 in. MERV 8	2 in. MERV 13
					25	50	75			
AD15 AD18 AD20	4000	0.09	0.03	0.01	0	0.01	0.02	0.05	0.05	0.05
	5000	0.11	0.05	0.02	0.03	0.03	0.04	0.06	0.05	0.06
	6000	0.15	0.06	0.07	0.04	0.04	0.05	0.07	0.06	0.07
	7000	0.2	0.07	0.11	0.05	0.06	0.07	0.09	0.07	0.09
	8000	0.28	0.09	0.14	0.07	0.08	0.09	0.12	0.09	0.12
	9000	0.38	0.1	0.15	0.09	0.1	0.11	0.14	0.11	0.14
	10000	0.49	0.11	0.16	0.12	0.13	0.14	0.18	0.13	0.18
AD25 AD28	7000	0.2	0.04	0.11	0.05	0.06	0.07	0.07	0.06	0.07
	8000	0.28	0.06	0.13	0.07	0.08	0.09	0.09	0.07	0.09
	9000	0.38	0.07	0.16	0.09	0.1	0.11	0.10	0.08	0.10
	10000	0.49	0.08	0.19	0.12	0.13	0.14	0.13	0.09	0.13
	11000	0.6	0.1	0.23	0.18	0.2	0.22	0.15	0.11	0.15
	12000	0.7	0.11	0.28	0.26	0.29	0.32	0.18	0.13	0.18
	13000	0.76	0.13	0.34	0.38	0.41	0.45	0.21	0.14	0.21
	14000	0.8	0.14	0.43	0.51	0.56	0.6	0.24	0.17	0.24

Drive selection

1. Determine the required airflow.
2. Calculate or measure the amount of external static pressure.
3. With the operating point determined from the previous steps, locate this point on the appropriate supply air blower performance table. Linear interpolation may be necessary.
4. Note the RPM and BHP from the previous step and locate the appropriate motor and/or drive.
5. Review the BHP compared to the motor options available. Select the appropriate motor and/or drive.
6. Review the RPM range for the motor options available. Select the appropriate drive if multiple drives are available for the chosen motor.
7. Determine the turns open to obtain the required operation point.

Example:

1. 5100 CFM
2. 0.8 iwg
3. Using the supply air blower performance table below, the following data point was located: 781 RPM and 1.97 BHP.
4. Using the RPM selection table below, Size X and Model Y is found.
5. 1.97 BHP does not exceed the maximum continuous BHP rating of any of the 3 motor options, so all 3 motors are still eligible for selection.
6. 781 RPM falls within the range of the 3 HP drive.
7. Using the 3 HP motor, 3.5 turns open achieves 781 RPM.

Table 42: Example supply air blower performance

Air flow (CFM)	Available external static pressure - IWG ¹																			
	0.2		0.4		0.6		0.8		1.0		1.2		1.4		1.6		1.8		2.0	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
	Standard 2 HP and drive				Medium static 3 HP and drive								High static 5 HP and drive							
4500	575	0.74	636	1.07	697	1.39	759	1.71	821	2.02	881	2.30	941	2.56	998	2.78	1054	2.95	1106	3.08
4800	586	0.87	647	1.19	708	1.51	770	1.83	831	2.14	892	2.42	951	2.68	1009	2.90	1064	3.08	1117	3.20
5100	597	1.00	658	1.32	720	1.65	781	1.97	843	2.27	904	2.56	963	2.81	1021	3.03	1076	3.21	1129	3.33
5400	610	1.14	671	1.47	732	1.79	794	2.11	856	2.42	916	2.70	976	2.96	1033	3.18	1089	3.35	1141	3.48
													High static 5 HP and field supplied drive							

- 1 Blower performance includes gas heat exchangers and 2-inch filters. See the Static resistance table for additional applications. See the RPM selection table to determine the required motor sheave setting and to determine the maximum continuous BHP. kW = BHP x 0.833

Table 43: Example RPM selection

Model	HP	Max BHP	Motor sheave	Blower sheave	6 turns open	5 turns open	4 turns open	3 turns open	2 turns open	1 turn open	Fully closed
AD15	2.0	2.30	1VP40	AK89	N/A	487	528	568	609	649	690
	3.0	3.45	1VP40	BK77	656	705	753	802	851	899	948
	5.0	5.75	1VP60	BK100	789	826	862	899	936	972	1009

Airflow specifications

Table 44: Altitude/temperature correction factors

Air temp.	Altitude (ft)										
	0	1000	2000	3000	4000	5000	6000	7000	8000	9000	10000
40	1.060	1.022	0.986	0.950	0.916	0.882	0.849	0.818	0.788	0.758	0.729
50	1.039	1.002	0.966	0.931	0.898	0.864	0.832	0.802	0.772	0.743	0.715
60	1.019	0.982	0.948	0.913	0.880	0.848	0.816	0.787	0.757	0.729	0.701
70	1.000	0.964	0.930	0.896	0.864	0.832	0.801	0.772	0.743	0.715	0.688

Table 44: Altitude/temperature correction factors

Air temp.	Altitude (ft)										
	0	1000	2000	3000	4000	5000	6000	7000	8000	9000	10000
80	0.982	0.947	0.913	0.880	0.848	0.817	0.787	0.758	0.730	0.702	0.676
90	0.964	0.929	0.897	0.864	0.833	0.802	0.772	0.744	0.716	0.689	0.663
100	0.946	0.912	0.880	0.848	0.817	0.787	0.758	0.730	0.703	0.676	0.651

Figure 3: Altitude/temperature correction factors

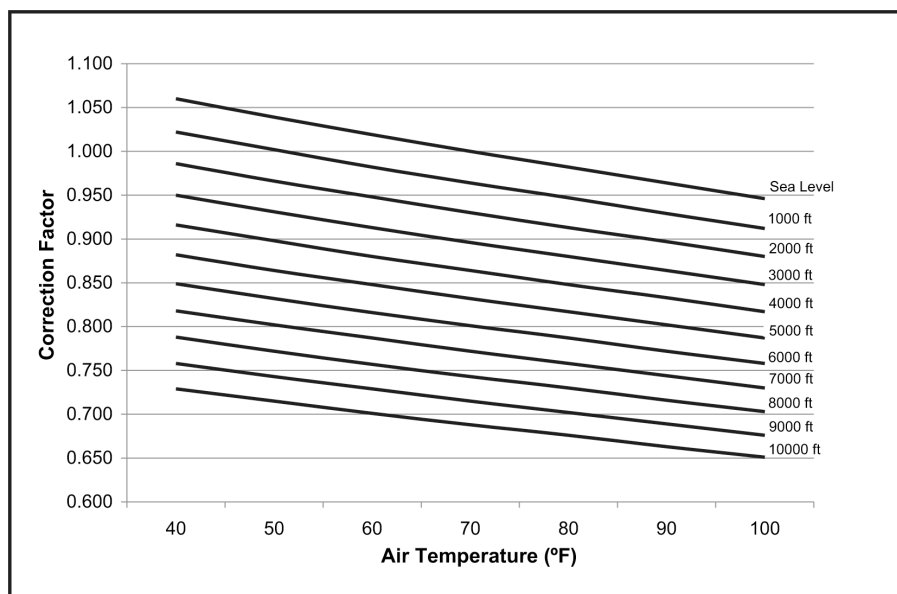


Table 45: Gas heat allowable air flow

Unit		Supply air (CFM)	
Size (tons)	Heat size	Min	Max
AD15 (15)	(N,S)1	3660	7500
	(N,S)3	4620	7500
	T3	3500	7500
AD18 (17.5)	(N,S)1	3660	8750
	(N,S)3	4620	8750
	T3	3500	8750
AD20 (20)	(N,S)1	3660	10000
	(N,S)3	4620	10000
	T3	3500	10000
AD25 (25)	(N,S)1	4120	12500
	(N,S)3	5450	12500
	T3	5000	12500
AD28 (27.5)	(N,S)1	4120	13750
	(N,S)3	5450	13750
	T3	5000	13750

CAUTION

For units with VFD and staged gas heat, the speed of the indoor blower motor continues to be controlled by duct static pressure through the VAV control board. If there are VAV boxes present in the duct system, the boxes must be driven to the full-open position using a customer-supplied power source to ensure adequate airflow across the gas heat furnace.

Table 46: Electric heat minimum air flow requirements

Size (tons)	Heat size		
	75 kW	50 kW	25 kW
AK15 (15)	6000	4500	4500
AD18 (17.5)	6000	5250	5250
AD20 (20)	6000	6000	6000
AD25 (25)	7500	7500	7500
AD28 (27.5)	8250	8250	8250



For units with VFD and electric heat, the speed of the indoor blower motor continues to be controlled by duct static pressure through the VAV control board. If there are VAV boxes present in the duct system, the boxes must be driven to the full-open position using a customer-supplied power source to ensure adequate airflow across the electric heating elements.

Table 47: Indoor blower specifications

Model	Static option	Motor					Motor sheave			Blower sheave			Belt
		HP	RPM	Eff.	SF	Frame	Datum dia. (in.)	New Mtr Shv	Bore (in.)	Datum dia. (in.)	Bore (in.)	Blower sheave	
AK15 (15)	Low	2.0	1756	0.77	1.15	56	2.8 - 3.8	1VL44	7/8	8.6	1-7/16	1B5V90	AX41
	Medium	3.0	1749	0.82	1.15	56	2.8 - 3.8	1VL44	7/8	7	1-7/16	1B5V74	AX41
	High	5.0	1726	0.80	1.15	145T	3.7 - 4.7	1VM50	7/8	6.6	1-7/16	1B5V66	BX40
AD18 (17.5)	Low	3.0	1749	0.82	1.15	56	2.8 - 3.8	1VL44	7/8	8.2	1-7/16	1B5V86	BX40
	Medium	5.0	1726	0.80	1.15	145T	3.7 - 4.7	1VM50	7/8	7.4	1-7/16	1B5V74	BX40
	High	7.5	1766	0.91	1.15	213T	4.3 - 5.5	1VP60	1-3/8	7.4	1-7/16	1B5V74	BX43
AD20 (20)	Low	5.0	1726	0.80	1.15	145T	3.7 - 4.7	1VM50	7/8	9	1-7/16	1B5V90	BX43
	Medium	5.0	1726	0.80	1.15	145T	3.7 - 4.7	1VM50	7/8	7.4	1-7/16	1B5V74	BX40
	High	7.5	1766	0.91	1.15	213T	4.3 - 5.5	1VP60	1-3/8	8	1-7/16	1B5V80	BX43
AD25 (25)	Low	5.0	1726	0.80	1.15	145T	3.7 - 4.7	1VM50	7/8	8	1-7/16	1B5V80	BX43
	Medium	7.5	1766	0.91	1.15	213T	4.3 - 5.5	1VP60	1-3/8	8	1-7/16	1B5V80	BX43
	High	10.0	1768	0.92	1.15	215T	4.3 - 5.5	1VP60	1-3/8	7	1-7/16	1B5V70	SVX450
AD28 (27.5)	Low	7.5	1766	0.91	1.15	213T	5.4 - 6.6	1VP71	1-3/8	11	1-7/16	1B5V110	BX50
	Medium	10.0	1768	0.92	1.15	215T	4.8 - 6.0	1VP65	1-3/8	8.7	1-7/16	1B5V86	BX43
	High	12.0	1760	0.92	1.15	215T	5.4 - 6.6	1VP71	1-3/8	8.7	1-7/16	1B5V86	SVX450

Table 48: Standard CFM constant volume power exhaust (208V) airflow

Motor speed	Available return static - IWG																	
	0.1			0.2			0.3			0.4			0.5			0.6		
	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM
Low	3029	1150	809	2978	1116	878	2913	1093	924	2828	1061	956	2716	1014	982	-	-	-
Med.	3293	1280	868	3196	1224	915	3093	1179	948	2982	1129	980	2852	1075	1009	-	-	-
High	3794	1527	968	3628	1437	1006	3501	1386	1023	3345	1323	1040	3170	1260	1057	-	-	-

Table 49: Standard CFM constant volume power exhaust (230, 460, 575V) airflow

Motor speed	Available return static - IWG																	
	0.1			0.2			0.3			0.4			0.5			0.6		
	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM
Low	3395	1308	886	3297	1265	937	3191	1228	969	3071	1171	990	2931	1105	1010	2765	1076	1039
Med.	3667	1454	940	3518	1368	983	3386	1307	1008	3251	1257	1026	3103	1207	1041	2944	1148	1051
High	4093	1702	1044	3910	1637	1064	3754	1576	1074	3577	1503	1086	3367	1430	1096	3152	1360	1105

Note:

- The following values represent the maximum power exhaust capability (maximum motor speed @ 10 VDC input signal from building pressure sensor [0-1 in. WC, 0-10 VDC])
- Airflow, watts, and RPM modulate as building pressure fluctuates below 1 in. WC

Table 50: Standard CFM modulating power exhaust airflow

Motor speed	Available return static - IWG																	
	0.1			0.2			0.3			0.4			0.5			0.6		
	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM
Max. (10 VDC)	3054	498	740	3152	630	829	3227	751	902	3278	861	962	3302	957	1012	3300	1039	1056

Table 51: Standard CFM modulating power exhaust airflow - continued

Motor speed	Available return static - IWG																	
	0.7			0.8			0.9			1.0			1.1			1.2		
	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM	CFM	Watts	RPM
Max. (10 VDC)	3273	1107	1096	3222	1162	1133	3149	1204	1168	3060	1236	1202	2958	1259	1235	2849	1277	1266

Table 52: High CFM constant volume and modulating power exhaust (208V) airflow - field-installed only

CFM	Available external static pressure - IWG											
	0		0.1		0.2		0.3		0.4		0.5	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2500	-	-	-	-	-	-	494	0.68	532	0.74	527	0.89
2750	-	-	-	-	-	-	511	0.71	549	0.78	543	0.93
3000	-	-	-	-	471	0.76	529	0.80	567	0.86	562	1.01
3250	-	-	-	-	492	0.87	549	0.91	587	0.97	582	1.12
3500	-	-	459	0.95	513	1.00	571	1.03	-	-	-	-
3750	-	-	482	1.08	536	1.14	-	-	-	-	-	-
4000	479	1.09	506	1.22	560	1.27	-	-	-	-	-	-
4250	504	1.22	531	1.35	585	1.40	-	-	-	-	-	-
4500	530	1.34	557	1.47	-	-	-	-	-	-	-	-
4750	556	1.45	583	1.59	-	-	-	-	-	-	-	-
5000	583	1.56	-	-	-	-	-	-	-	-	-	-

Table 53: High CFM constant volume and modulating power exhaust (230, 460, 575V) airflow - field-installed only

CFM	Available external static pressure - IWG											
	0		0.1		0.2		0.3		0.4		0.5	
	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP
2500	-	-	-	-	-	-	488	0.84	531	0.86	541	0.70
2750	-	-	-	-	-	-	508	0.93	550	0.94	560	0.78
3000	-	-	-	-	471	0.91	527	1.02	569	1.04	580	0.87
3250	-	-	-	-	491	1.01	547	1.12	589	1.13	-	-
3500	-	-	457	0.99	512	1.11	568	1.22	-	-	-	-
3750	-	-	480	1.09	534	1.22	591	1.32	-	-	-	-
4000	469	1.14	504	1.20	558	1.32	-	-	-	-	-	-
4250	495	1.25	529	1.31	583	1.44	-	-	-	-	-	-
4500	522	1.37	557	1.43	-	-	-	-	-	-	-	-
4750	551	1.49	586	1.55	-	-	-	-	-	-	-	-
5000	582	1.61	-	-	-	-	-	-	-	-	-	-

Table 54: Electric heat multipliers

Voltage		kW Capacity multipliers ¹
Nominal	Applied	
240	208	0.75
	230	0.92
480	460	0.92
600	575	0.92

¹ Electric heaters are rated at nominal voltage. Use this table to determine the electric heat capacity for heaters applied at lower voltages.

Sound performance

Table 55: Indoor sound performance

Size (tons)	CFM	Type	Sound power, dB (10 ⁻¹²) watts							
			Octave band centerline frequency (Hz)							
			63	125	250	500	1000	2000	4000	8000
AD15 (15)	6000	Ducted discharge	84	80	78	75	72	71	68	63
		Ducted inlet	85	77	75	73	72	69	64	60
AD18 (17.5)	7000	Ducted discharge	86	82	80	78	76	75	72	64
		Ducted inlet	86	76	73	70	69	66	62	59
AD20 (20)	8000	Ducted discharge	90	85	81	81	80	79	76	68
		Ducted inlet	89	75	71	63	64	59	56	48
AD25 (25)	10000	Ducted discharge	95	88	85	83	83	82	79	72
		Ducted inlet	93	80	73	68	68	63	58	47
AD28 (27.5)	11000	Ducted discharge	98	90	87	84	84	82	79	72
		Ducted inlet	96	82	72	69	68	62	57	46

Note:

- Tested in accordance with AHRI 260-2017.
- Ratings include duct end correction E1.
- Ratings include compressor noise.

Table 56: Outdoor sound performance

Size (tons)	Sound power, dB (10 ⁻¹²) watts								
	Sound rating dB (A)	Octave band centerline frequency (Hz)							
		63	125	250	500	1000	2000	4000	8000
AD15 (15)	85	89	85.5	83	83.5	80.5	76	72.5	67.5
AD18 (17.5)	85	92.5	86.5	83	83	80	76.5	73	68.5
AD20 (20)	82	95	88	80	77.5	76.5	74	71.5	67.5
AD25 (25)	84	94	87	80	79.5	78.5	76.5	73	70.5
AD28 (27.5)	86	92.5	87.5	84.5	84	81	78	74	71

Note:

- Tested in accordance with AHRI 370-2015.
- Ratings include compressor noise.

Electrical data

The following note applies to all electrical data tables.

- MCA = minimum circuit ampacity
- f/b = fuse/breaker
- Fuse is a dual element, time delay type
- Breaker is a HACR type per NEC

VFD 2 stage standard static

Table 57: AD15 to AD28 VFD 2 stage standard static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	25.0	190	25.0	190	2.1	13.2	9.6	None	-	-	-	73.7	90	78	452	83.3	100	89	461
									2EH04502525	18.8	1	52.1	81.6	90	78	452	93.6	100	89	461
									2EH04505025	37.6	2	104.3	146.9	150	135	452	158.9	175	146	461
									2EH04507525	56.3	2	156.2	172.7	200	195	452	184.7	200	206	461
	230-3-60	25.0	190	25.0	190	2.1	13.2	8.7	None	-	-	-	73.7	90	78	459	82.4	100	88	468
									2EH04502525	23.0	1	57.7	88.6	90	82	459	99.5	100	92	468
									2EH04505025	45.9	2	115.2	160.5	175	148	459	171.4	175	158	468
									2EH04507525	68.9	2	172.9	189.4	225	214	459	200.3	225	224	468
	460-3-60	12.2	100	12.2	100	1.1	6.1	4.3	None	-	-	-	35.8	45	38	240	40.1	50	43	244
									2EH04502546	23.0	1	28.8	43.6	45	40	240	49.0	50	45	244
									2EH04505046	45.9	2	57.6	79.6	80	73	240	85.0	90	78	244
									2EH04507546	68.9	2	86.4	94.0	110	106	240	99.4	110	111	244
	575-3-60	9.3	72	9.3	72	0.9	4.9	3.5	None	-	-	-	27.6	35	29	174	31.1	40	33	178
									2EH04502558	23.0	1	23.0	34.9	35	32	174	39.3	40	36	178
									2EH04505058	45.9	2	46.0	63.6	70	59	174	68.0	70	63	178
									2EH04507558	68.9	2	69.1	75.2	90	85	174	79.6	90	89	178
18 (17.5)	208-3-60	27.6	191	28.2	240	2.1	13.2	9.6	None	-	-	-	80.3	100	84	514	89.9	110	95	523
									2EH04502525	18.8	1	52.1	81.6	100	84	514	93.6	110	95	523
									2EH04505025	37.6	2	104.3	146.9	150	135	514	158.9	175	146	523
									2EH04507525	56.3	2	156.2	172.7	200	195	514	184.7	200	206	523
	230-3-60	27.6	191	28.2	240	2.1	13.2	8.7	None	-	-	-	80.3	100	84	522	89.0	110	94	530
									2EH04502525	23.0	1	57.7	88.6	100	84	522	99.5	110	94	530
									2EH04505025	45.9	2	115.2	160.5	175	148	522	171.4	175	158	530
									2EH04507525	68.9	2	172.9	189.4	225	214	522	200.3	225	224	530
	460-3-60	12.8	100	14.7	130	1.1	6.1	4.3	None	-	-	-	39.5	50	41	276	43.8	50	46	280
									2EH04502546	23.0	1	28.8	43.6	50	41	276	49.0	50	46	280
									2EH04505046	45.9	2	57.6	79.6	80	73	276	85.0	90	78	280
									2EH04507546	68.9	2	86.4	94.0	110	106	276	99.4	110	111	280
	575-3-60	9.6	78	11.3	94	0.9	4.9	3.5	None	-	-	-	30.4	40	32	216	33.9	45	36	220
									2EH04502558	23.0	1	23.0	34.9	40	32	216	39.3	45	36	220
									2EH04505058	45.9	2	46.0	63.6	70	59	216	68.0	70	63	220
									2EH04507558	68.9	2	69.1	75.2	90	85	216	79.6	90	89	220
20 (20)	208-3-60	28.2	240	34.0	240	2.0	20.4	9.6	None	-	-	-	99.1	125	104	600	108.7	125	115	610
									2EH04502525	18.8	1	52.1	99.1	125	104	600	108.7	125	115	610
									2EH04505025	37.6	2	104.3	155.9	175	143	600	167.9	175	154	610
									2EH04507525	56.3	2	156.2	181.7	200	203	600	193.7	200	214	610
	230-3-60	28.2	240	34.0	240	2.3	20.4	8.7	None	-	-	-	100.3	125	106	602	109.0	125	116	610
									2EH04502525	23.0	1	57.7	100.3	125	106	602	109.0	125	116	610
									2EH04505025	45.9	2	115.2	169.5	175	156	602	180.4	200	166	610
									2EH04507525	68.9	2	172.9	198.4	225	222	602	209.3	225	232	610
	460-3-60	14.7	130	16.0	140	1.3	9.9	4.3	None	-	-	-	49.8	60	53	333	54.1	70	58	337
									2EH04502546	23.0	1	28.8	49.8	60	53	333	54.1	70	58	337
									2EH04505046	45.9	2	57.6	84.4	90	78	333	89.8	90	83	337
									2EH04507546	68.9	2	86.4	98.8	110	111	333	104.2	110	116	337
	575-3-60	11.3	94	12.9	108	1.0	7.7	3.5	None	-	-	-	39.1	50	41	251	42.6	50	45	255
									2EH04502558	23.0	1	23.0	39.1	50	41	251	42.8	50	45	255
									2EH04505058	45.9	2	46.0	67.1	70	62	251	71.5	80	66	255
									2EH04507558	68.9	2	69.1	78.7	90	88	251	83.1	90	92	255

Table 57: AD15 to AD28 VFD 2 stage standard static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	41.0	304	41.0	304	2.0	20.4	9.6	None	-	-	-	120.7	150	127	728	130.3	150	138	738
									2EH04502525	18.8	1	52.1	120.7	150	127	728	130.3	150	138	738
									2EH04505025	37.6	2	104.3	155.9	175	143	728	167.9	175	154	738
									2EH04507525	56.3	2	156.2	181.7	200	203	728	193.7	200	214	738
	230-3-60	41.0	304	41.0	304	2.3	20.4	8.7	None	-	-	-	121.9	150	128	730	130.6	150	138	738
									2EH04502525	23.0	1	57.7	121.9	150	128	730	130.6	150	138	738
									2EH04505025	45.9	2	115.2	169.5	175	156	730	180.4	200	166	738
									2EH04507525	68.9	2	172.9	198.4	225	222	730	209.3	225	232	738
	460-3-60	19.2	147	19.2	147	1.3	9.9	4.3	None	-	-	-	58.3	70	62	357	62.6	80	66	361
									2EH04502546	23.0	1	28.8	58.3	70	62	357	62.6	80	66	361
									2EH04505046	45.9	2	57.6	84.4	90	78	357	89.8	90	83	361
									2EH04507546	68.9	2	86.4	98.8	110	111	357	104.2	110	116	361
	575-3-60	16.7	122	16.7	122	1.0	7.7	3.5	None	-	-	-	49.3	60	52	293	52.8	60	56	297
									2EH04502558	23.0	1	23.0	49.3	60	52	293	52.8	60	56	297
									2EH04505058	45.9	2	46.0	67.1	70	62	293	71.5	80	66	297
									2EH04507558	68.9	2	69.1	78.7	90	88	293	83.1	90	92	297
28 (27.5)	208-3-60	51.3	300	51.3	300	2.1	30.0	9.6	None	-	-	-	153.8	200	162	740	163.4	200	173	750
									2EH04502525	18.8	1	52.1	153.8	200	162	740	163.4	200	173	750
									2EH04505025	37.6	2	104.3	167.9	200	162	740	179.9	200	173	750
									2EH04507525	56.3	2	156.2	193.7	200	214	740	205.7	225	225	750
	230-3-60	51.3	300	51.3	300	2.1	30.0	8.7	None	-	-	-	153.8	200	162	740	162.5	200	172	749
									2EH04502525	23.0	1	57.7	153.8	200	162	740	162.5	200	172	749
									2EH04505025	45.9	2	115.2	181.5	200	167	740	192.4	200	177	749
									2EH04507525	68.9	2	172.9	210.4	225	233	740	221.3	225	243	749
	460-3-60	23.1	150	23.1	150	1.1	14.3	4.3	None	-	-	-	70.7	90	75	371	75.0	90	80	376
									2EH04502546	23.0	1	28.8	70.7	90	75	371	75.0	90	80	376
									2EH04505046	45.9	2	57.6	89.9	90	83	371	95.3	100	88	376
									2EH04507546	68.9	2	86.4	104.3	110	116	371	109.7	110	121	376
	575-3-60	19.9	109	19.9	109	0.9	11.5	3.5	None	-	-	-	59.9	70	63	277	63.4	80	67	280
									2EH04502558	23.0	1	23.0	59.9	70	63	277	63.4	80	67	280
									2EH04505058	45.9	2	46.0	71.9	80	66	277	76.3	80	70	280
									2EH04507558	68.9	2	69.1	83.5	90	93	277	87.9	90	97	280

Table 58: AD15 to AD28 VFD 2 stage standard static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	25.0	190	25.0	190	2.1	13.2	5.0	9.6	None	-	-	-	83.7	100	89	473	93.3	110	100	482
										2EH04502525	18.8	1	52.1	94.1	100	89	473	106.1	110	100	482
										2EH04505025	37.6	2	104.3	159.4	175	147	473	171.4	175	158	482
										2EH04507525	56.3	2	156.2	185.2	200	206	473	197.2	200	217	482
	230-3-60	25.0	190	25.0	190	2.1	13.2	5.0	8.7	None	-	-	-	83.7	100	89	480	92.4	110	99	489
										2EH04502525	23.0	1	57.7	101.1	110	93	480	112.0	125	103	489
										2EH04505025	45.9	2	115.2	173.0	175	159	480	183.9	200	169	489
										2EH04507525	68.9	2	172.9	201.9	225	226	480	212.8	225	236	489
	460-3-60	12.2	100	12.2	100	1.1	6.1	2.2	4.3	None	-	-	-	40.2	50	43	249	44.5	50	48	254
										2EH04502546	23.0	1	28.8	49.1	50	45	249	54.5	60	50	254
										2EH04505046	45.9	2	57.6	85.1	90	78	249	90.5	100	83	254
										2EH04507546	68.9	2	86.4	99.5	110	111	249	104.9	110	116	254
	575-3-60	9.3	72	9.3	72	0.9	4.9	1.5	3.5	None	-	-	-	30.6	35	33	181	34.1	40	37	184
										2EH04502558	23.0	1	23.0	38.6	40	36	181	43.0	45	40	184
										2EH04505058	45.9	2	46.0	67.4	70	62	181	71.8	80	66	184
										2EH04507558	68.9	2	69.1	79.0	90	89	181	83.4	90	93	184
18 (17.5)	208-3-60	27.6	191	28.2	240	2.1	13.2	5.0	9.6	None	-	-	-	90.3	110	96	535	99.9	125	107	544
										2EH04502525	18.8	1	52.1	94.1	110	96	535	106.1	125	107	544
										2EH04505025	37.6	2	104.3	159.4	175	147	535	171.4	175	158	544
										2EH04507525	56.3	2	156.2	185.2	200	206	535	197.2	200	217	544
	230-3-60	27.6	191	28.2	240	2.1	13.2	5.0	8.7	None	-	-	-	90.3	110	96	543	99.0	125	106	551
										2EH04502525	23.0	1	57.7	101.1	110	96	543	112.0	125	106	551
										2EH04505025	45.9	2	115.2	173.0	175	159	543	183.9	200	169	551
										2EH04507525	68.9	2	172.9	201.9	225	226	543	212.8	225	236	551
	460-3-60	12.8	100	14.7	130	1.1	6.1	2.2	4.3	None	-	-	-	43.9	50	46	285	48.2	60	51	289
										2EH04502546	23.0	1	28.8	49.1	50	46	285	54.5	60	51	289
										2EH04505046	45.9	2	57.6	85.1	90	78	285	90.5	100	83	289
										2EH04507546	68.9	2	86.4	99.5	110	111	285	104.9	110	116	289
	575-3-60	9.6	78	11.3	94	0.9	4.9	1.5	3.5	None	-	-	-	33.4	40	35	222	36.9	45	39	226
										2EH04502558	23.0	1	23.0	38.6	40	36	222	43.0	45	40	226
										2EH04505058	45.9	2	46.0	67.4	70	62	222	71.8	80	66	226
										2EH04507558	68.9	2	69.1	79.0	90	89	222	83.4	90	93	226
20 (20)	208-3-60	28.2	240	34.0	240	2.0	20.4	5.0	9.6	None	-	-	-	109.1	125	116	621	118.7	150	127	631
										2EH04502525	18.8	1	52.1	109.1	125	116	621	118.7	150	127	631
										2EH04505025	37.6	2	104.3	168.4	175	155	621	180.4	200	166	631
										2EH04507525	56.3	2	156.2	194.2	200	215	621	206.2	225	226	631
	230-3-60	28.2	240	34.0	240	2.3	20.4	5.0	8.7	None	-	-	-	110.3	125	117	623	119.0	150	127	631
										2EH04502525	23.0	1	57.7	110.3	125	117	623	121.0	150	127	631
										2EH04505025	45.9	2	115.2	182.0	200	167	623	192.9	200	177	631
										2EH04507525	68.9	2	172.9	210.9	225	234	623	221.8	225	244	631
	460-3-60	14.7	130	16.0	140	1.3	9.9	2.2	4.3	None	-	-	-	54.2	70	58	342	58.5	70	63	346
										2EH04502546	23.0	1	28.8	54.2	70	58	342	59.3	70	63	346
										2EH04505046	45.9	2	57.6	89.9	90	83	342	95.3	100	88	346
										2EH04507546	68.9	2	86.4	104.3	110	116	342	109.7	110	121	346
	575-3-60	11.3	94	12.9	108	1.0	7.7	1.5	3.5	None	-	-	-	42.1	50	45	258	45.6	50	49	261
										2EH04502558	23.0	1	23.0	42.1	50	45	258	46.5	50	49	261
										2EH04505058	45.9	2	46.0	70.9	80	65	258	75.3	80	69	261
										2EH04507558	68.9	2	69.1	82.5	90	92	258	86.9	90	96	261

Table 58: AD15 to AD28 VFD 2 stage standard static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	41.0	304	41.0	304	2.0	20.4	5.0	9.6	None	-	-	-	130.7	150	138	749	140.3	175	150	759
										2EH04502525	18.8	1	52.1	130.7	150	138	749	140.3	175	150	759
										2EH04505025	37.6	2	104.3	168.4	175	155	749	180.4	200	166	759
										2EH04507525	56.3	2	156.2	194.2	200	215	749	206.2	225	226	759
	230-3-60	41.0	304	41.0	304	2.3	20.4	5.0	8.7	None	-	-	-	131.9	150	140	751	140.6	175	150	759
										2EH04502525	23.0	1	57.7	131.9	150	140	751	140.6	175	150	759
										2EH04505025	45.9	2	115.2	182.0	200	167	751	192.9	200	177	759
										2EH04507525	68.9	2	172.9	210.9	225	234	751	221.8	225	244	759
	460-3-60	19.2	147	19.2	147	1.3	9.9	2.2	4.3	None	-	-	-	62.7	80	67	366	67.0	80	72	370
										2EH04502546	23.0	1	28.8	62.7	80	67	366	67.0	80	72	370
										2EH04505046	45.9	2	57.6	89.9	90	83	366	95.3	100	88	370
										2EH04507546	68.9	2	86.4	104.3	110	116	366	109.7	110	121	370
	575-3-60	16.7	122	16.7	122	1.0	7.7	1.5	3.5	None	-	-	-	52.3	60	55	300	55.8	70	59	303
										2EH04502558	23.0	1	23.0	52.3	60	55	300	55.8	70	59	303
										2EH04505058	45.9	2	46.0	70.9	80	65	300	75.3	80	69	303
										2EH04507558	68.9	2	69.1	82.5	90	92	300	86.9	90	96	303
28 (27.5)	208-3-60	51.3	300	51.3	300	2.1	30.0	5.0	9.6	None	-	-	-	163.8	200	174	761	173.4	200	185	771
										2EH04502525	18.8	1	52.1	163.8	200	174	761	173.4	200	185	771
										2EH04505025	37.6	2	104.3	180.4	200	174	761	192.4	200	185	771
										2EH04507525	56.3	2	156.2	206.2	225	226	761	218.2	225	237	771
	230-3-60	51.3	300	51.3	300	2.1	30.0	5.0	8.7	None	-	-	-	163.8	200	174	761	172.5	200	184	770
										2EH04502525	23.0	1	57.7	163.8	200	174	761	172.5	200	184	770
										2EH04505025	45.9	2	115.2	194.0	200	178	761	204.9	225	188	770
										2EH04507525	68.9	2	172.9	222.9	250	245	761	233.8	250	255	770
	460-3-60	23.1	150	23.1	150	1.1	14.3	2.2	4.3	None	-	-	-	75.1	90	80	380	79.4	100	85	385
										2EH04502546	23.0	1	28.8	75.1	90	80	380	79.4	100	85	385
										2EH04505046	45.9	2	57.6	95.4	100	88	380	100.8	110	93	385
										2EH04507546	68.9	2	86.4	109.8	110	121	380	115.2	125	126	385
	575-3-60	19.9	109	19.9	109	0.9	11.5	1.5	3.5	None	-	-	-	62.9	80	67	283	66.4	80	71	287
										2EH04502558	23.0	1	23.0	62.9	80	67	283	66.4	80	71	287
										2EH04505058	45.9	2	46.0	75.6	80	70	283	80.0	80	74	287
										2EH04507558	68.9	2	69.1	87.2	90	96	283	91.6	100	100	287

Table 59: AD15 to AD28 VFD 2 stage standard static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors (each) FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	25.0	190	25.0	190	2.1	13.2	6.7	9.6	None	-	-	-	87.1	110	93	465	96.7	110	104	475
										2EH04502525	18.8	1	52.1	98.4	110	93	465	110.4	125	104	475
										2EH04505025	37.6	2	104.3	163.6	175	151	465	175.6	200	162	475
										2EH04507525	56.3	2	156.2	189.5	200	210	465	201.5	225	221	475
	230-3-60	25.0	190	25.0	190	2.1	13.2	6.7	8.7	None	-	-	-	87.1	110	93	472	95.8	110	103	481
										2EH04502525	23.0	1	57.7	105.4	110	97	472	116.3	125	107	481
										2EH04505025	45.9	2	115.2	177.3	200	163	472	188.1	200	173	481
										2EH04507525	68.9	2	172.9	206.2	225	229	472	217.0	225	239	481
	460-3-60	12.2	100	12.2	100	1.1	6.1	3.4	4.3	None	-	-	-	42.6	50	45	247	46.9	50	50	251
										2EH04502546	23.0	1	28.8	52.1	60	48	247	57.5	60	53	251
										2EH04505046	45.9	2	57.6	88.1	90	81	247	93.5	100	86	251
										2EH04507546	68.9	2	86.4	102.5	110	114	247	107.9	110	119	251
	575-3-60	9.3	72	9.3	72	0.9	4.9	2.7	3.5	None	-	-	-	33.0	40	35	180	36.5	45	39	183
										2EH04502558	23.0	1	23.0	41.6	45	38	180	46.0	50	42	183
										2EH04505058	45.9	2	46.0	70.4	80	65	180	74.8	80	69	183
										2EH04507558	68.9	2	69.1	82.0	90	91	180	86.4	90	95	183
18 (17.5)	208-3-60	27.6	191	28.2	240	2.1	13.2	6.7	9.6	None	-	-	-	93.7	110	100	527	103.3	125	111	537
										2EH04502525	18.8	1	52.1	98.4	110	100	527	110.4	125	111	537
										2EH04505025	37.6	2	104.3	163.6	175	151	527	175.6	200	162	537
										2EH04507525	56.3	2	156.2	189.5	200	210	527	201.5	225	221	537
	230-3-60	27.6	191	28.2	240	2.1	13.2	6.7	8.7	None	-	-	-	93.7	110	100	535	102.4	125	110	544
										2EH04502525	23.0	1	57.7	105.4	110	100	535	116.3	125	110	544
										2EH04505025	45.9	2	115.2	177.3	200	163	535	188.1	200	173	544
										2EH04507525	68.9	2	172.9	206.2	225	229	535	217.0	225	239	544
	460-3-60	12.8	100	14.7	130	1.1	6.1	3.4	4.3	None	-	-	-	46.3	60	49	283	50.6	60	54	287
										2EH04502546	23.0	1	28.8	52.1	60	49	283	57.5	60	54	287
										2EH04505046	45.9	2	57.6	88.1	90	81	283	93.5	100	86	287
										2EH04507546	68.9	2	86.4	102.5	110	114	283	107.9	110	119	287
	575-3-60	9.6	78	11.3	94	0.9	4.9	2.7	3.5	None	-	-	-	35.8	45	38	221	39.3	50	42	225
										2EH04502558	23.0	1	23.0	41.6	45	38	221	46.0	50	42	225
										2EH04505058	45.9	2	46.0	70.4	80	65	221	74.8	80	69	225
										2EH04507558	68.9	2	69.1	82.0	90	91	221	86.4	90	95	225
20 (20)	208-3-60	28.2	240	34.0	240	2.0	20.4	6.7	9.6	None	-	-	-	112.5	125	120	614	122.1	150	131	623
										2EH04502525	18.8	1	52.1	112.5	125	120	614	122.1	150	131	623
										2EH04505025	37.6	2	104.3	172.6	175	159	614	184.6	200	170	623
										2EH04507525	56.3	2	156.2	198.5	200	219	614	210.5	225	230	623
	230-3-60	28.2	240	34.0	240	2.3	20.4	6.7	8.7	None	-	-	-	113.7	125	121	615	122.4	150	131	624
										2EH04502525	23.0	1	57.7	114.4	125	121	615	125.3	150	131	624
										2EH04505025	45.9	2	115.2	186.3	200	171	615	197.1	200	181	624
										2EH04507525	68.9	2	172.9	215.2	225	238	615	226.0	250	248	624
	460-3-60	14.7	130	16.0	140	1.3	9.9	3.4	4.3	None	-	-	-	56.6	70	60	339	60.9	70	65	344
										2EH04502546	23.0	1	28.8	56.9	70	60	339	62.3	70	65	344
										2EH04505046	45.9	2	57.6	92.9	100	85	339	98.3	100	90	344
										2EH04507546	68.9	2	86.4	107.3	110	119	339	112.7	125	124	344
	575-3-60	11.3	94	12.9	108	1.0	7.7	2.7	3.5	None	-	-	-	44.5	50	47	257	48.0	60	52	260
										2EH04502558	23.0	1	23.0	45.1	50	47	257	49.5	60	52	260
										2EH04505058	45.9	2	46.0	73.9	80	68	257	78.3	80	72	260
										2EH04507558	68.9	2	69.1	85.5	90	95	257	89.9	90	99	260

Table 59: AD15 to AD28 VFD 2 stage standard static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors (each) FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	41.0	304	41.0	304	2.0	20.4	6.7	9.6	None	-	-	-	134.1	175	142	742	143.7	175	153	751
										2EH04502525	18.8	1	52.1	134.1	175	142	742	143.7	175	153	751
										2EH04505025	37.6	2	104.3	172.6	175	159	742	184.6	200	170	751
										2EH04507525	56.3	2	156.2	198.5	200	219	742	210.5	225	230	751
	230-3-60	41.0	304	41.0	304	2.3	20.4	6.7	8.7	None	-	-	-	135.3	175	144	743	144.0	175	154	752
										2EH04502525	23.0	1	57.7	135.3	175	144	743	144.0	175	154	752
										2EH04505025	45.9	2	115.2	186.3	200	171	743	197.1	200	181	752
										2EH04507525	68.9	2	172.9	215.2	225	238	743	226.0	250	248	752
	460-3-60	19.2	147	19.2	147	1.3	9.9	3.4	4.3	None	-	-	-	65.1	80	69	363	69.4	80	74	368
										2EH04502546	23.0	1	28.8	65.1	80	69	363	69.4	80	74	368
										2EH04505046	45.9	2	57.6	92.9	100	85	363	98.3	100	90	368
										2EH04507546	68.9	2	86.4	107.3	110	119	363	112.7	125	124	368
	575-3-60	16.7	122	16.7	122	1.0	7.7	2.7	3.5	None	-	-	-	54.7	70	58	299	58.2	70	62	302
										2EH04502558	23.0	1	23.0	54.7	70	58	299	58.2	70	62	302
										2EH04505058	45.9	2	46.0	73.9	80	68	299	78.3	80	72	302
										2EH04507558	68.9	2	69.1	85.5	90	95	299	89.9	90	99	302
28 (27.5)	208-3-60	51.3	300	51.3	300	2.1	30.0	6.7	9.6	None	-	-	-	167.2	200	178	753	176.8	225	189	763
										2EH04502525	18.8	1	52.1	167.2	200	178	753	176.8	225	189	763
										2EH04505025	37.6	2	104.3	184.6	200	178	753	196.6	225	189	763
										2EH04507525	56.3	2	156.2	210.5	225	230	753	222.5	225	241	763
	230-3-60	51.3	300	51.3	300	2.1	30.0	6.7	8.7	None	-	-	-	167.2	200	178	753	175.9	225	188	762
										2EH04502525	23.0	1	57.7	167.2	200	178	753	175.9	225	188	762
										2EH04505025	45.9	2	115.2	198.3	200	182	753	209.1	225	192	762
										2EH04507525	68.9	2	172.9	227.2	250	249	753	238.0	250	259	762
	460-3-60	23.1	150	23.1	150	1.1	14.3	3.4	4.3	None	-	-	-	77.5	100	82	378	81.8	100	87	382
										2EH04502546	23.0	1	28.8	77.5	100	82	378	81.8	100	87	382
										2EH04505046	45.9	2	57.6	98.4	100	91	378	103.8	110	95	382
										2EH04507546	68.9	2	86.4	112.8	125	124	378	118.2	125	129	382
	575-3-60	19.9	109	19.9	109	0.9	11.5	2.7	3.5	None	-	-	-	65.3	80	69	282	68.8	80	73	286
										2EH04502558	23.0	1	23.0	65.3	80	69	282	68.8	80	73	286
										2EH04505058	45.9	2	46.0	78.6	80	72	282	83.0	90	76	286
										2EH04507558	68.9	2	69.1	90.2	100	99	282	94.6	100	103	286

VFD 2 stage medium static

Table 60: AD15 to AD28 VFD 2 stage medium static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	25.0	190	25.0	190	2.1	13.2	9.6	None	-	-	-	73.7	90	78	463	83.3	100	89	472
									2EH04502525	18.8	1	52.1	81.6	90	78	463	93.6	100	89	472
									2EH04505025	37.6	2	104.3	146.9	150	135	463	158.9	175	146	472
									2EH04507525	56.3	2	156.2	172.7	200	195	463	184.7	200	206	472
	230-3-60	25.0	190	25.0	190	2.1	13.2	8.7	None	-	-	-	73.7	90	78	471	82.4	100	88	479
									2EH04502525	23.0	1	57.7	88.6	90	82	471	99.5	100	92	479
									2EH04505025	45.9	2	115.2	160.5	175	148	471	171.4	175	158	479
									2EH04507525	68.9	2	172.9	189.4	225	214	471	200.3	225	224	479
	460-3-60	12.2	100	12.2	100	1.1	6.1	4.3	None	-	-	-	35.8	45	38	246	40.1	50	43	250
									2EH04502546	23.0	1	28.8	43.6	45	40	246	49.0	50	45	250
									2EH04505046	45.9	2	57.6	79.6	80	73	246	85.0	90	78	250
									2EH04507546	68.9	2	86.4	94.0	110	106	246	99.4	110	111	250
	575-3-60	9.3	72	9.3	72	0.9	4.9	3.5	None	-	-	-	27.6	35	29	188	31.1	40	33	192
									2EH04502558	23.0	1	23.0	34.9	35	32	188	39.3	40	36	192
									2EH04505058	45.9	2	46.0	63.6	70	59	188	68.0	70	63	192
									2EH04507558	68.9	2	69.1	75.2	90	85	188	79.6	90	89	192
18 (17.5)	208-3-60	27.6	191	28.2	240	2.1	20.4	9.6	None	-	-	-	87.5	110	92	544	97.1	125	104	553
									2EH04502525	18.8	1	52.1	90.6	110	92	544	102.6	125	104	553
									2EH04505025	37.6	2	104.3	155.9	175	143	544	167.9	175	154	553
									2EH04507525	56.3	2	156.2	181.7	200	203	544	193.7	200	214	553
	230-3-60	27.6	191	28.2	240	2.1	20.4	8.7	None	-	-	-	87.5	110	92	543	96.2	110	102	552
									2EH04502525	23.0	1	57.7	97.6	110	92	543	108.5	110	102	552
									2EH04505025	45.9	2	115.2	169.5	175	156	543	180.4	200	166	552
									2EH04507525	68.9	2	172.9	198.4	225	222	543	209.3	225	232	552
	460-3-60	12.8	100	14.7	130	1.1	9.9	4.3	None	-	-	-	43.3	50	46	287	47.6	60	50	291
									2EH04502546	23.0	1	28.8	48.4	50	46	287	53.8	60	50	291
									2EH04505046	45.9	2	57.6	84.4	90	78	287	89.8	90	83	291
									2EH04507546	68.9	2	86.4	98.8	110	111	287	104.2	110	116	291
	575-3-60	9.6	78	11.3	94	0.9	7.7	3.5	None	-	-	-	33.2	40	35	216	36.7	45	39	220
									2EH04502558	23.0	1	23.0	38.4	40	35	216	42.8	45	39	220
									2EH04505058	45.9	2	46.0	67.1	70	62	216	71.5	80	66	220
									2EH04507558	68.9	2	69.1	78.7	90	88	216	83.1	90	92	220
20 (20)	208-3-60	28.2	240	34.0	240	2.0	20.4	9.6	None	-	-	-	99.1	125	104	600	108.7	125	115	610
									2EH04502525	18.8	1	52.1	99.1	125	104	600	108.7	125	115	610
									2EH04505025	37.6	2	104.3	155.9	175	143	600	167.9	175	154	610
									2EH04507525	56.3	2	156.2	181.7	200	203	600	193.7	200	214	610
	230-3-60	28.2	240	34.0	240	2.3	20.4	8.7	None	-	-	-	100.3	125	106	602	109.0	125	116	610
									2EH04502525	23.0	1	57.7	100.3	125	106	602	109.0	125	116	610
									2EH04505025	45.9	2	115.2	169.5	175	156	602	180.4	200	166	610
									2EH04507525	68.9	2	172.9	198.4	225	222	602	209.3	225	232	610
	460-3-60	14.7	130	16.0	140	1.3	9.9	4.3	None	-	-	-	49.8	60	53	333	54.1	70	58	337
									2EH04502546	23.0	1	28.8	49.8	60	53	333	54.1	70	58	337
									2EH04505046	45.9	2	57.6	84.4	90	78	333	89.8	90	83	337
									2EH04507546	68.9	2	86.4	98.8	110	111	333	104.2	110	116	337
	575-3-60	11.3	94	12.9	108	1.0	7.7	3.5	None	-	-	-	39.1	50	41	251	42.6	50	45	255
									2EH04502558	23.0	1	23.0	39.1	50	41	251	42.8	50	45	255
									2EH04505058	45.9	2	46.0	67.1	70	62	251	71.5	80	66	255
									2EH04507558	68.9	2	69.1	78.7	90	88	251	83.1	90	92	255

Table 60: AD15 to AD28 VFD 2 stage medium static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	41.0	304	41.0	304	2.0	30.0	9.6	None	-	-	-	130.3	150	138	746	139.9	175	149	755
									2EH04502525	18.8	1	52.1	130.3	150	138	746	139.9	175	149	755
									2EH04505025	37.6	2	104.3	167.9	175	154	746	179.9	200	165	755
									2EH04507525	56.3	2	156.2	193.7	200	214	746	205.7	225	225	755
	230-3-60	41.0	304	41.0	304	2.3	30.0	8.7	None	-	-	-	131.5	150	139	748	140.2	175	149	756
									2EH04502525	23.0	1	57.7	131.5	150	139	748	140.2	175	149	756
									2EH04505025	45.9	2	115.2	181.5	200	167	748	192.4	200	177	756
									2EH04507525	68.9	2	172.9	210.4	225	233	748	221.3	225	243	756
	460-3-60	19.2	147	19.2	147	1.3	14.3	4.3	None	-	-	-	62.7	80	67	366	67.0	80	72	370
									2EH04502546	23.0	1	28.8	62.7	80	67	366	67.0	80	72	370
									2EH04505046	45.9	2	57.6	89.9	90	83	366	95.3	100	88	370
									2EH04507546	68.9	2	86.4	104.3	110	116	366	109.7	110	121	370
	575-3-60	16.7	122	16.7	122	1.0	11.5	3.5	None	-	-	-	53.1	60	56	304	56.6	70	60	308
									2EH04502558	23.0	1	23.0	53.1	60	56	304	56.6	70	60	308
									2EH04505058	45.9	2	46.0	71.9	80	66	304	76.3	80	70	308
									2EH04507558	68.9	2	69.1	83.5	90	93	304	87.9	90	97	308
28 (27.5)	208-3-60	51.3	300	51.3	300	2.1	39.6	9.6	None	-	-	-	163.4	200	173	778	173.0	200	184	788
									2EH04502525	18.8	1	52.1	163.4	200	173	778	173.0	200	184	788
									2EH04505025	37.6	2	104.3	179.9	200	173	778	191.9	200	184	788
									2EH04507525	56.3	2	156.2	205.7	225	225	778	217.7	250	236	788
	230-3-60	51.3	300	51.3	300	2.1	39.6	8.7	None	-	-	-	163.4	200	173	778	172.1	200	183	787
									2EH04502525	23.0	1	57.7	163.4	200	173	778	172.1	200	183	787
									2EH04505025	45.9	2	115.2	193.5	200	178	778	204.4	225	188	787
									2EH04507525	68.9	2	172.9	222.4	250	244	778	233.3	250	254	787
	460-3-60	23.1	150	23.1	150	1.1	18.7	4.3	None	-	-	-	75.1	90	80	390	79.4	100	85	395
									2EH04502546	23.0	1	28.8	75.1	90	80	390	79.4	100	85	395
									2EH04505046	45.9	2	57.6	95.4	100	88	390	100.8	110	93	395
									2EH04507546	68.9	2	86.4	109.8	125	121	390	115.2	125	126	395
	575-3-60	19.9	109	19.9	109	0.9	14.2	3.5	None	-	-	-	62.6	80	66	308	66.1	80	70	311
									2EH04502558	23.0	1	23.0	62.6	80	66	308	66.1	80	70	311
									2EH04505058	45.9	2	46.0	75.3	80	69	308	79.6	80	73	311
									2EH04507558	68.9	2	69.1	86.9	100	96	308	91.2	100	100	311

Table 61: AD15 to AD28 VFD 2 stage medium static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	25.0	190	25.0	190	2.1	13.2	5.0	9.6	None	-	-	-	83.7	100	89	484	93.3	110	100	493
										2EH04502525	18.8	1	52.1	94.1	100	89	484	106.1	110	100	493
										2EH04505025	37.6	2	104.3	159.4	175	147	484	171.4	175	158	493
										2EH04507525	56.3	2	156.2	185.2	200	206	484	197.2	200	217	493
	230-3-60	25.0	190	25.0	190	2.1	13.2	5.0	8.7	None	-	-	-	83.7	100	89	492	92.4	110	99	500
										2EH04502525	23.0	1	57.7	101.1	110	93	492	112.0	125	103	500
										2EH04505025	45.9	2	115.2	173.0	175	159	492	183.9	200	169	500
										2EH04507525	68.9	2	172.9	201.9	225	226	492	212.8	225	236	500
	460-3-60	12.2	100	12.2	100	1.1	6.1	2.2	4.3	None	-	-	-	40.2	50	43	255	44.5	50	48	259
										2EH04502546	23.0	1	28.8	49.1	50	45	255	54.5	60	50	259
										2EH04505046	45.9	2	57.6	85.1	90	78	255	90.5	100	83	259
										2EH04507546	68.9	2	86.4	99.5	110	111	255	104.9	110	116	259
	575-3-60	9.3	72	9.3	72	0.9	4.9	1.5	3.5	None	-	-	-	30.6	35	33	194	34.1	40	37	198
										2EH04502558	23.0	1	23.0	38.6	40	36	194	43.0	45	40	198
										2EH04505058	45.9	2	46.0	67.4	70	62	194	71.8	80	66	198
										2EH04507558	68.9	2	69.1	79.0	90	89	194	83.4	90	93	198
18 (17.5)	208-3-60	27.6	191	28.2	240	2.1	20.4	5.0	9.6	None	-	-	-	97.5	125	104	565	107.1	125	115	574
										2EH04502525	18.8	1	52.1	103.1	125	104	565	115.1	125	115	574
										2EH04505025	37.6	2	104.3	168.4	175	155	565	180.4	200	166	574
										2EH04507525	56.3	2	156.2	194.2	200	215	565	206.2	225	226	574
	230-3-60	27.6	191	28.2	240	2.1	20.4	5.0	8.7	None	-	-	-	97.5	125	104	564	106.2	125	114	573
										2EH04502525	23.0	1	57.7	110.1	125	104	564	121.0	125	114	573
										2EH04505025	45.9	2	115.2	182.0	200	167	564	192.9	200	177	573
										2EH04507525	68.9	2	172.9	210.9	225	234	564	221.8	225	244	573
	460-3-60	12.8	100	14.7	130	1.1	9.9	2.2	4.3	None	-	-	-	47.7	60	51	296	52.0	60	56	300
										2EH04502546	23.0	1	28.8	53.9	60	51	296	59.3	60	56	300
										2EH04505046	45.9	2	57.6	89.9	90	83	296	95.3	100	88	300
										2EH04507546	68.9	2	86.4	104.3	110	116	296	109.7	110	121	300
	575-3-60	9.6	78	11.3	94	0.9	7.7	1.5	3.5	None	-	-	-	36.2	45	38	222	39.7	50	42	226
										2EH04502558	23.0	1	23.0	42.1	45	39	222	46.5	50	43	226
										2EH04505058	45.9	2	46.0	70.9	80	65	222	75.3	80	69	226
										2EH04507558	68.9	2	69.1	82.5	90	92	222	86.9	90	96	226
20 (20)	208-3-60	28.2	240	34.0	240	2.0	20.4	5.0	9.6	None	-	-	-	109.1	125	116	621	118.7	150	127	631
										2EH04502525	18.8	1	52.1	109.1	125	116	621	118.7	150	127	631
										2EH04505025	37.6	2	104.3	168.4	175	155	621	180.4	200	166	631
										2EH04507525	56.3	2	156.2	194.2	200	215	621	206.2	225	226	631
	230-3-60	28.2	240	34.0	240	2.3	20.4	5.0	8.7	None	-	-	-	110.3	125	117	623	119.0	150	127	631
										2EH04502525	23.0	1	57.7	110.3	125	117	623	121.0	150	127	631
										2EH04505025	45.9	2	115.2	182.0	200	167	623	192.9	200	177	631
										2EH04507525	68.9	2	172.9	210.9	225	234	623	221.8	225	244	631
	460-3-60	14.7	130	16.0	140	1.3	9.9	2.2	4.3	None	-	-	-	54.2	70	58	342	58.5	70	63	346
										2EH04502546	23.0	1	28.8	54.2	70	58	342	59.3	70	63	346
										2EH04505046	45.9	2	57.6	89.9	90	83	342	95.3	100	88	346
										2EH04507546	68.9	2	86.4	104.3	110	116	342	109.7	110	121	346
	575-3-60	11.3	94	12.9	108	1.0	7.7	1.5	3.5	None	-	-	-	42.1	50	45	258	45.6	50	49	261
										2EH04502558	23.0	1	23.0	42.1	50	45	258	46.5	50	49	261
										2EH04505058	45.9	2	46.0	70.9	80	65	258	75.3	80	69	261
										2EH04507558	68.9	2	69.1	82.5	90	92	258	86.9	90	96	261

Table 61: AD15 to AD28 VFD 2 stage medium static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	41.0	304	41.0	304	2.0	30.0	5.0	9.6	None	-	-	-	140.3	175	150	767	149.9	175	161	776
										2EH04502525	18.8	1	52.1	140.3	175	150	767	149.9	175	161	776
										2EH04505025	37.6	2	104.3	180.4	200	166	767	192.4	200	177	776
										2EH04507525	56.3	2	156.2	206.2	225	226	767	218.2	225	237	776
	230-3-60	41.0	304	41.0	304	2.3	30.0	5.0	8.7	None	-	-	-	141.5	175	151	769	150.2	175	161	777
										2EH04502525	23.0	1	57.7	141.5	175	151	769	150.2	175	161	777
										2EH04505025	45.9	2	115.2	194.0	200	178	769	204.9	225	188	777
										2EH04507525	68.9	2	172.9	222.9	250	245	769	233.8	250	255	777
	460-3-60	19.2	147	19.2	147	1.3	14.3	2.2	4.3	None	-	-	-	67.1	80	72	375	71.4	90	77	379
										2EH04502546	23.0	1	28.8	67.1	80	72	375	71.4	90	77	379
										2EH04505046	45.9	2	57.6	95.4	100	88	375	100.8	110	93	379
										2EH04507546	68.9	2	86.4	109.8	110	121	375	115.2	125	126	379
	575-3-60	16.7	122	16.7	122	1.0	11.5	1.5	3.5	None	-	-	-	56.1	70	60	310	59.6	70	64	314
										2EH04502558	23.0	1	23.0	56.1	70	60	310	59.6	70	64	314
										2EH04505058	45.9	2	46.0	75.6	80	70	310	80.0	90	74	314
										2EH04507558	68.9	2	69.1	87.2	90	96	310	91.6	100	100	314
28 (27.5)	208-3-60	51.3	300	51.3	300	2.1	39.6	5.0	9.6	None	-	-	-	173.4	200	185	799	183.0	225	196	809
										2EH04502525	18.8	1	52.1	173.4	200	185	799	183.0	225	196	809
										2EH04505025	37.6	2	104.3	192.4	200	185	799	204.4	225	196	809
										2EH04507525	56.3	2	156.2	218.2	250	237	799	230.2	250	248	809
	230-3-60	51.3	300	51.3	300	2.1	39.6	5.0	8.7	None	-	-	-	173.4	200	185	799	182.1	225	195	808
										2EH04502525	23.0	1	57.7	173.4	200	185	799	182.1	225	195	808
										2EH04505025	45.9	2	115.2	206.0	225	190	799	216.9	225	200	808
										2EH04507525	68.9	2	172.9	234.9	250	256	799	245.8	250	266	808
	460-3-60	23.1	150	23.1	150	1.1	18.7	2.2	4.3	None	-	-	-	79.5	100	85	399	83.8	100	90	404
										2EH04502546	23.0	1	28.8	79.5	100	85	399	83.8	100	90	404
										2EH04505046	45.9	2	57.6	100.9	110	93	399	106.3	110	98	404
										2EH04507546	68.9	2	86.4	115.3	125	126	399	120.7	125	131	404
	575-3-60	19.9	109	19.9	109	0.9	14.2	1.5	3.5	None	-	-	-	65.6	80	70	314	69.1	80	74	317
										2EH04502558	23.0	1	23.0	65.6	80	70	314	69.1	80	74	317
										2EH04505058	45.9	2	46.0	79.0	80	73	314	83.4	90	77	317
										2EH04507558	68.9	2	69.1	90.6	100	99	314	95.0	100	103	317

Table 62: AD15 to AD28 VFD 2 stage medium static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	25.0	190	25.0	190	2.1	13.2	6.7	9.6	None	-	-	-	87.1	110	93	476	96.7	110	104	486
										2EH04502525	18.8	1	52.1	98.4	110	93	476	110.4	125	104	486
										2EH04505025	37.6	2	104.3	163.6	175	151	476	175.6	200	162	486
										2EH04507525	56.3	2	156.2	189.5	200	210	476	201.5	225	221	486
	230-3-60	25.0	190	25.0	190	2.1	13.2	6.7	8.7	None	-	-	-	87.1	110	93	484	95.8	110	103	493
										2EH04502525	23.0	1	57.7	105.4	110	97	484	116.3	125	107	493
										2EH04505025	45.9	2	115.2	177.3	200	163	484	188.1	200	173	493
										2EH04507525	68.9	2	172.9	206.2	225	229	484	217.0	225	239	493
	460-3-60	12.2	100	12.2	100	1.1	6.1	3.4	4.3	None	-	-	-	42.6	50	45	253	46.9	50	50	257
										2EH04502546	23.0	1	28.8	52.1	60	48	253	57.5	60	53	257
										2EH04505046	45.9	2	57.6	88.1	90	81	253	93.5	100	86	257
										2EH04507546	68.9	2	86.4	102.5	110	114	253	107.9	110	119	257
	575-3-60	9.3	72	9.3	72	0.9	4.9	2.7	3.5	None	-	-	-	33.0	40	35	193	36.5	45	39	197
										2EH04502558	23.0	1	23.0	41.6	45	38	193	46.0	50	42	197
										2EH04505058	45.9	2	46.0	70.4	80	65	193	74.8	80	69	197
										2EH04507558	68.9	2	69.1	82.0	90	91	193	86.4	90	95	197
18 (17.5)	208-3-60	27.6	191	28.2	240	2.1	20.4	6.7	9.6	None	-	-	-	100.9	125	108	557	110.5	125	119	567
										2EH04502525	18.8	1	52.1	107.4	125	108	557	119.4	125	119	567
										2EH04505025	37.6	2	104.3	172.6	175	159	557	184.6	200	170	567
										2EH04507525	56.3	2	156.2	198.5	200	219	557	210.5	225	230	567
	230-3-60	27.6	191	28.2	240	2.1	20.4	6.7	8.7	None	-	-	-	100.9	125	108	556	109.6	125	118	565
										2EH04502525	23.0	1	57.7	114.4	125	108	556	125.3	150	118	565
										2EH04505025	45.9	2	115.2	186.3	200	171	556	197.1	200	181	565
										2EH04507525	68.9	2	172.9	215.2	225	238	556	226.0	250	248	565
	460-3-60	12.8	100	14.7	130	1.1	9.9	3.4	4.3	None	-	-	-	50.1	60	53	293	54.4	60	58	298
										2EH04502546	23.0	1	28.8	56.9	60	53	293	62.3	70	58	298
										2EH04505046	45.9	2	57.6	92.9	100	85	293	98.3	100	90	298
										2EH04507546	68.9	2	86.4	107.3	110	119	293	112.7	125	124	298
	575-3-60	9.6	78	11.3	94	0.9	7.7	2.7	3.5	None	-	-	-	38.6	45	41	221	42.1	50	45	225
										2EH04502558	23.0	1	23.0	45.1	50	42	221	49.5	50	46	225
										2EH04505058	45.9	2	46.0	73.9	80	68	221	78.3	80	72	225
										2EH04507558	68.9	2	69.1	85.5	90	95	221	89.9	90	99	225
20 (20)	208-3-60	28.2	240	34.0	240	2.0	20.4	6.7	9.6	None	-	-	-	112.5	125	120	614	122.1	150	131	623
										2EH04502525	18.8	1	52.1	112.5	125	120	614	122.1	150	131	623
										2EH04505025	37.6	2	104.3	172.6	175	159	614	184.6	200	170	623
										2EH04507525	56.3	2	156.2	198.5	200	219	614	210.5	225	230	623
	230-3-60	28.2	240	34.0	240	2.3	20.4	6.7	8.7	None	-	-	-	113.7	125	121	615	122.4	150	131	624
										2EH04502525	23.0	1	57.7	114.4	125	121	615	125.3	150	131	624
										2EH04505025	45.9	2	115.2	186.3	200	171	615	197.1	200	181	624
										2EH04507525	68.9	2	172.9	215.2	225	238	615	226.0	250	248	624
	460-3-60	14.7	130	16.0	140	1.3	9.9	3.4	4.3	None	-	-	-	56.6	70	60	339	60.9	70	65	344
										2EH04502546	23.0	1	28.8	56.9	70	60	339	62.3	70	65	344
										2EH04505046	45.9	2	57.6	92.9	100	85	339	98.3	100	90	344
										2EH04507546	68.9	2	86.4	107.3	110	119	339	112.7	125	124	344
	575-3-60	11.3	94	12.9	108	1.0	7.7	2.7	3.5	None	-	-	-	44.5	50	47	257	48.0	60	52	260
										2EH04502558	23.0	1	23.0	45.1	50	47	257	49.5	60	52	260
										2EH04505058	45.9	2	46.0	73.9	80	68	257	78.3	80	72	260
										2EH04507558	68.9	2	69.1	85.5	90	95	257	89.9	90	99	260

Table 62: AD15 to AD28 VFD 2 stage medium static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	41.0	304	41.0	304	2.0	30.0	6.7	9.6	None	-	-	-	143.7	175	153	759	153.3	175	164	769
										2EH04502525	18.8	1	52.1	143.7	175	153	759	153.3	175	164	769
										2EH04505025	37.6	2	104.3	184.6	200	170	759	196.6	200	181	769
										2EH04507525	56.3	2	156.2	210.5	225	230	759	222.5	225	241	769
	230-3-60	41.0	304	41.0	304	2.3	30.0	6.7	8.7	None	-	-	-	144.9	175	155	761	153.6	175	165	770
										2EH04502525	23.0	1	57.7	144.9	175	155	761	153.6	175	165	770
										2EH04505025	45.9	2	115.2	198.3	200	182	761	209.1	225	192	770
										2EH04507525	68.9	2	172.9	227.2	250	249	761	238.0	250	259	770
	460-3-60	19.2	147	19.2	147	1.3	14.3	3.4	4.3	None	-	-	-	69.5	80	74	372	73.8	90	79	377
										2EH04502546	23.0	1	28.8	69.5	80	74	372	73.8	90	79	377
										2EH04505046	45.9	2	57.6	98.4	100	91	372	103.8	110	95	377
										2EH04507546	68.9	2	86.4	112.8	125	124	372	118.2	125	129	377
	575-3-60	16.7	122	16.7	122	1.0	11.5	2.7	3.5	None	-	-	-	58.5	70	62	309	62.0	70	66	313
										2EH04502558	23.0	1	23.0	58.5	70	62	309	62.0	70	66	313
										2EH04505058	45.9	2	46.0	78.6	80	72	309	83.0	90	76	313
										2EH04507558	68.9	2	69.1	90.2	100	99	309	94.6	100	103	313
28 (27.5)	208-3-60	51.3	300	51.3	300	2.1	39.6	6.7	9.6	None	-	-	-	176.8	225	189	791	186.4	225	200	801
										2EH04502525	18.8	1	52.1	176.8	225	189	791	186.4	225	200	801
										2EH04505025	37.6	2	104.3	196.6	225	189	791	208.6	225	200	801
										2EH04507525	56.3	2	156.2	222.5	250	241	791	234.5	250	252	801
	230-3-60	51.3	300	51.3	300	2.1	39.6	6.7	8.7	None	-	-	-	176.8	225	189	791	185.5	225	199	800
										2EH04502525	23.0	1	57.7	176.8	225	189	791	185.5	225	199	800
										2EH04505025	45.9	2	115.2	210.3	225	193	791	221.1	225	203	800
										2EH04507525	68.9	2	172.9	239.2	250	260	791	250.0	250	270	800
	460-3-60	23.1	150	23.1	150	1.1	18.7	3.4	4.3	None	-	-	-	81.9	100	88	397	86.2	100	92	401
										2EH04502546	23.0	1	28.8	81.9	100	88	397	86.2	100	92	401
										2EH04505046	45.9	2	57.6	103.9	110	96	397	109.3	110	101	401
										2EH04507546	68.9	2	86.4	118.3	125	129	397	123.7	125	134	401
	575-3-60	19.9	109	19.9	109	0.9	14.2	2.7	3.5	None	-	-	-	68.0	80	72	313	71.5	90	76	316
										2EH04502558	23.0	1	23.0	68.0	80	72	313	71.5	90	76	316
										2EH04505058	45.9	2	46.0	82.0	90	75	313	86.4	90	79	316
										2EH04507558	68.9	2	69.1	93.6	100	102	313	98.0	110	106	316

VFD 2 stage high static

Table 63: AD15 to AD28 VFD 2 stage high static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min Disconnect Rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	25.0	190	25.0	190	2.1	20.4	9.6	None	-	-	-	80.9	100	86	493	90.5	110	97	502
									2EH04502525	18.8	1	52.1	90.6	100	86	493	102.6	110	97	502
									2EH04505025	37.6	2	104.3	155.9	175	143	493	167.9	175	154	502
									2EH04507525	56.3	2	156.2	181.7	200	203	493	193.7	200	214	502
	230-3-60	25.0	190	25.0	190	2.1	20.4	8.7	None	-	-	-	80.9	100	86	492	89.6	110	96	501
									2EH04502525	23.0	1	57.7	97.6	100	90	492	108.5	110	100	501
									2EH04505025	45.9	2	115.2	169.5	175	156	492	180.4	200	166	501
									2EH04507525	68.9	2	172.9	198.4	225	222	492	209.3	225	232	501
	460-3-60	12.2	100	12.2	100	1.1	9.9	4.3	None	-	-	-	39.6	50	42	257	43.9	50	47	261
									2EH04502546	23.0	1	28.8	48.4	50	45	257	53.8	60	49	261
									2EH04505046	45.9	2	57.6	84.4	90	78	257	89.8	90	83	261
									2EH04507546	68.9	2	86.4	98.8	110	111	257	104.2	110	116	261
	575-3-60	9.3	72	9.3	72	0.9	7.7	3.5	None	-	-	-	30.4	35	32	188	33.9	40	36	192
									2EH04502558	23.0	1	23.0	38.4	40	35	188	42.8	45	39	192
									2EH04505058	45.9	2	46.0	67.1	70	62	188	71.5	80	66	192
									2EH04507558	68.9	2	69.1	78.7	90	88	188	83.1	90	92	192
18 (17.5)	208-3-60	27.6	191	28.2	240	2.1	30.0	9.6	None	-	-	-	97.5	125	104	561	107.1	125	115	571
									2EH04502525	18.8	1	52.1	102.6	125	104	561	114.6	125	115	571
									2EH04505025	37.6	2	104.3	167.9	175	154	561	179.9	200	165	571
									2EH04507525	56.3	2	156.2	193.7	200	214	561	205.7	225	225	571
	230-3-60	27.6	191	28.2	240	2.1	30.0	8.7	None	-	-	-	97.5	125	104	561	106.2	125	114	570
									2EH04502525	23.0	1	57.7	109.6	125	104	561	120.5	125	114	570
									2EH04505025	45.9	2	115.2	181.5	200	167	561	192.4	200	177	570
									2EH04507525	68.9	2	172.9	210.4	225	233	561	221.3	225	243	570
	460-3-60	12.8	100	14.7	130	1.1	14.3	4.3	None	-	-	-	47.7	60	51	296	52.0	60	56	300
									2EH04502546	23.0	1	28.8	53.9	60	51	296	59.3	60	56	300
									2EH04505046	45.9	2	57.6	89.9	90	83	296	95.3	100	88	300
									2EH04507546	68.9	2	86.4	104.3	110	116	296	109.7	110	121	300
	575-3-60	9.6	78	11.3	94	0.9	11.5	3.5	None	-	-	-	37.1	45	39	227	40.6	50	43	230
									2EH04502558	23.0	1	23.0	43.1	45	40	227	47.5	50	44	230
									2EH04505058	45.9	2	46.0	71.9	80	66	227	76.3	80	70	230
									2EH04507558	68.9	2	69.1	83.5	90	93	227	87.9	90	97	230
20 (20)	208-3-60	28.2	240	34.0	240	2.0	30.0	9.6	None	-	-	-	108.7	125	115	618	118.3	150	126	627
									2EH04502525	18.8	1	52.1	108.7	125	115	618	118.3	150	126	627
									2EH04505025	37.6	2	104.3	167.9	175	154	618	179.9	200	165	627
									2EH04507525	56.3	2	156.2	193.7	200	214	618	205.7	225	225	627
	230-3-60	28.2	240	34.0	240	2.3	30.0	8.7	None	-	-	-	109.9	125	117	620	118.6	150	127	628
									2EH04502525	23.0	1	57.7	109.9	125	117	620	120.5	150	127	628
									2EH04505025	45.9	2	115.2	181.5	200	167	620	192.4	200	177	628
									2EH04507525	68.9	2	172.9	210.4	225	233	620	221.3	225	243	628
	460-3-60	14.7	130	16.0	140	1.3	14.3	4.3	None	-	-	-	54.2	70	58	342	58.5	70	63	346
									2EH04502546	23.0	1	28.8	54.2	70	58	342	59.3	70	63	346
									2EH04505046	45.9	2	57.6	89.9	90	83	342	95.3	100	88	346
									2EH04507546	68.9	2	86.4	104.3	110	116	342	109.7	110	121	346
	575-3-60	11.3	94	12.9	108	1.0	11.5	3.5	None	-	-	-	42.9	50	46	262	46.4	50	50	266
									2EH04502558	23.0	1	23.0	43.1	50	46	262	47.5	50	50	266
									2EH04505058	45.9	2	46.0	71.9	80	66	262	76.3	80	70	266
									2EH04507558	68.9	2	69.1	83.5	90	93	262	87.9	90	97	266

Table 63: AD15 to AD28 VFD 2 stage high static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min Disconnect Rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	41.0	304	41.0	304	2.0	39.6	9.6	None	-	-	-	139.9	175	149	784	149.5	175	160	793
									2EH04502525	18.8	1	52.1	139.9	175	149	784	149.5	175	160	793
									2EH04505025	37.6	2	104.3	179.9	200	165	784	191.9	200	177	793
									2EH04507525	56.3	2	156.2	205.7	225	225	784	217.7	250	236	793
	230-3-60	41.0	304	41.0	304	2.3	39.6	8.7	None	-	-	-	141.1	175	150	786	149.8	175	160	794
									2EH04502525	23.0	1	57.7	141.1	175	150	786	149.8	175	160	794
									2EH04505025	45.9	2	115.2	193.5	200	178	786	204.4	225	188	794
									2EH04507525	68.9	2	172.9	222.4	250	244	786	233.3	250	254	794
	460-3-60	19.2	147	19.2	147	1.3	18.7	4.3	None	-	-	-	67.1	80	72	385	71.4	90	77	389
									2EH04502546	23.0	1	28.8	67.1	80	72	385	71.4	90	77	389
									2EH04505046	45.9	2	57.6	95.4	100	88	385	100.8	110	93	389
									2EH04507546	68.9	2	86.4	109.8	125	121	385	115.2	125	126	389
	575-3-60	16.7	122	16.7	122	1.0	14.2	3.5	None	-	-	-	55.8	70	59	335	59.3	70	63	338
									2EH04502558	23.0	1	23.0	55.8	70	59	335	59.3	70	63	338
									2EH04505058	45.9	2	46.0	75.3	80	69	335	79.6	80	73	338
									2EH04507558	68.9	2	69.1	86.9	100	96	335	91.2	100	100	338
28 (27.5)	208-3-60	51.3	300	51.3	300	2.1	39.6	9.6	None	-	-	-	163.4	200	173	808	173.0	200	184	818
									2EH04502525	18.8	1	52.1	163.4	200	173	808	173.0	200	184	818
									2EH04505025	37.6	2	104.3	179.9	200	173	808	191.9	200	184	818
									2EH04507525	56.3	2	156.2	205.7	225	225	808	217.7	250	236	818
	230-3-60	51.3	300	51.3	300	2.1	39.6	8.7	None	-	-	-	163.4	200	173	808	172.1	200	183	817
									2EH04502525	23.0	1	57.7	163.4	200	173	808	172.1	200	183	817
									2EH04505025	45.9	2	115.2	193.5	200	178	808	204.4	225	188	817
									2EH04507525	68.9	2	172.9	222.4	250	244	808	233.3	250	254	817
	460-3-60	23.1	150	23.1	150	1.1	18.7	4.3	None	-	-	-	75.1	90	80	405	79.4	100	85	410
									2EH04502546	23.0	1	28.8	75.1	90	80	405	79.4	100	85	410
									2EH04505046	45.9	2	57.6	95.4	100	88	405	100.8	110	93	410
									2EH04507546	68.9	2	86.4	109.8	125	121	405	115.2	125	126	410
	575-3-60	19.9	109	19.9	109	0.9	14.2	3.5	None	-	-	-	62.6	80	66	296	66.1	80	70	300
									2EH04502558	23.0	1	23.0	62.6	80	66	296	66.1	80	70	300
									2EH04505058	45.9	2	46.0	75.3	80	69	296	79.6	80	73	300
									2EH04507558	68.9	2	69.1	86.9	100	96	296	91.2	100	100	300

Table 64: AD15 to AD28 VFD 2 stage high static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	25.0	190	25.0	190	2.1	20.4	5.0	9.6	None	-	-	-	90.9	110	97	514	100.5	125	108	523
										2EH04502525	18.8	1	52.1	103.1	110	97	514	115.1	125	108	523
										2EH04505025	37.6	2	104.3	168.4	175	155	514	180.4	200	166	523
										2EH04507525	56.3	2	156.2	194.2	200	215	514	206.2	225	226	523
	230-3-60	25.0	190	25.0	190	2.1	20.4	5.0	8.7	None	-	-	-	90.9	110	97	513	99.6	110	107	522
										2EH04502525	23.0	1	57.7	110.1	125	101	513	121.0	125	111	522
										2EH04505025	45.9	2	115.2	182.0	200	167	513	192.9	200	177	522
										2EH04507525	68.9	2	172.9	210.9	225	234	513	221.8	225	244	522
	460-3-60	12.2	100	12.2	100	1.1	9.9	2.2	4.3	None	-	-	-	44.0	50	47	266	48.3	60	52	270
										2EH04502546	23.0	1	28.8	53.9	60	50	266	59.3	60	55	270
										2EH04505046	45.9	2	57.6	89.9	90	83	266	95.3	100	88	270
										2EH04507546	68.9	2	86.4	104.3	110	116	266	109.7	110	121	270
	575-3-60	9.3	72	9.3	72	0.9	7.7	1.5	3.5	None	-	-	-	33.4	40	36	194	36.9	45	40	198
										2EH04502558	23.0	1	23.0	42.1	45	39	194	46.5	50	43	198
										2EH04505058	45.9	2	46.0	70.9	80	65	194	75.3	80	69	198
										2EH04507558	68.9	2	69.1	82.5	90	92	194	86.9	90	96	198
18 (17.5)	208-3-60	27.6	191	28.2	240	2.1	30.0	5.0	9.6	None	-	-	-	107.5	125	115	582	117.1	125	126	592
										2EH04502525	18.8	1	52.1	115.1	125	115	582	127.1	150	126	592
										2EH04505025	37.6	2	104.3	180.4	200	166	582	192.4	200	177	592
										2EH04507525	56.3	2	156.2	206.2	225	226	582	218.2	225	237	592
	230-3-60	27.6	191	28.2	240	2.1	30.0	5.0	8.7	None	-	-	-	107.5	125	115	582	116.2	125	125	591
										2EH04502525	23.0	1	57.7	122.1	125	115	582	133.0	150	125	591
										2EH04505025	45.9	2	115.2	194.0	200	178	582	204.9	225	188	591
										2EH04507525	68.9	2	172.9	222.9	250	245	582	233.8	250	255	591
	460-3-60	12.8	100	14.7	130	1.1	14.3	2.2	4.3	None	-	-	-	52.1	60	56	305	56.4	70	61	309
										2EH04502546	23.0	1	28.8	59.4	60	56	305	64.8	70	61	309
										2EH04505046	45.9	2	57.6	95.4	100	88	305	100.8	110	93	309
										2EH04507546	68.9	2	86.4	109.8	110	121	305	115.2	125	126	309
	575-3-60	9.6	78	11.3	94	0.9	11.5	1.5	3.5	None	-	-	-	40.1	50	43	233	43.6	50	47	237
										2EH04502558	23.0	1	23.0	46.9	50	43	233	51.3	60	47	237
										2EH04505058	45.9	2	46.0	75.6	80	70	233	80.0	90	74	237
										2EH04507558	68.9	2	69.1	87.2	90	96	233	91.6	100	100	237
20 (20)	208-3-60	28.2	240	34.0	240	2.0	30.0	5.0	9.6	None	-	-	-	118.7	150	127	639	128.3	150	138	648
										2EH04502525	18.8	1	52.1	118.7	150	127	639	128.3	150	138	648
										2EH04505025	37.6	2	104.3	180.4	200	166	639	192.4	200	177	648
										2EH04507525	56.3	2	156.2	206.2	225	226	639	218.2	225	237	648
	230-3-60	28.2	240	34.0	240	2.3	30.0	5.0	8.7	None	-	-	-	119.9	150	128	641	128.6	150	138	649
										2EH04502525	23.0	1	57.7	122.1	150	128	641	133.0	150	138	649
										2EH04505025	45.9	2	115.2	194.0	200	178	641	204.9	225	188	649
										2EH04507525	68.9	2	172.9	222.9	250	245	641	233.8	250	255	649
	460-3-60	14.7	130	16.0	140	1.3	14.3	2.2	4.3	None	-	-	-	58.6	70	63	351	62.9	70	68	355
										2EH04502546	23.0	1	28.8	59.4	70	63	351	64.8	70	68	355
										2EH04505046	45.9	2	57.6	95.4	100	88	351	100.8	110	93	355
										2EH04507546	68.9	2	86.4	109.8	110	121	351	115.2	125	126	355
	575-3-60	11.3	94	12.9	108	1.0	11.5	1.5	3.5	None	-	-	-	45.9	50	49	268	49.4	60	53	272
										2EH04502558	23.0	1	23.0	46.9	50	49	268	51.3	60	53	272
										2EH04505058	45.9	2	46.0	75.6	80	70	268	80.0	90	74	272
										2EH04507558	68.9	2	69.1	87.2	90	96	268	91.6	100	100	272

Table 64: AD15 to AD28 VFD 2 stage high static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	41.0	304	41.0	304	2.0	39.6	5.0	9.6	None	-	-	-	149.9	175	161	805	159.5	200	172	814
										2EH04502525	18.8	1	52.1	149.9	175	161	805	159.5	200	172	814
										2EH04505025	37.6	2	104.3	192.4	200	177	805	204.4	225	188	814
										2EH04507525	56.3	2	156.2	218.2	250	237	805	230.2	250	248	814
	230-3-60	41.0	304	41.0	304	2.3	39.6	5.0	8.7	None	-	-	-	151.1	175	162	807	159.8	200	172	815
										2EH04502525	23.0	1	57.7	151.1	175	162	807	159.8	200	172	815
										2EH04505025	45.9	2	115.2	206.0	225	190	807	216.9	225	200	815
										2EH04507525	68.9	2	172.9	234.9	250	256	807	245.8	250	266	815
	460-3-60	19.2	147	19.2	147	1.3	18.7	2.2	4.3	None	-	-	-	71.5	90	77	394	75.8	90	82	398
										2EH04502546	23.0	1	28.8	71.5	90	77	394	75.8	90	82	398
										2EH04505046	45.9	2	57.6	100.9	110	93	394	106.3	110	98	398
										2EH04507546	68.9	2	86.4	115.3	125	126	394	120.7	125	131	398
	575-3-60	16.7	122	16.7	122	1.0	14.2	1.5	3.5	None	-	-	-	58.8	70	63	341	62.3	70	67	345
										2EH04502558	23.0	1	23.0	58.8	70	63	341	62.3	70	67	345
										2EH04505058	45.9	2	46.0	79.0	80	73	341	83.4	90	77	345
										2EH04507558	68.9	2	69.1	90.6	100	99	341	95.0	100	103	345
28 (27.5)	208-3-60	51.3	300	51.3	300	2.1	39.6	5.0	9.6	None	-	-	-	173.4	200	185	829	183.0	225	196	839
										2EH04502525	18.8	1	52.1	173.4	200	185	829	183.0	225	196	839
										2EH04505025	37.6	2	104.3	192.4	200	185	829	204.4	225	196	839
										2EH04507525	56.3	2	156.2	218.2	250	237	829	230.2	250	248	839
	230-3-60	51.3	300	51.3	300	2.1	39.6	5.0	8.7	None	-	-	-	173.4	200	185	829	182.1	225	195	838
										2EH04502525	23.0	1	57.7	173.4	200	185	829	182.1	225	195	838
										2EH04505025	45.9	2	115.2	206.0	225	190	829	216.9	225	200	838
										2EH04507525	68.9	2	172.9	234.9	250	256	829	245.8	250	266	838
	460-3-60	23.1	150	23.1	150	1.1	18.7	2.2	4.3	None	-	-	-	79.5	100	85	414	83.8	100	90	419
										2EH04502546	23.0	1	28.8	79.5	100	85	414	83.8	100	90	419
										2EH04505046	45.9	2	57.6	100.9	110	93	414	106.3	110	98	419
										2EH04507546	68.9	2	86.4	115.3	125	126	414	120.7	125	131	419
	575-3-60	19.9	109	19.9	109	0.9	14.2	1.5	3.5	None	-	-	-	65.6	80	70	303	69.1	80	74	306
										2EH04502558	23.0	1	23.0	65.6	80	70	303	69.1	80	74	306
										2EH04505058	45.9	2	46.0	79.0	80	73	303	83.4	90	77	306
										2EH04507558	68.9	2	69.1	90.6	100	99	303	95.0	100	103	306

Table 65: AD15 to AD28 VFD 2 stage high static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	25.0	190	25.0	190	2.1	20.4	6.7	9.6	None	-	-	-	94.3	110	101	506	103.9	125	112	516
										2EH04502525	18.8	1	52.1	107.4	110	101	506	119.4	125	112	516
										2EH04505025	37.6	2	104.3	172.6	175	159	506	184.6	200	170	516
										2EH04507525	56.3	2	156.2	198.5	200	219	506	210.5	225	230	516
	230-3-60	25.0	190	25.0	190	2.1	20.4	6.7	8.7	None	-	-	-	94.3	110	101	505	103.0	125	111	514
										2EH04502525	23.0	1	57.7	114.4	125	105	505	125.3	150	115	514
										2EH04505025	45.9	2	115.2	186.3	200	171	505	197.1	200	181	514
										2EH04507525	68.9	2	172.9	215.2	225	238	505	226.0	250	248	514
	460-3-60	12.2	100	12.2	100	1.1	9.9	3.4	4.3	None	-	-	-	46.4	50	50	263	50.7	60	55	268
										2EH04502546	23.0	1	28.8	56.9	60	52	263	62.3	70	57	268
										2EH04505046	45.9	2	57.6	92.9	100	85	263	98.3	100	90	268
										2EH04507546	68.9	2	86.4	107.3	110	119	263	112.7	125	124	268
	575-3-60	9.3	72	9.3	72	0.9	7.7	2.7	3.5	None	-	-	-	35.8	45	39	193	39.3	45	43	197
										2EH04502558	23.0	1	23.0	45.1	50	42	193	49.5	50	46	197
										2EH04505058	45.9	2	46.0	73.9	80	68	193	78.3	80	72	197
										2EH04507558	68.9	2	69.1	85.5	90	95	193	89.9	90	99	197
18 (17.5)	208-3-60	27.6	191	28.2	240	2.1	30.0	6.7	9.6	None	-	-	-	110.9	125	119	574	120.5	150	130	584
										2EH04502525	18.8	1	52.1	119.4	125	119	574	131.4	150	130	584
										2EH04505025	37.6	2	104.3	184.6	200	170	574	196.6	200	181	584
										2EH04507525	56.3	2	156.2	210.5	225	230	574	222.5	225	241	584
	230-3-60	27.6	191	28.2	240	2.1	30.0	6.7	8.7	None	-	-	-	110.9	125	119	574	119.6	125	129	583
										2EH04502525	23.0	1	57.7	126.4	150	119	574	137.3	150	129	583
										2EH04505025	45.9	2	115.2	198.3	200	182	574	209.1	225	192	583
										2EH04507525	68.9	2	172.9	227.2	250	249	574	238.0	250	259	583
	460-3-60	12.8	100	14.7	130	1.1	14.3	3.4	4.3	None	-	-	-	54.5	60	58	302	58.8	70	63	307
										2EH04502546	23.0	1	28.8	62.4	70	58	302	67.8	70	63	307
										2EH04505046	45.9	2	57.6	98.4	100	91	302	103.8	110	95	307
										2EH04507546	68.9	2	86.4	112.8	125	124	302	118.2	125	129	307
	575-3-60	9.6	78	11.3	94	0.9	11.5	2.7	3.5	None	-	-	-	42.5	50	46	232	46.0	50	50	236
										2EH04502558	23.0	1	23.0	49.9	50	46	232	54.3	60	50	236
										2EH04505058	45.9	2	46.0	78.6	80	72	232	83.0	90	76	236
										2EH04507558	68.9	2	69.1	90.2	100	99	232	94.6	100	103	236
20 (20)	208-3-60	28.2	240	34.0	240	2.0	30.0	6.7	9.6	None	-	-	-	122.1	150	131	631	131.7	150	142	641
										2EH04502525	18.8	1	52.1	122.1	150	131	631	131.7	150	142	641
										2EH04505025	37.6	2	104.3	184.6	200	170	631	196.6	200	181	641
										2EH04507525	56.3	2	156.2	210.5	225	230	631	222.5	225	241	641
	230-3-60	28.2	240	34.0	240	2.3	30.0	6.7	8.7	None	-	-	-	123.3	150	132	633	132.0	150	142	642
										2EH04502525	23.0	1	57.7	126.4	150	132	633	137.3	150	142	642
										2EH04505025	45.9	2	115.2	198.3	200	182	633	209.1	225	192	642
										2EH04507525	68.9	2	172.9	227.2	250	249	633	238.0	250	259	642
	460-3-60	14.7	130	16.0	140	1.3	14.3	3.4	4.3	None	-	-	-	61.0	70	66	348	65.3	80	70	353
										2EH04502546	23.0	1	28.8	62.4	70	66	348	67.8	80	70	353
										2EH04505046	45.9	2	57.6	98.4	100	91	348	103.8	110	95	353
										2EH04507546	68.9	2	86.4	112.8	125	124	348	118.2	125	129	353
	575-3-60	11.3	94	12.9	108	1.0	11.5	2.7	3.5	None	-	-	-	48.3	60	52	267	51.8	60	56	271
										2EH04502558	23.0	1	23.0	49.9	60	52	267	54.3	60	56	271
										2EH04505058	45.9	2	46.0	78.6	80	72	267	83.0	90	76	271
										2EH04507558	68.9	2	69.1	90.2	100	99	267	94.6	100	103	271

Table 65: AD15 to AD28 VFD 2 stage high static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	41.0	304	41.0	304	2.0	39.6	6.7	9.6	None	-	-	-	153.3	175	164	797	162.9	200	175	807
										2EH04502525	18.8	1	52.1	153.3	175	164	797	162.9	200	175	807
										2EH04505025	37.6	2	104.3	196.6	200	181	797	208.6	225	192	807
										2EH04507525	56.3	2	156.2	222.5	250	241	797	234.5	250	252	807
	230-3-60	41.0	304	41.0	304	2.3	39.6	6.7	8.7	None	-	-	-	154.5	175	166	799	163.2	200	176	808
										2EH04502525	23.0	1	57.7	154.5	175	166	799	163.2	200	176	808
										2EH04505025	45.9	2	115.2	210.3	225	193	799	221.1	225	203	808
										2EH04507525	68.9	2	172.9	239.2	250	260	799	250.0	250	270	808
	460-3-60	19.2	147	19.2	147	1.3	18.7	3.4	4.3	None	-	-	-	73.9	90	79	391	78.2	90	84	396
										2EH04502546	23.0	1	28.8	73.9	90	79	391	78.2	90	84	396
										2EH04505046	45.9	2	57.6	103.9	110	96	391	109.3	110	101	396
										2EH04507546	68.9	2	86.4	118.3	125	129	391	123.7	125	134	396
	575-3-60	16.7	122	16.7	122	1.0	14.2	2.7	3.5	None	-	-	-	61.2	70	66	340	64.7	80	70	344
										2EH04502558	23.0	1	23.0	61.2	70	66	340	64.7	80	70	344
										2EH04505058	45.9	2	46.0	82.0	90	75	340	86.4	90	79	344
										2EH04507558	68.9	2	69.1	93.6	100	102	340	98.0	110	106	344
28 (27.5)	208-3-60	51.3	300	51.3	300	2.1	39.6	6.7	9.6	None	-	-	-	176.8	225	189	821	186.4	225	200	831
										2EH04502525	18.8	1	52.1	176.8	225	189	821	186.4	225	200	831
										2EH04505025	37.6	2	104.3	196.6	225	189	821	208.6	225	200	831
										2EH04507525	56.3	2	156.2	222.5	250	241	821	234.5	250	252	831
	230-3-60	51.3	300	51.3	300	2.1	39.6	6.7	8.7	None	-	-	-	176.8	225	189	821	185.5	225	199	830
										2EH04502525	23.0	1	57.7	176.8	225	189	821	185.5	225	199	830
										2EH04505025	45.9	2	115.2	210.3	225	193	821	221.1	225	203	830
										2EH04507525	68.9	2	172.9	239.2	250	260	821	250.0	250	270	830
	460-3-60	23.1	150	23.1	150	1.1	18.7	3.4	4.3	None	-	-	-	81.9	100	88	412	86.2	100	92	416
										2EH04502546	23.0	1	28.8	81.9	100	88	412	86.2	100	92	416
										2EH04505046	45.9	2	57.6	103.9	110	96	412	109.3	110	101	416
										2EH04507546	68.9	2	86.4	118.3	125	129	412	123.7	125	134	416
	575-3-60	19.9	109	19.9	109	0.9	14.2	2.7	3.5	None	-	-	-	68.0	80	72	302	71.5	90	76	305
										2EH04502558	23.0	1	23.0	68.0	80	72	302	71.5	90	76	305
										2EH04505058	45.9	2	46.0	82.0	90	75	302	86.4	90	79	305
										2EH04507558	68.9	2	69.1	93.6	100	102	302	98.0	110	106	305

VFD 4 stage standard static

Table 66: AD15 to AD28 VFD 4 stage standard static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	13.2	9.6	None	-	-	-	76.0	100	80	426	85.6	110	91	435
											2EH04502525	18.8	1	52.1	81.6	100	80	426	93.6	110	91	435
											2EH04505025	37.6	2	104.3	146.9	150	135	426	158.9	175	146	435
											2EH04507525	56.3	2	156.2	172.7	200	195	426	184.7	200	206	435
	230-3-60	26.9	164	25.0	190			2.1	13.2	8.7	None	-	-	-	76.0	100	80	433	84.7	110	90	442
											2EH04502525	23.0	1	57.7	88.6	100	82	433	99.5	110	92	442
											2EH04505025	45.9	2	115.2	160.5	175	148	433	171.4	175	158	442
											2EH04507525	68.9	2	172.9	189.4	225	214	433	200.3	225	224	442
	460-3-60	12.0	94	12.2	100			1.1	6.1	4.3	None	-	-	-	35.6	45	37	234	39.9	50	42	238
											2EH04502546	23.0	1	28.8	43.6	45	40	234	49.0	50	45	238
											2EH04505046	45.9	2	57.6	79.6	80	73	234	85.0	90	78	238
											2EH04507546	68.9	2	86.4	94.0	110	106	234	99.4	110	111	238
	575-3-60	9.0	65	9.3	72			0.9	4.9	3.5	None	-	-	-	27.3	35	29	167	30.8	40	33	171
											2EH04502558	23.0	1	23.0	34.9	35	32	167	39.3	40	36	171
											2EH04505058	45.9	2	46.0	63.6	70	59	167	68.0	70	63	171
											2EH04507558	68.9	2	69.1	75.2	90	85	167	79.6	90	89	171
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	13.2	9.6	None	-	-	-	81.6	110	86	546	91.2	110	97	555
											2EH04502525	18.8	1	52.1	81.6	110	86	546	93.6	110	97	555
											2EH04505025	37.6	2	104.3	146.9	150	135	546	158.9	175	146	555
											2EH04507525	56.3	2	156.2	172.7	200	195	546	184.7	200	206	555
	230-3-60	28.8	223	28.2	240			2.1	13.2	8.7	None	-	-	-	81.6	110	86	554	90.3	110	96	562
											2EH04502525	23.0	1	57.7	88.6	110	86	554	99.5	110	96	562
											2EH04505025	45.9	2	115.2	160.5	175	148	554	171.4	175	158	562
											2EH04507525	68.9	2	172.9	189.4	225	214	554	200.3	225	224	562
	460-3-60	12.5	100	14.7	130			1.1	6.1	4.3	None	-	-	-	39.2	50	41	276	43.5	50	46	280
											2EH04502546	23.0	1	28.8	43.6	50	41	276	49.0	50	46	280
											2EH04505046	45.9	2	57.6	79.6	80	73	276	85.0	90	78	280
											2EH04507546	68.9	2	86.4	94.0	110	106	276	99.4	110	111	280
	575-3-60	9.7	70	11.3	94			0.9	4.9	3.5	None	-	-	-	30.5	40	32	208	34.0	45	36	212
											2EH04502558	23.0	1	23.0	34.9	40	32	208	39.3	45	36	212
											2EH04505058	45.9	2	46.0	63.6	70	59	208	68.0	70	63	212
											2EH04507558	68.9	2	69.1	75.2	90	85	208	79.6	90	89	212
20 (20)	208-3-60	32.6	240	34.0	240			2.0	20.4	9.6	None	-	-	-	103.5	125	109	600	113.1	125	120	610
											2EH04502525	18.8	1	52.1	103.5	125	109	600	113.1	125	120	610
											2EH04505025	37.6	2	104.3	155.9	175	143	600	167.9	175	154	610
											2EH04507525	56.3	2	156.2	181.7	200	203	600	193.7	200	214	610
	230-3-60	32.6	240	34.0	240			2.3	20.4	8.7	None	-	-	-	104.7	125	111	602	113.4	125	121	610
											2EH04502525	23.0	1	57.7	104.7	125	111	602	113.4	125	121	610
											2EH04505025	45.9	2	115.2	169.5	175	156	602	180.4	200	166	610
											2EH04507525	68.9	2	172.9	198.4	225	222	602	209.3	225	232	610
	460-3-60	14.8	130	16.0	140			1.3	9.9	4.3	None	-	-	-	49.9	60	53	333	54.2	70	58	337
											2EH04502546	23.0	1	28.8	49.9	60	53	333	54.2	70	58	337
											2EH04505046	45.9	2	57.6	84.4	90	78	333	89.8	90	83	337
											2EH04507546	68.9	2	86.4	98.8	110	111	333	104.2	110	116	337
	575-3-60	11.1	94	12.9	108			1.0	7.7	3.5	None	-	-	-	38.9	50	41	251	42.4	50	45	255
											2EH04502558	23.0	1	23.0	38.9	50	41	251	42.8	50	45	255
											2EH04505058	45.9	2	46.0	67.1	70	62	251	71.5	80	66	255
											2EH04507558	68.9	2	69.1	78.7	90	88	251	83.1	90	92	255

Table 66: AD15 to AD28 VFD 4 stage standard static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	20.4	9.6	None	-	-	-	124.5	150	131	722	134.1	175	142	732
											2EH04502525	18.8	1	52.1	124.5	150	131	722	134.1	175	142	732
											2EH04505025	37.6	2	104.3	155.9	175	143	722	167.9	175	154	732
											2EH04507525	56.3	2	156.2	181.7	200	203	722	193.7	200	214	732
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	20.4	8.7	None	-	-	-	125.7	150	133	724	134.4	175	143	732
											2EH04502525	23.0	1	57.7	125.7	150	133	724	134.4	175	143	732
											2EH04505025	45.9	2	115.2	169.5	175	156	724	180.4	200	166	732
											2EH04507525	68.9	2	172.9	198.4	225	222	724	209.3	225	232	732
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	9.9	4.3	None	-	-	-	60.3	70	64	360	64.6	80	69	364
											2EH04502546	23.0	1	28.8	60.3	70	64	360	64.6	80	69	364
											2EH04505046	45.9	2	57.6	84.4	90	78	360	89.8	90	83	364
											2EH04507546	68.9	2	86.4	98.8	110	111	360	104.2	110	116	364
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	7.7	3.5	None	-	-	-	48.0	60	50	279	51.5	60	54	283
											2EH04502558	23.0	1	23.0	48.0	60	50	279	51.5	60	54	283
											2EH04505058	45.9	2	46.0	67.1	70	62	279	71.5	80	66	283
											2EH04507558	68.9	2	69.1	78.7	90	88	279	83.1	90	92	283
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	30.0	9.6	None	-	-	-	152.5	200	161	768	162.1	200	172	778
											2EH04502525	18.8	1	52.1	152.5	200	161	768	162.1	200	172	778
											2EH04505025	37.6	2	104.3	167.9	200	161	768	179.9	200	172	778
											2EH04507525	56.3	2	156.2	193.7	200	214	768	205.7	225	225	778
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	30.0	8.7	None	-	-	-	152.5	200	161	768	161.2	200	171	777
											2EH04502525	23.0	1	57.7	152.5	200	161	768	161.2	200	171	777
											2EH04505025	45.9	2	115.2	181.5	200	167	768	192.4	200	177	777
											2EH04507525	68.9	2	172.9	210.4	225	233	768	221.3	225	243	777
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	14.3	4.3	None	-	-	-	73.2	90	78	421	77.5	100	82	426
											2EH04502546	23.0	1	28.8	73.2	90	78	421	77.5	100	82	426
											2EH04505046	45.9	2	57.6	89.9	90	83	421	95.3	100	88	426
											2EH04507546	68.9	2	86.4	104.3	110	116	421	109.7	110	121	426
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	11.5	3.5	None	-	-	-	59.2	70	62	324	62.7	80	66	327
											2EH04502558	23.0	1	23.0	59.2	70	62	324	62.7	80	66	327
											2EH04505058	45.9	2	46.0	71.9	80	66	324	76.3	80	70	327
											2EH04507558	68.9	2	69.1	83.5	90	93	324	87.9	90	97	327

Table 67: AD15 to AD28 VFD 4 stage standard static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/ 120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	13.2	5.0	9.6	None	-	-	-	86.0	110	91	447	95.6	110	102	456
												2EH04502525	18.8	1	52.1	94.1	110	91	447	106.1	110	102	456
												2EH04505025	37.6	2	104.3	159.4	175	147	447	171.4	175	158	456
												2EH04507525	56.3	2	156.2	185.2	200	206	447	197.2	200	217	456
	230-3-60	26.9	164	25.0	190			2.1	13.2	5.0	8.7	None	-	-	-	86.0	110	91	454	94.7	110	101	463
												2EH04502525	23.0	1	57.7	101.1	110	93	454	112.0	125	103	463
												2EH04505025	45.9	2	115.2	173.0	175	159	454	183.9	200	169	463
												2EH04507525	68.9	2	172.9	201.9	225	226	454	212.8	225	236	463
	460-3-60	12.0	94	12.2	100			1.1	6.1	2.2	4.3	None	-	-	-	40.0	50	42	243	44.3	50	47	248
												2EH04502546	23.0	1	28.8	49.1	50	45	243	54.5	60	50	248
												2EH04505046	45.9	2	57.6	85.1	90	78	243	90.5	100	83	248
												2EH04507546	68.9	2	86.4	99.5	110	111	243	104.9	110	116	248
	575-3-60	9.0	65	9.3	72			0.9	4.9	1.5	3.5	None	-	-	-	30.3	35	32	174	33.8	40	36	177
												2EH04502558	23.0	1	23.0	38.6	40	36	174	43.0	45	40	177
												2EH04505058	45.9	2	46.0	67.4	70	62	174	71.8	80	66	177
												2EH04507558	68.9	2	69.1	79.0	90	89	174	83.4	90	93	177
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	13.2	5.0	9.6	None	-	-	-	91.6	110	97	567	101.2	125	108	576
												2EH04502525	18.8	1	52.1	94.1	110	97	567	106.1	125	108	576
												2EH04505025	37.6	2	104.3	159.4	175	147	567	171.4	175	158	576
												2EH04507525	56.3	2	156.2	185.2	200	206	567	197.2	200	217	576
	230-3-60	28.8	223	28.2	240			2.1	13.2	5.0	8.7	None	-	-	-	91.6	110	97	575	100.3	125	107	583
												2EH04502525	23.0	1	57.7	101.1	110	97	575	112.0	125	107	583
												2EH04505025	45.9	2	115.2	173.0	175	159	575	183.9	200	169	583
												2EH04507525	68.9	2	172.9	201.9	225	226	575	212.8	225	236	583
	460-3-60	12.5	100	14.7	130			1.1	6.1	2.2	4.3	None	-	-	-	43.6	50	46	285	47.9	60	51	289
												2EH04502546	23.0	1	28.8	49.1	50	46	285	54.5	60	51	289
												2EH04505046	45.9	2	57.6	85.1	90	78	285	90.5	100	83	289
												2EH04507546	68.9	2	86.4	99.5	110	111	285	104.9	110	116	289
	575-3-60	9.7	70	11.3	94			0.9	4.9	1.5	3.5	None	-	-	-	33.5	40	35	214	37.0	45	39	218
												2EH04502558	23.0	1	23.0	38.6	40	36	214	43.0	45	40	218
												2EH04505058	45.9	2	46.0	67.4	70	62	214	71.8	80	66	218
												2EH04507558	68.9	2	69.1	79.0	90	89	214	83.4	90	93	218
20 (20)	208-3-60	32.6	240	34.0	240			2.0	20.4	5.0	9.6	None	-	-	-	113.5	125	121	621	123.1	150	132	631
												2EH04502525	18.8	1	52.1	113.5	125	121	621	123.1	150	132	631
												2EH04505025	37.6	2	104.3	168.4	175	155	621	180.4	200	166	631
												2EH04507525	56.3	2	156.2	194.2	200	215	621	206.2	225	226	631
	230-3-60	32.6	240	34.0	240			2.3	20.4	5.0	8.7	None	-	-	-	114.7	125	122	623	123.4	150	132	631
												2EH04502525	23.0	1	57.7	114.7	125	122	623	123.4	150	132	631
												2EH04505025	45.9	2	115.2	182.0	200	167	623	192.9	200	177	631
												2EH04507525	68.9	2	172.9	210.9	225	234	623	221.8	225	244	631
	460-3-60	14.8	130	16.0	140			1.3	9.9	2.2	4.3	None	-	-	-	54.3	70	58	342	58.6	70	63	346
												2EH04502546	23.0	1	28.8	54.3	70	58	342	59.3	70	63	346
												2EH04505046	45.9	2	57.6	89.9	90	83	342	95.3	100	88	346
												2EH04507546	68.9	2	86.4	104.3	110	116	342	109.7	110	121	346
	575-3-60	11.1	94	12.9	108			1.0	7.7	1.5	3.5	None	-	-	-	41.9	50	45	258	45.4	50	49	261
												2EH04502558	23.0	1	23.0	42.1	50	45	258	46.5	50	49	261
												2EH04505058	45.9	2	46.0	70.9	80	65	258	75.3	80	69	261
												2EH04507558	68.9	2	69.1	82.5	90	92	258	86.9	90	96	261

Table 67: AD15 to AD28 VFD 4 stage standard static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/ 120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	20.4	5.0	9.6	None	-	-	-	134.5	175	143	743	144.1	175	154	753
												2EH04502525	18.8	1	52.1	134.5	175	143	743	144.1	175	154	753
												2EH04505025	37.6	2	104.3	168.4	175	155	743	180.4	200	166	753
												2EH04507525	56.3	2	156.2	194.2	200	215	743	206.2	225	226	753
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	20.4	5.0	8.7	None	-	-	-	135.7	175	144	745	144.4	175	154	753
												2EH04502525	23.0	1	57.7	135.7	175	144	745	144.4	175	154	753
												2EH04505025	45.9	2	115.2	182.0	200	167	745	192.9	200	177	753
												2EH04507525	68.9	2	172.9	210.9	225	234	745	221.8	225	244	753
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	9.9	2.2	4.3	None	-	-	-	64.7	80	69	369	69.0	80	74	373
												2EH04502546	23.0	1	28.8	64.7	80	69	369	69.0	80	74	373
												2EH04505046	45.9	2	57.6	89.9	90	83	369	95.3	100	88	373
												2EH04507546	68.9	2	86.4	104.3	110	116	369	109.7	110	121	373
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	7.7	1.5	3.5	None	-	-	-	51.0	60	54	286	54.5	70	58	289
												2EH04502558	23.0	1	23.0	51.0	60	54	286	54.5	70	58	289
												2EH04505058	45.9	2	46.0	70.9	80	65	286	75.3	80	69	289
												2EH04507558	68.9	2	69.1	82.5	90	92	286	86.9	90	96	289
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	30.0	5.0	9.6	None	-	-	-	162.5	200	172	789	172.1	200	183	799
												2EH04502525	18.8	1	52.1	162.5	200	172	789	172.1	200	183	799
												2EH04505025	37.6	2	104.3	180.4	200	172	789	192.4	200	183	799
												2EH04507525	56.3	2	156.2	206.2	225	226	789	218.2	225	237	799
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	30.0	5.0	8.7	None	-	-	-	162.5	200	172	789	171.2	200	182	798
												2EH04502525	23.0	1	57.7	162.5	200	172	789	171.2	200	182	798
												2EH04505025	45.9	2	115.2	194.0	200	178	789	204.9	225	188	798
												2EH04507525	68.9	2	172.9	222.9	250	245	789	233.8	250	255	798
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	14.3	2.2	4.3	None	-	-	-	77.6	100	83	430	81.9	100	88	435
												2EH04502546	23.0	1	28.8	77.6	100	83	430	81.9	100	88	435
												2EH04505046	45.9	2	57.6	95.4	100	88	430	100.8	110	93	435
												2EH04507546	68.9	2	86.4	109.8	110	121	430	115.2	125	126	435
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	11.5	1.5	3.5	None	-	-	-	62.2	80	66	330	65.7	80	70	334
												2EH04502558	23.0	1	23.0	62.2	80	66	330	65.7	80	70	334
												2EH04505058	45.9	2	46.0	75.6	80	70	330	80.0	80	74	334
												2EH04507558	68.9	2	69.1	87.2	90	96	330	91.6	100	100	334

Table 68: AD15 to AD28 VFD 4 stage standard static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	13.2	6.7	9.6	None	-	-	-	89.4	110	95	439	99.0	125	106	449
												2EH04502525	18.8	1	52.1	98.4	110	95	439	110.4	125	106	449
												2EH04505025	37.6	2	104.3	163.6	175	151	439	175.6	200	162	449
												2EH04507525	56.3	2	156.2	189.5	200	210	439	201.5	225	221	449
	230-3-60	26.9	164	25.0	190			2.1	13.2	6.7	8.7	None	-	-	-	89.4	110	95	446	98.1	125	105	455
												2EH04502525	23.0	1	57.7	105.4	110	97	446	116.3	125	107	455
												2EH04505025	45.9	2	115.2	177.3	200	163	446	188.1	200	173	455
												2EH04507525	68.9	2	172.9	206.2	225	229	446	217.0	225	239	455
	460-3-60	12.0	94	12.2	100			1.1	6.1	3.4	4.3	None	-	-	-	42.4	50	45	241	46.7	50	50	245
												2EH04502546	23.0	1	28.8	52.1	60	48	241	57.5	60	53	245
												2EH04505046	45.9	2	57.6	88.1	90	81	241	93.5	100	86	245
												2EH04507546	68.9	2	86.4	102.5	110	114	241	107.9	110	119	245
	575-3-60	9.0	65	9.3	72			0.9	4.9	2.7	3.5	None	-	-	-	32.7	40	35	173	36.2	45	39	176
												2EH04502558	23.0	1	23.0	41.6	45	38	173	46.0	50	42	176
												2EH04505058	45.9	2	46.0	70.4	80	65	173	74.8	80	69	176
												2EH04507558	68.9	2	69.1	82.0	90	91	173	86.4	90	95	176
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	13.2	6.7	9.6	None	-	-	-	95.0	110	101	559	104.6	125	112	569
												2EH04502525	18.8	1	52.1	98.4	110	101	559	110.4	125	112	569
												2EH04505025	37.6	2	104.3	163.6	175	151	559	175.6	200	162	569
												2EH04507525	56.3	2	156.2	189.5	200	210	559	201.5	225	221	569
	230-3-60	28.8	223	28.2	240			2.1	13.2	6.7	8.7	None	-	-	-	95.0	110	101	567	103.7	125	111	576
												2EH04502525	23.0	1	57.7	105.4	110	101	567	116.3	125	111	576
												2EH04505025	45.9	2	115.2	177.3	200	163	567	188.1	200	173	576
												2EH04507525	68.9	2	172.9	206.2	225	229	567	217.0	225	239	576
	460-3-60	12.5	100	14.7	130			1.1	6.1	3.4	4.3	None	-	-	-	46.0	60	49	283	50.3	60	54	287
												2EH04502546	23.0	1	28.8	52.1	60	49	283	57.5	60	54	287
												2EH04505046	45.9	2	57.6	88.1	90	81	283	93.5	100	86	287
												2EH04507546	68.9	2	86.4	102.5	110	114	283	107.9	110	119	287
	575-3-60	9.7	70	11.3	94			0.9	4.9	2.7	3.5	None	-	-	-	35.9	45	38	213	39.4	50	42	217
												2EH04502558	23.0	1	23.0	41.6	45	38	213	46.0	50	42	217
												2EH04505058	45.9	2	46.0	70.4	80	65	213	74.8	80	69	217
												2EH04507558	68.9	2	69.1	82.0	90	91	213	86.4	90	95	217
20 (20)	208-3-60	32.6	240	34.0	240			2.0	20.4	6.7	9.6	None	-	-	-	116.9	150	125	614	126.5	150	136	623
												2EH04502525	18.8	1	52.1	116.9	150	125	614	126.5	150	136	623
												2EH04505025	37.6	2	104.3	172.6	175	159	614	184.6	200	170	623
												2EH04507525	56.3	2	156.2	198.5	200	219	614	210.5	225	230	623
	230-3-60	32.6	240	34.0	240			2.3	20.4	6.7	8.7	None	-	-	-	118.1	150	126	615	126.8	150	136	624
												2EH04502525	23.0	1	57.7	118.1	150	126	615	126.8	150	136	624
												2EH04505025	45.9	2	115.2	186.3	200	171	615	197.1	200	181	624
												2EH04507525	68.9	2	172.9	215.2	225	238	615	226.0	250	248	624
	460-3-60	14.8	130	16.0	140			1.3	9.9	3.4	4.3	None	-	-	-	56.7	70	61	339	61.0	70	66	344
												2EH04502546	23.0	1	28.8	56.9	70	61	339	62.3	70	66	344
												2EH04505046	45.9	2	57.6	92.9	100	85	339	98.3	100	90	344
												2EH04507546	68.9	2	86.4	107.3	110	119	339	112.7	125	124	344
	575-3-60	11.1	94	12.9	108			1.0	7.7	2.7	3.5	None	-	-	-	44.3	50	47	257	47.8	60	51	260
												2EH04502558	23.0	1	23.0	45.1	50	47	257	49.5	60	51	260
												2EH04505058	45.9	2	46.0	73.9	80	68	257	78.3	80	72	260
												2EH04507558	68.9	2	69.1	85.5	90	95	257	89.9	90	99	260

Table 68: AD15 to AD28 VFD 4 stage standard static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	20.4	6.7	9.6	None	-	-	-	137.9	175	147	736	147.5	175	158	745
												2EH04502525	18.8	1	52.1	137.9	175	147	736	147.5	175	158	745
												2EH04505025	37.6	2	104.3	172.6	175	159	736	184.6	200	170	745
												2EH04507525	56.3	2	156.2	198.5	200	219	736	210.5	225	230	745
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	20.4	6.7	8.7	None	-	-	-	139.1	175	148	737	147.8	175	158	746
												2EH04502525	23.0	1	57.7	139.1	175	148	737	147.8	175	158	746
												2EH04505025	45.9	2	115.2	186.3	200	171	737	197.1	200	181	746
												2EH04507525	68.9	2	172.9	215.2	225	238	737	226.0	250	248	746
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	9.9	3.4	4.3	None	-	-	-	67.1	80	72	366	71.4	90	77	371
												2EH04502546	23.0	1	28.8	67.1	80	72	366	71.4	90	77	371
												2EH04505046	45.9	2	57.6	92.9	100	85	366	98.3	100	90	371
												2EH04507546	68.9	2	86.4	107.3	110	119	366	112.7	125	124	371
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	7.7	2.7	3.5	None	-	-	-	53.4	70	57	285	56.9	70	61	288
												2EH04502558	23.0	1	23.0	53.4	70	57	285	56.9	70	61	288
												2EH04505058	45.9	2	46.0	73.9	80	68	285	78.3	80	72	288
												2EH04507558	68.9	2	69.1	85.5	90	95	285	89.9	90	99	288
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	30.0	6.7	9.6	None	-	-	-	165.9	200	176	781	175.5	225	187	791
												2EH04502525	18.8	1	52.1	165.9	200	176	781	175.5	225	187	791
												2EH04505025	37.6	2	104.3	184.6	200	176	781	196.6	225	187	791
												2EH04507525	56.3	2	156.2	210.5	225	230	781	222.5	225	241	791
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	30.0	6.7	8.7	None	-	-	-	165.9	200	176	781	174.6	225	186	790
												2EH04502525	23.0	1	57.7	165.9	200	176	781	174.6	225	186	790
												2EH04505025	45.9	2	115.2	198.3	200	182	781	209.1	225	192	790
												2EH04507525	68.9	2	172.9	227.2	250	249	781	238.0	250	259	790
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	14.3	3.4	4.3	None	-	-	-	80.0	100	85	428	84.3	100	90	432
												2EH04502546	23.0	1	28.8	80.0	100	85	428	84.3	100	90	432
												2EH04505046	45.9	2	57.6	98.4	100	91	428	103.8	110	95	432
												2EH04507546	68.9	2	86.4	112.8	125	124	428	118.2	125	129	432
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	11.5	2.7	3.5	None	-	-	-	64.6	80	69	329	68.1	80	73	333
												2EH04502558	23.0	1	23.0	64.6	80	69	329	68.1	80	73	333
												2EH04505058	45.9	2	46.0	78.6	80	72	329	83.0	90	76	333
												2EH04507558	68.9	2	69.1	90.2	100	99	329	94.6	100	103	333

VFD 4 stage medium static

Table 69: AD15 to AD28 VFD 4 stage medium static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	13.2	9.6	None	-	-	-	76.0	100	80	437	85.6	110	91	446
											2EH04502525	18.8	1	52.1	81.6	100	80	437	93.6	110	91	446
											2EH04505025	37.6	2	104.3	146.9	150	135	437	158.9	175	146	446
											2EH04507525	56.3	2	156.2	172.7	200	195	437	184.7	200	206	446
	230-3-60	26.9	164	25.0	190			2.1	13.2	8.7	None	-	-	-	76.0	100	80	445	84.7	110	90	453
											2EH04502525	23.0	1	57.7	88.6	100	82	445	99.5	110	92	453
											2EH04505025	45.9	2	115.2	160.5	175	148	445	171.4	175	158	453
											2EH04507525	68.9	2	172.9	189.4	225	214	445	200.3	225	224	453
	460-3-60	12.0	94	12.2	100			1.1	6.1	4.3	None	-	-	-	35.6	45	37	240	39.9	50	42	244
											2EH04502546	23.0	1	28.8	43.6	45	40	240	49.0	50	45	244
											2EH04505046	45.9	2	57.6	79.6	80	73	240	85.0	90	78	244
											2EH04507546	68.9	2	86.4	94.0	110	106	240	99.4	110	111	244
	575-3-60	9.0	65	9.3	72			0.9	4.9	3.5	None	-	-	-	27.3	35	29	181	30.8	40	33	185
											2EH04502558	23.0	1	23.0	34.9	35	32	181	39.3	40	36	185
											2EH04505058	45.9	2	46.0	63.6	70	59	181	68.0	70	63	185
											2EH04507558	68.9	2	69.1	75.2	90	85	181	79.6	90	89	185
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	20.4	9.6	None	-	-	-	88.8	110	94	576	98.4	125	105	585
											2EH04502525	18.8	1	52.1	90.6	110	94	576	102.6	125	105	585
											2EH04505025	37.6	2	104.3	155.9	175	143	576	167.9	175	154	585
											2EH04507525	56.3	2	156.2	181.7	200	203	576	193.7	200	214	585
	230-3-60	28.8	223	28.2	240			2.1	20.4	8.7	None	-	-	-	88.8	110	94	575	97.5	125	104	584
											2EH04502525	23.0	1	57.7	97.6	110	94	575	108.5	125	104	584
											2EH04505025	45.9	2	115.2	169.5	175	156	575	180.4	200	166	584
											2EH04507525	68.9	2	172.9	198.4	225	222	575	209.3	225	232	584
	460-3-60	12.5	100	14.7	130			1.1	9.9	4.3	None	-	-	-	43.0	50	45	287	47.3	60	50	291
											2EH04502546	23.0	1	28.8	48.4	50	45	287	53.8	60	50	291
											2EH04505046	45.9	2	57.6	84.4	90	78	287	89.8	90	83	291
											2EH04507546	68.9	2	86.4	98.8	110	111	287	104.2	110	116	291
	575-3-60	9.7	70	11.3	94			0.9	7.7	3.5	None	-	-	-	33.3	40	35	208	36.8	45	39	212
											2EH04502558	23.0	1	23.0	38.4	40	35	208	42.8	45	39	212
											2EH04505058	45.9	2	46.0	67.1	70	62	208	71.5	80	66	212
											2EH04507558	68.9	2	69.1	78.7	90	88	208	83.1	90	92	212
20 (20)	208-3-60	32.6	240	34.0	240			2.0	20.4	9.6	None	-	-	-	103.5	125	109	600	113.1	125	120	610
											2EH04502525	18.8	1	52.1	103.5	125	109	600	113.1	125	120	610
											2EH04505025	37.6	2	104.3	155.9	175	143	600	167.9	175	154	610
											2EH04507525	56.3	2	156.2	181.7	200	203	600	193.7	200	214	610
	230-3-60	32.6	240	34.0	240			2.3	20.4	8.7	None	-	-	-	104.7	125	111	602	113.4	125	121	610
											2EH04502525	23.0	1	57.7	104.7	125	111	602	113.4	125	121	610
											2EH04505025	45.9	2	115.2	169.5	175	156	602	180.4	200	166	610
											2EH04507525	68.9	2	172.9	198.4	225	222	602	209.3	225	232	610
	460-3-60	14.8	130	16.0	140			1.3	9.9	4.3	None	-	-	-	49.9	60	53	333	54.2	70	58	337
											2EH04502546	23.0	1	28.8	49.9	60	53	333	54.2	70	58	337
											2EH04505046	45.9	2	57.6	84.4	90	78	333	89.8	90	83	337
											2EH04507546	68.9	2	86.4	98.8	110	111	333	104.2	110	116	337
	575-3-60	11.1	94	12.9	108			1.0	7.7	3.5	None	-	-	-	38.9	50	41	251	42.4	50	45	255
											2EH04502558	23.0	1	23.0	38.9	50	41	251	42.8	50	45	255
											2EH04505058	45.9	2	46.0	67.1	70	62	251	71.5	80	66	255
											2EH04507558	68.9	2	69.1	78.7	90	88	251	83.1	90	92	255

Table 69: AD15 to AD28 VFD 4 stage medium static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	30.0	9.6	None	-	-	-	134.1	175	142	740	143.7	175	153	749
											2EH04502525	18.8	1	52.1	134.1	175	142	740	143.7	175	153	749
											2EH04505025	37.6	2	104.3	167.9	175	154	740	179.9	200	165	749
											2EH04507525	56.3	2	156.2	193.7	200	214	740	205.7	225	225	749
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	30.0	8.7	None	-	-	-	135.3	175	144	742	144.0	175	154	750
											2EH04502525	23.0	1	57.7	135.3	175	144	742	144.0	175	154	750
											2EH04505025	45.9	2	115.2	181.5	200	167	742	192.4	200	177	750
											2EH04507525	68.9	2	172.9	210.4	225	233	742	221.3	225	243	750
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	14.3	4.3	None	-	-	-	64.7	80	69	369	69.0	80	74	373
											2EH04502546	23.0	1	28.8	64.7	80	69	369	69.0	80	74	373
											2EH04505046	45.9	2	57.6	89.9	90	83	369	95.3	100	88	373
											2EH04507546	68.9	2	86.4	104.3	110	116	369	109.7	110	121	373
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	11.5	3.5	None	-	-	-	51.8	60	55	290	55.3	70	59	294
											2EH04502558	23.0	1	23.0	51.8	60	55	290	55.3	70	59	294
											2EH04505058	45.9	2	46.0	71.9	80	66	290	76.3	80	70	294
											2EH04507558	68.9	2	69.1	83.5	90	93	290	87.9	90	97	294
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	39.6	9.6	None	-	-	-	162.1	200	172	806	171.7	200	183	816
											2EH04502525	18.8	1	52.1	162.1	200	172	806	171.7	200	183	816
											2EH04505025	37.6	2	104.3	179.9	200	172	806	191.9	200	183	816
											2EH04507525	56.3	2	156.2	205.7	225	225	806	217.7	250	236	816
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	39.6	8.7	None	-	-	-	162.1	200	172	806	170.8	200	182	815
											2EH04502525	23.0	1	57.7	162.1	200	172	806	170.8	200	182	815
											2EH04505025	45.9	2	115.2	193.5	200	178	806	204.4	225	188	815
											2EH04507525	68.9	2	172.9	222.4	250	244	806	233.3	250	254	815
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	18.7	4.3	None	-	-	-	77.6	100	83	440	81.9	100	88	445
											2EH04502546	23.0	1	28.8	77.6	100	83	440	81.9	100	88	445
											2EH04505046	45.9	2	57.6	95.4	100	88	440	100.8	110	93	445
											2EH04507546	68.9	2	86.4	109.8	125	121	440	115.2	125	126	445
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	14.2	3.5	None	-	-	-	61.9	80	65	355	65.4	80	69	358
											2EH04502558	23.0	1	23.0	61.9	80	65	355	65.4	80	69	358
											2EH04505058	45.9	2	46.0	75.3	80	69	355	79.6	80	73	358
											2EH04507558	68.9	2	69.1	86.9	100	96	355	91.2	100	100	358

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans	Max f/b size with 120V trans A	Min disconnect rating/120V trans		
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			A	FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	13.2	5.0	9.6	None	-	-	-	86.0	110	91	458	95.6	110	102	467	
												2EH04502525	18.8	1	52.1	94.1	110	91	458	106.1	110	102	467	
												2EH04505025	37.6	2	104.3	159.4	175	147	458	171.4	175	158	467	
												2EH04507525	56.3	2	156.2	185.2	200	206	458	197.2	200	217	467	
	230-3-60	26.9	164	25.0	190			2.1	13.2	5.0	8.7	None	-	-	-	86.0	110	91	466	94.7	110	101	474	
												2EH04502525	23.0	1	57.7	101.1	110	93	466	112.0	125	103	474	
												2EH04505025	45.9	2	115.2	173.0	175	159	466	183.9	200	169	474	
												2EH04507525	68.9	2	172.9	201.9	225	226	466	212.8	225	236	474	
	460-3-60	12.0	94	12.2	100			1.1	6.1	2.2	4.3	None	-	-	-	40.0	50	42	249	44.3	50	47	253	
												2EH04502546	23.0	1	28.8	49.1	50	45	249	54.5	60	50	253	
												2EH04505046	45.9	2	57.6	85.1	90	78	249	90.5	100	83	253	
												2EH04507546	68.9	2	86.4	99.5	110	111	249	104.9	110	116	253	
	575-3-60	9.0	65	9.3	72			0.9	4.9	1.5	3.5	None	-	-	-	30.3	35	32	187	33.8	40	36	191	
												2EH04502558	23.0	1	23.0	38.6	40	36	187	43.0	45	40	191	
												2EH04505058	45.9	2	46.0	67.4	70	62	187	71.8	80	66	191	
												2EH04507558	68.9	2	69.1	79.0	90	89	187	83.4	90	93	191	
	18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	20.4	5.0	9.6	None	-	-	-	98.8	125	105	597	108.4	125	116	606
													2EH04502525	18.8	1	52.1	103.1	125	105	597	115.1	125	116	606
													2EH04505025	37.6	2	104.3	168.4	175	155	597	180.4	200	166	606
													2EH04507525	56.3	2	156.2	194.2	200	215	597	206.2	225	226	606
230-3-60		28.8	223	28.2	240			2.1	20.4	5.0	8.7	None	-	-	-	98.8	125	105	596	107.5	125	115	605	
												2EH04502525	23.0	1	57.7	110.1	125	105	596	121.0	125	115	605	
												2EH04505025	45.9	2	115.2	182.0	200	167	596	192.9	200	177	605	
												2EH04507525	68.9	2	172.9	210.9	225	234	596	221.8	225	244	605	
460-3-60		12.5	100	14.7	130			1.1	9.9	2.2	4.3	None	-	-	-	47.4	60	50	296	51.7	60	55	300	
												2EH04502546	23.0	1	28.8	53.9	60	50	296	59.3	60	55	300	
												2EH04505046	45.9	2	57.6	89.9	90	83	29					

Table 70: AD15 to AD28 VFD 4 stage medium static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	30.0	5.0	9.6	None	-	-	-	144.1	175	154	761	153.7	175	165	770
												2EH04502525	18.8	1	52.1	144.1	175	154	761	153.7	175	165	770
												2EH04505025	37.6	2	104.3	180.4	200	166	761	192.4	200	177	770
												2EH04507525	56.3	2	156.2	206.2	225	226	761	218.2	225	237	770
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	30.0	5.0	8.7	None	-	-	-	145.3	175	155	763	154.0	175	165	771
												2EH04502525	23.0	1	57.7	145.3	175	155	763	154.0	175	165	771
												2EH04505025	45.9	2	115.2	194.0	200	178	763	204.9	225	188	771
												2EH04507525	68.9	2	172.9	222.9	250	245	763	233.8	250	255	771
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	14.3	2.2	4.3	None	-	-	-	69.1	80	74	378	73.4	90	79	382
												2EH04502546	23.0	1	28.8	69.1	80	74	378	73.4	90	79	382
												2EH04505046	45.9	2	57.6	95.4	100	88	378	100.8	110	93	382
												2EH04507546	68.9	2	86.4	109.8	110	121	378	115.2	125	126	382
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	11.5	1.5	3.5	None	-	-	-	54.8	70	58	296	58.3	70	62	300
												2EH04502558	23.0	1	23.0	54.8	70	58	296	58.3	70	62	300
												2EH04505058	45.9	2	46.0	75.6	80	70	296	80.0	90	74	300
												2EH04507558	68.9	2	69.1	87.2	90	96	296	91.6	100	100	300
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	39.6	5.0	9.6	None	-	-	-	172.1	200	183	827	181.7	225	194	837
												2EH04502525	18.8	1	52.1	172.1	200	183	827	181.7	225	194	837
												2EH04505025	37.6	2	104.3	192.4	200	183	827	204.4	225	194	837
												2EH04507525	56.3	2	156.2	218.2	250	237	827	230.2	250	248	837
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	39.6	5.0	8.7	None	-	-	-	172.1	200	183	827	180.8	225	193	836
												2EH04502525	23.0	1	57.7	172.1	200	183	827	180.8	225	193	836
												2EH04505025	45.9	2	115.2	206.0	225	190	827	216.9	225	200	836
												2EH04507525	68.9	2	172.9	234.9	250	256	827	245.8	250	266	836
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	18.7	2.2	4.3	None	-	-	-	82.0	100	88	449	86.3	100	93	454
												2EH04502546	23.0	1	28.8	82.0	100	88	449	86.3	100	93	454
												2EH04505046	45.9	2	57.6	100.9	110	93	449	106.3	110	98	454
												2EH04507546	68.9	2	86.4	115.3	125	126	449	120.7	125	131	454
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	14.2	1.5	3.5	None	-	-	-	64.9	80	69	361	68.4	80	73	364
												2EH04502558	23.0	1	23.0	64.9	80	69	361	68.4	80	73	364
												2EH04505058	45.9	2	46.0	79.0	80	73	361	83.4	90	77	364
												2EH04507558	68.9	2	69.1	90.6	100	99	361	95.0	100	103	364

Table 71: AD15 to AD28 VFD 4 stage medium static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	13.2	6.7	9.6	None	-	-	-	89.4	110	95	450	99.0	125	106	460
												2EH04502525	18.8	1	52.1	98.4	110	95	450	110.4	125	106	460
												2EH04505025	37.6	2	104.3	163.6	175	151	450	175.6	200	162	460
												2EH04507525	56.3	2	156.2	189.5	200	210	450	201.5	225	221	460
	230-3-60	26.9	164	25.0	190			2.1	13.2	6.7	8.7	None	-	-	-	89.4	110	95	458	98.1	125	105	467
												2EH04502525	23.0	1	57.7	105.4	110	97	458	116.3	125	107	467
												2EH04505025	45.9	2	115.2	177.3	200	163	458	188.1	200	173	467
												2EH04507525	68.9	2	172.9	206.2	225	229	458	217.0	225	239	467
	460-3-60	12.0	94	12.2	100			1.1	6.1	3.4	4.3	None	-	-	-	42.4	50	45	247	46.7	50	50	251
												2EH04502546	23.0	1	28.8	52.1	60	48	247	57.5	60	53	251
												2EH04505046	45.9	2	57.6	88.1	90	81	247	93.5	100	86	251
												2EH04507546	68.9	2	86.4	102.5	110	114	247	107.9	110	119	251
	575-3-60	9.0	65	9.3	72			0.9	4.9	2.7	3.5	None	-	-	-	32.7	40	35	186	36.2	45	39	190
												2EH04502558	23.0	1	23.0	41.6	45	38	186	46.0	50	42	190
												2EH04505058	45.9	2	46.0	70.4	80	65	186	74.8	80	69	190
												2EH04507558	68.9	2	69.1	82.0	90	91	186	86.4	90	95	190
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	20.4	6.7	9.6	None	-	-	-	102.2	125	109	589	111.8	125	120	599
												2EH04502525	18.8	1	52.1	107.4	125	109	589	119.4	125	120	599
												2EH04505025	37.6	2	104.3	172.6	175	159	589	184.6	200	170	599
												2EH04507525	56.3	2	156.2	198.5	200	219	589	210.5	225	230	599
	230-3-60	28.8	223	28.2	240			2.1	20.4	6.7	8.7	None	-	-	-	102.2	125	109	588	110.9	125	119	597
												2EH04502525	23.0	1	57.7	114.4	125	109	588	125.3	150	119	597
												2EH04505025	45.9	2	115.2	186.3	200	171	588	197.1	200	181	597
												2EH04507525	68.9	2	172.9	215.2	225	238	588	226.0	250	248	597
	460-3-60	12.5	100	14.7	130			1.1	9.9	3.4	4.3	None	-	-	-	49.8	60	53	293	54.1	60	58	298
												2EH04502546	23.0	1	28.8	56.9	60	53	293	62.3	70	58	298
												2EH04505046	45.9	2	57.6	92.9	100	85	293	98.3	100	90	298
												2EH04507546	68.9	2	86.4	107.3	110	119	293	112.7	125	124	298
	575-3-60	9.7	70	11.3	94			0.9	7.7	2.7	3.5	None	-	-	-	38.7	50	41	213	42.2	50	45	217
												2EH04502558	23.0	1	23.0	45.1	50	42	213	49.5	50	46	217
												2EH04505058	45.9	2	46.0	73.9	80	68	213	78.3	80	72	217
												2EH04507558	68.9	2	69.1	85.5	90	95	213	89.9	90	99	217
20 (20)	208-3-60	32.6	240	34.0	240			2.0	20.4	6.7	9.6	None	-	-	-	116.9	150	125	614	126.5	150	136	623
												2EH04502525	18.8	1	52.1	116.9	150	125	614	126.5	150	136	623
												2EH04505025	37.6	2	104.3	172.6	175	159	614	184.6	200	170	623
												2EH04507525	56.3	2	156.2	198.5	200	219	614	210.5	225	230	623
	230-3-60	32.6	240	34.0	240			2.3	20.4	6.7	8.7	None	-	-	-	118.1	150	126	615	126.8	150	136	624
												2EH04502525	23.0	1	57.7	118.1	150	126	615	126.8	150	136	624
												2EH04505025	45.9	2	115.2	186.3	200	171	615	197.1	200	181	624
												2EH04507525	68.9	2	172.9	215.2	225	238	615	226.0	250	248	624
	460-3-60	14.8	130	16.0	140			1.3	9.9	3.4	4.3	None	-	-	-	56.7	70	61	339	61.0	70	66	344
												2EH04502546	23.0	1	28.8	56.9	70	61	339	62.3	70	66	344
												2EH04505046	45.9	2	57.6	92.9	100	85	339	98.3	100	90	344
												2EH04507546	68.9	2	86.4	107.3	110	119	339	112.7	125	124	344
	575-3-60	11.1	94	12.9	108			1.0	7.7	2.7	3.5	None	-	-	-	44.3	50	47	257	47.8	60	51	260
												2EH04502558	23.0	1	23.0	45.1	50	47	257	49.5	60	51	260
												2EH04505058	45.9	2	46.0	73.9	80	68	257	78.3	80	72	260
												2EH04507558	68.9	2	69.1	85.5	90	95	257	89.9	90	99	260

Table 71: AD15 to AD28 VFD 4 stage medium static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	30.0	6.7	9.6	None	-	-	-	147.5	175	158	753	157.1	175	169	763
												2EH04502525	18.8	1	52.1	147.5	175	158	753	157.1	175	169	763
												2EH04505025	37.6	2	104.3	184.6	200	170	753	196.6	200	181	763
												2EH04507525	56.3	2	156.2	210.5	225	230	753	222.5	225	241	763
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	30.0	6.7	8.7	None	-	-	-	148.7	175	159	755	157.4	175	169	764
												2EH04502525	23.0	1	57.7	148.7	175	159	755	157.4	175	169	764
												2EH04505025	45.9	2	115.2	198.3	200	182	755	209.1	225	192	764
												2EH04507525	68.9	2	172.9	227.2	250	249	755	238.0	250	259	764
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	14.3	3.4	4.3	None	-	-	-	71.5	90	77	375	75.8	90	82	380
												2EH04502546	23.0	1	28.8	71.5	90	77	375	75.8	90	82	380
												2EH04505046	45.9	2	57.6	98.4	100	91	375	103.8	110	95	380
												2EH04507546	68.9	2	86.4	112.8	125	124	375	118.2	125	129	380
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	11.5	2.7	3.5	None	-	-	-	57.2	70	61	295	60.7	70	65	299
												2EH04502558	23.0	1	23.0	57.2	70	61	295	60.7	70	65	299
												2EH04505058	45.9	2	46.0	78.6	80	72	295	83.0	90	76	299
												2EH04507558	68.9	2	69.1	90.2	100	99	295	94.6	100	103	299
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	39.6	6.7	9.6	None	-	-	-	175.5	225	187	819	185.1	225	198	829
												2EH04502525	18.8	1	52.1	175.5	225	187	819	185.1	225	198	829
												2EH04505025	37.6	2	104.3	196.6	225	187	819	208.6	225	198	829
												2EH04507525	56.3	2	156.2	222.5	250	241	819	234.5	250	252	829
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	39.6	6.7	8.7	None	-	-	-	175.5	225	187	819	184.2	225	197	828
												2EH04502525	23.0	1	57.7	175.5	225	187	819	184.2	225	197	828
												2EH04505025	45.9	2	115.2	210.3	225	193	819	221.1	225	203	828
												2EH04507525	68.9	2	172.9	239.2	250	260	819	250.0	250	270	828
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	18.7	3.4	4.3	None	-	-	-	84.4	100	90	447	88.7	110	95	451
												2EH04502546	23.0	1	28.8	84.4	100	90	447	88.7	110	95	451
												2EH04505046	45.9	2	57.6	103.9	110	96	447	109.3	110	101	451
												2EH04507546	68.9	2	86.4	118.3	125	129	447	123.7	125	134	451
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	14.2	2.7	3.5	None	-	-	-	67.3	80	72	360	70.8	90	76	363
												2EH04502558	23.0	1	23.0	67.3	80	72	360	70.8	90	76	363
												2EH04505058	45.9	2	46.0	82.0	90	75	360	86.4	90	79	363
												2EH04507558	68.9	2	69.1	93.6	100	102	360	98.0	110	106	363

VFD 4 stage high static

Table 72: AD15 to AD28 VFD 4 stage high static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating 120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	20.4	9.6	None	-	-	-	83.2	110	88	467	92.8	110	99	476
											2EH04502525	18.8	1	52.1	90.6	110	88	467	102.6	110	99	476
											2EH04505025	37.6	2	104.3	155.9	175	143	467	167.9	175	154	476
											2EH04507525	56.3	2	156.2	181.7	200	203	467	193.7	200	214	476
	230-3-60	26.9	164	25.0	190			2.1	20.4	8.7	None	-	-	-	83.2	110	88	466	91.9	110	98	475
											2EH04502525	23.0	1	57.7	97.6	110	90	466	108.5	110	100	475
											2EH04505025	45.9	2	115.2	169.5	175	156	466	180.4	200	166	475
											2EH04507525	68.9	2	172.9	198.4	225	222	466	209.3	225	232	475
	460-3-60	12.0	94	12.2	100			1.1	9.9	4.3	None	-	-	-	39.4	50	42	251	43.7	50	47	255
											2EH04502546	23.0	1	28.8	48.4	50	45	251	53.8	60	49	255
											2EH04505046	45.9	2	57.6	84.4	90	78	251	89.8	90	83	255
											2EH04507546	68.9	2	86.4	98.8	110	111	251	104.2	110	116	255
	575-3-60	9.0	65	9.3	72			0.9	7.7	3.5	None	-	-	-	30.1	35	32	181	33.6	40	36	185
											2EH04502558	23.0	1	23.0	38.4	40	35	181	42.8	45	39	185
											2EH04505058	45.9	2	46.0	67.1	70	62	181	71.5	80	66	185
											2EH04507558	68.9	2	69.1	78.7	90	88	181	83.1	90	92	185
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	30.0	9.6	None	-	-	-	98.7	125	105	593	108.3	125	116	603
											2EH04502525	18.8	1	52.1	102.6	125	105	593	114.6	125	116	603
											2EH04505025	37.6	2	104.3	167.9	175	154	593	179.9	200	165	603
											2EH04507525	56.3	2	156.2	193.7	200	214	593	205.7	225	225	603
	230-3-60	28.8	223	28.2	240			2.1	30.0	8.7	None	-	-	-	98.7	125	105	593	107.4	125	115	602
											2EH04502525	23.0	1	57.7	109.6	125	105	593	120.5	125	115	602
											2EH04505025	45.9	2	115.2	181.5	200	167	593	192.4	200	177	602
											2EH04507525	68.9	2	172.9	210.4	225	233	593	221.3	225	243	602
	460-3-60	12.5	100	14.7	130			1.1	14.3	4.3	None	-	-	-	47.4	60	50	296	51.7	60	55	300
											2EH04502546	23.0	1	28.8	53.9	60	50	296	59.3	60	55	300
											2EH04505046	45.9	2	57.6	89.9	90	83	296	95.3	100	88	300
											2EH04507546	68.9	2	86.4	104.3	110	116	296	109.7	110	121	300
	575-3-60	9.7	70	11.3	94			0.9	11.5	3.5	None	-	-	-	37.2	45	39	219	40.7	50	43	222
											2EH04502558	23.0	1	23.0	43.1	45	40	219	47.5	50	44	222
											2EH04505058	45.9	2	46.0	71.9	80	66	219	76.3	80	70	222
											2EH04507558	68.9	2	69.1	83.5	90	93	219	87.9	90	97	222
20 (20)	208-3-60	32.6	240	34.0	240			2.0	30.0	9.6	None	-	-	-	113.1	125	120	618	122.7	150	131	627
											2EH04502525	18.8	1	52.1	113.1	125	120	618	122.7	150	131	627
											2EH04505025	37.6	2	104.3	167.9	175	154	618	179.9	200	165	627
											2EH04507525	56.3	2	156.2	193.7	200	214	618	205.7	225	225	627
	230-3-60	32.6	240	34.0	240			2.3	30.0	8.7	None	-	-	-	114.3	125	122	620	123.0	150	132	628
											2EH04502525	23.0	1	57.7	114.3	125	122	620	123.0	150	132	628
											2EH04505025	45.9	2	115.2	181.5	200	167	620	192.4	200	177	628
											2EH04507525	68.9	2	172.9	210.4	225	233	620	221.3	225	243	628
	460-3-60	14.8	130	16.0	140			1.3	14.3	4.3	None	-	-	-	54.3	70	58	342	58.6	70	63	346
											2EH04502546	23.0	1	28.8	54.3	70	58	342	59.3	70	63	346
											2EH04505046	45.9	2	57.6	89.9	90	83	342	95.3	100	88	346
											2EH04507546	68.9	2	86.4	104.3	110	116	342	109.7	110	121	346
	575-3-60	11.1	94	12.9	108			1.0	11.5	3.5	None	-	-	-	42.7	50	45	262	46.2	50	49	266
											2EH04502558	23.0	1	23.0	43.1	50	45	262	47.5	50	49	266
											2EH04505058	45.9	2	46.0	71.9	80	66	262	76.3	80	70	266
											2EH04507558	68.9	2	69.1	83.5	90	93	262	87.9	90	97	266

Table 72: AD15 to AD28 VFD 4 stage high static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating 120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA				Model	kW	Stage s	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	39.6	9.6	None	-	-	-	143.7	175	153	778	153.3	175	164	787
											2EH04502525	18.8	1	52.1	143.7	175	153	778	153.3	175	164	787
											2EH04505025	37.6	2	104.3	179.9	200	165	778	191.9	200	177	787
											2EH04507525	56.3	2	156.2	205.7	225	225	778	217.7	250	236	787
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	39.6	8.7	None	-	-	-	144.9	175	155	780	153.6	175	165	788
											2EH04502525	23.0	1	57.7	144.9	175	155	780	153.6	175	165	788
											2EH04505025	45.9	2	115.2	193.5	200	178	780	204.4	225	188	788
											2EH04507525	68.9	2	172.9	222.4	250	244	780	233.3	250	254	788
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	18.7	4.3	None	-	-	-	69.1	80	74	388	73.4	90	79	392
											2EH04502546	23.0	1	28.8	69.1	80	74	388	73.4	90	79	392
											2EH04505046	45.9	2	57.6	95.4	100	88	388	100.8	110	93	392
											2EH04507546	68.9	2	86.4	109.8	125	121	388	115.2	125	126	392
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	14.2	3.5	None	-	-	-	54.5	70	58	321	58.0	70	62	324
											2EH04502558	23.0	1	23.0	54.5	70	58	321	58.0	70	62	324
											2EH04505058	45.9	2	46.0	75.3	80	69	321	79.6	80	73	324
											2EH04507558	68.9	2	69.1	86.9	100	96	321	91.2	100	100	324
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	39.6	9.6	None	-	-	-	162.1	200	172	836	171.7	200	183	846
											2EH04502525	18.8	1	52.1	162.1	200	172	836	171.7	200	183	846
											2EH04505025	37.6	2	104.3	179.9	200	172	836	191.9	200	183	846
											2EH04507525	56.3	2	156.2	205.7	225	225	836	217.7	250	236	846
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	39.6	8.7	None	-	-	-	162.1	200	172	836	170.8	200	182	845
											2EH04502525	23.0	1	57.7	162.1	200	172	836	170.8	200	182	845
											2EH04505025	45.9	2	115.2	193.5	200	178	836	204.4	225	188	845
											2EH04507525	68.9	2	172.9	222.4	250	244	836	233.3	250	254	845
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	18.7	4.3	None	-	-	-	77.6	100	83	455	81.9	100	88	460
											2EH04502546	23.0	1	28.8	77.6	100	83	455	81.9	100	88	460
											2EH04505046	45.9	2	57.6	95.4	100	88	455	100.8	110	93	460
											2EH04507546	68.9	2	86.4	109.8	125	121	455	115.2	125	126	460
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	14.2	3.5	None	-	-	-	61.9	80	65	343	65.4	80	69	347
											2EH04502558	23.0	1	23.0	61.9	80	65	343	65.4	80	69	347
											2EH04505058	45.9	2	46.0	75.3	80	69	343	79.6	80	73	347
											2EH04507558	68.9	2	69.1	86.9	100	96	343	91.2	100	100	347

Table 73: AD15 to AD28 VFD 4 stage high static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	20.4	5.0	9.6	None	-	-	-	93.2	110	99	488	102.8	125	111	497
												2EH04502525	18.8	1	52.1	103.1	110	99	488	115.1	125	111	497
												2EH04505025	37.6	2	104.3	168.4	175	155	488	180.4	200	166	497
												2EH04507525	56.3	2	156.2	194.2	200	215	488	206.2	225	226	497
	230-3-60	26.9	164	25.0	190			2.1	20.4	5.0	8.7	None	-	-	-	93.2	110	99	487	101.9	125	109	496
												2EH04502525	23.0	1	57.7	110.1	125	101	487	121.0	125	111	496
												2EH04505025	45.9	2	115.2	182.0	200	167	487	192.9	200	177	496
												2EH04507525	68.9	2	172.9	210.9	225	234	487	221.8	225	244	496
	460-3-60	12.0	94	12.2	100			1.1	9.9	2.2	4.3	None	-	-	-	43.8	50	47	260	48.1	60	52	264
												2EH04502546	23.0	1	28.8	53.9	60	50	260	59.3	60	55	264
												2EH04505046	45.9	2	57.6	89.9	90	83	260	95.3	100	88	264
												2EH04507546	68.9	2	86.4	104.3	110	116	260	109.7	110	121	264
	575-3-60	9.0	65	9.3	72			0.9	7.7	1.5	3.5	None	-	-	-	33.1	40	35	187	36.6	45	39	191
												2EH04502558	23.0	1	23.0	42.1	45	39	187	46.5	50	43	191
												2EH04505058	45.9	2	46.0	70.9	80	65	187	75.3	80	69	191
												2EH04507558	68.9	2	69.1	82.5	90	92	187	86.9	90	96	191
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	30.0	5.0	9.6	None	-	-	-	108.7	125	116	614	118.3	125	127	624
												2EH04502525	18.8	1	52.1	115.1	125	116	614	127.1	150	127	624
												2EH04505025	37.6	2	104.3	180.4	200	166	614	192.4	200	177	624
												2EH04507525	56.3	2	156.2	206.2	225	226	614	218.2	225	237	624
	230-3-60	28.8	223	28.2	240			2.1	30.0	5.0	8.7	None	-	-	-	108.7	125	116	614	117.4	125	126	623
												2EH04502525	23.0	1	57.7	122.1	125	116	614	133.0	150	126	623
												2EH04505025	45.9	2	115.2	194.0	200	178	614	204.9	225	188	623
												2EH04507525	68.9	2	172.9	222.9	250	245	614	233.8	250	255	623
	460-3-60	12.5	100	14.7	130			1.1	14.3	2.2	4.3	None	-	-	-	51.8	60	55	305	56.1	70	60	309
												2EH04502546	23.0	1	28.8	59.4	60	55	305	64.8	70	60	309
												2EH04505046	45.9	2	57.6	95.4	100	88	305	100.8	110	93	309
												2EH04507546	68.9	2	86.4	109.8	110	121	305	115.2	125	126	309
	575-3-60	9.7	70	11.3	94			0.9	11.5	1.5	3.5	None	-	-	-	40.2	50	43	225	43.7	50	47	229
												2EH04502558	23.0	1	23.0	46.9	50	43	225	51.3	60	47	229
												2EH04505058	45.9	2	46.0	75.6	80	70	225	80.0	90	74	229
												2EH04507558	68.9	2	69.1	87.2	90	96	225	91.6	100	100	229
20 (20)	208-3-60	32.6	240	34.0	240			2.0	30.0	5.0	9.6	None	-	-	-	123.1	150	132	639	132.7	150	143	648
												2EH04502525	18.8	1	52.1	123.1	150	132	639	132.7	150	143	648
												2EH04505025	37.6	2	104.3	180.4	200	166	639	192.4	200	177	648
												2EH04507525	56.3	2	156.2	206.2	225	226	639	218.2	225	237	648
	230-3-60	32.6	240	34.0	240			2.3	30.0	5.0	8.7	None	-	-	-	124.3	150	133	641	133.0	150	143	649
												2EH04502525	23.0	1	57.7	124.3	150	133	641	133.0	150	143	649
												2EH04505025	45.9	2	115.2	194.0	200	178	641	204.9	225	188	649
												2EH04507525	68.9	2	172.9	222.9	250	245	641	233.8	250	255	649
	460-3-60	14.8	130	16.0	140			1.3	14.3	2.2	4.3	None	-	-	-	58.7	70	63	351	63.0	70	68	355
												2EH04502546	23.0	1	28.8	59.4	70	63	351	64.8	70	68	355
												2EH04505046	45.9	2	57.6	95.4	100	88	351	100.8	110	93	355
												2EH04507546	68.9	2	86.4	109.8	110	121	351	115.2	125	126	355
	575-3-60	11.1	94	12.9	108			1.0	11.5	1.5	3.5	None	-	-	-	45.7	50	49	268	49.2	60	53	272
												2EH04502558	23.0	1	23.0	46.9	50	49	268	51.3	60	53	272
												2EH04505058	45.9	2	46.0	75.6	80	70	268	80.0	90	74	272
												2EH04507558	68.9	2	69.1	87.2	90	96	268	91.6	100	100	272

Table 73: AD15 to AD28 VFD 4 stage high static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
												FLA	LRA	FLA	LRA								
		Model	kW	Stages	A	FLA	LRA					FLA	LRA										
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	39.6	5.0	9.6	None	-	-	-	153.7	175	165	799	163.3	200	176	808
												2EH04502525	18.8	1	52.1	153.7	175	165	799	163.3	200	176	808
												2EH04505025	37.6	2	104.3	192.4	200	177	799	204.4	225	188	808
												2EH04507525	56.3	2	156.2	218.2	250	237	799	230.2	250	248	808
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	39.6	5.0	8.7	None	-	-	-	154.9	175	166	801	163.6	200	176	809
												2EH04502525	23.0	1	57.7	154.9	175	166	801	163.6	200	176	809
												2EH04505025	45.9	2	115.2	206.0	225	190	801	216.9	225	200	809
												2EH04507525	68.9	2	172.9	234.9	250	256	801	245.8	250	266	809
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	18.7	2.2	4.3	None	-	-	-	73.5	90	79	397	77.8	90	84	401
												2EH04502546	23.0	1	28.8	73.5	90	79	397	77.8	90	84	401
												2EH04505046	45.9	2	57.6	100.9	110	93	397	106.3	110	98	401
												2EH04507546	68.9	2	86.4	115.3	125	126	397	120.7	125	131	401
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	14.2	1.5	3.5	None	-	-	-	57.5	70	61	327	61.0	70	65	331
												2EH04502558	23.0	1	23.0	57.5	70	61	327	61.0	70	65	331
												2EH04505058	45.9	2	46.0	79.0	80	73	327	83.4	90	77	331
												2EH04507558	68.9	2	69.1	90.6	100	99	327	95.0	100	103	331
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	39.6	5.0	9.6	None	-	-	-	172.1	200	183	857	181.7	225	194	867
												2EH04502525	18.8	1	52.1	172.1	200	183	857	181.7	225	194	867
												2EH04505025	37.6	2	104.3	192.4	200	183	857	204.4	225	194	867
												2EH04507525	56.3	2	156.2	218.2	250	237	857	230.2	250	248	867
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	39.6	5.0	8.7	None	-	-	-	172.1	200	183	857	180.8	225	193	866
												2EH04502525	23.0	1	57.7	172.1	200	183	857	180.8	225	193	866
												2EH04505025	45.9	2	115.2	206.0	225	190	857	216.9	225	200	866
												2EH04507525	68.9	2	172.9	234.9	250	256	857	245.8	250	266	866
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	18.7	2.2	4.3	None	-	-	-	82.0	100	88	464	86.3	100	93	469
												2EH04502546	23.0	1	28.8	82.0	100	88	464	86.3	100	93	469
												2EH04505046	45.9	2	57.6	100.9	110	93	464	106.3	110	98	469
												2EH04507546	68.9	2	86.4	115.3	125	126	464	120.7	125	131	469
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	14.2	1.5	3.5	None	-	-	-	64.9	80	69	350	68.4	80	73	353
												2EH04502558	23.0	1	23.0	64.9	80	69	350	68.4	80	73	353
												2EH04505058	45.9	2	46.0	79.0	80	73	350	83.4	90	77	353
												2EH04507558	68.9	2	69.1	90.6	100	99	350	95.0	100	103	353

Table 74: AD15 to AD28 VFD 4 stage high static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	20.4	6.7	9.6	None	-	-	-	96.6	110	103	480	106.2	125	114	490
												2EH04502525	18.8	1	52.1	107.4	110	103	480	119.4	125	114	490
												2EH04505025	37.6	2	104.3	172.6	175	159	480	184.6	200	170	490
												2EH04507525	56.3	2	156.2	198.5	200	219	480	210.5	225	230	490
	230-3-60	26.9	164	25.0	190			2.1	20.4	6.7	8.7	None	-	-	-	96.6	110	103	479	105.3	125	113	488
												2EH04502525	23.0	1	57.7	114.4	125	105	479	125.3	150	115	488
												2EH04505025	45.9	2	115.2	186.3	200	171	479	197.1	200	181	488
												2EH04507525	68.9	2	172.9	215.2	225	238	479	226.0	250	248	488
	460-3-60	12.0	94	12.2	100			1.1	9.9	3.4	4.3	None	-	-	-	46.2	50	50	257	50.5	60	55	262
												2EH04502546	23.0	1	28.8	56.9	60	52	257	62.3	70	57	262
												2EH04505046	45.9	2	57.6	92.9	100	85	257	98.3	100	90	262
												2EH04507546	68.9	2	86.4	107.3	110	119	257	112.7	125	124	262
	575-3-60	9.0	65	9.3	72			0.9	7.7	2.7	3.5	None	-	-	-	35.5	40	38	186	39.0	45	42	190
												2EH04502558	23.0	1	23.0	45.1	50	42	186	49.5	50	46	190
												2EH04505058	45.9	2	46.0	73.9	80	68	186	78.3	80	72	190
												2EH04507558	68.9	2	69.1	85.5	90	95	186	89.9	90	99	190
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	30.0	6.7	9.6	None	-	-	-	112.1	125	120	606	121.7	150	131	616
												2EH04502525	18.8	1	52.1	119.4	125	120	606	131.4	150	131	616
												2EH04505025	37.6	2	104.3	184.6	200	170	606	196.6	200	181	616
												2EH04507525	56.3	2	156.2	210.5	225	230	606	222.5	225	241	616
	230-3-60	28.8	223	28.2	240			2.1	30.0	6.7	8.7	None	-	-	-	112.1	125	120	606	120.8	150	130	615
												2EH04502525	23.0	1	57.7	126.4	150	120	606	137.3	150	130	615
												2EH04505025	45.9	2	115.2	198.3	200	182	606	209.1	225	192	615
												2EH04507525	68.9	2	172.9	227.2	250	249	606	238.0	250	259	615
	460-3-60	12.5	100	14.7	130			1.1	14.3	3.4	4.3	None	-	-	-	54.2	60	58	302	58.5	70	63	307
												2EH04502546	23.0	1	28.8	62.4	70	58	302	67.8	70	63	307
												2EH04505046	45.9	2	57.6	98.4	100	91	302	103.8	110	95	307
												2EH04507546	68.9	2	86.4	112.8	125	124	302	118.2	125	129	307
	575-3-60	9.7	70	11.3	94			0.9	11.5	2.7	3.5	None	-	-	-	42.6	50	46	224	46.1	50	50	228
												2EH04502558	23.0	1	23.0	49.9	50	46	224	54.3	60	50	228
												2EH04505058	45.9	2	46.0	78.6	80	72	224	83.0	90	76	228
												2EH04507558	68.9	2	69.1	90.2	100	99	224	94.6	100	103	228
20 (20)	208-3-60	32.6	240	34.0	240			2.0	30.0	6.7	9.6	None	-	-	-	126.5	150	136	631	136.1	150	147	641
												2EH04502525	18.8	1	52.1	126.5	150	136	631	136.1	150	147	641
												2EH04505025	37.6	2	104.3	184.6	200	170	631	196.6	200	181	641
												2EH04507525	56.3	2	156.2	210.5	225	230	631	222.5	225	241	641
	230-3-60	32.6	240	34.0	240			2.3	30.0	6.7	8.7	None	-	-	-	127.7	150	137	633	136.4	150	147	642
												2EH04502525	23.0	1	57.7	127.7	150	137	633	137.3	150	147	642
												2EH04505025	45.9	2	115.2	198.3	200	182	633	209.1	225	192	642
												2EH04507525	68.9	2	172.9	227.2	250	249	633	238.0	250	259	642
	460-3-60	14.8	130	16.0	140			1.3	14.3	3.4	4.3	None	-	-	-	61.1	70	66	348	65.4	80	71	353
												2EH04502546	23.0	1	28.8	62.4	70	66	348	67.8	80	71	353
												2EH04505046	45.9	2	57.6	98.4	100	91	348	103.8	110	95	353
												2EH04507546	68.9	2	86.4	112.8	125	124	348	118.2	125	129	353
	575-3-60	11.1	94	12.9	108			1.0	11.5	2.7	3.5	None	-	-	-	48.1	60	52	267	51.6	60	56	271
												2EH04502558	23.0	1	23.0	49.9	60	52	267	54.3	60	56	271
												2EH04505058	45.9	2	46.0	78.6	80	72	267	83.0	90	76	271
												2EH04507558	68.9	2	69.1	90.2	100	99	267	94.6	100	103	271

Table 74: AD15 to AD28 VFD 4 stage high static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	39.6	6.7	9.6	None	-	-	-	157.1	175	169	791	166.7	200	180	801
												2EH04502525	18.8	1	52.1	157.1	175	169	791	166.7	200	180	801
												2EH04505025	37.6	2	104.3	196.6	200	181	791	208.6	225	192	801
												2EH04507525	56.3	2	156.2	222.5	250	241	791	234.5	250	252	801
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	39.6	6.7	8.7	None	-	-	-	158.3	175	170	793	167.0	200	180	802
												2EH04502525	23.0	1	57.7	158.3	175	170	793	167.0	200	180	802
												2EH04505025	45.9	2	115.2	210.3	225	193	793	221.1	225	203	802
												2EH04507525	68.9	2	172.9	239.2	250	260	793	250.0	250	270	802
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	18.7	3.4	4.3	None	-	-	-	75.9	90	82	394	80.2	90	87	399
												2EH04502546	23.0	1	28.8	75.9	90	82	394	80.2	90	87	399
												2EH04505046	45.9	2	57.6	103.9	110	96	394	109.3	110	101	399
												2EH04507546	68.9	2	86.4	118.3	125	129	394	123.7	125	134	399
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	14.2	2.7	3.5	None	-	-	-	59.9	70	64	326	63.4	80	68	330
												2EH04502558	23.0	1	23.0	59.9	70	64	326	63.4	80	68	330
												2EH04505058	45.9	2	46.0	82.0	90	75	326	86.4	90	79	330
												2EH04507558	68.9	2	69.1	93.6	100	102	326	98.0	110	106	330
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	39.6	6.7	9.6	None	-	-	-	175.5	225	187	849	185.1	225	198	859
												2EH04502525	18.8	1	52.1	175.5	225	187	849	185.1	225	198	859
												2EH04505025	37.6	2	104.3	196.6	225	187	849	208.6	225	198	859
												2EH04507525	56.3	2	156.2	222.5	250	241	849	234.5	250	252	859
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	39.6	6.7	8.7	None	-	-	-	175.5	225	187	849	184.2	225	197	858
												2EH04502525	23.0	1	57.7	175.5	225	187	849	184.2	225	197	858
												2EH04505025	45.9	2	115.2	210.3	225	193	849	221.1	225	203	858
												2EH04507525	68.9	2	172.9	239.2	250	260	849	250.0	250	270	858
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	18.7	3.4	4.3	None	-	-	-	84.4	100	90	462	88.7	110	95	466
												2EH04502546	23.0	1	28.8	84.4	100	90	462	88.7	110	95	466
												2EH04505046	45.9	2	57.6	103.9	110	96	462	109.3	110	101	466
												2EH04507546	68.9	2	86.4	118.3	125	129	462	123.7	125	134	466
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	14.2	2.7	3.5	None	-	-	-	67.3	80	72	349	70.8	90	76	352
												2EH04502558	23.0	1	23.0	67.3	80	72	349	70.8	90	76	352
												2EH04505058	45.9	2	46.0	82.0	90	75	349	86.4	90	79	352
												2EH04507558	68.9	2	69.1	93.6	100	102	349	98.0	110	106	352

VFD customer supplied standard static

Table 75: AD15 to AD28 VFD customer supplied standard static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	8.9	9.6	None	-	-	-	71.7	90	75	426	81.3	100	86	435
											2EH04502525	18.8	1	52.1	76.3	90	75	426	88.3	100	86	435
											2EH04505025	37.6	2	104.3	141.5	150	130	426	153.5	175	141	435
											2EH04507525	56.3	2	156.2	167.3	200	190	426	179.3	200	201	435
	230-3-60	26.9	164	25.0	190			2.1	8.2	8.7	None	-	-	-	71.0	90	74	433	79.7	100	84	442
											2EH04502525	23.0	1	57.7	82.4	90	76	433	93.3	100	86	442
											2EH04505025	45.9	2	115.2	154.3	175	142	433	165.1	175	152	442
											2EH04507525	68.9	2	172.9	183.2	200	208	433	194.0	225	218	442
	460-3-60	12.0	94	12.2	100			1.1	4.1	4.3	None	-	-	-	33.6	45	35	234	37.9	50	40	238
											2EH04502546	23.0	1	28.8	41.1	45	38	234	46.5	50	43	238
											2EH04505046	45.9	2	57.6	77.1	80	71	234	82.5	90	76	238
											2EH04507546	68.9	2	86.4	91.5	100	104	234	96.9	100	109	238
	575-3-60	9.0	65	9.3	72			0.9	3.2	3.5	None	-	-	-	25.6	30	27	167	29.1	35	31	171
											2EH04502558	23.0	1	23.0	32.8	35	30	167	37.1	40	34	171
											2EH04505058	45.9	2	46.0	61.5	70	57	167	65.9	70	61	171
											2EH04507558	68.9	2	69.1	73.1	80	83	167	77.5	80	87	171
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	9.9	9.6	None	-	-	-	78.3	100	82	546	87.9	110	93	555
											2EH04502525	18.8	1	52.1	78.3	100	82	546	89.5	110	93	555
											2EH04505025	37.6	2	104.3	142.8	150	131	546	154.8	175	142	555
											2EH04507525	56.3	2	156.2	168.6	200	191	546	180.6	200	202	555
	230-3-60	28.8	223	28.2	240			2.1	9.4	8.7	None	-	-	-	77.8	100	81	554	86.5	110	91	562
											2EH04502525	23.0	1	57.7	83.9	100	81	554	94.8	110	91	562
											2EH04505025	45.9	2	115.2	155.8	175	143	554	166.6	175	153	562
											2EH04507525	68.9	2	172.9	184.7	200	210	554	195.5	225	220	562
	460-3-60	12.5	100	14.7	130			1.1	4.7	4.3	None	-	-	-	37.8	50	39	276	42.1	50	44	280
											2EH04502546	23.0	1	28.8	41.9	50	39	276	47.3	50	44	280
											2EH04505046	45.9	2	57.6	77.9	80	72	276	83.3	90	77	280
											2EH04507546	68.9	2	86.4	92.3	100	105	276	97.7	110	110	280
	575-3-60	9.7	70	11.3	94			0.9	4.3	3.5	None	-	-	-	29.9	40	31	208	33.4	40	35	212
											2EH04502558	23.0	1	23.0	34.1	40	31	208	38.5	40	35	212
											2EH04505058	45.9	2	46.0	62.9	70	58	208	67.3	70	62	212
											2EH04507558	68.9	2	69.1	74.5	80	84	208	78.9	90	88	212
20 (20)	208-3-60	32.6	240	34.0	240			2.0	13.5	9.6	None	-	-	-	96.6	125	101	600	106.2	125	112	610
											2EH04502525	18.8	1	52.1	96.6	125	101	600	106.2	125	112	610
											2EH04505025	37.6	2	104.3	147.3	150	135	600	159.3	175	147	610
											2EH04507525	56.3	2	156.2	173.1	200	195	600	185.1	200	206	610
	230-3-60	32.6	240	34.0	240			2.3	13.4	8.7	None	-	-	-	97.7	125	103	602	106.4	125	113	610
											2EH04502525	23.0	1	57.7	97.7	125	103	602	106.4	125	113	610
											2EH04505025	45.9	2	115.2	160.8	175	148	602	171.6	175	158	610
											2EH04507525	68.9	2	172.9	189.7	225	214	602	200.5	225	224	610
	460-3-60	14.8	130	16.0	140			1.3	6.7	4.3	None	-	-	-	46.7	60	49	333	51.0	60	54	337
											2EH04502546	23.0	1	28.8	46.7	60	49	333	51.0	60	54	337
											2EH04505046	45.9	2	57.6	80.4	90	74	333	85.8	90	79	337
											2EH04507546	68.9	2	86.4	94.8	110	107	333	100.2	110	112	337
	575-3-60	11.1	94	12.9	108			1.0	5.4	3.5	None	-	-	-	36.6	45	38	251	40.1	50	42	255
											2EH04502558	23.0	1	23.0	36.6	45	38	251	40.1	50	42	255
											2EH04505058	45.9	2	46.0	64.3	70	59	251	68.6	70	63	255
											2EH04507558	68.9	2	69.1	75.9	90	86	251	80.2	90	90	255

Table 75: AD15 to AD28 VFD customer supplied standard static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	13.5	9.6	None	-	-	-	117.6	150	123	722	127.2	150	134	732
											2EH04502525	18.8	1	52.1	117.6	150	123	722	127.2	150	134	732
											2EH04505025	37.6	2	104.3	147.3	150	135	722	159.3	175	147	732
											2EH04507525	56.3	2	156.2	173.1	200	195	722	185.1	200	206	732
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	13.4	8.7	None	-	-	-	118.7	150	125	724	127.4	150	135	732
											2EH04502525	23.0	1	57.7	118.7	150	125	724	127.4	150	135	732
											2EH04505025	45.9	2	115.2	160.8	175	148	724	171.6	175	158	732
											2EH04507525	68.9	2	172.9	189.7	225	214	724	200.5	225	224	732
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	6.7	4.3	None	-	-	-	57.1	70	60	360	61.4	80	65	364
											2EH04502546	23.0	1	28.8	57.1	70	60	360	61.4	80	65	364
											2EH04505046	45.9	2	57.6	80.4	90	74	360	85.8	90	79	364
											2EH04507546	68.9	2	86.4	94.8	110	107	360	100.2	110	112	364
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	5.4	3.5	None	-	-	-	45.7	60	48	279	49.2	60	52	283
											2EH04502558	23.0	1	23.0	45.7	60	48	279	49.2	60	52	283
											2EH04505058	45.9	2	46.0	64.3	70	59	279	68.6	70	63	283
											2EH04507558	68.9	2	69.1	75.9	90	86	279	80.2	90	90	283
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	19.8	9.6	None	-	-	-	142.3	175	149	768	151.9	200	160	778
											2EH04502525	18.8	1	52.1	142.3	175	149	768	151.9	200	160	778
											2EH04505025	37.6	2	104.3	155.1	175	149	768	167.1	200	160	778
											2EH04507525	56.3	2	156.2	181.0	200	202	768	193.0	200	213	778
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	19.8	8.7	None	-	-	-	142.3	175	149	768	151.0	200	159	777
											2EH04502525	23.0	1	57.7	142.3	175	149	768	151.0	200	159	777
											2EH04505025	45.9	2	115.2	168.8	175	155	768	179.6	200	165	777
											2EH04507525	68.9	2	172.9	197.7	225	222	768	208.5	225	232	777
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	9.9	4.3	None	-	-	-	68.8	90	72	421	73.1	90	77	426
											2EH04502546	23.0	1	28.8	68.8	90	72	421	73.1	90	77	426
											2EH04505046	45.9	2	57.6	84.4	90	78	421	89.8	90	83	426
											2EH04507546	68.9	2	86.4	98.8	110	111	421	104.2	110	116	426
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	7.9	3.5	None	-	-	-	55.6	70	58	324	59.1	70	62	327
											2EH04502558	23.0	1	23.0	55.6	70	58	324	59.1	70	62	327
											2EH04505058	45.9	2	46.0	67.4	70	62	324	71.8	80	66	327
											2EH04507558	68.9	2	69.1	79.0	90	89	324	83.4	90	93	327

Table 76: AD15 to AD28 VFD customer supplied standard static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	8.9	5.0	9.6	None	-	-	-	81.7	100	86	447	91.3	110	97	456
												2EH04502525	18.8	1	52.1	88.8	100	86	447	100.8	110	97	456
												2EH04505025	37.6	2	104.3	154.0	175	142	447	166.0	175	153	456
												2EH04507525	56.3	2	156.2	179.8	200	201	447	191.8	200	212	456
	230-3-60	26.9	164	25.0	190			2.1	8.2	5.0	8.7	None	-	-	-	81.0	100	85	454	89.7	110	95	463
												2EH04502525	23.0	1	57.7	94.9	100	87	454	105.8	110	97	463
												2EH04505025	45.9	2	115.2	166.8	175	153	454	177.6	200	163	463
												2EH04507525	68.9	2	172.9	195.7	225	220	454	206.5	225	230	463
	460-3-60	12.0	94	12.2	100			1.1	4.1	2.2	4.3	None	-	-	-	38.0	50	40	243	42.3	50	45	248
												2EH04502546	23.0	1	28.8	46.6	50	43	243	52.0	60	48	248
												2EH04505046	45.9	2	57.6	82.6	90	76	243	88.0	90	81	248
												2EH04507546	68.9	2	86.4	97.0	110	109	243	102.4	110	114	248
	575-3-60	9.0	65	9.3	72			0.9	3.2	1.5	3.5	None	-	-	-	28.6	35	30	174	32.1	40	34	177
												2EH04502558	23.0	1	23.0	36.5	40	34	174	40.9	45	38	177
												2EH04505058	45.9	2	46.0	65.3	70	60	174	69.6	70	64	177
												2EH04507558	68.9	2	69.1	76.9	80	87	174	81.2	90	91	177
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	9.9	5.0	9.6	None	-	-	-	88.3	110	93	567	97.9	125	104	576
												2EH04502525	18.8	1	52.1	90.0	110	93	567	102.0	125	104	576
												2EH04505025	37.6	2	104.3	155.3	175	143	567	167.3	175	154	576
												2EH04507525	56.3	2	156.2	181.1	200	203	567	193.1	200	214	576
	230-3-60	28.8	223	28.2	240			2.1	9.4	5.0	8.7	None	-	-	-	87.8	110	93	575	96.5	125	103	583
												2EH04502525	23.0	1	57.7	96.4	110	93	575	107.3	125	103	583
												2EH04505025	45.9	2	115.2	168.3	175	155	575	179.1	200	165	583
												2EH04507525	68.9	2	172.9	197.2	225	221	575	208.0	225	231	583
	460-3-60	12.5	100	14.7	130			1.1	4.7	2.2	4.3	None	-	-	-	42.2	50	44	285	46.5	60	49	289
												2EH04502546	23.0	1	28.8	47.4	50	44	285	52.8	60	49	289
												2EH04505046	45.9	2	57.6	83.4	90	77	285	88.8	90	82	289
												2EH04507546	68.9	2	86.4	97.8	110	110	285	103.2	110	115	289
	575-3-60	9.7	70	11.3	94			0.9	4.3	1.5	3.5	None	-	-	-	32.9	40	35	214	36.4	45	39	218
												2EH04502558	23.0	1	23.0	37.9	40	35	214	42.3	45	39	218
												2EH04505058	45.9	2	46.0	66.6	70	61	214	71.0	80	65	218
												2EH04507558	68.9	2	69.1	78.2	90	88	214	82.6	90	92	218
20 (20)	208-3-60	32.6	240	34.0	240			2.0	13.5	5.0	9.6	None	-	-	-	106.6	125	113	621	116.2	150	124	631
												2EH04502525	18.8	1	52.1	106.6	125	113	621	116.2	150	124	631
												2EH04505025	37.6	2	104.3	159.8	175	147	621	171.8	175	158	631
												2EH04507525	56.3	2	156.2	185.6	200	207	621	197.6	200	218	631
	230-3-60	32.6	240	34.0	240			2.3	13.4	5.0	8.7	None	-	-	-	107.7	125	114	623	116.4	150	124	631
												2EH04502525	23.0	1	57.7	107.7	125	114	623	116.4	150	124	631
												2EH04505025	45.9	2	115.2	173.3	175	159	623	184.1	200	169	631
												2EH04507525	68.9	2	172.9	202.2	225	226	623	213.0	225	236	631
	460-3-60	14.8	130	16.0	140			1.3	6.7	2.2	4.3	None	-	-	-	51.1	60	54	342	55.4	70	59	346
												2EH04502546	23.0	1	28.8	51.1	60	54	342	55.4	70	59	346
												2EH04505046	45.9	2	57.6	85.9	90	79	342	91.3	100	84	346
												2EH04507546	68.9	2	86.4	100.3	110	112	342	105.7	110	117	346
	575-3-60	11.1	94	12.9	108			1.0	5.4	1.5	3.5	None	-	-	-	39.6	50	42	258	43.1	50	46	261
												2EH04502558	23.0	1	23.0	39.6	50	42	258	43.6	50	46	261
												2EH04505058	45.9	2	46.0	68.0	70	63	258	72.4	80	67	261
												2EH04507558	68.9	2	69.1	79.6	90	89	258	84.0	90	93	261

Table 76: AD15 to AD28 VFD customer supplied standard static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	13.5	5.0	9.6	None	-	-	-	127.6	150	135	743	137.2	175	146	753
												2EH04502525	18.8	1	52.1	127.6	150	135	743	137.2	175	146	753
												2EH04505025	37.6	2	104.3	159.8	175	147	743	171.8	175	158	753
												2EH04507525	56.3	2	156.2	185.6	200	207	743	197.6	200	218	753
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	13.4	5.0	8.7	None	-	-	-	128.7	150	136	745	137.4	175	146	753
												2EH04502525	23.0	1	57.7	128.7	150	136	745	137.4	175	146	753
												2EH04505025	45.9	2	115.2	173.3	175	159	745	184.1	200	169	753
												2EH04507525	68.9	2	172.9	202.2	225	226	745	213.0	225	236	753
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	6.7	2.2	4.3	None	-	-	-	61.5	80	65	369	65.8	80	70	373
												2EH04502546	23.0	1	28.8	61.5	80	65	369	65.8	80	70	373
												2EH04505046	45.9	2	57.6	85.9	90	79	369	91.3	100	84	373
												2EH04507546	68.9	2	86.4	100.3	110	112	369	105.7	110	117	373
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	5.4	1.5	3.5	None	-	-	-	48.7	60	51	286	52.2	60	55	289
												2EH04502558	23.0	1	23.0	48.7	60	51	286	52.2	60	55	289
												2EH04505058	45.9	2	46.0	68.0	70	63	286	72.4	80	67	289
												2EH04507558	68.9	2	69.1	79.6	90	89	286	84.0	90	93	289
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	19.8	5.0	9.6	None	-	-	-	152.3	200	160	789	161.9	200	171	799
												2EH04502525	18.8	1	52.1	152.3	200	160	789	161.9	200	171	799
												2EH04505025	37.6	2	104.3	167.6	200	160	789	179.6	200	171	799
												2EH04507525	56.3	2	156.2	193.5	200	214	789	205.5	225	225	799
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	19.8	5.0	8.7	None	-	-	-	152.3	200	160	789	161.0	200	170	798
												2EH04502525	23.0	1	57.7	152.3	200	160	789	161.0	200	170	798
												2EH04505025	45.9	2	115.2	181.3	200	167	789	192.1	200	177	798
												2EH04507525	68.9	2	172.9	210.2	225	233	789	221.0	225	243	798
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	9.9	2.2	4.3	None	-	-	-	73.2	90	78	430	77.5	100	82	435
												2EH04502546	23.0	1	28.8	73.2	90	78	430	77.5	100	82	435
												2EH04505046	45.9	2	57.6	89.9	90	83	430	95.3	100	88	435
												2EH04507546	68.9	2	86.4	104.3	110	116	430	109.7	110	121	435
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	7.9	1.5	3.5	None	-	-	-	58.6	70	62	330	62.1	80	66	334
												2EH04502558	23.0	1	23.0	58.6	70	62	330	62.1	80	66	334
												2EH04505058	45.9	2	46.0	71.1	80	65	330	75.5	80	69	334
												2EH04507558	68.9	2	69.1	82.7	90	92	330	87.1	90	96	334

Table 77: AD15 to AD28 VFD customer supplied standard static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	8.9	6.7	9.6	None	-	-	-	85.1	110	90	439	94.7	110	101	449
												2EH04502525	18.8	1	52.1	93.0	110	90	439	105.0	110	101	449
												2EH04505025	37.6	2	104.3	158.3	175	146	439	170.3	175	157	449
												2EH04507525	56.3	2	156.2	184.1	200	205	439	196.1	200	216	449
	230-3-60	26.9	164	25.0	190			2.1	8.2	6.7	8.7	None	-	-	-	84.4	110	89	446	93.1	110	99	455
												2EH04502525	23.0	1	57.7	99.1	110	91	446	110.0	110	101	455
												2EH04505025	45.9	2	115.2	171.0	175	157	446	181.9	200	167	455
												2EH04507525	68.9	2	172.9	199.9	225	224	446	210.8	225	234	455
	460-3-60	12.0	94	12.2	100			1.1	4.1	3.4	4.3	None	-	-	-	40.4	50	43	241	44.7	50	48	245
												2EH04502546	23.0	1	28.8	49.6	50	46	241	55.0	60	51	245
												2EH04505046	45.9	2	57.6	85.6	90	79	241	91.0	100	84	245
												2EH04507546	68.9	2	86.4	100.0	110	112	241	105.4	110	117	245
	575-3-60	9.0	65	9.3	72			0.9	3.2	2.7	3.5	None	-	-	-	31.0	40	33	173	34.5	40	37	176
												2EH04502558	23.0	1	23.0	39.5	40	36	173	43.9	45	40	176
												2EH04505058	45.9	2	46.0	68.3	70	63	173	72.6	80	67	176
												2EH04507558	68.9	2	69.1	79.9	90	89	173	84.2	90	93	176
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	9.9	6.7	9.6	None	-	-	-	91.7	110	97	559	101.3	125	108	569
												2EH04502525	18.8	1	52.1	94.3	110	97	559	106.3	125	108	569
												2EH04505025	37.6	2	104.3	159.5	175	147	559	171.5	175	158	569
												2EH04507525	56.3	2	156.2	185.3	200	206	559	197.3	200	217	569
	230-3-60	28.8	223	28.2	240			2.1	9.4	6.7	8.7	None	-	-	-	91.2	110	97	567	99.9	125	107	576
												2EH04502525	23.0	1	57.7	100.6	110	97	567	111.5	125	107	576
												2EH04505025	45.9	2	115.2	172.5	175	159	567	183.4	200	169	576
												2EH04507525	68.9	2	172.9	201.4	225	225	567	212.3	225	235	576
	460-3-60	12.5	100	14.7	130			1.1	4.7	3.4	4.3	None	-	-	-	44.6	50	47	283	48.9	60	52	287
												2EH04502546	23.0	1	28.8	50.4	60	47	283	55.8	60	52	287
												2EH04505046	45.9	2	57.6	86.4	90	79	283	91.8	100	84	287
												2EH04507546	68.9	2	86.4	100.8	110	113	283	106.2	110	118	287
	575-3-60	9.7	70	11.3	94			0.9	4.3	2.7	3.5	None	-	-	-	35.3	45	37	213	38.8	50	41	217
												2EH04502558	23.0	1	23.0	40.9	45	38	213	45.3	50	42	217
												2EH04505058	45.9	2	46.0	69.6	70	64	213	74.0	80	68	217
												2EH04507558	68.9	2	69.1	81.2	90	91	213	85.6	90	95	217
20 (20)	208-3-60	32.6	240	34.0	240			2.0	13.5	6.7	9.6	None	-	-	-	110.0	125	117	614	119.6	150	128	623
												2EH04502525	18.8	1	52.1	110.0	125	117	614	119.6	150	128	623
												2EH04505025	37.6	2	104.3	164.0	175	151	614	176.0	200	162	623
												2EH04507525	56.3	2	156.2	189.8	200	211	614	201.8	225	222	623
	230-3-60	32.6	240	34.0	240			2.3	13.4	6.7	8.7	None	-	-	-	111.1	125	118	615	119.8	150	128	624
												2EH04502525	23.0	1	57.7	111.1	125	118	615	119.8	150	128	624
												2EH04505025	45.9	2	115.2	177.5	200	163	615	188.4	200	173	624
												2EH04507525	68.9	2	172.9	206.4	225	230	615	217.3	225	240	624
	460-3-60	14.8	130	16.0	140			1.3	6.7	3.4	4.3	None	-	-	-	53.5	60	57	339	57.8	70	62	344
												2EH04502546	23.0	1	28.8	53.5	60	57	339	58.3	70	62	344
												2EH04505046	45.9	2	57.6	88.9	90	82	339	94.3	100	87	344
												2EH04507546	68.9	2	86.4	103.3	110	115	339	108.7	110	120	344
	575-3-60	11.1	94	12.9	108			1.0	5.4	2.7	3.5	None	-	-	-	42.0	50	45	257	45.5	50	49	260
												2EH04502558	23.0	1	23.0	42.3	50	45	257	46.6	50	49	260
												2EH04505058	45.9	2	46.0	71.0	80	65	257	75.4	80	69	260
												2EH04507558	68.9	2	69.1	82.6	90	92	257	87.0	90	96	260

Table 77: AD15 to AD28 VFD customer supplied standard static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	13.5	6.7	9.6	None	-	-	-	131.0	150	139	736	140.6	175	150	745
												2EH04502525	18.8	1	52.1	131.0	150	139	736	140.6	175	150	745
												2EH04505025	37.6	2	104.3	164.0	175	151	736	176.0	200	162	745
												2EH04507525	56.3	2	156.2	189.8	200	211	736	201.8	225	222	745
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	13.4	6.7	8.7	None	-	-	-	132.1	150	140	737	140.8	175	150	746
												2EH04502525	23.0	1	57.7	132.1	150	140	737	140.8	175	150	746
												2EH04505025	45.9	2	115.2	177.5	200	163	737	188.4	200	173	746
												2EH04507525	68.9	2	172.9	206.4	225	230	737	217.3	225	240	746
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	6.7	3.4	4.3	None	-	-	-	63.9	80	68	366	68.2	80	73	371
												2EH04502546	23.0	1	28.8	63.9	80	68	366	68.2	80	73	371
												2EH04505046	45.9	2	57.6	88.9	90	82	366	94.3	100	87	371
												2EH04507546	68.9	2	86.4	103.3	110	115	366	108.7	110	120	371
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	5.4	2.7	3.5	None	-	-	-	51.1	60	54	285	54.6	70	58	288
												2EH04502558	23.0	1	23.0	51.1	60	54	285	54.6	70	58	288
												2EH04505058	45.9	2	46.0	71.0	80	65	285	75.4	80	69	288
												2EH04507558	68.9	2	69.1	82.6	90	92	285	87.0	90	96	288
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	19.8	6.7	9.6	None	-	-	-	155.7	200	164	781	165.3	200	175	791
												2EH04502525	18.8	1	52.1	155.7	200	164	781	165.3	200	175	791
												2EH04505025	37.6	2	104.3	171.9	200	164	781	183.9	200	175	791
												2EH04507525	56.3	2	156.2	197.7	200	218	781	209.7	225	229	791
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	19.8	6.7	8.7	None	-	-	-	155.7	200	164	781	164.4	200	174	790
												2EH04502525	23.0	1	57.7	155.7	200	164	781	164.4	200	174	790
												2EH04505025	45.9	2	115.2	185.5	200	171	781	196.4	200	181	790
												2EH04507525	68.9	2	172.9	214.4	225	237	781	225.3	250	247	790
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	9.9	3.4	4.3	None	-	-	-	75.6	90	80	428	79.9	100	85	432
												2EH04502546	23.0	1	28.8	75.6	90	80	428	79.9	100	85	432
												2EH04505046	45.9	2	57.6	92.9	100	85	428	98.3	100	90	432
												2EH04507546	68.9	2	86.4	107.3	110	119	428	112.7	125	124	432
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	7.9	2.7	3.5	None	-	-	-	61.0	80	64	329	64.5	80	68	333
												2EH04502558	23.0	1	23.0	61.0	80	64	329	64.5	80	68	333
												2EH04505058	45.9	2	46.0	74.1	80	68	329	78.5	80	72	333
												2EH04507558	68.9	2	69.1	85.7	90	95	329	90.1	100	99	333

VFD customer supplied medium static

Table 78: AD15 to AD28 VFD customer supplied medium static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	9.9	9.6	None	-	-	-	72.7	90	76	437	82.3	100	87	446
											2EH04502525	18.8	1	52.1	77.5	90	76	437	89.5	100	87	446
											2EH04505025	37.6	2	104.3	142.8	150	131	437	154.8	175	142	446
											2EH04507525	56.3	2	156.2	168.6	200	191	437	180.6	200	202	446
	230-3-60	26.9	164	25.0	190			2.1	9.4	8.7	None	-	-	-	72.2	90	75	445	80.9	100	85	453
											2EH04502525	23.0	1	57.7	83.9	90	77	445	94.8	100	87	453
											2EH04505025	45.9	2	115.2	155.8	175	143	445	166.6	175	153	453
											2EH04507525	68.9	2	172.9	184.7	200	210	445	195.5	225	220	453
	460-3-60	12.0	94	12.2	100			1.1	4.7	4.3	None	-	-	-	34.2	45	36	240	38.5	50	41	244
											2EH04502546	23.0	1	28.8	41.9	45	39	240	47.3	50	43	244
											2EH04505046	45.9	2	57.6	77.9	80	72	240	83.3	90	77	244
											2EH04507546	68.9	2	86.4	92.3	100	105	240	97.7	110	110	244
	575-3-60	9.0	65	9.3	72			0.9	4.3	3.5	None	-	-	-	26.7	35	28	181	30.2	35	32	185
											2EH04502558	23.0	1	23.0	34.1	35	31	181	38.5	40	35	185
											2EH04505058	45.9	2	46.0	62.9	70	58	181	67.3	70	62	185
											2EH04507558	68.9	2	69.1	74.5	80	84	181	78.9	90	88	185
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	13.5	9.6	None	-	-	-	81.9	110	86	576	91.5	110	97	585
											2EH04502525	18.8	1	52.1	82.0	110	86	576	94.0	110	97	585
											2EH04505025	37.6	2	104.3	147.3	150	135	576	159.3	175	147	585
											2EH04507525	56.3	2	156.2	173.1	200	195	576	185.1	200	206	585
	230-3-60	28.8	223	28.2	240			2.1	13.4	8.7	None	-	-	-	81.8	110	86	575	90.5	110	96	584
											2EH04502525	23.0	1	57.7	88.9	110	86	575	99.8	110	96	584
											2EH04505025	45.9	2	115.2	160.8	175	148	575	171.6	175	158	584
											2EH04507525	68.9	2	172.9	189.7	225	214	575	200.5	225	224	584
	460-3-60	12.5	100	14.7	130			1.1	6.7	4.3	None	-	-	-	39.8	50	42	287	44.1	50	46	291
											2EH04502546	23.0	1	28.8	44.4	50	42	287	49.8	50	46	291
											2EH04505046	45.9	2	57.6	80.4	90	74	287	85.8	90	79	291
											2EH04507546	68.9	2	86.4	94.8	110	107	287	100.2	110	112	291
	575-3-60	9.7	70	11.3	94			0.9	5.4	3.5	None	-	-	-	31.0	40	32	208	34.5	45	36	212
											2EH04502558	23.0	1	23.0	35.5	40	33	208	39.9	45	37	212
											2EH04505058	45.9	2	46.0	64.3	70	59	208	68.6	70	63	212
											2EH04507558	68.9	2	69.1	75.9	90	86	208	80.2	90	90	212
20 (20)	208-3-60	32.6	240	34.0	240			2.0	13.5	9.6	None	-	-	-	96.6	125	101	600	106.2	125	112	610
											2EH04502525	18.8	1	52.1	96.6	125	101	600	106.2	125	112	610
											2EH04505025	37.6	2	104.3	147.3	150	135	600	159.3	175	147	610
											2EH04507525	56.3	2	156.2	173.1	200	195	600	185.1	200	206	610
	230-3-60	32.6	240	34.0	240			2.3	13.4	8.7	None	-	-	-	97.7	125	103	602	106.4	125	113	610
											2EH04502525	23.0	1	57.7	97.7	125	103	602	106.4	125	113	610
											2EH04505025	45.9	2	115.2	160.8	175	148	602	171.6	175	158	610
											2EH04507525	68.9	2	172.9	189.7	225	214	602	200.5	225	224	610
	460-3-60	14.8	130	16.0	140			1.3	6.7	4.3	None	-	-	-	46.7	60	49	333	51.0	60	54	337
											2EH04502546	23.0	1	28.8	46.7	60	49	333	51.0	60	54	337
											2EH04505046	45.9	2	57.6	80.4	90	74	333	85.8	90	79	337
											2EH04507546	68.9	2	86.4	94.8	110	107	333	100.2	110	112	337
	575-3-60	11.1	94	12.9	108			1.0	5.4	3.5	None	-	-	-	36.6	45	38	251	40.1	50	42	255
											2EH04502558	23.0	1	23.0	36.6	45	38	251	40.1	50	42	255
											2EH04505058	45.9	2	46.0	64.3	70	59	251	68.6	70	63	255
											2EH04507558	68.9	2	69.1	75.9	90	86	251	80.2	90	90	255

Table 78: AD15 to AD28 VFD customer supplied medium static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	19.8	9.6	None	-	-	-	123.9	150	131	740	133.5	150	142	749
											2EH04502525	18.8	1	52.1	123.9	150	131	740	133.5	150	142	749
											2EH04505025	37.6	2	104.3	155.1	175	143	740	167.1	175	154	749
											2EH04507525	56.3	2	156.2	181.0	200	202	740	193.0	200	213	749
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	19.8	8.7	None	-	-	-	125.1	150	132	742	133.8	150	142	750
											2EH04502525	23.0	1	57.7	125.1	150	132	742	133.8	150	142	750
											2EH04505025	45.9	2	115.2	168.8	175	155	742	179.6	200	165	750
											2EH04507525	68.9	2	172.9	197.7	225	222	742	208.5	225	232	750
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	9.9	4.3	None	-	-	-	60.3	70	64	369	64.6	80	69	373
											2EH04502546	23.0	1	28.8	60.3	70	64	369	64.6	80	69	373
											2EH04505046	45.9	2	57.6	84.4	90	78	369	89.8	90	83	373
											2EH04507546	68.9	2	86.4	98.8	110	111	369	104.2	110	116	373
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	7.9	3.5	None	-	-	-	48.2	60	51	290	51.7	60	55	294
											2EH04502558	23.0	1	23.0	48.2	60	51	290	51.7	60	55	294
											2EH04505058	45.9	2	46.0	67.4	70	62	290	71.8	80	66	294
											2EH04507558	68.9	2	69.1	79.0	90	89	290	83.4	90	93	294
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	25.4	9.6	None	-	-	-	147.9	175	155	806	157.5	200	166	816
											2EH04502525	18.8	1	52.1	147.9	175	155	806	157.5	200	166	816
											2EH04505025	37.6	2	104.3	162.1	175	155	806	174.1	200	166	816
											2EH04507525	56.3	2	156.2	188.0	200	209	806	200.0	200	220	816
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	25.4	8.7	None	-	-	-	147.9	175	155	806	156.6	200	165	815
											2EH04502525	23.0	1	57.7	147.9	175	155	806	156.6	200	165	815
											2EH04505025	45.9	2	115.2	175.8	200	162	806	186.6	200	172	815
											2EH04507525	68.9	2	172.9	204.7	225	228	806	215.5	225	238	815
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	12.7	4.3	None	-	-	-	71.6	90	76	440	75.9	90	81	445
											2EH04502546	23.0	1	28.8	71.6	90	76	440	75.9	90	81	445
											2EH04505046	45.9	2	57.6	87.9	90	81	440	93.3	100	86	445
											2EH04507546	68.9	2	86.4	102.3	110	114	440	107.7	110	119	445
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	10.5	3.5	None	-	-	-	58.2	70	61	355	61.7	80	65	358
											2EH04502558	23.0	1	23.0	58.2	70	61	355	61.7	80	65	358
											2EH04505058	45.9	2	46.0	70.6	80	65	355	75.0	80	69	358
											2EH04507558	68.9	2	69.1	82.2	90	92	355	86.6	90	96	358

Table 79: AD15 to AD28 VFD customer supplied medium static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	9.9	5.0	9.6	None	-	-	-	82.7	100	87	458	92.3	110	98	467
												2EH04502525	18.8	1	52.1	90.0	100	87	458	102.0	110	98	467
												2EH04505025	37.6	2	104.3	155.3	175	143	458	167.3	175	154	467
												2EH04507525	56.3	2	156.2	181.1	200	203	458	193.1	200	214	467
	230-3-60	26.9	164	25.0	190			2.1	9.4	5.0	8.7	None	-	-	-	82.2	100	87	466	90.9	110	97	474
												2EH04502525	23.0	1	57.7	96.4	100	89	466	107.3	110	99	474
												2EH04505025	45.9	2	115.2	168.3	175	155	466	179.1	200	165	474
												2EH04507525	68.9	2	172.9	197.2	225	221	466	208.0	225	231	474
	460-3-60	12.0	94	12.2	100			1.1	4.7	2.2	4.3	None	-	-	-	38.6	50	41	249	42.9	50	46	253
												2EH04502546	23.0	1	28.8	47.4	50	44	249	52.8	60	49	253
												2EH04505046	45.9	2	57.6	83.4	90	77	249	88.8	90	82	253
												2EH04507546	68.9	2	86.4	97.8	110	110	249	103.2	110	115	253
	575-3-60	9.0	65	9.3	72			0.9	4.3	1.5	3.5	None	-	-	-	29.7	35	32	187	33.2	40	36	191
												2EH04502558	23.0	1	23.0	37.9	40	35	187	42.3	45	39	191
												2EH04505058	45.9	2	46.0	66.6	70	61	187	71.0	80	65	191
												2EH04507558	68.9	2	69.1	78.2	90	88	187	82.6	90	92	191
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	13.5	5.0	9.6	None	-	-	-	91.9	110	97	597	101.5	125	108	606
												2EH04502525	18.8	1	52.1	94.5	110	97	597	106.5	125	108	606
												2EH04505025	37.6	2	104.3	159.8	175	147	597	171.8	175	158	606
												2EH04507525	56.3	2	156.2	185.6	200	207	597	197.6	200	218	606
	230-3-60	28.8	223	28.2	240			2.1	13.4	5.0	8.7	None	-	-	-	91.8	110	97	596	100.5	125	107	605
												2EH04502525	23.0	1	57.7	101.4	110	97	596	112.3	125	107	605
												2EH04505025	45.9	2	115.2	173.3	175	159	596	184.1	200	169	605
												2EH04507525	68.9	2	172.9	202.2	225	226	596	213.0	225	236	605
	460-3-60	12.5	100	14.7	130			1.1	6.7	2.2	4.3	None	-	-	-	44.2	50	47	296	48.5	60	52	300
												2EH04502546	23.0	1	28.8	49.9	50	47	296	55.3	60	52	300
												2EH04505046	45.9	2	57.6	85.9	90	79	296	91.3	100	84	300
												2EH04507546	68.9	2	86.4	100.3	110	112	296	105.7	110	117	300
	575-3-60	9.7	70	11.3	94			0.9	5.4	1.5	3.5	None	-	-	-	34.0	45	36	214	37.5	45	40	218
												2EH04502558	23.0	1	23.0	39.3	45	36	214	43.6	45	40	218
												2EH04505058	45.9	2	46.0	68.0	70	63	214	72.4	80	67	218
												2EH04507558	68.9	2	69.1	79.6	90	89	214	84.0	90	93	218
20 (20)	208-3-60	32.6	240	34.0	240			2.0	13.5	5.0	9.6	None	-	-	-	106.6	125	113	621	116.2	150	124	631
												2EH04502525	18.8	1	52.1	106.6	125	113	621	116.2	150	124	631
												2EH04505025	37.6	2	104.3	159.8	175	147	621	171.8	175	158	631
												2EH04507525	56.3	2	156.2	185.6	200	207	621	197.6	200	218	631
	230-3-60	32.6	240	34.0	240			2.3	13.4	5.0	8.7	None	-	-	-	107.7	125	114	623	116.4	150	124	631
												2EH04502525	23.0	1	57.7	107.7	125	114	623	116.4	150	124	631
												2EH04505025	45.9	2	115.2	173.3	175	159	623	184.1	200	169	631
												2EH04507525	68.9	2	172.9	202.2	225	226	623	213.0	225	236	631
	460-3-60	14.8	130	16.0	140			1.3	6.7	2.2	4.3	None	-	-	-	51.1	60	54	342	55.4	70	59	346
												2EH04502546	23.0	1	28.8	51.1	60	54	342	55.4	70	59	346
												2EH04505046	45.9	2	57.6	85.9	90	79	342	91.3	100	84	346
												2EH04507546	68.9	2	86.4	100.3	110	112	342	105.7	110	117	346
	575-3-60	11.1	94	12.9	108			1.0	5.4	1.5	3.5	None	-	-	-	39.6	50	42	258	43.1	50	46	261
												2EH04502558	23.0	1	23.0	39.6	50	42	258	43.6	50	46	261
												2EH04505058	45.9	2	46.0	68.0	70	63	258	72.4	80	67	261
												2EH04507558	68.9	2	69.1	79.6	90	89	258	84.0	90	93	261

Table 79: AD15 to AD28 VFD customer supplied medium static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	19.8	5.0	9.6	None	-	-	-	133.9	150	142	761	143.5	175	153	770
												2EH04502525	18.8	1	52.1	133.9	150	142	761	143.5	175	153	770
												2EH04505025	37.6	2	104.3	167.6	175	154	761	179.6	200	165	770
												2EH04507525	56.3	2	156.2	193.5	200	214	761	205.5	225	225	770
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	19.8	5.0	8.7	None	-	-	-	135.1	175	144	763	143.8	175	154	771
												2EH04502525	23.0	1	57.7	135.1	175	144	763	143.8	175	154	771
												2EH04505025	45.9	2	115.2	181.3	200	167	763	192.1	200	177	771
												2EH04507525	68.9	2	172.9	210.2	225	233	763	221.0	225	243	771
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	9.9	2.2	4.3	None	-	-	-	64.7	80	69	378	69.0	80	74	382
												2EH04502546	23.0	1	28.8	64.7	80	69	378	69.0	80	74	382
												2EH04505046	45.9	2	57.6	89.9	90	83	378	95.3	100	88	382
												2EH04507546	68.9	2	86.4	104.3	110	116	378	109.7	110	121	382
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	7.9	1.5	3.5	None	-	-	-	51.2	60	54	296	54.7	70	58	300
												2EH04502558	23.0	1	23.0	51.2	60	54	296	54.7	70	58	300
												2EH04505058	45.9	2	46.0	71.1	80	65	296	75.5	80	69	300
												2EH04507558	68.9	2	69.1	82.7	90	92	296	87.1	90	96	300
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	25.4	5.0	9.6	None	-	-	-	157.9	200	167	827	167.5	200	178	837
												2EH04502525	18.8	1	52.1	157.9	200	167	827	167.5	200	178	837
												2EH04505025	37.6	2	104.3	174.6	200	167	827	186.6	200	178	837
												2EH04507525	56.3	2	156.2	200.5	225	220	827	212.5	225	231	837
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	25.4	5.0	8.7	None	-	-	-	157.9	200	167	827	166.6	200	177	836
												2EH04502525	23.0	1	57.7	157.9	200	167	827	166.6	200	177	836
												2EH04505025	45.9	2	115.2	188.3	200	173	827	199.1	200	183	836
												2EH04507525	68.9	2	172.9	217.2	225	240	827	228.0	250	250	836
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	12.7	2.2	4.3	None	-	-	-	76.0	90	81	449	80.3	100	86	454
												2EH04502546	23.0	1	28.8	76.0	90	81	449	80.3	100	86	454
												2EH04505046	45.9	2	57.6	93.4	100	86	449	98.8	100	91	454
												2EH04507546	68.9	2	86.4	107.8	110	119	449	113.2	125	124	454
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	10.5	1.5	3.5	None	-	-	-	61.2	80	65	361	64.7	80	69	364
												2EH04502558	23.0	1	23.0	61.2	80	65	361	64.7	80	69	364
												2EH04505058	45.9	2	46.0	74.4	80	68	361	78.8	80	72	364
												2EH04507558	68.9	2	69.1	86.0	90	95	361	90.4	100	99	364

Table 80: AD15 to AD28 VFD customer supplied medium static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	9.9	6.7	9.6	None	-	-	-	86.1	110	91	450	95.7	110	102	460
												2EH04502525	18.8	1	52.1	94.3	110	91	450	106.3	110	102	460
												2EH04505025	37.6	2	104.3	159.5	175	147	450	171.5	175	158	460
												2EH04507525	56.3	2	156.2	185.3	200	206	450	197.3	200	217	460
	230-3-60	26.9	164	25.0	190			2.1	9.4	6.7	8.7	None	-	-	-	85.6	110	91	458	94.3	110	101	467
												2EH04502525	23.0	1	57.7	100.6	110	93	458	111.5	125	103	467
												2EH04505025	45.9	2	115.2	172.5	175	159	458	183.4	200	169	467
												2EH04507525	68.9	2	172.9	201.4	225	225	458	212.3	225	235	467
	460-3-60	12.0	94	12.2	100			1.1	4.7	3.4	4.3	None	-	-	-	41.0	50	44	247	45.3	50	49	251
												2EH04502546	23.0	1	28.8	50.4	60	46	247	55.8	60	51	251
												2EH04505046	45.9	2	57.6	86.4	90	79	247	91.8	100	84	251
												2EH04507546	68.9	2	86.4	100.8	110	113	247	106.2	110	118	251
	575-3-60	9.0	65	9.3	72			0.9	4.3	2.7	3.5	None	-	-	-	32.1	40	34	186	35.6	40	38	190
												2EH04502558	23.0	1	23.0	40.9	45	38	186	45.3	50	42	190
												2EH04505058	45.9	2	46.0	69.6	70	64	186	74.0	80	68	190
												2EH04507558	68.9	2	69.1	81.2	90	91	186	85.6	90	95	190
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	13.5	6.7	9.6	None	-	-	-	95.3	110	101	589	104.9	125	112	599
												2EH04502525	18.8	1	52.1	98.8	110	101	589	110.8	125	112	599
												2EH04505025	37.6	2	104.3	164.0	175	151	589	176.0	200	162	599
												2EH04507525	56.3	2	156.2	189.8	200	211	589	201.8	225	222	599
	230-3-60	28.8	223	28.2	240			2.1	13.4	6.7	8.7	None	-	-	-	95.2	110	101	588	103.9	125	111	597
												2EH04502525	23.0	1	57.7	105.6	110	101	588	116.5	125	111	597
												2EH04505025	45.9	2	115.2	177.5	200	163	588	188.4	200	173	597
												2EH04507525	68.9	2	172.9	206.4	225	230	588	217.3	225	240	597
	460-3-60	12.5	100	14.7	130			1.1	6.7	3.4	4.3	None	-	-	-	46.6	60	49	293	50.9	60	54	298
												2EH04502546	23.0	1	28.8	52.9	60	49	293	58.3	60	54	298
												2EH04505046	45.9	2	57.6	88.9	90	82	293	94.3	100	87	298
												2EH04507546	68.9	2	86.4	103.3	110	115	293	108.7	110	120	298
	575-3-60	9.7	70	11.3	94			0.9	5.4	2.7	3.5	None	-	-	-	36.4	45	39	213	39.9	50	43	217
												2EH04502558	23.0	1	23.0	42.3	45	39	213	46.6	50	43	217
												2EH04505058	45.9	2	46.0	71.0	80	65	213	75.4	80	69	217
												2EH04507558	68.9	2	69.1	82.6	90	92	213	87.0	90	96	217
20 (20)	208-3-60	32.6	240	34.0	240			2.0	13.5	6.7	9.6	None	-	-	-	110.0	125	117	614	119.6	150	128	623
												2EH04502525	18.8	1	52.1	110.0	125	117	614	119.6	150	128	623
												2EH04505025	37.6	2	104.3	164.0	175	151	614	176.0	200	162	623
												2EH04507525	56.3	2	156.2	189.8	200	211	614	201.8	225	222	623
	230-3-60	32.6	240	34.0	240			2.3	13.4	6.7	8.7	None	-	-	-	111.1	125	118	615	119.8	150	128	624
												2EH04502525	23.0	1	57.7	111.1	125	118	615	119.8	150	128	624
												2EH04505025	45.9	2	115.2	177.5	200	163	615	188.4	200	173	624
												2EH04507525	68.9	2	172.9	206.4	225	230	615	217.3	225	240	624
	460-3-60	14.8	130	16.0	140			1.3	6.7	3.4	4.3	None	-	-	-	53.5	60	57	339	57.8	70	62	344
												2EH04502546	23.0	1	28.8	53.5	60	57	339	58.3	70	62	344
												2EH04505046	45.9	2	57.6	88.9	90	82	339	94.3	100	87	344
												2EH04507546	68.9	2	86.4	103.3	110	115	339	108.7	110	120	344
	575-3-60	11.1	94	12.9	108			1.0	5.4	2.7	3.5	None	-	-	-	42.0	50	45	257	45.5	50	49	260
												2EH04502558	23.0	1	23.0	42.3	50	45	257	46.6	50	49	260
												2EH04505058	45.9	2	46.0	71.0	80	65	257	75.4	80	69	260
												2EH04507558	68.9	2	69.1	82.6	90	92	257	87.0	90	96	260

Table 80: AD15 to AD28 VFD customer supplied medium static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	19.8	6.7	9.6	None	-	-	-	137.3	175	146	753	146.9	175	157	763
												2EH04502525	18.8	1	52.1	137.3	175	146	753	146.9	175	157	763
												2EH04505025	37.6	2	104.3	171.9	175	158	753	183.9	200	169	763
												2EH04507525	56.3	2	156.2	197.7	200	218	753	209.7	225	229	763
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	19.8	6.7	8.7	None	-	-	-	138.5	175	147	755	147.2	175	157	764
												2EH04502525	23.0	1	57.7	138.5	175	147	755	147.2	175	157	764
												2EH04505025	45.9	2	115.2	185.5	200	171	755	196.4	200	181	764
												2EH04507525	68.9	2	172.9	214.4	225	237	755	225.3	250	247	764
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	9.9	3.4	4.3	None	-	-	-	67.1	80	72	375	71.4	90	77	380
												2EH04502546	23.0	1	28.8	67.1	80	72	375	71.4	90	77	380
												2EH04505046	45.9	2	57.6	92.9	100	85	375	98.3	100	90	380
												2EH04507546	68.9	2	86.4	107.3	110	119	375	112.7	125	124	380
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	7.9	2.7	3.5	None	-	-	-	53.6	70	57	295	57.1	70	61	299
												2EH04502558	23.0	1	23.0	53.6	70	57	295	57.1	70	61	299
												2EH04505058	45.9	2	46.0	74.1	80	68	295	78.5	80	72	299
												2EH04507558	68.9	2	69.1	85.7	90	95	295	90.1	100	99	299
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	25.4	6.7	9.6	None	-	-	-	161.3	200	171	819	170.9	200	182	829
												2EH04502525	18.8	1	52.1	161.3	200	171	819	170.9	200	182	829
												2EH04505025	37.6	2	104.3	178.9	200	171	819	190.9	200	182	829
												2EH04507525	56.3	2	156.2	204.7	225	224	819	216.7	225	235	829
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	25.4	6.7	8.7	None	-	-	-	161.3	200	171	819	170.0	200	181	828
												2EH04502525	23.0	1	57.7	161.3	200	171	819	170.0	200	181	828
												2EH04505025	45.9	2	115.2	192.5	200	177	819	203.4	225	187	828
												2EH04507525	68.9	2	172.9	221.4	225	243	819	232.3	250	253	828
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	12.7	3.4	4.3	None	-	-	-	78.4	100	83	447	82.7	100	88	451
												2EH04502546	23.0	1	28.8	78.4	100	83	447	82.7	100	88	451
												2EH04505046	45.9	2	57.6	96.4	100	89	447	101.8	110	94	451
												2EH04507546	68.9	2	86.4	110.8	125	122	447	116.2	125	127	451
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	10.5	2.7	3.5	None	-	-	-	63.6	80	67	360	67.1	80	71	363
												2EH04502558	23.0	1	23.0	63.6	80	67	360	67.1	80	71	363
												2EH04505058	45.9	2	46.0	77.4	80	71	360	81.8	90	75	363
												2EH04507558	68.9	2	69.1	89.0	90	98	360	93.4	100	102	363

VFD customer supplied high static

Table 81: AD15 to AD28 VFD customer supplied high static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	13.5	9.6	None	-	-	-	76.3	100	80	467	85.9	110	91	476
											2EH04502525	18.8	1	52.1	82.0	100	80	467	94.0	110	91	476
											2EH04505025	37.6	2	104.3	147.3	150	135	467	159.3	175	147	476
											2EH04507525	56.3	2	156.2	173.1	200	195	467	185.1	200	206	476
	230-3-60	26.9	164	25.0	190			2.1	13.4	8.7	None	-	-	-	76.2	100	80	466	84.9	110	90	475
											2EH04502525	23.0	1	57.7	88.9	100	82	466	99.8	110	92	475
											2EH04505025	45.9	2	115.2	160.8	175	148	466	171.6	175	158	475
											2EH04507525	68.9	2	172.9	189.7	225	214	466	200.5	225	224	475
	460-3-60	12.0	94	12.2	100			1.1	6.7	4.3	None	-	-	-	36.2	45	38	251	40.5	50	43	255
											2EH04502546	23.0	1	28.8	44.4	45	41	251	49.8	50	46	255
											2EH04505046	45.9	2	57.6	80.4	90	74	251	85.8	90	79	255
											2EH04507546	68.9	2	86.4	94.8	110	107	251	100.2	110	112	255
	575-3-60	9.0	65	9.3	72			0.9	5.4	3.5	None	-	-	-	27.8	35	29	181	31.3	40	33	185
											2EH04502558	23.0	1	23.0	35.5	40	33	181	39.9	40	37	185
											2EH04505058	45.9	2	46.0	64.3	70	59	181	68.6	70	63	185
											2EH04507558	68.9	2	69.1	75.9	90	86	181	80.2	90	90	185
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	19.8	9.6	None	-	-	-	88.2	110	93	593	97.8	125	104	603
											2EH04502525	18.8	1	52.1	89.9	110	93	593	101.9	125	104	603
											2EH04505025	37.6	2	104.3	155.1	175	143	593	167.1	175	154	603
											2EH04507525	56.3	2	156.2	181.0	200	202	593	193.0	200	213	603
	230-3-60	28.8	223	28.2	240			2.1	19.8	8.7	None	-	-	-	88.2	110	93	593	96.9	125	103	602
											2EH04502525	23.0	1	57.7	96.9	110	93	593	107.8	125	103	602
											2EH04505025	45.9	2	115.2	168.8	175	155	593	179.6	200	165	602
											2EH04507525	68.9	2	172.9	197.7	225	222	593	208.5	225	232	602
	460-3-60	12.5	100	14.7	130			1.1	9.9	4.3	None	-	-	-	43.0	50	45	296	47.3	60	50	300
											2EH04502546	23.0	1	28.8	48.4	50	45	296	53.8	60	50	300
											2EH04505046	45.9	2	57.6	84.4	90	78	296	89.8	90	83	300
											2EH04507546	68.9	2	86.4	98.8	110	111	296	104.2	110	116	300
	575-3-60	9.7	70	11.3	94			0.9	7.9	3.5	None	-	-	-	33.5	40	35	219	37.0	45	39	222
											2EH04502558	23.0	1	23.0	38.6	40	36	219	43.0	45	40	222
											2EH04505058	45.9	2	46.0	67.4	70	62	219	71.8	80	66	222
											2EH04507558	68.9	2	69.1	79.0	90	89	219	83.4	90	93	222
20 (20)	208-3-60	32.6	240	34.0	240			2.0	19.8	9.6	None	-	-	-	102.9	125	109	618	112.5	125	120	627
											2EH04502525	18.8	1	52.1	102.9	125	109	618	112.5	125	120	627
											2EH04505025	37.6	2	104.3	155.1	175	143	618	167.1	175	154	627
											2EH04507525	56.3	2	156.2	181.0	200	202	618	193.0	200	213	627
	230-3-60	32.6	240	34.0	240			2.3	19.8	8.7	None	-	-	-	104.1	125	110	620	112.8	125	120	628
											2EH04502525	23.0	1	57.7	104.1	125	110	620	112.8	125	120	628
											2EH04505025	45.9	2	115.2	168.8	175	155	620	179.6	200	165	628
											2EH04507525	68.9	2	172.9	197.7	225	222	620	208.5	225	232	628
	460-3-60	14.8	130	16.0	140			1.3	9.9	4.3	None	-	-	-	49.9	60	53	342	54.2	70	58	346
											2EH04502546	23.0	1	28.8	49.9	60	53	342	54.2	70	58	346
											2EH04505046	45.9	2	57.6	84.4	90	78	342	89.8	90	83	346
											2EH04507546	68.9	2	86.4	98.8	110	111	342	104.2	110	116	346
	575-3-60	11.1	94	12.9	108			1.0	7.9	3.5	None	-	-	-	39.1	50	41	262	42.6	50	45	266
											2EH04502558	23.0	1	23.0	39.1	50	41	262	43.0	50	45	266
											2EH04505058	45.9	2	46.0	67.4	70	62	262	71.8	80	66	266
											2EH04507558	68.9	2	69.1	79.0	90	89	262	83.4	90	93	266

Table 81: AD15 to AD28 VFD customer supplied high static without power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA				Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	25.4	9.6	None	-	-	-	129.5	150	137	778	139.1	175	148	787
											2EH04502525	18.8	1	52.1	129.5	150	137	778	139.1	175	148	787
											2EH04505025	37.6	2	104.3	162.1	175	149	778	174.1	175	160	787
											2EH04507525	56.3	2	156.2	188.0	200	209	778	200.0	200	220	787
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	25.4	8.7	None	-	-	-	130.7	150	138	780	139.4	175	148	788
											2EH04502525	23.0	1	57.7	130.7	150	138	780	139.4	175	148	788
											2EH04505025	45.9	2	115.2	175.8	200	162	780	186.6	200	172	788
											2EH04507525	68.9	2	172.9	204.7	225	228	780	215.5	225	238	788
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	12.7	4.3	None	-	-	-	63.1	80	67	388	67.4	80	72	392
											2EH04502546	23.0	1	28.8	63.1	80	67	388	67.4	80	72	392
											2EH04505046	45.9	2	57.6	87.9	90	81	388	93.3	100	86	392
											2EH04507546	68.9	2	86.4	102.3	110	114	388	107.7	110	119	392
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	10.5	3.5	None	-	-	-	50.8	60	54	321	54.3	70	58	324
											2EH04502558	23.0	1	23.0	50.8	60	54	321	54.3	70	58	324
											2EH04505058	45.9	2	46.0	70.6	80	65	321	75.0	80	69	324
											2EH04507558	68.9	2	69.1	82.2	90	92	321	86.6	90	96	324
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	30.2	9.6	None	-	-	-	152.7	200	161	836	162.3	200	172	846
											2EH04502525	18.8	1	52.1	152.7	200	161	836	162.3	200	172	846
											2EH04505025	37.6	2	104.3	168.1	200	161	836	180.1	200	172	846
											2EH04507525	56.3	2	156.2	194.0	200	214	836	206.0	225	225	846
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	30.2	8.7	None	-	-	-	152.7	200	161	836	161.4	200	171	845
											2EH04502525	23.0	1	57.7	152.7	200	161	836	161.4	200	171	845
											2EH04505025	45.9	2	115.2	181.8	200	167	836	192.6	200	177	845
											2EH04507525	68.9	2	172.9	210.7	225	234	836	221.5	225	244	845
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	15.1	4.3	None	-	-	-	74.0	90	78	455	78.3	100	83	460
											2EH04502546	23.0	1	28.8	74.0	90	78	455	78.3	100	83	460
											2EH04505046	45.9	2	57.6	90.9	100	84	455	96.3	100	89	460
											2EH04507546	68.9	2	86.4	105.3	110	117	455	110.7	125	122	460
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	12.0	3.5	None	-	-	-	59.7	70	63	343	63.2	80	67	347
											2EH04502558	23.0	1	23.0	59.7	70	63	343	63.2	80	67	347
											2EH04505058	45.9	2	46.0	72.5	80	67	343	76.9	80	71	347
											2EH04507558	68.9	2	69.1	84.1	90	93	343	88.5	90	97	347

Table 82: AD15 to AD28 VFD customer supplied high static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	13.5	5.0	9.6	None	-	-	-	86.3	110	92	488	95.9	110	103	497
												2EH04502525	18.8	1	52.1	94.5	110	92	488	106.5	110	103	497
												2EH04505025	37.6	2	104.3	159.8	175	147	488	171.8	175	158	497
												2EH04507525	56.3	2	156.2	185.6	200	207	488	197.6	200	218	497
	230-3-60	26.9	164	25.0	190			2.1	13.4	5.0	8.7	None	-	-	-	86.2	110	91	487	94.9	110	101	496
												2EH04502525	23.0	1	57.7	101.4	110	93	487	112.3	125	103	496
												2EH04505025	45.9	2	115.2	173.3	175	159	487	184.1	200	169	496
												2EH04507525	68.9	2	172.9	202.2	225	226	487	213.0	225	236	496
	460-3-60	12.0	94	12.2	100			1.1	6.7	2.2	4.3	None	-	-	-	40.6	50	43	260	44.9	50	48	264
												2EH04502546	23.0	1	28.8	49.9	50	46	260	55.3	60	51	264
												2EH04505046	45.9	2	57.6	85.9	90	79	260	91.3	100	84	264
												2EH04507546	68.9	2	86.4	100.3	110	112	260	105.7	110	117	264
	575-3-60	9.0	65	9.3	72			0.9	5.4	1.5	3.5	None	-	-	-	30.8	40	33	187	34.3	40	37	191
												2EH04502558	23.0	1	23.0	39.3	40	36	187	43.6	45	40	191
												2EH04505058	45.9	2	46.0	68.0	70	63	187	72.4	80	67	191
												2EH04507558	68.9	2	69.1	79.6	90	89	187	84.0	90	93	191
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	19.8	5.0	9.6	None	-	-	-	98.2	125	105	614	107.8	125	116	624
												2EH04502525	18.8	1	52.1	102.4	125	105	614	114.4	125	116	624
												2EH04505025	37.6	2	104.3	167.6	175	154	614	179.6	200	165	624
												2EH04507525	56.3	2	156.2	193.5	200	214	614	205.5	225	225	624
	230-3-60	28.8	223	28.2	240			2.1	19.8	5.0	8.7	None	-	-	-	98.2	125	105	614	106.9	125	115	623
												2EH04502525	23.0	1	57.7	109.4	125	105	614	120.3	125	115	623
												2EH04505025	45.9	2	115.2	181.3	200	167	614	192.1	200	177	623
												2EH04507525	68.9	2	172.9	210.2	225	233	614	221.0	225	243	623
	460-3-60	12.5	100	14.7	130			1.1	9.9	2.2	4.3	None	-	-	-	47.4	60	50	305	51.7	60	55	309
												2EH04502546	23.0	1	28.8	53.9	60	50	305	59.3	60	55	309
												2EH04505046	45.9	2	57.6	89.9	90	83	305	95.3	100	88	309
												2EH04507546	68.9	2	86.4	104.3	110	116	305	109.7	110	121	309
	575-3-60	9.7	70	11.3	94			0.9	7.9	1.5	3.5	None	-	-	-	36.5	45	39	225	40.0	50	43	229
												2EH04502558	23.0	1	23.0	42.4	45	39	225	46.8	50	43	229
												2EH04505058	45.9	2	46.0	71.1	80	65	225	75.5	80	69	229
												2EH04507558	68.9	2	69.1	82.7	90	92	225	87.1	90	96	229
20 (20)	208-3-60	32.6	240	34.0	240			2.0	19.8	5.0	9.6	None	-	-	-	112.9	125	120	639	122.5	150	131	648
												2EH04502525	18.8	1	52.1	112.9	125	120	639	122.5	150	131	648
												2EH04505025	37.6	2	104.3	167.6	175	154	639	179.6	200	165	648
												2EH04507525	56.3	2	156.2	193.5	200	214	639	205.5	225	225	648
	230-3-60	32.6	240	34.0	240			2.3	19.8	5.0	8.7	None	-	-	-	114.1	125	121	641	122.8	150	131	649
												2EH04502525	23.0	1	57.7	114.1	125	121	641	122.8	150	131	649
												2EH04505025	45.9	2	115.2	181.3	200	167	641	192.1	200	177	649
												2EH04507525	68.9	2	172.9	210.2	225	233	641	221.0	225	243	649
	460-3-60	14.8	130	16.0	140			1.3	9.9	2.2	4.3	None	-	-	-	54.3	70	58	351	58.6	70	63	355
												2EH04502546	23.0	1	28.8	54.3	70	58	351	59.3	70	63	355
												2EH04505046	45.9	2	57.6	89.9	90	83	351	95.3	100	88	355
												2EH04507546	68.9	2	86.4	104.3	110	116	351	109.7	110	121	355
	575-3-60	11.1	94	12.9	108			1.0	7.9	1.5	3.5	None	-	-	-	42.1	50	45	268	45.6	50	49	272
												2EH04502558	23.0	1	23.0	42.4	50	45	268	46.8	50	49	272
												2EH04505058	45.9	2	46.0	71.1	80	65	268	75.5	80	69	272
												2EH04507558	68.9	2	69.1	82.7	90	92	268	87.1	90	96	272

Table 82: AD15 to AD28 VFD customer supplied high static with on/off power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	25.4	5.0	9.6	None	-	-	-	139.5	175	149	799	149.1	175	160	808
												2EH04502525	18.8	1	52.1	139.5	175	149	799	149.1	175	160	808
												2EH04505025	37.6	2	104.3	174.6	175	161	799	186.6	200	172	808
												2EH04507525	56.3	2	156.2	200.5	225	220	799	212.5	225	231	808
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	25.4	5.0	8.7	None	-	-	-	140.7	175	150	801	149.4	175	160	809
												2EH04502525	23.0	1	57.7	140.7	175	150	801	149.4	175	160	809
												2EH04505025	45.9	2	115.2	188.3	200	173	801	199.1	200	183	809
												2EH04507525	68.9	2	172.9	217.2	225	240	801	228.0	250	250	809
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	12.7	2.2	4.3	None	-	-	-	67.5	80	72	397	71.8	90	77	401
												2EH04502546	23.0	1	28.8	67.5	80	72	397	71.8	90	77	401
												2EH04505046	45.9	2	57.6	93.4	100	86	397	98.8	100	91	401
												2EH04507546	68.9	2	86.4	107.8	110	119	397	113.2	125	124	401
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	10.5	1.5	3.5	None	-	-	-	53.8	70	57	327	57.3	70	61	331
												2EH04502558	23.0	1	23.0	53.8	70	57	327	57.3	70	61	331
												2EH04505058	45.9	2	46.0	74.4	80	68	327	78.8	80	72	331
												2EH04507558	68.9	2	69.1	86.0	90	95	327	90.4	100	99	331
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	30.2	5.0	9.6	None	-	-	-	162.7	200	172	857	172.3	200	183	867
												2EH04502525	18.8	1	52.1	162.7	200	172	857	172.3	200	183	867
												2EH04505025	37.6	2	104.3	180.6	200	172	857	192.6	200	183	867
												2EH04507525	56.3	2	156.2	206.5	225	226	857	218.5	225	237	867
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	30.2	5.0	8.7	None	-	-	-	162.7	200	172	857	171.4	200	182	866
												2EH04502525	23.0	1	57.7	162.7	200	172	857	171.4	200	182	866
												2EH04505025	45.9	2	115.2	194.3	200	179	857	205.1	225	189	866
												2EH04507525	68.9	2	172.9	223.2	250	245	857	234.0	250	255	866
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	15.1	2.2	4.3	None	-	-	-	78.4	100	83	464	82.7	100	88	469
												2EH04502546	23.0	1	28.8	78.4	100	83	464	82.7	100	88	469
												2EH04505046	45.9	2	57.6	96.4	100	89	464	101.8	110	94	469
												2EH04507546	68.9	2	86.4	110.8	125	122	464	116.2	125	127	469
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	12.0	1.5	3.5	None	-	-	-	62.7	80	66	350	66.2	80	70	353
												2EH04502558	23.0	1	23.0	62.7	80	66	350	66.2	80	70	353
												2EH04505058	45.9	2	46.0	76.3	80	70	350	80.6	90	74	353
												2EH04507558	68.9	2	69.1	87.9	90	97	350	92.2	100	101	353

Table 83: AD15 to AD28 VFD customer supplied high static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
15 (15)	208-3-60	26.9	164	25.0	190			2.1	13.5	6.7	9.6	None	-	-	-	89.7	110	95	480	99.3	125	106	490
												2EH04502525	18.8	1	52.1	98.8	110	95	480	110.8	125	106	490
												2EH04505025	37.6	2	104.3	164.0	175	151	480	176.0	200	162	490
												2EH04507525	56.3	2	156.2	189.8	200	211	480	201.8	225	222	490
	230-3-60	26.9	164	25.0	190			2.1	13.4	6.7	8.7	None	-	-	-	89.6	110	95	479	98.3	125	105	488
												2EH04502525	23.0	1	57.7	105.6	110	97	479	116.5	125	107	488
												2EH04505025	45.9	2	115.2	177.5	200	163	479	188.4	200	173	488
												2EH04507525	68.9	2	172.9	206.4	225	230	479	217.3	225	240	488
	460-3-60	12.0	94	12.2	100			1.1	6.7	3.4	4.3	None	-	-	-	43.0	50	46	257	47.3	50	51	262
												2EH04502546	23.0	1	28.8	52.9	60	49	257	58.3	60	54	262
												2EH04505046	45.9	2	57.6	88.9	90	82	257	94.3	100	87	262
												2EH04507546	68.9	2	86.4	103.3	110	115	257	108.7	110	120	262
	575-3-60	9.0	65	9.3	72			0.9	5.4	2.7	3.5	None	-	-	-	33.2	40	36	186	36.7	45	40	190
												2EH04502558	23.0	1	23.0	42.3	45	39	186	46.6	50	43	190
												2EH04505058	45.9	2	46.0	71.0	80	65	186	75.4	80	69	190
												2EH04507558	68.9	2	69.1	82.6	90	92	186	87.0	90	96	190
18 (17.5)	208-3-60	28.8	223	28.2	240			2.1	19.8	6.7	9.6	None	-	-	-	101.6	125	109	606	111.2	125	120	616
												2EH04502525	18.8	1	52.1	106.6	125	109	606	118.6	125	120	616
												2EH04505025	37.6	2	104.3	171.9	175	158	606	183.9	200	169	616
												2EH04507525	56.3	2	156.2	197.7	200	218	606	209.7	225	229	616
	230-3-60	28.8	223	28.2	240			2.1	19.8	6.7	8.7	None	-	-	-	101.6	125	109	606	110.3	125	119	615
												2EH04502525	23.0	1	57.7	113.6	125	109	606	124.5	125	119	615
												2EH04505025	45.9	2	115.2	185.5	200	171	606	196.4	200	181	615
												2EH04507525	68.9	2	172.9	214.4	225	237	606	225.3	250	247	615
	460-3-60	12.5	100	14.7	130			1.1	9.9	3.4	4.3	None	-	-	-	49.8	60	53	302	54.1	60	58	307
												2EH04502546	23.0	1	28.8	56.9	60	53	302	62.3	70	58	307
												2EH04505046	45.9	2	57.6	92.9	100	85	302	98.3	100	90	307
												2EH04507546	68.9	2	86.4	107.3	110	119	302	112.7	125	124	307
	575-3-60	9.7	70	11.3	94			0.9	7.9	2.7	3.5	None	-	-	-	38.9	50	42	224	42.4	50	46	228
												2EH04502558	23.0	1	23.0	45.4	50	42	224	49.8	50	46	228
												2EH04505058	45.9	2	46.0	74.1	80	68	224	78.5	80	72	228
												2EH04507558	68.9	2	69.1	85.7	90	95	224	90.1	100	99	228
20 (20)	208-3-60	32.6	240	34.0	240			2.0	19.8	6.7	9.6	None	-	-	-	116.3	150	124	631	125.9	150	135	641
												2EH04502525	18.8	1	52.1	116.3	150	124	631	125.9	150	135	641
												2EH04505025	37.6	2	104.3	171.9	175	158	631	183.9	200	169	641
												2EH04507525	56.3	2	156.2	197.7	200	218	631	209.7	225	229	641
	230-3-60	32.6	240	34.0	240			2.3	19.8	6.7	8.7	None	-	-	-	117.5	150	125	633	126.2	150	135	642
												2EH04502525	23.0	1	57.7	117.5	150	125	633	126.2	150	135	642
												2EH04505025	45.9	2	115.2	185.5	200	171	633	196.4	200	181	642
												2EH04507525	68.9	2	172.9	214.4	225	237	633	225.3	250	247	642
	460-3-60	14.8	130	16.0	140			1.3	9.9	3.4	4.3	None	-	-	-	56.7	70	61	348	61.0	70	66	353
												2EH04502546	23.0	1	28.8	56.9	70	61	348	62.3	70	66	353
												2EH04505046	45.9	2	57.6	92.9	100	85	348	98.3	100	90	353
												2EH04507546	68.9	2	86.4	107.3	110	119	348	112.7	125	124	353
	575-3-60	11.1	94	12.9	108			1.0	7.9	2.7	3.5	None	-	-	-	44.5	50	47	267	48.0	60	52	271
												2EH04502558	23.0	1	23.0	45.4	50	47	267	49.8	60	52	271
												2EH04505058	45.9	2	46.0	74.1	80	68	267	78.5	80	72	271
												2EH04507558	68.9	2	69.1	85.7	90	95	267	90.1	100	99	271

Table 83: AD15 to AD28 VFD customer supplied high static with modulating power exhaust

Size (tons)	Nominal unit voltage	Comp. 1		Comp. 2		Comp. 3		OD fan motors each FLA	Supply blower motor FLA	Pwr exh motor FLA	120V trans FLA	Electric heat option field installed kit				MCA A	Max f/b size A	Min disconnect rating		MCA with 120V trans A	Max f/b size with 120V trans A	Min disconnect rating/120V trans	
		RLA	LRA	RLA	LRA	RLA	LRA					Model	kW	Stages	A			FLA	LRA			FLA	LRA
25 (25)	208-3-60	22.4	149	41.0	304	22.4	149	2.0	25.4	6.7	9.6	None	-	-	-	142.9	175	152	791	152.5	175	164	801
												2EH04502525	18.8	1	52.1	142.9	175	152	791	152.5	175	164	801
												2EH04505025	37.6	2	104.3	178.9	200	165	791	190.9	200	176	801
												2EH04507525	56.3	2	156.2	204.7	225	224	791	216.7	225	235	801
	230-3-60	22.4	149	41.0	304	22.4	149	2.3	25.4	6.7	8.7	None	-	-	-	144.1	175	154	793	152.8	175	164	802
												2EH04502525	23.0	1	57.7	144.1	175	154	793	152.8	175	164	802
												2EH04505025	45.9	2	115.2	192.5	200	177	793	203.4	225	187	802
												2EH04507525	68.9	2	172.9	221.4	225	243	793	232.3	250	253	802
	460-3-60	10.6	75	19.2	147	10.6	75	1.3	12.7	3.4	4.3	None	-	-	-	69.9	80	75	394	74.2	90	80	399
												2EH04502546	23.0	1	28.8	69.9	80	75	394	74.2	90	80	399
												2EH04505046	45.9	2	57.6	96.4	100	89	394	101.8	110	94	399
												2EH04507546	68.9	2	86.4	110.8	125	122	394	116.2	125	127	399
	575-3-60	7.7	54	16.7	122	7.7	54	1.0	10.5	2.7	3.5	None	-	-	-	56.2	70	60	326	59.7	70	64	330
												2EH04502558	23.0	1	23.0	56.2	70	60	326	59.7	70	64	330
												2EH04505058	45.9	2	46.0	77.4	80	71	326	81.8	90	75	330
												2EH04507558	68.9	2	69.1	89.0	90	98	326	93.4	100	102	330
28 (27.5)	208-3-60	25.0	164	51.3	300	25.0	164	2.1	30.2	6.7	9.6	None	-	-	-	166.1	200	176	849	175.7	225	187	859
												2EH04502525	18.8	1	52.1	166.1	200	176	849	175.7	225	187	859
												2EH04505025	37.6	2	104.3	184.9	200	176	849	196.9	225	187	859
												2EH04507525	56.3	2	156.2	210.7	225	230	849	222.7	225	241	859
	230-3-60	25.0	164	51.3	300	25.0	164	2.1	30.2	6.7	8.7	None	-	-	-	166.1	200	176	849	174.8	225	186	858
												2EH04502525	23.0	1	57.7	166.1	200	176	849	174.8	225	186	858
												2EH04505025	45.9	2	115.2	198.5	200	183	849	209.4	225	193	858
												2EH04507525	68.9	2	172.9	227.4	250	249	849	238.3	250	259	858
	460-3-60	12.8	100	23.1	150	12.8	100	1.1	15.1	3.4	4.3	None	-	-	-	80.8	100	86	462	85.1	100	91	466
												2EH04502546	23.0	1	28.8	80.8	100	86	462	85.1	100	91	466
												2EH04505046	45.9	2	57.6	99.4	100	91	462	104.8	110	96	466
												2EH04507546	68.9	2	86.4	113.8	125	125	462	119.2	125	129	466
	575-3-60	9.6	78	19.9	109	9.6	78	0.9	12.0	2.7	3.5	None	-	-	-	65.1	80	69	349	68.6	80	73	352
												2EH04502558	23.0	1	23.0	65.1	80	69	349	68.6	80	73	352
												2EH04505058	45.9	2	46.0	79.3	80	73	349	83.6	90	77	352
												2EH04507558	68.9	2	69.1	90.9	100	99	349	95.2	100	104	352

Weights and dimensions

Figure 4: AD15 and AD18 physical dimensions

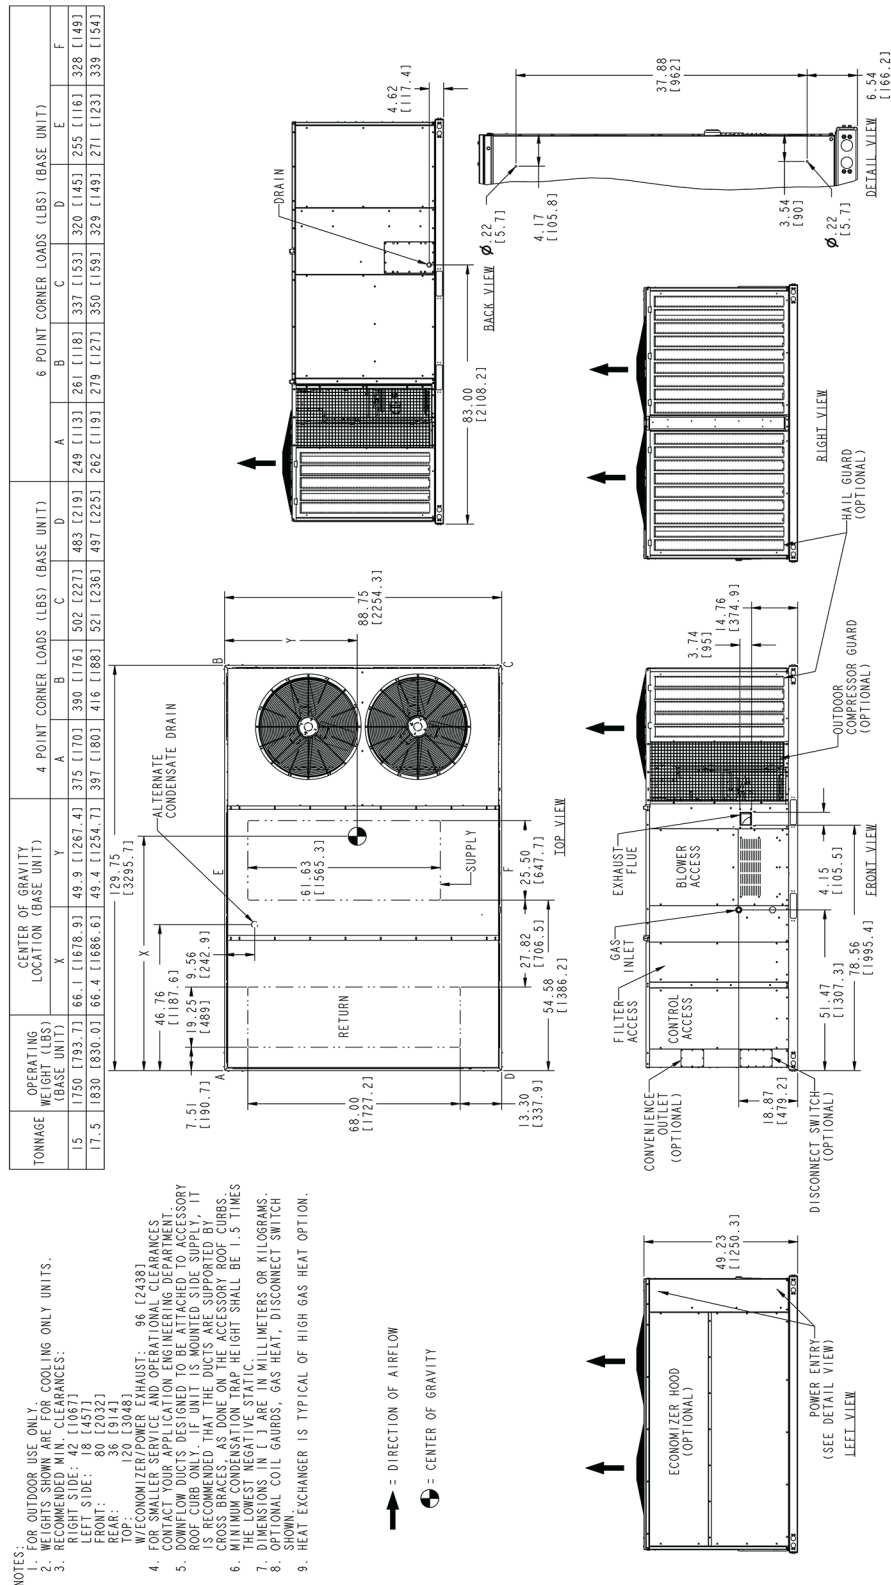


Figure 5: AD20 physical dimensions

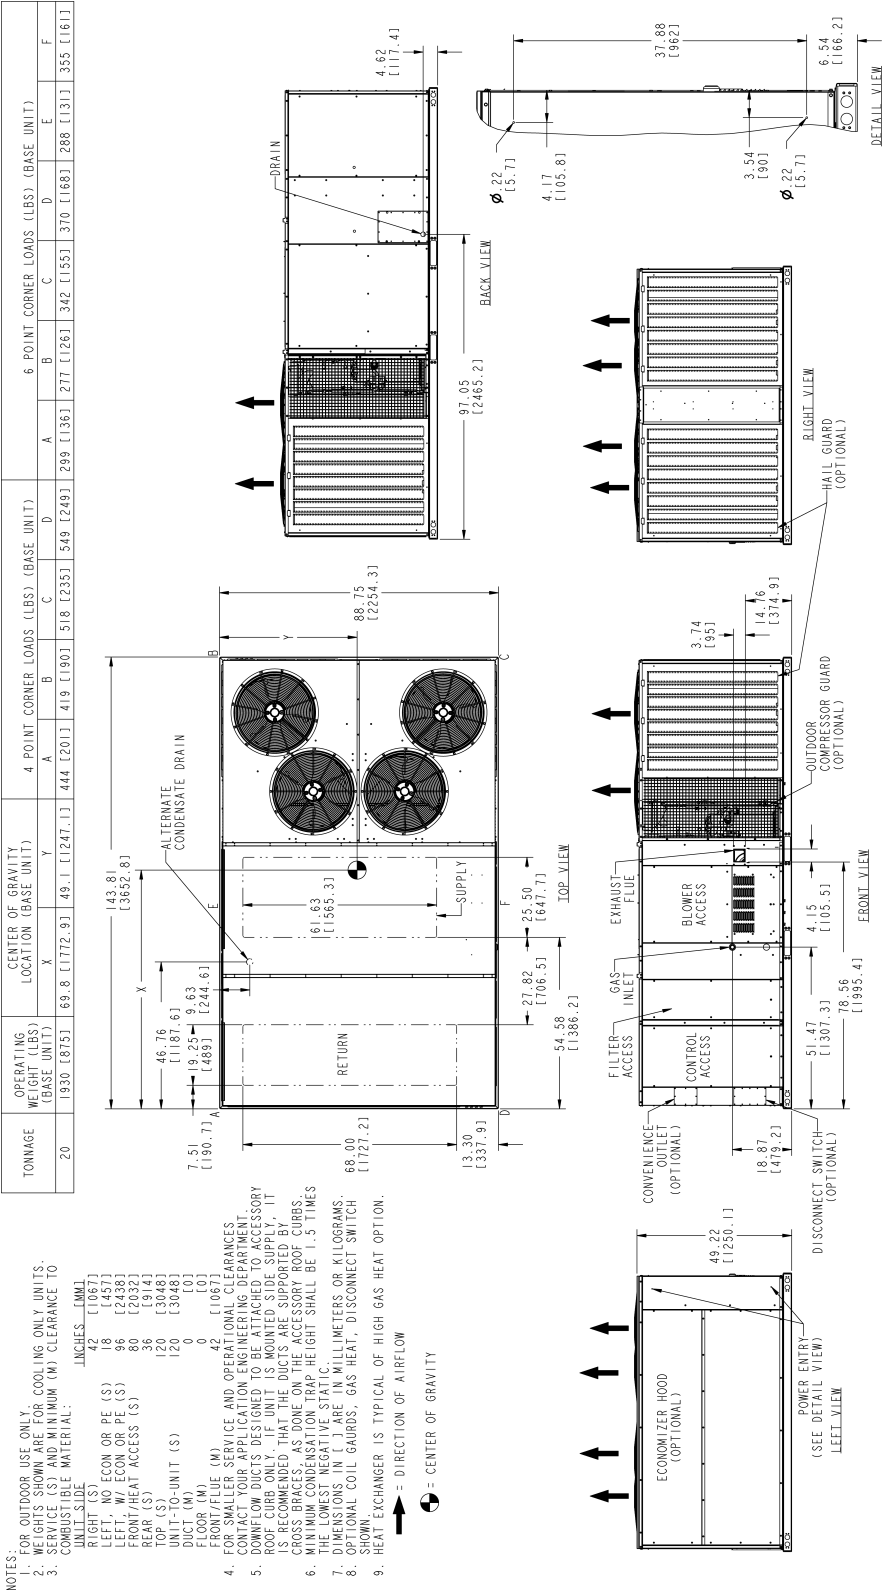


Figure 6: AD25 physical dimensions



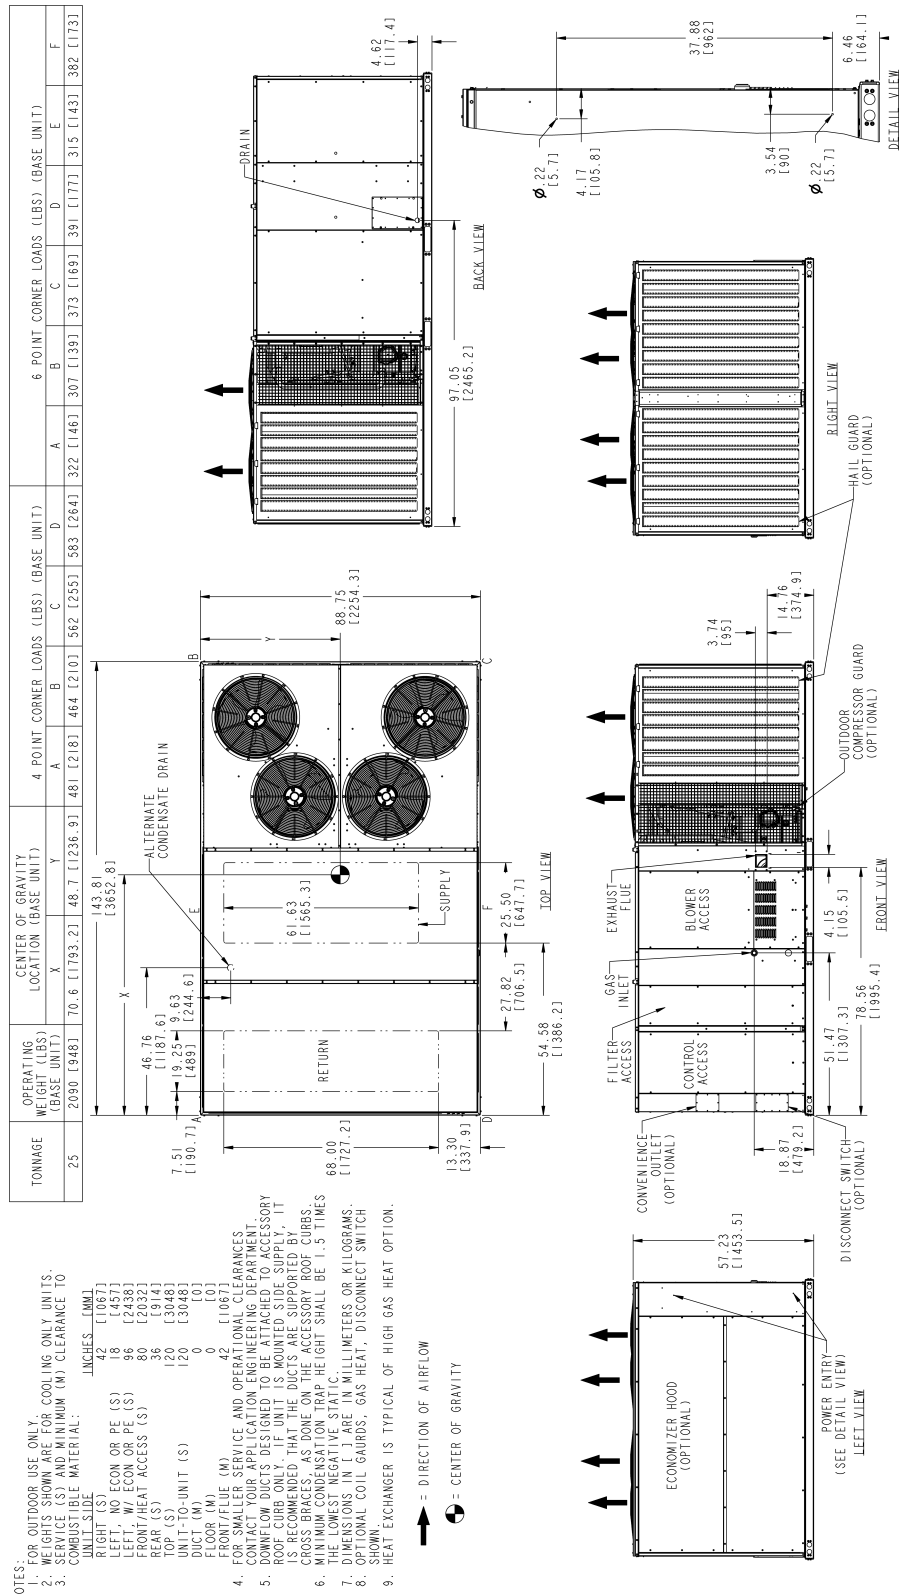


Figure 7: AD28 physical dimensions

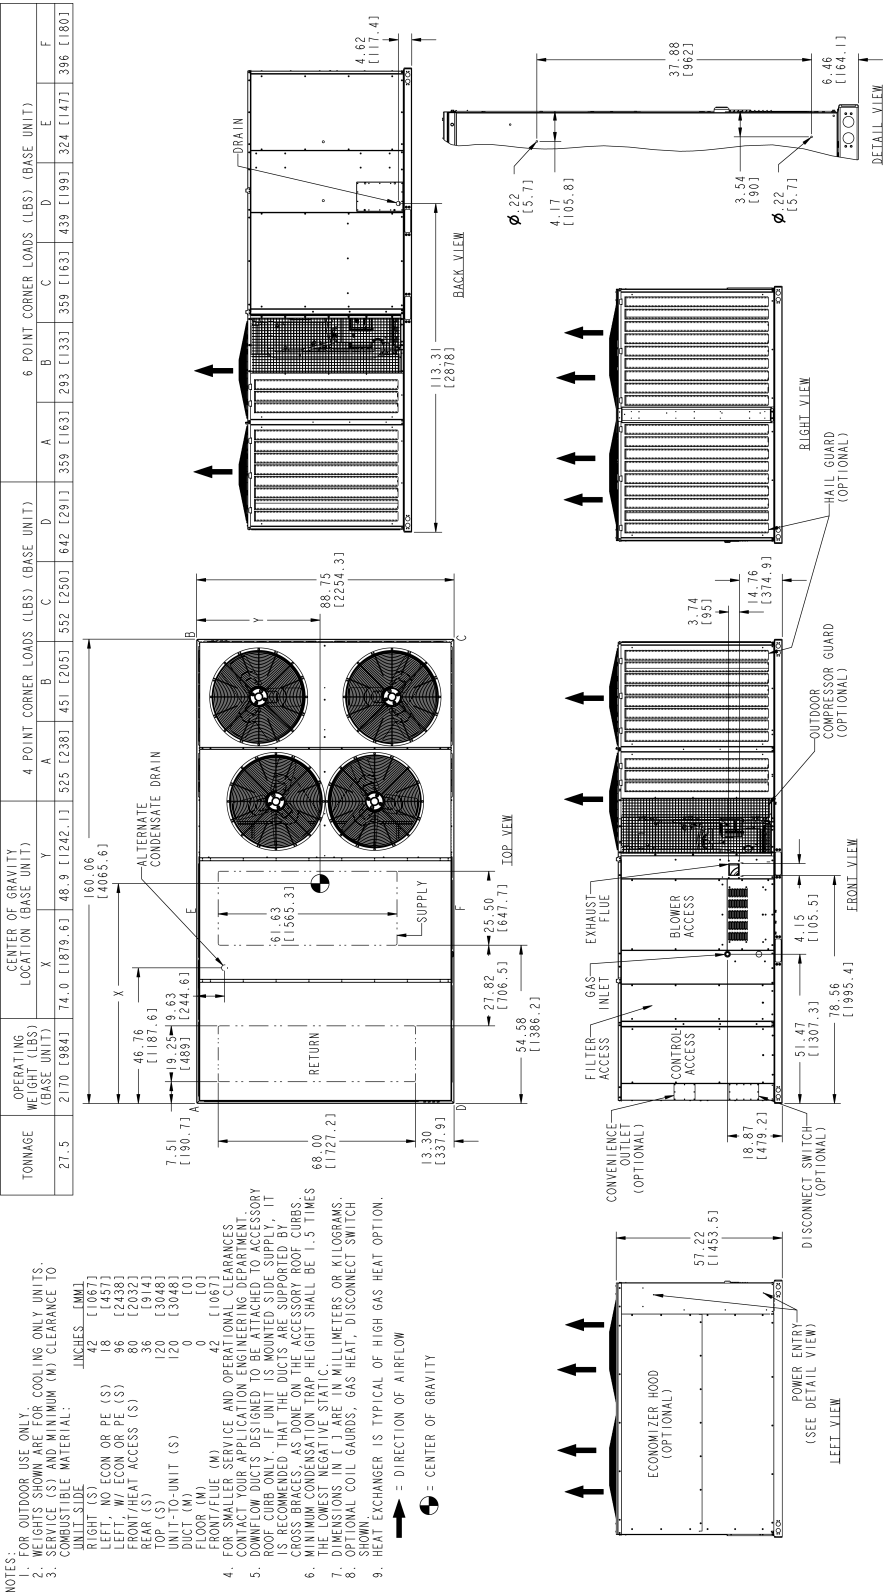

Rain hood dimensions

Figure 8: Rain hood dimensions

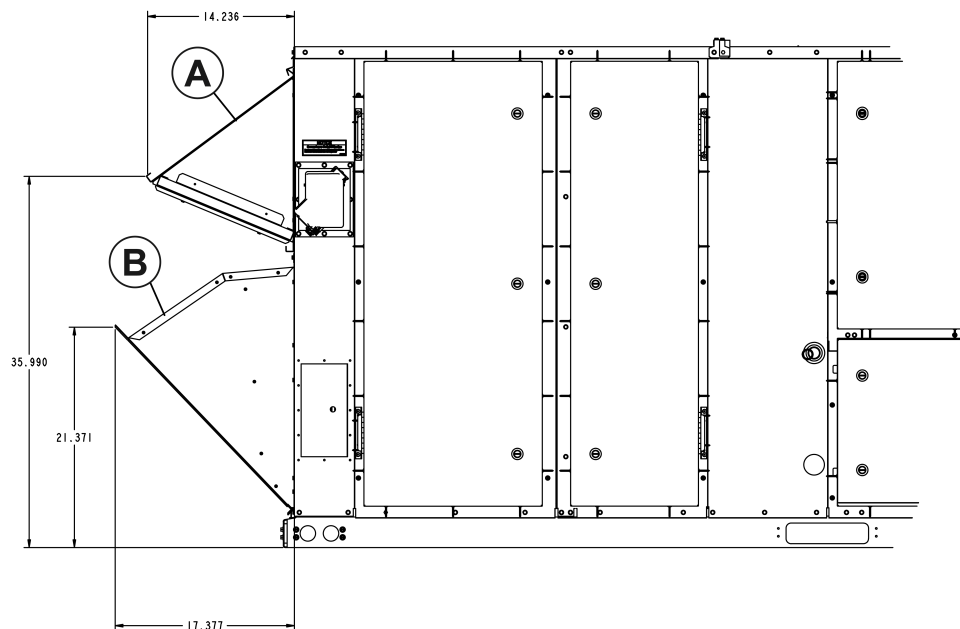

Item	Description
A	Economizer, manual damper, and motorized damper rain hood
B	Power exhaust rain hood

Utilities entry

① **Note:** Field-seal all entry holes to prevent rainwater entry into the building.

Table 84: Utilities entry

Entry description		Opening size diameter (in.)
Control wiring	Left	Field drilled ¹ to maximum of 7/8 in.
	Bottom	Field drilled ¹ to maximum of 7/8 in.
Power wiring	Left	Field drilled ¹ to maximum of 3 in.
	Bottom	Field drilled ¹ to maximum of 3 in.
Gas piping	Left ^{2, 3}	2 in. hole with 3/4 in. grommet
	Bottom ²	1 1/4 in. hole
Condensate drain	Front ⁴	1 1/2 in. hole
	Bottom ^{3, 4}	2 in. hole with 1 1/4 in. grommet

1 Factory provided dimples show the hole location to facilitate the drilling of entry holes.

2 3/4 in. NPT gas piping is required.

3 You must insert the piping through the factory-installed grommet for a watertight seal.

4 1 in. NPT female connection piping is required.

Accessory weights

Table 85: Unit accessory weights

Unit accessory	Unit size			
	15 to 17.5 ton	20 ton	25 ton	27.5 ton
Economizer	145	145	165	165
Motorized damper	65	65	75	75
Power exhaust	200	200	200	200
Barometric damper	50	50	50	50
Electric heat (75 kW)	75	75	75	75
Gas heat (largest)	155	155	155	155
Hail guards	80	86	107	132
Wood skid and shipping brackets	60	70	70	80
Roof curb	215	230	230	250

Supply fan VFD weights

Table 86: Supply fan VFD weights

Supply Fan Motor	208/230V	460V	575V
2.9 HP	10	10	10
3.7 HP	10	10	10
5.3 HP	10	10	10
7.5 HP	15	15	15
10 HP	20	15	15

Note: Add 5 lb. to the supply fan VFD weights if there is a bypass.

Roof curbs

The following figures show the roof curbs for the units. All dimensions are in inches.




Figure 9: 1RC0443 and 1RC0446 roof curb dimensions

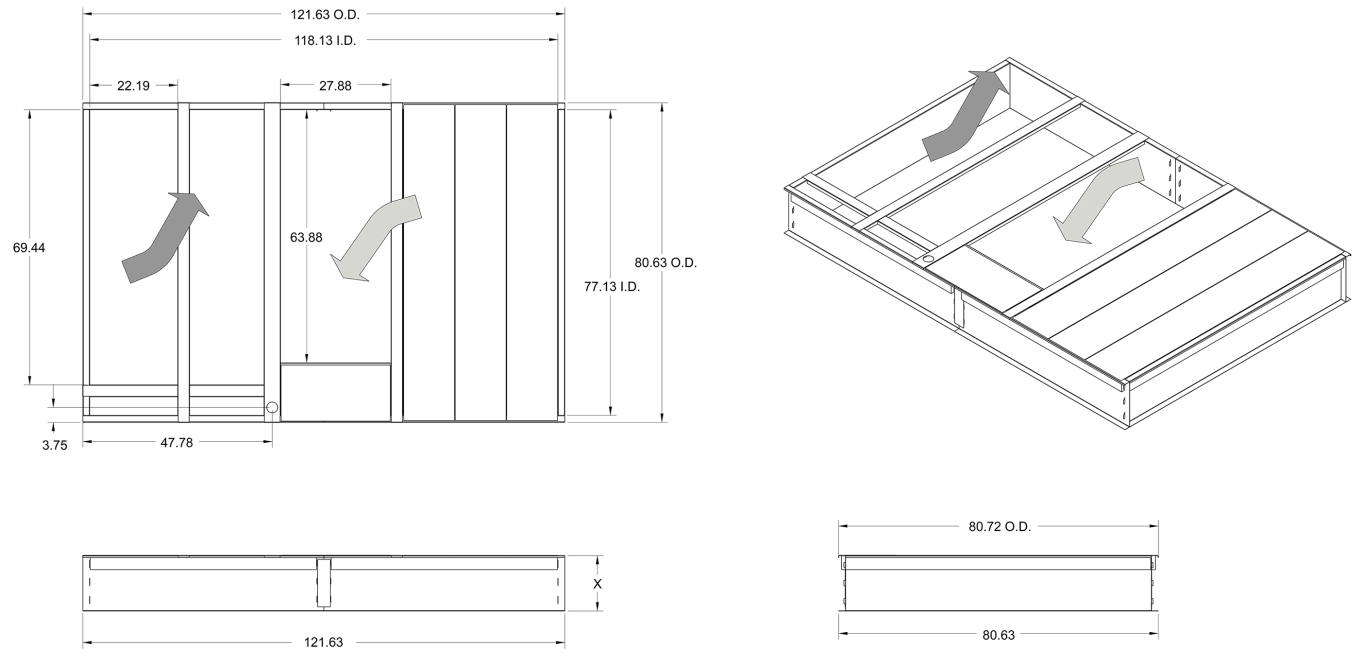


Table 87: 1RC0443 and 1RC0446 dimensions

Roof curb	X measurement (in.)
1RC0443	14
1RC0446	24

The following units are compatible with 1RC0443 and 1RC0446 roof curbs.

- AD15
- AD18

Figure 10: 1RC0444 and 1RC0447 roof curb dimensions

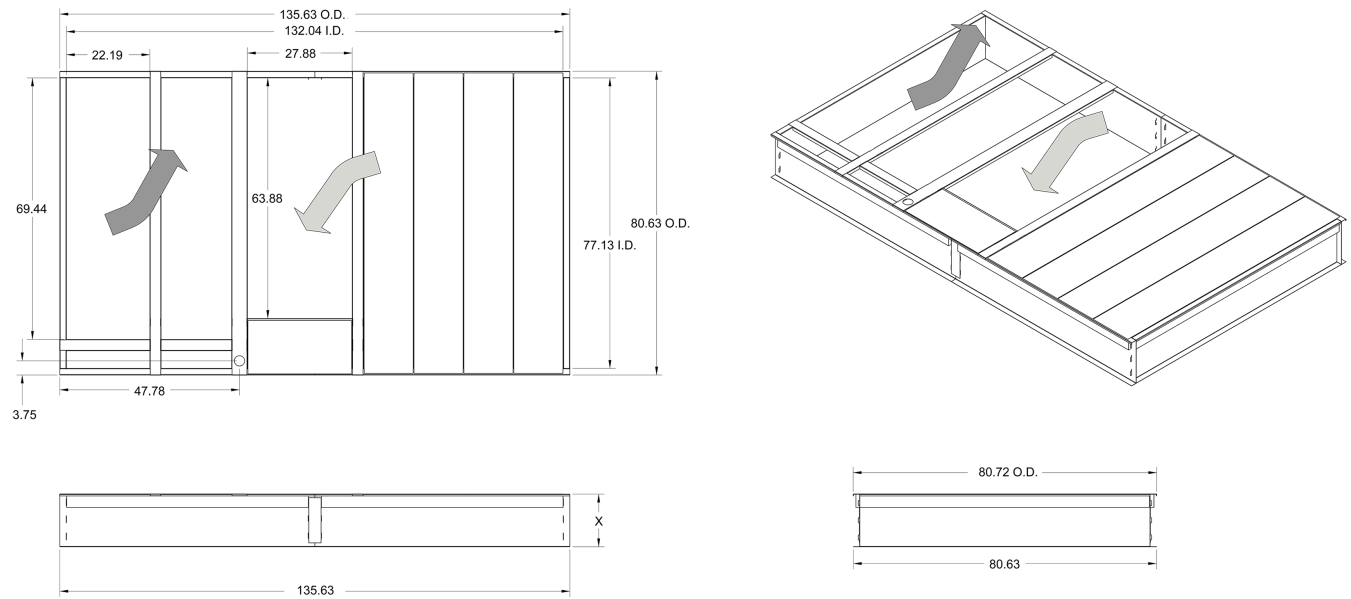


Table 88: 1RC0444 and 1RC0447 dimensions

Roof curb	X measurement (in.)
1RC0444	14
1RC0447	24

The following units are compatible with 1RC0444 and 1RC0447 roof curbs.

- AD20
- AD25

Figure 11: 1RC0445 and 1RC0448 roof curb dimensions

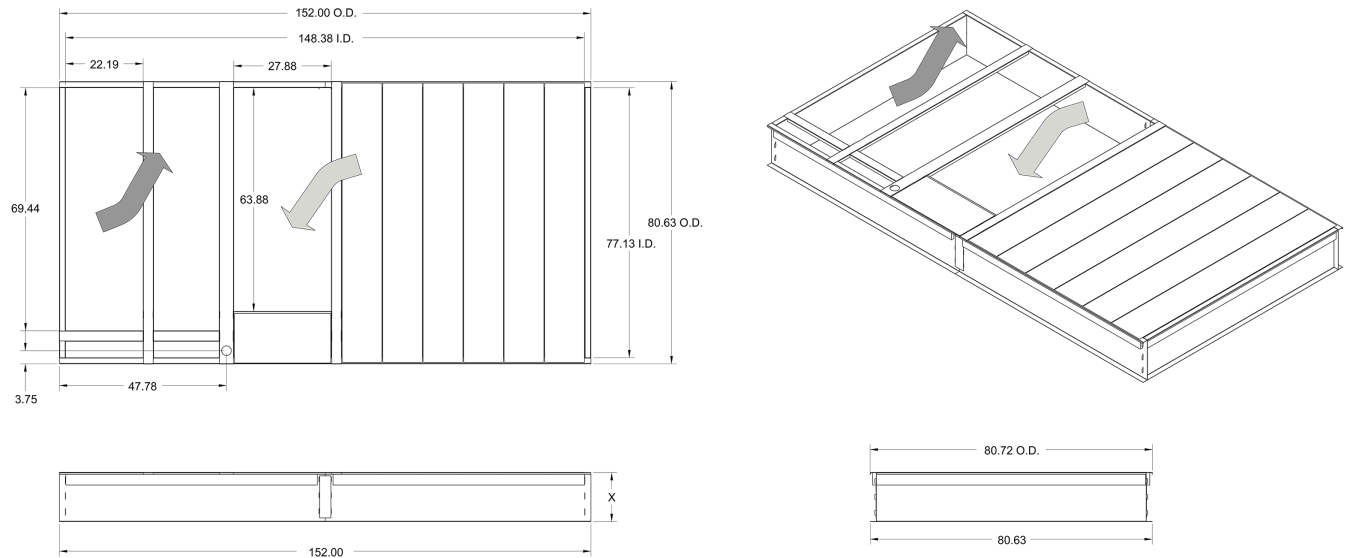


Table 89: 1RC0445 and 1RC0448 dimensions

Roof curb	X measurement (in.)
1RC0445	14
1RC0448	24

The following unit is compatible with 1RC0445 and 1RC0448 roof curbs.

- AD28

Figure 12: Roof curb cutaway

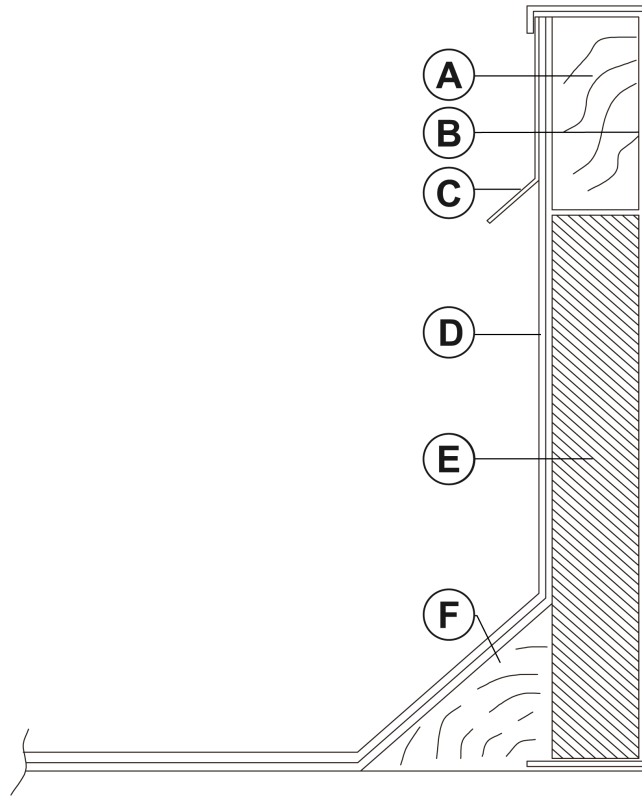


Table 90: Roof curb cutaway components

Item	Description	Item	Description
A	Wood nailer	D	Roof felt (field supplied)
B	Curb frame	E	Rigid insulation (field supplied)
C	Counter flashing (field supplied)	F	Cant strip (field supplied)

Economizer options

Figure 13: Economizer options

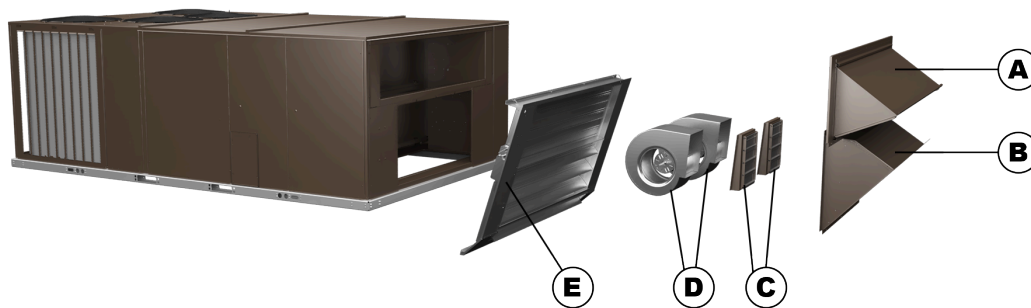


Table 91: Economizer components

Item	Description
A	Fresh air hood
B	Power exhaust hood
C	Power exhaust damper
D	Power exhaust
E	Low leak economizer

Typical installation

The following figures show the typical installations for the unit.

Figure 14: Roof jack installation

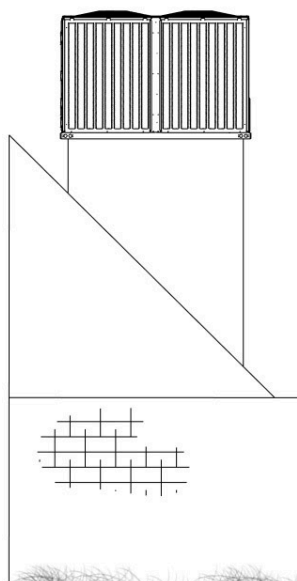


Figure 15: Roof curb installation

