


Flat Belt Conveyor SV Series
End Drive, 2-Groove Frame (Pulley Dia. 30mm)

CE
Compliant


Features: Streamlined structure has lowered cost.

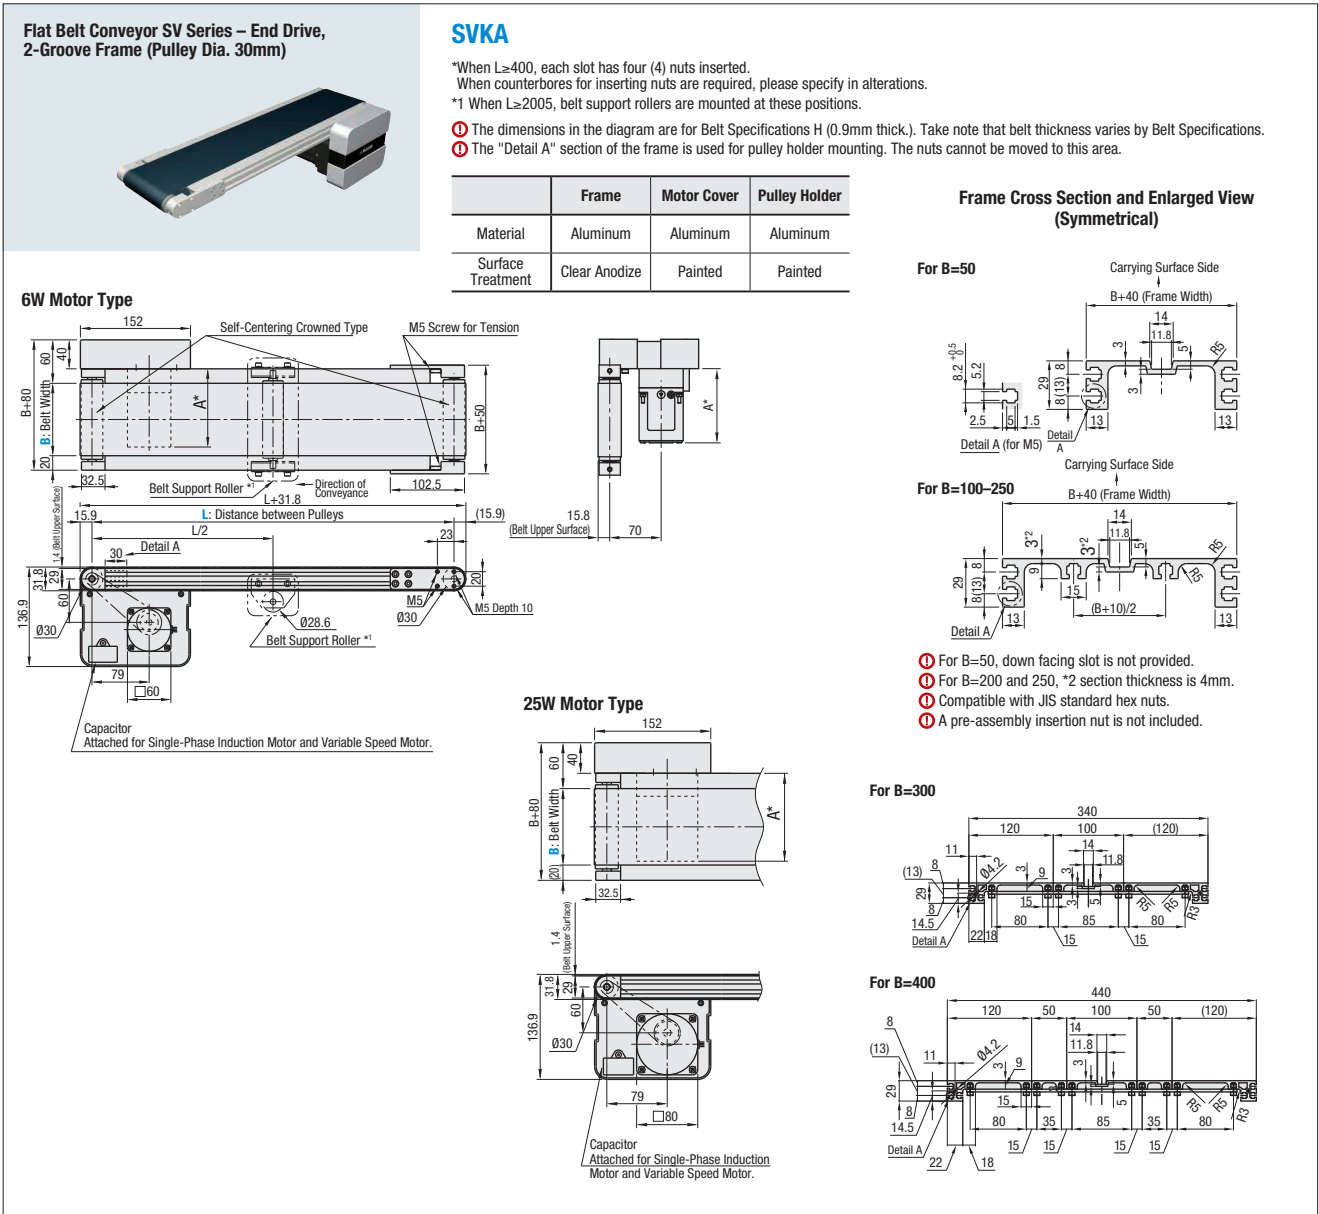

Motor Specifications

Output (W)	Motor		Reduction Ratio	Motor Length (A)
	Specification	Manufacturer		
6W	Constant Speed Motor	Panasonic	12.5-25	101.0
			30-180	108.0
		Oriental	12.5-18	105.0
		Taiwanese	25-180	115.0
	Variable Speed Motor	Panasonic	12.5-75	119.7
			90-180	125.7
25W	Constant Speed Motor	Panasonic	12.5-25	111.0
			25-180	118.0
		Oriental	12.5-18	115.0
			25-180	125.0
		Taiwanese	12.5-75	131.9
			90-180	137.9
	Variable Speed Motor	Panasonic	5-180	115.0
			5-18	117.0
		Oriental	25-180	127.5
			5-75	129.0
		Taiwanese	90-180	136.0
			5-180	125.0

Conveying Capacity

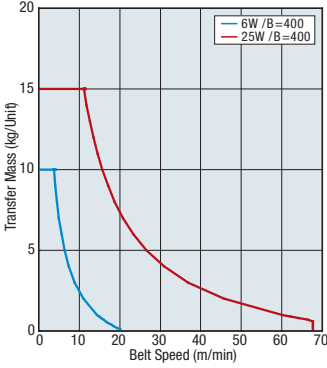

*Reference Value may different by selected Belt.

Gearhead Reduction Ratio

Gearhead Reduction Ratio	Belt Speed (m/min)	
	50Hz	60Hz
5	56.4	67.7
7.5	37.6	45.1
9	31.3	37.6
12.5	22.6	27.1
15	18.8	22.6
18	15.7	18.8
25	11.3	13.5
30	9.4	11.3
36	7.8	9.4
50	5.6	6.8
60	4.7	5.6
75	3.8	4.5
90	3.1	3.8
100	2.8	3.4
120	2.4	2.8
150	1.9	2.3
180	1.6	1.9

Ⓢ For motor specification SCM, this is adjustable up to (1/15) × (max. speed).

The weight that can be conveyed decreases as the speed decreases.

Flat Belt Conveyor SV Series
End Drive, 2-Groove Frame (Pulley Dia. 30mm), continued

GOOD
DESIGN

Conveyor Resource Site:
http://www.misumiusa.com/conveyor/
Conveyor selection, Design your own kit,
& Maintenance parts search.

Part Number	Width B (mm)	Length L 5mm Increment	Motor				Belt Specification	Motor Manufacturer Selection
			Output (W)	Voltage (V)	Specification	Gearhead Reduction Ratio		
SVKA	50 100 150 200 250 300 400	300 - 3000	6 25	(Single-Phase) TA100 TA110 TA115 TA200 TA220 TA230	IM* (Constant Speed Motor) SCM (Variable Speed Motor)	5 7.5 9 12.5 15 18 25 30 36 50 60 75 90 100 120 150 180	H (General Specifications, Green) W (General Specifications, White) G (For Sliding, Green) S (For Sliding, White) D (Static Conductive) F (Food Grade, White) O (Oil Resistant, Navy Blue) N (Non-Stick Food Grade, White) J (No Belt)	A (Panasonic Motor) B (Oriental Motor) C (Taiwanese Motor)
				(Three-Phase) SA200 SA220 SA230	IM (Constant Speed Motor) INV (Induction Motor + Inverter)	Ⓢ 5-9 not applicable for 6W Motor Ⓢ Gear head reduction ratio 7.5, 100, and 150 are not applicable to self kit conveyor.		
			6 25	NV* (No Motor)	NM (No Motor)*	NH (No Gearhead)*		
								R (No Motor, Gearhead)

- Ⓢ Connect the motor so that the belt rotates in the direction of conveyance.
- Ⓢ When "No motor, gearhead" is selected, the motor mounting hole pitch will vary depending on the motor's power rating. Please see Technical Information in our Conveyor Selection web site for the dimension details.
- Ⓢ When "No motor, gearhead" is selected, this unit will be delivered unassembled. The customer is to assemble the unit according to the included assembly instructions. See our Conveyor Selection site for assembly procedures and packaging details.
- Ⓢ Regardless of the belt specifications, it is not recommended to use the conveyor while the conveyor is tilted.

Belt Specification	Standard Belt	Optional Belt 1	Optional Belt 2	No Belt
General Purpose	H (Green), W (White), HG (Green)	—	HY (Yellow Green), HBN (Sky Blue)	J (No Belt)
For Sliding	G (White), S (White)	—	—	
For Inclined Transfer	LG (Green), LW (White)	—	—	
Grip Type	—	GG (Green), GW (White)	GSN (Green)	
Oil Resistant	O (Navy Blue), OH (Green), OG (Green)	OW (White)	ON (White)	
Non-Stick Food Grade	N (White), NS (White)	NB (Sky Blue), NBG (Lime Green), HH (Green), HW (White)	NWN (White), NSN (Sky Blue), NGN (Lime Green), HBG (Green), HBW (White), BW (White)	
Food Grade	F (White)	KW (White), KSB (Sky Blue), PHB (Sky Blue)	PHN (Sky Blue), PWN (Sky Blue), KWN (White)	
Static Conductive	D (Black), DS (Black)	—	DG (Black)	

- Ⓢ If using Optional Belts, please select motor manufacturer A or B (Motor C is applicable for Standard Belt only.)
- Ⓢ Select a belt with a thickness of 1.0 mm or less for a motor output of 6 W.

Part Number	B	Available Types																					
		L300-400	L405-500*	L505-600	L605-700	L705-800*	L805-900	L905-1000*	L1005-1100	L1105-1200	L1205-1300	L1305-1400	L1405-1500	L1505-1600	L1605-1700	L1705-1800	L1805-1900	L1905-2000	L2005-2200	L2205-2400	L2405-2600	L2605-2800	L2805-3000
SVKA	50*	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	100*	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	150*	—	—	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	200	—	—	—	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	250	—	—	—	—	—	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	300	—	—	—	—	—	—	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	400	—	—	—	—	—	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

Part Number Example

Part Number	-	B	-	L	-	Motor				-	Belt Specification	-	Motor Manufacturer Selection			
SVKA	-	100	-	1000	-	Output	-	Voltage	-	Specification	-	Gearhead Reduction Ratio	-	H	-	C

Machine Weight (With a Motor Output of 6 W)

*Reference values (may vary depending on motor manufacturer)

Belt Width B (mm)	Distance Between Pulleys L (mm)					
	500	1000	1500	2000	2500	3000
50	3.7	4.8	5.8	6.9	7.9	9
100	4.4	5.8	7.3	8.7	10.4	11.8
150	5	6.8	8.7	10.5	12.8	14.6
200	5.7	7.9	10.1	12.3	15.1	17.3
250	6.3	8.9	11.6	14.3	17.3	20
300	6.8	10.5	11.9	16	19	22.1
400	8.2	12.4	15	19.7	23.9	27.7

*When the motor output is 25 W, add 1.1 kg.

Part Number Alterations

Motor Position Reversed
Additional Counterbores
Motor Cover with Window
Brackets for Speed Controller Included
Post-Assembly Insertion Nuts Included
Motor with Terminal Box
Self Kit Conveyor
Stands (Legs)

For details of alterations, see P.1276.