

TEST REPORT**Report No.: GZES260200356831****Date: 2026-03-31**

The following sample(s) was/were submitted and identified on behalf of the client as:

Applicant: Jiangxi EQi Industrial Co., Ltd.
Luliang Avenue, Yining Town, Xiushui County, Jiujiang, Jiangxi, China

Manufacturer: Same as applicant

Name of Testing Laboratory preparing the Report: SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch
198 Kezhu Road, Science City, Economic & Technology Development Area, Guangzhou, Guangdong, China

The standards: BS EN ISO 20957-1: 2024, BS EN 957-6: 2010 + A1: 2014,
ISO 20957-1: 2024, ISO 20957-6: 2021,
EN ISO 12100:2010


Test item description: Household Electric Treadmill

Model/Type reference: P12, T3899, T3803D, WFTM015, T3823, T5009, T5006, SP38240/T3837,
SP38242/T3807, A4003D, TM037, CS-WP3

Test result: For further details, please refer to the following page(s)

Remark: --


Vickie Luo
Reviewer


Holon Li
Project Engineer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch (E-Service) EEC Laboratory

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT**Report No.: GZES260200356831****Date: 2026-03-31****Summary of testing:**

Tests according to the following standard was carried out:

BS EN ISO 20957-1: 2024, BS EN 957-6: 2010 + A1: 2014,

ISO 20957-1: 2024, ISO 20957-6: 2021,

EN ISO 12100:2010

After reviewing, full tests were carried out on model P12, T3899 and CS-WP3.

The submitted samples fulfil the requirements of specified standards.

Test Location:

Xiamen Products Quality Supervision & Inspection Institute

259, Huanmei North Road, Jimei, Xiamen, Fujian, China

This report is based on report GZES260100169431.

Possible test case verdicts:

- test case does not apply to the test object: N/A (not applicable)
- not tested as per client's request.: N/T
- test object does meet the requirement: P (Pass)
- test object does not meet the requirement: F (Fail)

Testing

Date of receipt of test item: 2025-06-03

Date (s) of performance of tests: 2025-06-04 to 2025-06-10

General product information:

Household electric treadmill for indoor use.

All models are same except trade mark, model no., decoration and colour of enclosure.

1. **Usage Class:** H
2. **Accuracy Class:** C
3. **Maximum user weight:** 120kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CT (Guangzhou Branch) Technical Services Co., Ltd.
Guangzhou Branch of SGS-CT EEC Laboratory

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

Test Conducted:

- Based on BS EN ISO 20957-1: 2024 and ISO 20957-1: 2024 Stationary training equipment - Part 1: General safety requirements and test methods

Test Results: Details shown as following table

BS EN ISO 20957-1: 2024 and ISO 20957-1: 2024			
Clause	Requirement – Test	Results-Remarks	Verdict
5	Safety requirements		
5.2	Stability The stationary training equipment shall be stable in any direction, in training, folding and storage positions.		P
	Test in training position Place the equipment on a $(10^{+1}_{-0})^{\circ}$ incline surface, in the most onerous position. Perform exercise(s) that involve(s) the user's mass, with the equipment loaded with a person weighing (100 ± 5) kg, using the minimum as well as the maximum load, over the full range of exercise motion. In addition, if applicable, perform exercise(s) that does not involve the user's mass, using the minimum as well as the maximum load, over the full range of exercise motion. The equipment shall not tip over in either test. The test person shall not lean or try to influence the balance of the machine.	Not tip over in either test	P
	Test in folded or storage position Place the equipment, folded according to the user's manual, on a $(10^{+1}_{-0})^{\circ}$ incline surface. The equipment shall not tip over in either test.		P
5.3	External construction		
5.3.1	General Equipment shall be free of burrs.		P
5.3.2	Edges and corners All edges and corners of surfaces supporting bodies shall have a radius $r \geq 2,5\text{mm}$. All edges within the accessible hand and foot area shall be rounded or protected. Test by measuring the radius and by visual and tactile examination.		P
5.3.3	Tube ends All tube ends within the accessible hand and foot area shall		P



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CS (China) Standards Technical Services Co., Ltd.
Guangzhou Branch: Guangzhou EEC Laboratory

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN ISO 20957-1: 2024 and ISO 20957-1: 2024

Clause	Requirement – Test	Results-Remarks	Verdict
	be closed off, for example by parts of the equipment or by plugs. If plugs are used, they shall remain in position at the end of the endurance load test, as described in the relevant part(s) of the ISO 20957 series. If no endurance test is described in the applicable part, the pull-out force of the plug shall be ≥ 20 N. A visual inspection of the unit to verify that all tube ends in the accessible hand and foot area are closed off shall be performed. The pull-out test shall be performed using a constant force.		
5.3.4	Squeeze and shear points Squeeze points and/or shear points within the accessible hand and foot area, whether between moving parts, between moving parts and fixed parts, or between a moving part and the floor, shall be guarded by a protective cover or shall have a minimum clearance of at least 60 mm, with the following exceptions.		P
	a) If only the fingers are at risk, the distance shall be at least 25 mm.		P
	b) If third party access is prevented by the user's body position, and where the user is able to immediately stop the movement, the distance shall be at least 25 mm.		P
	c) If the distance between the moving part and the fixed part, or between two moving parts, does not change during use or setup, the distance shall be greater than 25 mm or less than 9,5 mm.		P
	d) If the angle between two adjacent moving parts or between a rigid part and an adjacent moving part is always 50 degrees or greater, it is not considered a shear point.		P
	e) Open and obvious stops are excluded; however, if the stop is the part which is moving, then it shall pass no closer than 25mm from any fixed frame member throughout its range of movement.		P
	f) If the following three requirements are simultaneously met during folding and unfolding, it is not considered a squeeze or shear point. 1) Inadvertent movement is not possible during folding, unfolding, transportation and/or storage. 2) Access to squeeze points and shear points remains at all times in the user's field of vision. 3) The user can stop the motion at any time.		P



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CS (Guangzhou) Technical Services Co., Ltd.
Guangzhou Branch of SGS (China) EEC Laboratory

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN ISO 20957-1: 2024 and ISO 20957-1: 2024

Clause	Requirement – Test	Results-Remarks	Verdict
5.3.5	Weights and other resistance means The range of motion of all weights attached to the stationary training equipment shall be limited to that required to perform the exercise. Weights and other resistance means with stored energies (e.g. bungee cords, elastic tubes, springs) shall move freely and return to the starting point. Weights shall be securely retained during use. A functional test using the maximum and minimum resistance or weights including added resistance or weights (e.g. incremental weights) shall be carried out over the maximum range of movement.		N/A
5.4	Entrapment of the user Users shall be able to exit the equipment when using it according to the user's manual. If necessary, means of escape shall be provided. A visual and functional test shall be carried out to determine whether or not the user can become entrapped.		P
5.5	Adjustment components and locking mechanisms Adjustment components and locking mechanisms on the stationary training equipment shall function securely and be conspicuous, self-evident and safely accessible to the user. The possibility of unintended change shall be avoided. Adjustment components and locking mechanisms, for example knobs and levers, shall not interfere with the user's range of movement. Weight selection pins shall be fitted with a retention device to prevent unintended change or movement during the exercise. Perform a visual and functional examination before, during and after every test.		P
5.6	Ropes, belts, chains and attachment components		
5.6.1	General Ropes, belts, chains and their attachment components (e.g. snap links, shackles, carabiners, clamps or similar) shall withstand tension equal to 6 times the maximum possible tension that can be developed. The design of the pulleys and the bending radius should be in accordance with the applicable requirements of the rope, belt or chain manufacturers. After the test, the training equipment shall not be broken or have visible signs of fracture or cracking and shall still function as intended by the manufacturer.		N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CHINA Standards Technical Services Co., Ltd.
Guangzhou Branch, Guangzhou EEC Laboratory

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663


t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN ISO 20957-1: 2024 and ISO 20957-1: 2024			
Clause	Requirement – Test	Results-Remarks	Verdict
5.6.2	Ropes and belts Rope and belt ends shall be, as a minimum, flush with the end of the termination means and shall be visible for inspection. Pressed connections shall not be subjected to bending. Rope and belt ends and grips shall have no sharp edges or frayed ends. Measure the tension of the rope, belt or chain as well as the attachment components while statically applying the maximum specified training load. Then perform a tensile test, with 6 times the maximum measured tension for the whole functional system.		N/A
5.6.3	Rope and belt guides A means shall be provided to prevent a rope or a belt becoming unintentionally disengaged during use or set-up.		N/A
5.7	Pull-in points		
5.7.1	General The test finger shall not become trapped. Dimensions in millimetres  Key 1 handle R_a-value ≤ 0,40 μm Surface hardness ≥ HRC 40 (hardness Rockwell c-scale) Figure 1 — Test finger Approach the pull-in point with the test finger probe in the most onerous direction to determine whether the test finger can become trapped, while the equipment is in normal operation.		P
5.7.2	Pulleys Pull-in points of rope or belt drives up to 1 800mm height shall be guarded, except a) if the surface pressure is ≤ 90 N/cm ² , or b) when access to the pull-in point is prevented by the user's body during exercising. If a guard is required, the angle between the rope or belt and the guard shall be ≥50° in all positions. The guard shall not rotate around the axis of the pulley as the pulley rotates. If guarded, measure the angle between the rope or belt and the guard. If unguarded, measure the pressure between the		N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CS Standards Technical Services Co., Ltd.
Guangzhou Branch, Guangzhou EEC Laboratory

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN ISO 20957-1: 2024 and ISO 20957-1: 2024			
Clause	Requirement – Test	Results-Remarks	Verdict
	pulley and the rope or belt. The test shall be performed with the maximum load.		
5.7.3	Chains, gears and sprockets Pull-in points for chains, gears and sprockets shall be protected in accordance with ISO 12100:2010. Perform a visual check that guarding prevents access to chains, gears and sprockets.		P
5.8	Hand grips		
5.8.1	Integral handgrips Gripping positions shall be easily identifiable and designed to reduce slipping (e.g. textured, coated, knurled).		P
5.8.2	Applied handgrips Applied handgrips shall not be removed. Applied handgrips shall be equipped with a surface that reduces hand slip. Apply a force of 70 N to the handgrip in the most onerous direction. The load shall be applied for at least 1 minute.		N/A
5.8.3	Rotating handgrips Rotating handgrips shall be secured during use and shall be designed to reduce slipping (e.g. textured).		N/A
5.9	Endurance The training equipment shall withstand for: a) class H: 12 000 cycles; b) class S: 100 000 cycles; After the test, the training equipment shall not be broken or have visible signs of fracture or cracking and shall still function as intended by the manufacturer. Carry out the test as close as possible to normal exercise frequency and free of shocks: a) with maximum load; b) in the direction of the load in accordance with the exercise instructions over 80 % of the possible range of movement; c) with a frequency of movement simulating normal use. If the equipment offers multiple exercise stations, the test shall be done with all stations and functions as described in the user's manual.	Class H: 12 000 cycles	P



SGS-CSL Standards Technical Services Co., Ltd.
Guangzhou Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663 t (86-20) 82155555 www.sgs.com.cn
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN ISO 20957-1: 2024 and ISO 20957-1: 2024			
Clause	Requirement – Test	Results-Remarks	Verdict
5.10	Isometric test function Stationary training equipment designed to perform an isometric test shall have the load or force on the user's body displayed with an accuracy of $\pm 10\%$ in the range of measurement given in the user's manual. Measure the static output force or torque of the body in the position(s) as described in the user's manual and compare this value to the displayed value. Perform the test using the following three values: --minimum; --maximum; --a third random value between these two points.		N/A
5.11	Heart rate measurement system		
5.11.1	Indication The function of the heart rate measurement system shall be indicated on the display when the equipment is receiving a usable signal from the user, e.g, a blinking heart.		N/A
5.11.2	Heart rate control mode For equipment using the heart rate measurement system to control resistance, speed or other effort intensity, the loss of heart rate signal shall result in effort intensity remaining at the same intensity for maximum 60 s and then decrease until the minimum intensity is reached. The rate of decrease shall be at least 10 % in each 20 s time period. Set the equipment to the heart rate control mode with a target of 120 bpm. Operate the product according to the manufacturer's specifications, then use a heart rate simulator or a person to activate the control mode. Cut off the signal and then check if the resistance or the load reduces according to the requirements shown in 5.11.2. If there is more than one heart rate control system, each system shall be tested.		N/A
5.12	Electrical safety For electrical and electronic aspects of stationary training equipment, IEC 60335-1 shall be applied. For medical devices, IEC 60601-1 shall be applied.		P



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CS (China) Standards Technical Services Co., Ltd.
Guangzhou Branch of SGS (Guangzhou Branch of SGS)

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN ISO 20957-1: 2024 and ISO 20957-1: 2024			
Clause	Requirement – Test	Results-Remarks	Verdict
5.13	Loading Stationary training equipment that is loaded with the user's body mass, training load, or a combination of body mass and training load shall withstand a test load F_{test} as calculated in accordance with formula: $F_{test} = S(W_p + 1,5F_a)$; After the test, the training equipment shall not be broken or have visible signs of fracture or cracking and shall still function as intended by the manufacturer.	The maximum user's bodymass:120kg. Test load:300kg.	P
5.14	Care and maintenance Care and, if applicable, maintenance advice shall be provided with each piece of equipment. The advice shall include at least: a) a warning notice indicating that the safety level of the equipment can be maintained only if it is examined regularly for damage and wear, e.g. ropes, pulleys, connection points; b) advice to replace defective components immediately and/or keep the equipment out of use until repair; c) special attention to components most susceptible to wear.		P
5.15	Assembly instructions If the stationary training equipment requires assembly, an assembly manual in the national language shall be available, including at least: a) warning and precautions for safe handling of the stationary training equipment during the assembly process; b) clear and accurate assembly instructions; c) a list of tools needed; d) a comprehensive parts list including part numbers; e) the total mass and the total surface area (e.g. footprint) of the equipment; f) instruction that freestanding equipment shall be installed on a flat, stable and horizontal base; g) if stationary training equipment is attached or anchored, for example to a wall or to the floor, instructions including the attaching or anchoring operations with the minimum value (force) each attachment shall withstand.		P
5.16	General instructions for use An owner's manual shall be available for each stationary training equipment in the national language including at least: a) customer service contact information (e.g. address, website, etc.); b) name and full address of the manufacturer or importer;		P



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CS (China) Standards Technical Services Co., Ltd.
Guangzhou Branch, EEC Laboratory

No.198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN ISO 20957-1: 2024 and ISO 20957-1: 2024

Clause	Requirement – Test	Results-Remarks	Verdict
	c) indication that the field of application is for indoor use only and an explanation of the usage class (e.g. H or S); d) a dedicated figure to illustrate the free area and training area with an indication that: 1) the free area shall be at least 0,6 m greater than the training area in the directions from which the equipment is accessed; 2) the free area shall include the area for emergency dismount; 3) where equipment are positioned adjacent to each other, the free area may be shared. e) information on the correct use of the equipment and its features with the emphasis on safe operation, and the importance of keeping unsupervised children away from the equipment; f) exercise instructions with advice on the correct biomechanical positioning of the user on the stationary training equipment for every major exercise type for which the equipment is designed, including a warning indicating that injuries to health can result from incorrect or excessive training; g) statement that the owner shall provide the user with all warnings and instructions; h) design illustration; i) illustrations to accompany texts concerning difficult or complicated manoeuvres; j) instruction on how to safely use access and escape assist means; k) setting of the load and equipment further adjustments (e.g. seat adjustments); l) warning, if applicable, that if any of the adjustment devices are left projecting, they can interfere with the user's movement; m) warning that free standing equipment shall be positioned on a flat, stable and horizontal base; n) indication of the maximum user body mass; o) indication of the maximum training load, if applicable; p) explanation of the displayed data, if applicable; q) if a heart rate system exists, a warning with the following content: "WARNING! Heart rate monitoring systems can be inaccurate. If you feel faint, stop exercising immediately"; r) for accuracy classes B and C, indication that the equipment is not suitable for high accuracy purposes.		
5.17	Marking		



SGS-CT (Guangzhou) Technical Services Co., Ltd.
Guangzhou Branch of SGS-CT EEC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN ISO 20957-1: 2024 and ISO 20957-1: 2024			
Clause	Requirement – Test	Results-Remarks	Verdict
5.17.1	Permanent marking Stationary training equipment shall be permanently marked with the following minimum information: a) name or trademark and full address of the manufacturer, supplier or importer; b) maximum body mass of user and the maximum training load for the individual exercise stations (if applicable); c) usage classes S, H or I and accuracy classes A, B or C, which can be combined (e.g. SA) if both classes are specified in the relevant part(s) of the ISO 20957 series, if applicable; d) individual code number (which contains information about type and year of manufacture); e) graphical symbol or written information in the national language(s) instructing the user to read the information supplied by the manufacturer; f) for class S and I equipment, a conspicuous graphical symbol or written information in the national language(s) shall be applied if the equipment needs attachment/anchoring for safe operation. It is the responsibility of the manufacturer to display conformity to this document by the additional indication of ISO 20957 in connection with the letter symbol of the usage class(es) (class S, H and I).		P
5.17.2	Additional marking If a heart rate system exists, for classes S and I, a warning with the following content shall be provided: “WARNING - Heart rate monitoring systems can be inaccurate. If you feel faint, stop exercising immediately.” The heart rate warning shall be placed in a conspicuous position on or near the console visible during training or the warning shall be shown on the display at any time while the heart rate system is active.		N/A



SGS-CS Standards Technical Services Co., Ltd.
Guangzhou Branch, Accredited EEC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663 t (86-20) 82155555 www.sgs.com.cn
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

- Based on EN ISO 12100:2010 Safety of machinery - General principles for design – Risk assessment and risk reduction;
- Based on BS EN 957-6: 2010 + A1: 2014 and ISO 20957-6: 2021 Stationary training equipment - Part 6: Treadmills, additional specific safety requirements and test methods.

Test Result: details shown as following table:

EN ISO 12100:2010																																																								
Requirement – Test	Results-Remarks	Verdict																																																						
List of significant hazards Table 1 shows the significant hazards, hazardous situations and events, as far as they are dealt with in this European Standard, identified by risk assessment as significant for this type of equipment and which require action to eliminate or reduce the risk. NOTE For a particular treadmill, a risk assessment should be carried out by the manufacturer to identify any additional significant hazards so that suitable protective measures can be taken. Additional hazards are outside the scope of this standard. For identification and evaluation of hazards EN ISO 12100 applies. Table 1 — List of significant hazards and major sources of these hazards associated with treadmills <table> <tr> <th>*)</th><th>Description</th><th>Associated activity/situation</th></tr> <tr> <td>1.</td><td>Mechanical hazards</td><td></td></tr> <tr> <td>1.1.</td><td>Crushing</td><td>Inclining Folding</td></tr> <tr> <td>1.2.</td><td>Shearing</td><td>Inclining Folding</td></tr> <tr> <td>1.3.</td><td>Drawing-in or Trapping</td><td>Rear roller Drive system</td></tr> <tr> <td>1.4.</td><td>Falling</td><td>Sudden starts/stops Excessive speed variation Support failure</td></tr> <tr> <td>1.5.</td><td>Abrasion</td><td>Contact with moving running surface</td></tr> <tr> <td>1.6.</td><td>Slippery surfaces</td><td>Slipping and Falling</td></tr> <tr> <td>1.7.</td><td>Stored energy</td><td>Folded treadmills falling down Springs or elastomeric devices prior to assembly</td></tr> <tr> <td>2.</td><td>Electrical hazards</td><td></td></tr> <tr> <td>2.1.</td><td>Electrocution</td><td>Contact with live components</td></tr> <tr> <td>3.</td><td>Thermal Hazards</td><td></td></tr> <tr> <td>3.1.</td><td>Burns</td><td>Contact with hot surfaces</td></tr> <tr> <td>4.</td><td>Hazards generated by neglecting ergonomic principles in design process</td><td></td></tr> <tr> <td>4.1.</td><td>Ineffective ergonomics</td><td>Size or location of support surfaces Running surface dimensions</td></tr> <tr> <td>4.2.</td><td>Human errors, human behaviour</td><td>Reasonably foreseeable misuse</td></tr> <tr> <td>5.</td><td>Noise Hazards</td><td></td></tr> <tr> <td>5.1.</td><td>Disturbing acoustic communication</td><td>Moving treadmill motor and belt</td></tr> </table>			*)	Description	Associated activity/situation	1.	Mechanical hazards		1.1.	Crushing	Inclining Folding	1.2.	Shearing	Inclining Folding	1.3.	Drawing-in or Trapping	Rear roller Drive system	1.4.	Falling	Sudden starts/stops Excessive speed variation Support failure	1.5.	Abrasion	Contact with moving running surface	1.6.	Slippery surfaces	Slipping and Falling	1.7.	Stored energy	Folded treadmills falling down Springs or elastomeric devices prior to assembly	2.	Electrical hazards		2.1.	Electrocution	Contact with live components	3.	Thermal Hazards		3.1.	Burns	Contact with hot surfaces	4.	Hazards generated by neglecting ergonomic principles in design process		4.1.	Ineffective ergonomics	Size or location of support surfaces Running surface dimensions	4.2.	Human errors, human behaviour	Reasonably foreseeable misuse	5.	Noise Hazards		5.1.	Disturbing acoustic communication	Moving treadmill motor and belt
*)	Description	Associated activity/situation																																																						
1.	Mechanical hazards																																																							
1.1.	Crushing	Inclining Folding																																																						
1.2.	Shearing	Inclining Folding																																																						
1.3.	Drawing-in or Trapping	Rear roller Drive system																																																						
1.4.	Falling	Sudden starts/stops Excessive speed variation Support failure																																																						
1.5.	Abrasion	Contact with moving running surface																																																						
1.6.	Slippery surfaces	Slipping and Falling																																																						
1.7.	Stored energy	Folded treadmills falling down Springs or elastomeric devices prior to assembly																																																						
2.	Electrical hazards																																																							
2.1.	Electrocution	Contact with live components																																																						
3.	Thermal Hazards																																																							
3.1.	Burns	Contact with hot surfaces																																																						
4.	Hazards generated by neglecting ergonomic principles in design process																																																							
4.1.	Ineffective ergonomics	Size or location of support surfaces Running surface dimensions																																																						
4.2.	Human errors, human behaviour	Reasonably foreseeable misuse																																																						
5.	Noise Hazards																																																							
5.1.	Disturbing acoustic communication	Moving treadmill motor and belt																																																						
		P																																																						



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CS (China) Standards Technical Services Co., Ltd.
Guangzhou Branch: Guangzhou EEC Laboratory

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

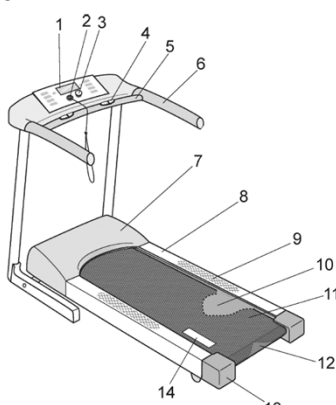
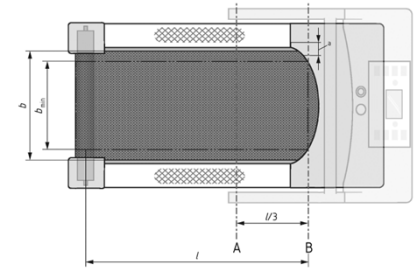
t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN 957-6: 2010 + A1: 2014 and ISO 20957-6: 2021			
Clause	Requirement – Test	Results-Remarks	Verdict
5	Classification  Key 1 display 2 safety stop (cord type) 3 safety stop (mushroom type) 4 heart rate hand sensor 5 front handlebar 6 side handrail 7 front protective cover 8 foot rail 9 non slip surface 10 running deck 11 running surface 12 rear roller 13 rear roller protective cover 14 marking of the running surface Figure 1 — Example of a treadmill  Key - A line located at 1/3 of the length of the running surface measured from B - B front end of the running surface - a identifiable feature according to 6.3 - b width of the running surface - b_{min} minimum required width of the running surface according to Table 2 - l length of the running surface Figure 2 — Definition of main measures		
6	Safety requirements and/or protective measures		
6.1	General The equipment shall comply with the safety requirements and/or protective measures of this clause. In addition, the equipment shall be designed according to the principles of EN ISO 12100 for relevant but not significant hazards, which are not dealt with by this document. Fixed guards shall be fixed by systems that can be opened or removed only with tools. Fixed guards that have to be removed for maintenance, adjustment or inspection shall be retained by fasteners that are retained in the guard or machine when the guard is removed.		P



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSI (Guangzhou) Inspection & Testing Services Co., Ltd.
Guangzhou Branch of SGS-CSI EEC Laboratory

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663


t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN 957-6: 2010 + A1: 2014 and ISO 20957-6: 2021			
Clause	Requirement – Test	Results-Remarks	Verdict
6.2	Squeeze and shear points within the accessible area All parts of treadmills, including any folding mechanism, shall be in accordance with EN ISO 20957-1 in folded position, during folding and in useable position. For folding treadmills the lock for securing the equipment is excluded. Where the inclination can be changed during operation thus causing the distance between any part of the equipment and the floor to become smaller than 60 mm, the speed of inclination shall not exceed 1°/s and the user shall be able to stop this movement.		P
6.3	Transmission elements and rotating parts Drawing-in shall be prevented at all points between the running surface and fixed or moving parts of the treadmills or the floor. Identifiable feature(s) indicating the acceptable lateral position(s) of the running surface shall be provided on the treadmill [see in Figure 2 and Clause 10 g)]. Adjust the running surface in the most onerous position according to the user's manual. Set the treadmill speed at $(3 \pm 0,5)$ km/h. Try to insert the test finger in all drawing-in points at least between the: a) running surface and the rear roller guard; b) running surface and the rear roller; c) running surface and the running deck. The test finger shall not be trapped. it shall not be possible that the test finger becomes trapped between the rear roller guard and the running surface. With the running surface centred, the rear roller guard shall overlap the edges of the running surfaces by min. 10 mm and max. 40 mm (see Figure 3). The vertical gap between the running surface and the rear roller guard or overlapping foot rails shall not be more than 9,5 mm. Dimensions in millimetres  Figure 3 — Example of a rear roller guard (min. 10 mm and max. 40 mm)		P
6.4	Temperature rise Accessible parts of the treadmill shall not have a temperature greater than 65 °C.		P
6.5	Safety stop (emergency stop)		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CHINA Standards Technical Services Co., Ltd.
Guangzhou Branch, EEC Laboratory

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN 957-6: 2010 + A1: 2014 and ISO 20957-6: 2021			
Clause	Requirement – Test	Results-Remarks	Verdict
6.5.1	General All power driven treadmills shall be equipped with a safety stop switch, which shall include a push-button operated switch and/or a pull-cord operated switch. The push-button type or pull cord safety stop actuator shall be in a reachable position in front of the user and in an area of ± 180 mm parallel to the centreline of the running surface. If the push-button type safety stop actuator is outside this area it shall be duplicated on the opposite side except when a pull-cord actuator is provided.	Equipped with a pull-cord operated switch.	P
6.5.2	Characteristics Operating the safety stop shall result in the machine cutting off the main power of the motor and the inclination system without relying on any software functions. The contacts of manually operated safety stop devices shall ensure positive opening. The achievement of contacts separation shall be the direct result of a specified movement of the switch actuator through non resilient members. Emergency stop relays or manually reset fail-safe relays may be used. It shall not be possible to restore the circuit until the actuator of the safety stop device has been manually reset. After restoring the circuit, the equipment shall restart with standstill and the incline shall stay the same or reset according to 6.2. Where several safety stop devices are provided, the circuit shall not be restored until all actuators previously operated have been reset.		P
6.5.3	Actuator(s) Actuators of safety stop devices shall be coloured RED. The actuator of a push-button operated switch shall be of the palm or mushroom head type and shall have a yellow background. The background around the actuator shall be at least 5 mm wider than the actuator itself on all sides. Pull-cord safety stop actuators shall release with a maximum force of 50 % of the force required to release the attachment device when attached to the user according to the manufacturers' recommendation. The actuator cord shall have a suitable length so that the actuator releases at a position not more than 70 % of the length of the running surface. Visual inspection, measurement and dimensional test. Attach the pull-cord safety stop according to the manufacturer's recommendations. Measure the release force while pulling the actuator cord progressively in the direction parallel to the running surface and in the normal direction of motion. If the attachment device clamps to the fabric of the user's shirt, then simulate the shirt with the test fabric according to ISO 12947-1:1998, Table 1.		P



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CS (China) Standards Technical Services Co., Ltd.
Guangzhou Branch: Guangzhou EEC Laboratory

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN 957-6: 2010 + A1: 2014 and ISO 20957-6: 2021			
Clause	Requirement – Test	Results-Remarks	Verdict
6.6	Immobilization method For power driven treadmills there shall be an immobilization method for the treadmill to prevent uncontrolled usage of third parties. This method shall be explained in the instructions for use.		P
6.7	Stability The treadmill shall be stable in both training and storage positions		P
	Testing in training position Carry out the test with a test person of (100 ± 5) kg with the running surface operating at a speed of (9 ± 1) km/h: at +10°+1 and -10°+1 in the running direction and at 5°+1 in all the other directions, through the maximum and minimum ranges of inclinations. Carry out an emergency dismount test using the front handlebars/foot rails on flat surface with a maximum inclination of the treadmill at a speed of (9 ± 1) km/h or where this is not possible at maximum speed.		P
	Testing in folded position Carry out the test at 10°+1 in the most unfavourable direction.		P
	Testing of the foot rail support system Apply the load in the most unfavourable position and measure the distance vertically to the floor where the load is applied before and immediately after the test. Determine the permanent deformation as a percentage of the length of the running surface.		P
6.8	Static strength of the running surface Classes H, S and I treadmills shall withstand a load four times the maximum user weight specified by the manufacturer or 4 000 N whichever is greater without fracture, cracking or permanent deformation. Apply the test load over an area of (300 ± 5) mm × (300 ± 5) mm in the middle of the running surface, the centre of which is lined up with line A in Figure 2. The running surface may be restrained to prevent movement. The duration of the test shall be (60 ± 5) s. If inclination is applicable, apply the load at the flat, the mid and the highest inclination. --The treadmill shall withstand the test in flat, mid and maximum inclination, where inclination is applicable. --the running surface shall show no permanent deformation of more than 3 %.	Class H Maximum weight of user: 120kg, Test load:480kg.	P
6.9	Endurance The treadmill shall withstand: a) 12 000 impacts for class H and b) 100 000 impacts for classes S and I. The test shall not cause any fracture, cracking, or permanent deformation to the treadmill. After the test, the treadmill shall be capable of functioning correctly according to the information given in the user's manual.	Class H After the test, the treadmill functioned well.	P



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CS (China) Standards Technical Services Co., Ltd.
Guangzhou Branch: Guangzhou EEC Laboratory

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN 957-6: 2010 + A1: 2014 and ISO 20957-6: 2021			
Clause	Requirement – Test	Results-Remarks	Verdict
6.10	Handrails		
6.10.1	General Treadmills shall be equipped with two side handrails or with two side handrails and a front handlebar for user support and emergency dismount.		N/T
6.10.2	Treadmills with side handrails only The top of the side handrails shall be at a height between 800 mm and 950 mm above the running surface measured vertically, which may not be perpendicular to the running surface at all incline positions. The distance between the side handrails shall not exceed 900 mm (inside to inside). Each side handrail shall extend beyond line A (see Figure 2). The side handrails shall show no permanent deformation of more than 3 %. The length of the handrails to the rear of the vertical projection of line B or a vertical projection of a line from the edge of any part of the front protection cover overlapping the running surface (see Figure 2) shall be measured. The measurement shall be made in the non-inclined position. Apply a test force of (1 000 ± 50) N vertically in the most onerous position of the side handrails/front handlebar by means of a belt with a width of (80 ± 5) mm for a period of minimum 5 min. Measure the maximum permanent deformation after removing the load. Apply a force of (500 ± 25) N horizontally using the belt in the same position as in the vertical test but in the most onerous horizontal direction of the side handrail/front handlebar for a period of minimum 5 min. Measure the maximum permanent deformation after removing the load. Determine the permanent deformation as a percentage of the side handrail length as measured in accordance with the first paragraph of this subclause.		N/T



SGS-CHINA Inspection & Testing Services Co., Ltd.
Guangzhou Branch, EEC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN 957-6: 2010 + A1: 2014 and ISO 20957-6: 2021			
Clause	Requirement – Test	Results-Remarks	Verdict
6.10.3	Treadmills with front handlebar and side handrails Either the side handrails shall be in accordance with 6.10.2 or the front handlebar shall be at a height between 800 mm and 950 mm above the running surface in any inclination. The front handle bar shall consist of a single grip-able length of minimum 500 mm or two grip-able lengths of minimum 175 mm located symmetrically to the longitudinal axis of the running surface with a minimum distance of 375 mm and a maximum distance of 675 mm from centre to centre. The side handrails and the front handlebar shall show no permanent deformation of more than 3%. In the case of treadmills having both the side handrails and a front handlebar, both shall fulfil this requirement. The length of the handrails to the rear of the vertical projection of line B or a vertical projection of a line from the edge of any part of the front protection cover overlapping the running surface (see Figure 2) shall be measured. The measurement shall be made in the non-inclined position. Apply a test force of $(1\,000 \pm 50)$ N vertically in the most onerous position of the side handrails/front handlebar by means of a belt with a width of (80 ± 5) mm for a period of minimum 5 min. Measure the maximum permanent deformation after removing the load. Apply a force of (500 ± 25) N horizontally using the belt in the same position as in the vertical test but in the most onerous horizontal direction of the side handrail/front handlebar for a period of minimum 5 min. Measure the maximum permanent deformation after removing the load. Determine the permanent deformation as a percentage of the side handrail length as measured in accordance with the first paragraph of this subclause.		N/T



SGS-CHINA Standards Technical Services Co., Ltd.
Guangzhou Branch / EEC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN 957-6: 2010 + A1: 2014 and ISO 20957-6: 2021			
Clause	Requirement – Test	Results-Remarks	Verdict
6.11	Foot rails Treadmills shall be equipped with foot rails, see Figure 1. The foot rails shall be a minimum length of 70 % of the length of the running surface / (see Figure 2) and have a minimum width of 80 mm. The foot rails shall cover at least 25 % of the length of the running surface / in front of line A and at least 45 % of the length of the running surface / behind line A, see Figure 2. The upper surface of the foot rails shall have a minimum width of 70 mm. They shall have a slip resistant upper surface over minimum 70 % of the exposed length of the foot rail. The slip resistant surface shall have a coefficient of friction in the most onerous direction of more than 0,5, when tested in accordance with ISO 5904. The lowest measured force shall be used for the friction factor calculation. Apply a force of twice the maximum user weight indicated in the user's manual or (2 000 ± 50) N, whichever is greater, by means of a test sole (305 ± 1) mm × (80 ± 1) mm in the middle of the non-slip surface of each foot rail for a period of minimum 5 min, the foot rail shall not break. The attachment of the side handrails to foot rails shall avoid a trip hazard.	Test load: 240kg	P
6.12	Running surface Permanent marking in a contrasting colour is required on the running surface to determine if the belt is either moving or stationary. At least one marking shall be visible from the top view in any position of the running surface. The markings on the running surface shall have a length between 150 mm and 450 mm and a width between 50 mm and 100 mm. The space between markings shall not be less than the width of the markings measured in the direction of travel. This requirement is only applicable for classes S and I.	Class H	N/A
6.13	Acceleration For motorised treadmills, the initial starting speed of the running surface shall not exceed the speed given in Table 2. The acceleration of the running surface, with the treadmill in an unloaded condition, shall not exceed 0,9 m/s ² . Remove all loads from the treadmill. Provide a means of recording the instantaneous speed of the running surface. Measure the speed in 5 s intervals from the minimum to the maximum speed and calculate the acceleration between measured values.	Initial starting speed: 1.0km/h.	P



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CHINA Standards Technical Services Co., Ltd.
Guangzhou Branch / EEC Laboratory

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN 957-6: 2010 + A1: 2014 and ISO 20957-6: 2021			
Clause	Requirement – Test	Results-Remarks	Verdict
6.14	Heart rate control mode If a heart rate control mode is incorporated into the treadmill, the function of the heart rate system shall be indicated on the display, e.g. by a blinking heart or any other means. The loss of heart rate signal shall result in speed remaining at the same level for maximum 60 s and then decrease until the minimum speed is reached. The rate of decrease shall be at least 0,014 m/s ² (1 km/h in 20 s). Set the treadmill to the heart rate control mode at a speed of 8 km/h and 0 % inclination. Use a heart pulse simulator or a person to activate the control mode. Cut off the signal and then check that the speed reduces according to the requirements shown in 6.14. If there are more than one heart rate control system, each system shall be tested.		N/A
6.15	Folding treadmills A folding treadmill shall be equipped with a safe locking system to keep it in a folded position where the running surface is designed to be folded up for storage. A folding treadmill shall be equipped with a safe locking system to keep it in the useable position when the side handrails are designed to be folded down when stored. The folding portion shall not be capable of reaching a stable position of equilibrium before being locked. The maximum vertical handling force shall be less than 150 N. If there is stored energy, e.g. compressed gas spring, in the packaged position or in folded position, a safety device to avoid inadvertent release of the stored energy shall be provided.		P
6.16	Noise Information on airborne noise emission measured, it shall be given in the instructions for use of the motorized treadmill (see 10 I) and 10 m)). Measure the A-weighted emission sound pressure level at trainer's ears, LpA in accordance with ISO 11201 or ISO 11202 at a speed of the running surface of 8 km/h for class H equipment and 12 km/h for class S and I equipment in an unloaded situation.	The maximum noise:57dB(A).	P
6.17	Electrical safety Concerning electrical and electronic aspects, the equipment shall meet the requirements of EN 60335-1 for general use and EN 60601-1 for medical use. The running surface or the incline mechanism shall not restart automatically after an interruption of the power supply.		P
6.18	Additional classified requirements Classes A, B and C shall fulfil the requirements of Table 2.		P



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CS (China) Standards Technical Services Co., Ltd.
Guangzhou Branch: Guangzhou EEC Laboratory

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN 957-6: 2010 + A1: 2014 and ISO 20957-6: 2021

BS EN 957-6: 2010 + A1: 2014 and ISO 20957-6: 2021				
Clause	Requirement – Test		Results-Remarks	Verdict
Table 2-Classified basic requirements				
	Class A	Class B	Class C	Testing
Read out (display indicator)	speed, inclination (if fitted) in % (see Figure 4) distance, time in SI units	speed, inclination (if fitted) in %, distance, time in SI units	none	visual test, performance test
Accuracy	time ± 1 % distance ± 5 % speed ± 5 % up to 2 km/h ± 0,1 km/h inclination (if any) ± 10 % accuracy above 2 % inclination	time ± 1 % ^a distance ± 10 % speed ± 10 % up to 2 km/h ± 0,2 km/h inclination (if any) ± 15 % accuracy above 2 % inclination	none ^b	A1 7.15 A1
Minimum length and width of the running surface for motor driven treadmills in mm	≤ 8 km/h: 1 000 × 400 > 8 km/h to 16 km/h: 1 200 × 400 > 16 km/h: 1 300 × 400	≤ 8 km/h: 1 000 × 400 > 8 km/h to 16 km/h: 1 200 × 400 > 16 km/h: 1 300 × 400	1 000 × 325 ≤ 6 km/h (walking) > 6 km/h see class B	references to speed measuring test
Minimum length and width of the running surface <i>l</i> for manual driven treadmills in mm	not applicable	1 000 × 400	1 000 × 325	—
Minimum speed	≤ 0,5 km/h, increments 0,1	≤ 2 km/h, increments 0,5	≤ 3 km/h	A1 7.15 A1
^a For mechanical timing devices ± 5 % is allowed. ^b If included: – time ± 2 % ^a – distance ± 20 % – speed ± 20 % up to 3 km/h ± 0,3 km/h – inclination ± 25 % accuracy above 2 % inclination.				
6.19	Additional warning label If a heart rate system exists: For classes S and I, a warning label with the following content shall be attached: “WARNING! Heart rate monitoring systems may be inaccurate. Over exercising may result in serious injury or death. If you feel faint stop exercising immediately. The above label shall be placed in a conspicuous position on the display console.		Class H	N/A



SGS-CS (Guangzhou) Technical Services Co., Ltd.
Guangzhou Branch of SGS (China) EEC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663 t (86-20) 82155555 www.sgs.com.cn
 中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

BS EN 957-6: 2010 + A1: 2014 and ISO 20957-6: 2021			
Clause	Requirement – Test	Results-Remarks	Verdict
9	Marking In addition to the marking requirements of EN ISO 20957-1, motor driven treadmills shall be marked visibly, legibly and indelibly.		P
10	Additional instructions for use In addition to EN ISO 20957-1 easy-to-understand instructions for use shall be supplied with each treadmill.		P



SGS-CSI Standards Technical Services Co., Ltd.
Guangzhou Branch (Authorized EEC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31

ANNEX 1: Photo documentation



P12



T3899 and TM037



SGS-CS Standards Technical Services Co., Ltd.
Guangzhou Branch (Guangzhou EEC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgs.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT

Report No.: GZES260200356831

Date: 2026-03-31



CS-WP3



CS-WP3

The testing report/certificate only refers to the sample(s) tested.

--- End of Report ---



SGS-CS (Guangzhou) Branch
Guangzhou Branch of SGS (Guangzhou) EEC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 198, Kezhu Road, Science City, Economic & Technological Development Area, Guangzhou, Guangdong, China 510663
中国·广东·广州高新技术产业开发区科学城科珠路198号 邮编: 510663

t (86-20) 82155555 www.sgsgroup.com.cn
t (86-20) 82155555 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

TEST REPORT IEC 60335-1 Safety of household and similar electrical appliances	
Report Number..... :	GZES250501015601
Date of issue..... :	2025-06-23, Amendment 03: 2026-03-12
Total number of pages	8
Name of Testing Laboratory preparing the Report	SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch
Applicant's name	Jiangxi EQi Industrial Co., Ltd.
Address..... :	Luliang Avenue, Yining Town, Xiushui County, Jiujiang, Jiangxi, China
Test specification: Standard : IEC 60335-1:2010/COR1:2010/COR2:2010 /AMD1:2013/COR1:2014/AMD2:2016/COR1:2016 Test procedure : SGS-CSTC Non-standard test method : N/A	
Test Report Form No. :	IEC60335_1X
Test Report Form(s) Originator :	Nemko AS
Master TRF	Dated 2016-10
Copyright © 2016 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
General disclaimer: The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

Test item description	Motorized Treadmill (Product name: Household electric treadmill)	
Trade Mark..... :	—	
Manufacturer	Same as applicant	
Model/Type reference.....:	P12, T3803D, WFTM015, T3823, T5009, T5006, SP38240/T3837, SP38242/T3807, A4003D, T3899, CS-WP3, TM037	
Ratings.....:	220 V – 240 V; 50 Hz - 60 Hz; 551 W	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
☒	CB Testing Laboratory:	SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch
Testing location/ address		198 Kezhu Road, Science City, Economic & Technology Development Area, Guangzhou, Guangdong, China
Tested by (name, function, signature)		Romy Huang / Project Engineer <i>Romy Huang</i>
Approved by (name, function, signature) .. :		Vickie Luo / Reviewer <i>Vickie Luo</i>
Testing procedure: CTF Stage 1:		
☐	N/A	
Testing location/ address		
Tested by (name, function, signature)		
Approved by (name, function, signature) .. :		
Testing procedure: CTF Stage 2:		
☐	N/A	
Testing location/ address		
Tested by (name + signature)..... :		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) .. :		
Testing procedure: CTF Stage 3:		
☐	N/A	
Testing procedure: CTF Stage 4:		
☐	N/A	
Testing location/ address		
Tested by (name, function, signature)		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) .. :		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment):

Attachment 1: 14 pages of European group differences and national differences;

Attachment 2: 1 page of photo document

Summary of testing:**Tests performed (name of test and test clause):**

The tests were carried out according to the following standards:

IEC 60335-1: 2010 + A1: 2013+ A2: 2016

Amendment 03:

Added UK plug in table 24.1 no need to add testing.

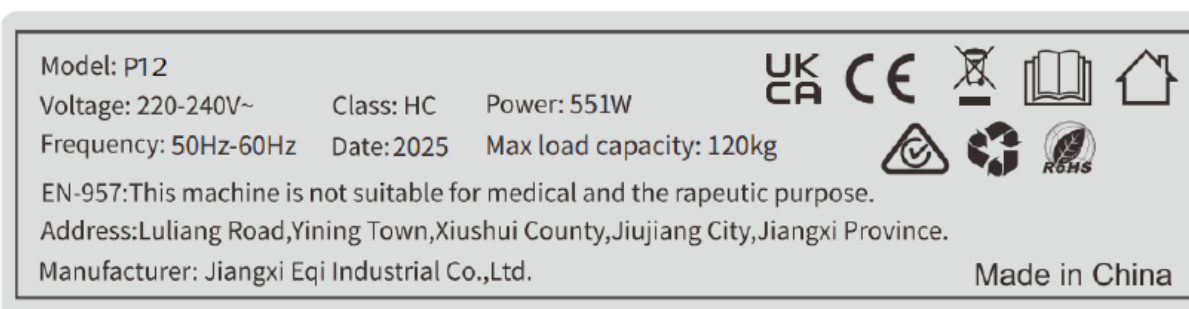
The submitted samples were in compliance with above standards.

Testing location:SGS-CSTC Standards Technical Service Co., Ltd.
Guangzhou Branch.

198 Kezhu Road, Science City, Economic & Technology Development Area, Guangzhou, Guangdong, China

Summary of compliance with National Differences (List of countries addressed):

GB, European group differences

Copy of marking plate:**The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.**

Location: the plate is affixed on the rear of the unit.

Remark:

All model' labels are identical except for model name and trade mark.

The Height of CE logo and UKCA logo shall not be less than 5 mm; Height of WEEE logo shall not be less than 7 mm.

As declared by the applicant, the importer (and manufacturer, if it is different)'s name, registered trade name or registered trade mark and the postal address will be marked on the products before being place on the market. The contact details shall be in a language easily understood by end-users and market surveillance authorities.

Marking on the packaging or in a document accompanying the electrical equipment is only acceptable if it is not possible to place such markings on the product.

Test item particulars :	
Classification of installation and use : Stationary appliance	
Supply Connection..... : Appliance Inlet	
Possible test case verdicts: - test case does not apply to the test object : N/A - test object does meet the requirement : P (Pass) - test object does not meet the requirement : F (Fail)	
Testing :	
Date of receipt of test item : 2026-03-02	
Date (s) of performance of tests..... : --	
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a ☒ comma / ☐ point is used as the decimal separator. This document is issued by the Company subject to its General Conditions of Service, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx . Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. This report (GZES250501015601 Amendment 03) was not valid without used with original report GZES250501015601, GZES250501015601 Amendment 01 and GZES250501015601 Amendment 02.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60335-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided :	☐ Yes ☒ Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)..... : Same as applicant	

General product information:

Electrical treadmill for indoor use. It contains incline motor, main motor, display panel, control panel.
All models have the same construction except for decoration, colour of enclosure and model name.

Amendment 01:

The original Test Report Ref. No. GZES250501015601, dated 2025-06-23, was modified on 2026-01-27 to include the following changes, which were considered technical modifications:

1. Delete model WFTM020(T4254C) and add new model T3899, CS-WP3.

Amendment 02:

The original Test Report Ref. No. GZES250501015601 Amendment 01, dated 2026-01-27, was modified on 2026-02-10 to include the following changes, which were considered technical modifications:

1. Add new model TM037.
2. Add model TM037 and CS-WP3 photo.

Amendment 03:

The original Test Report Ref. No. GZES250501015601 Amendment 02, dated 2026-02-10, was modified on 2026-03-12 to include the following changes, which were considered technical modifications:

1. Added alternative components of UK plug, see table 24.1 for details, added UKCA logo in label.
Modified model name, from model WFTM015(T3823) to model WFTM015 and T3823.

After review, no test was considered necessary to be performed.

The product fulfils the requirements of:

EN 60335-1: 2012 + A11: 2014 + A13: 2017 + A1: 2019 + A14: 2019 + A2: 2019 + A15: 2021 + A16: 2023
EN 62233: 2008

24.1	TABLE: Critical components information					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾	
Plug	Zhejiang Jinting Nuclear Cable Co., Ltd.	JT008	AC 250 V; 16 A	VDE 0620-2-1	VDE 40050831	
UK Plug	Zhejiang Jinting Nuclear Cable Co., Ltd	JT006A	AC 250 V; 13 A	BS 1363-1	ASTA 1120	
Power Cord	Zhejiang Jinting Nuclear Cable Co., Ltd.	H05VV-F 60227 IEC 53	3 G 0,75 mm²	EN 50525-2-11	VDE 40013419	
Connector	Zhejiang Jinting Nuclear Cable Co., Ltd.	JT-ST3	AC 250 V; 10 A; C13	EN IEC 60320-1	VDE 40025292	
AC Inlet	Yueqing Qiyang Electronics Co., Ltd.	AC-14-F16	AC 250 V; 10 A; C14	EN IEC 60320-1	TUV SUD B N8A 098459 0004	
Switch	Ningbo Master Soken Electrical Co., Ltd.	RK1-01	250 V; 16A; 10E3; T100	EN IEC 61058-1	VDE 40012988	
Internal wire	Xinya Electronic Co., Ltd.	1015	16 AWG or 18 AWG; 600 V; 105 °C	EN 60335-1	Tested with appliance UL E170689	
(Alternative)	Shenzhen Shunjia Electrical Technology Co., Ltd.	1015	16 AWG or 18 AWG; 600 V; 105 °C		Tested with appliance UL E490463	
(Alternative)	Wenzhou Yuanyang Wire & Cable Co., Ltd.	1015	16 AWG or 18 AWG; 600 V; 105 °C		Tested with appliance UL E349477	
(Alternative)	Changzhou Hong Chang Electronics Co Ltd	1015	16 AWG or 18 AWG; 600 V; 105 °C		Tested with appliance UL E212395	
(Alternative)	Zhejiang Jinting Nuclear Cable Co Ltd	1015	16 AWG or 18 AWG; 600 V; 105 °C		Tested with appliance UL E313965	
EMI	Shanghai Mestrong Electronics Co., Ltd.	JN213-4A-22	115 / 250 V; 60/50 Hz; 4 A	EN 60335-1	Tested with appliance	
--CX1	Shanghai Xiang Ri Ya Electronic Co., Ltd.	MKP X2	275 V; 0,22 uF; T100; X2	EN 60384-14	VDE 40001876	
--CY	Jyh Hsu (Jec) Electronics Ltd	JY	250 V; 10000 pF; T85; Y2	EN 60384-14	VDE 40038643	

Main motor	JiangYin Aotelai Motor Co., Ltd.	82-238	180 VDC; 2,5 HP; 5000 rpm; Class 155	EN 60335-1	Tested with appliance
--Winding of main motor	Ningbo Jintian New Material Co., Ltd.	xEIW180, QZY-x180	180 °C		Tested with appliance UL E227047
--Wires for main motor	Jiangyin Haocheng Electric Appliance Wire & Cable Mfg Co Ltd	1015	18 AWG; 600 V; 105 °C		Test with appliance UL E227587
(Alternative)	Jiangsu Jianwei Technology Joint Stock Co., Ltd.	1015	18 AWG; 600 V; 105 °C		Test with appliance UL E501367
(Alternative)	Suzhou Dongchen Wire & Cable Technology Co Ltd	1015	18 AWG; 600 V; 105 °C		Test with appliance UL E484806
PCB base material for power board	YSBY PCB LIMITED	6V0	FR-4; V-0; 130 °C	EN 60335-1	Tested with appliance UL E78030
(Alternative)	Kingboard Laminates Holdings Ltd.	KB-6150, KB-5150, KB-6160	FR-4; V-0; 130 °C		Tested with appliance UL E123995
Fuse	Dongguan Better Electronics Technology Co., Ltd.	932	250 VAC; T10 A	EN 60127-1 EN 60127-7	TUV Rh R 50279350
Varistor	Hongzhi Enterprises Ltd.	HEL10D471K	470 V; T85	IEC 61051-1 IEC 61051-2 IEC 61051-2-2 EN 61051-1	VDE 40037512
Relay	Jiangxi Weiqi Electric Co., Ltd	WL73-S-112DM	250 VAC; 10 A; 12 VDC; T85; 1E4	EN 61810-1	TUV R 50545274
(Alternative)	Shenzhen Yuanze Electric Co., Ltd.	Y3F-SS-112DM	250 VAC; 10 A; 12 VDC; T85; 1E4	EN 61810-1	TUV R 50197243
Optocoupler	Everlight Electronics Co., Ltd.	EL817	Cr. / Cl. / Dti.: ≥ 7,6 mm / ≥ 7,6 mm / >0,4 mm; 55/110/21; CTI 175	EN IEC 60747-5-5	VDE 132249

Transformer	Jinxian Boersai Electronic Technology Co., Ltd.	EI22-8V	EE22; Pri. Winding: N1(pin 1-2): Ø 0,2 mm / 137 Ts; N2(pin 4-5): Ø 0,2mm / 21 Ts ; N3(pin 9-10): Ø 0,2 mm x 2 P / 27 Ts Sec. Winding: N4(pin 6-7): Ø 0,13 mm x 7P / 16 Ts Class 130	EN 60335-1	Tested with appliance
--Bobbin	Chang Chun Plastics Co., Ltd.	T375HF	V-0; 150 °C	EN 60335-1	Tested with appliance UL E59481
--Winding	Hongqi Group Jiangxi Copper Co., Ltd.	2UEW/155	155 °C	EN 60335-1	Tested with appliance UL E355168
--Triple insulated wire	Dongguan Hilde Electronics Co., Ltd.	THW-B	130 °C; Reinforced	EN IEC 62368-1 EN 61558-2-16 Annex K	VDE 40047386
Sleeving	Foshan Fangpu Dipping Technology Co., Ltd.	FC series	600V	EN 60335-1	Tested with appliance UL E185679
Plastic enclosure	Dongguan Huanuo Insulation Mstar Technology Ltd	HN-CP150, HN-SB120, HN-SP001, HN-SPT	Min. Thickness: 2,4mm	EN 60335-1	Tested with appliance UL E494880
Supplementary information: 1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					

---End of main Report---

ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT IEC 60335-1:2010, IEC 60335-1:2010/AMD1:2013, IEC 60335-1:2010/AMD2:2016 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES Household and similar electrical appliances – Safety – Part 1: GENERAL REQUIREMENTS			
Differences according to : EN 60335-1:2012 + A11:2014 + A13:2017 + A1:2019 + A14:2019 + A2:2019 + A15:2021 + A16:2023 EN 62233:2008			
TRF template used : IECEE OD-2020-F2:2022, Ed. 1.2			
Attachment Form No. : EU_GD_IEC60335_1X_III			
Attachment Originator : Nemko Group AS			
Master Attachment : Dated 2024-01-19			
Copyright © 2024 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	CENELEC COMMON MODIFICATIONS (EN)		—
6.1	Delete “class 0” and “class 01”		P
7.1	Single-phase appliances to be connected to the supply mains: 230 V covered		P
	Multi-phase appliances to be connected to the supply mains: 400 V covered		N/A
7.12	The instructions include the substance of the following:		—
	- this appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved		P
	- children shall not play with the appliance		P
	- cleaning and user maintenance shall not be made by children without supervision		P
8.1.1	Also test probe 18 of EN 61032 is applied		P
	The appliance being in every possible position during the test, except that		P
	appliances normally used on the floor and having a mass exceeding 40 kg are not tilted		P
	The force on the probe in the straight position is increased to 10 N when probe 18 is used		P

ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
	When using test probe 18 the appliance is fully assembled as in normal use without any parts removed, and		P
	parts intended to be removed for user maintenance are also not removed		P
8.1.3	Instead of test probe B, test probe 18 and test probe 13, for appliances other than those of class II, test probe 41 of IEC 61032 is applied with a force not exceeding 1 N to live parts of visibly glowing heating elements, all poles of which can be disconnected by a single switching action		N/A
8.2	Compliance is checked by inspection and by applying the test probes of EN 61032 in accordance with the conditions specified in 8.1.1		P
	Test probe B and probe 18 of EN 61032 are applied to built-in appliances and fixed appliances only after installation		N/A
15.1.2	Appliances with an automatic cord reel tested with the cord in the most unfavourable position so that the reeling of the wet cord may affect electrical insulation during operation, the cord not being dried before reeling		N/A
20.2	For appliances having hazardous moving parts, due to their working function, e.g. the needle of a sewing machine, tools of kitchen machines or the blade of an electrical knife, full protection is not possible for performing their intended use		P
	When using a test probe similar to test probe B of EN 61032, having a circular stop face and applied with a force of 5N, the accessories and detachable covers are removed		P
	When using test probe 18 it is applied with a force of 2,5N on the appliance fully assembled		P
22.12	Other parts intended to be detached during use, maintenance or cleaning (e.g. batteries, battery covers, lids, attachments, steam nozzles) are not considered as parts providing a similar function as handles, knobs, grips, levers		N/A
22.17	The requirement is not applicable to built-in appliances		N/A
22.44	An appliance is child-appealing if one of the following criteria is present:		—
	- appliance decorated using faces, cartoon like characters, or similar images	no used such decorated	N/A
	- appliance using shapes representing animals, characters, persons or scale models	no such shapes	N/A
	An appliance is child-appealing if more than one of the following criteria are present:		—

ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
	- using non-functional light (functional light is e.g. illumination of an object or area, signal indicating status of an appliance)	functional indicator	N/A
	- using non-functional sound (e.g. music)		N/A
	- using non-functional movement		N/A
	If the appliance is child-appealing and		—
	- has a mass less than 4 kg, and		N/A
	- is mounted or normally intended for use at a height less than 850 mm,		N/A
	the following conditions are met:		N/A
	- surface temperature rise requirements not exceeded		N/A
	- hazardous moving parts not accessible		N/A
	- live parts not accessible		N/A
	- liquid temperature requirement not exceeded,		N/A
	unless for vessels in which two independent and sequential actions are needed to access the liquid		N/A
	- the requirement of 22.12 is applicable for all accessible parts of the appliance		N/A
24.1	Components comply with the safety requirements specified in the relevant EN standards as far as they reasonably apply		P
	Motors are not required to comply with EN 60034-1, but tested as part of the appliance according to this standard		P
	Relays are tested as part of the appliance according to this standard		N/A
	Relays may be alternatively tested to EN 60730-1 and the additional requirements in EN 60335-1		P
	The requirements of Clause 29 of this standard apply between live parts of components and accessible parts of the appliance		P
	Components may comply with the requirements for clearances and creepage distances for functional insulation as specified in the relevant component standard		P
	The requirements of 30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections inside components		P

ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
	Components that have not been tested and shown to comply with the EN standard for the relevant component are tested according to the requirements of 30.2 of this standard		P
	Components that have been tested and shown to comply with the resistance to fire requirements in the EN standard for the relevant component need not be retested provided that:		—
	- the severity specified in the component standard is not less than the severity specified in 30.2, and		N/A
	- the test report for the component states the values of t_e and t_i acc. to EN 60695-2-11		N/A
	If the above two conditions are not satisfied, the component is tested as part of the appliance		P
	Power electronic converter circuits are not required to comply with EN 62477-1, but tested as part of the appliance according to this standard		N/A
	Unless components have been tested and found to comply with the relevant EN standard for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.9		N/A
	For components mentioned in 24.1.1 to 24.1.9, no additional tests specified in the relevant EN standard for the component are necessary other than those specified in 24.1.1 to 24.1.9		P
	Components that have not been tested and found to comply with the relevant EN standard, and		P
	components that are not marked or not used in accordance with their marking,		P
	are tested in accordance with the conditions occurring in the appliance, the number of samples being that required by the relevant standard		P
	Lamp-holders and starter-holders that have not been tested and found to comply with the relevant EN standard are tested as a part of the appliance and additionally comply with the gauging and interchangeability requirements of the relevant EN standard under the conditions occurring in the appliance		N/A

ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
	Where the relevant EN standard specifies these gauging and interchangeability requirements at elevated temperatures, the temperatures measured during the tests of Clause 11 are used		N/A
	There are no additional tests specified for nationally standardized plugs such as those detailed in IEC/TR 60083 or connectors complying with the standard sheets of EN 60320-1 and EN 60309, unless they are specifically mentioned in the text of this standard		P
	Plugs and socket-outlets and other connecting devices of interconnection cords are not interchangeable with plugs and socket-outlets listed in IEC/TR 60083 or IEC 60906-1, or		N/A
	with connectors and appliance inlets complying with the standard sheets of EN 60320-1, if		P
	direct supply to these parts from the supply mains gives rise to a hazard		P
	For plugs used in CENELEC countries Annex ZH applies		P
24.Z1	Type S2 and S3 capacitors according to EN 60252-1 are not required to undergo the testing as required by 30.2.2 and 30.2.3.1		N/A
25.1	Plugs and pins for insertion into socket outlets follow the relevant standards sheets in Annex ZH		P
25.7	Rubber sheathed cords (60245 IEC 53) are not suitable for appliances intended to be used outdoors, or		N/A
	when they are liable to be exposed to significant amount of ultraviolet radiation		N/A
25.25	Instead of IEC/TR 60083, dimensions of the pins and engagement face of plugs of appliances that are inserted into socket-outlets are in accordance with the dimensions of the relevant plug standard		N/A
	Common plugs and socket-outlets types in CENELEC countries as shown in Annex ZH		N/A
26.11	Conductors connected by soldering are not considered to be positioned or fixed so that reliance is not placed upon the soldering alone to maintain them in position,		N/A
	unless they are held in place near the terminals independently of the solder		N/A
29.3.Z1	Appliance constructed so that if there is a possibility of damaging the insulation during installation, the insulation withstands the scratch and penetration test of 21.2		N/A

ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
32	Compliance regarding electromagnetic fields is checked according to EN 62233		P
Annex I, 19.1.101	The appliance is supplied at rated voltage and operated under normal operation with each of the fault conditions specified		N/A
	The duration of any of the tests is as specified in 19.7		N/A
ZA	ANNEX ZA (NORMATIVE) SPECIAL NATIONAL CONDITIONS (EN)		—
	Denmark, Sweden, Norway and Finland		N/A
7.12.8	The maximum inlet water pressure is at least 1,0 MPa		N/A
	Norway		N/A
19.5	The test is also applicable to appliances intended to be permanently connected to fixed wiring		N/A
	Norway		N/A
22.2	The second paragraph of this subclause, dealing with single-phase, permanently connected class I appliances having heating elements, is not applicable due to the supply system		N/A
	Denmark		N/A
22.47	The maximum inlet water pressure is at least 1,0 MPa		N/A
	Ireland, United Kingdom and Cyprus		N/A
25.8	In the table, the line >10 A and ≤16 A is replaced with:		—
	> 10 and ≤ 13 1,25 (1,0) ^b		N/A
	> 13 and ≤ 16 1,5 (1,0) ^b		N/A
ZB	ANNEX ZB (INFORMATIVE) A-DEVIATIONS		—
	Ireland		N/A

ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
25.1 and 25.25	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs complying with I.S. 401:1997, or equivalent, to be fitted to domestic appliances		N/A
	United Kingdom		P
25.1 and 25.25	These regulations apply to all plugs for domestic use at a voltage of not less than 200 V and in general allow only plugs to BS 1363 to be fitted to domestic appliances.		P
	It also allows plugs to BS 4573 and EN 50075 to be fitted to shavers and toothbrushes		N/A
ZC	ANNEX ZC (NORMATIVE) NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS		—
	A list of documents referred to in the text of this standard in such a way that some or all of their content constitutes requirements of this document		P
ZD	ANNEX ZD (INFORMATIVE) IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS		—
	List of IEC and CENELEC code designations for flexible cords		P
ZE	ANNEX ZE (INFORMATIVE) SPECIFIC ADDITIONAL REQUIREMENTS FOR APPLIANCES AND MACHINES INTENDED FOR COMMERCIAL USE		—
7.1	Business name and full address of the manufacturer and, where applicable, his authorized representative		N/A
	Model or type reference		N/A
	Serial number, if any		N/A
	Production year		N/A
	Designation of the appliance.....		N/A
7.12	Instructions provided with the appliance so that the appliance can be used safely		N/A
	The instructions contain at least the following information:		—
	- the business name and full address of the manufacturer and, where applicable, his authorized representative		N/A

ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
	- model or type reference of the appliance as marked on the appliance itself, except for the serial number		N/A
	- the designation of the appliance together with its explanation in case it is given by a combination of letters and/or numbers		N/A
	- the general description of the appliance, when needed due to the complexity of the appliance		N/A
	- specific precautions required during installation, operation, adjusting, user maintenance, cleaning, repairing or moving		N/A
	- when needed drawings, diagrams, descriptions and explanations necessary for the safe use and user maintenance of the appliance		N/A
	- the possible reasonably foreseeable misuse and, whenever relevant, a warning against the effects it may have on the safe use of the appliance		N/A
	The words "Original instructions" appear on the language version(s) verified by the manufacturer or by the authorized representative		N/A
	When a translation of the original instructions has been provided by a person introducing the appliance on the market; the meaning of the sentence "Translation of the original instructions" appear in the relevant instructions delivered with the appliance		N/A
	The instructions for maintenance/service to be done by specialized personnel, mandated by the manufacturer or the authorized representative may be supplied in only one Community language which the specialized personnel understand		N/A
	The instructions indicate the type and frequency of inspections and maintenance required for safe operation including the preventive maintenance measures		N/A
7.12.ZE1	If needed for specific appliances, the following information to be given:		—
	- on use, transportation, assembly, dismantling when out of service, testing or foreseeable breakdowns, if these operations have consequences on stability of the appliance in order to avoid overturning, falling or uncontrolled movements of the appliance or of its component parts		N/A
	- on how to maintain adequate mechanical stability when in use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N/A

ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
	- on the protective measures to be taken by the user, including, where appropriate, the personal protective equipment to be provided		N/A
	- on the operating method to be followed in the event of accident or breakdown; if a blockage is likely to occur the operating method to safely unblock the appliance		N/A
	- on the specifications on the spare parts to be used, when these affect the health and safety of the operator		N/A
	- on airborne noise emissions, determined and declared in accordance with the relevant Part 2, which includes:		—
	- the A-weighted emission sound pressure level at workstations, where this exceeds 70 dB(A)		N/A
	- where this level does not exceed 70 dB(A), this fact is indicated		N/A
	- the peak C-weighted instantaneous sound pressure value at workstations, where this exceeds 63 Pa (130 dB in relation to 20 µPa)		N/A
	- the A-weighted sound power level emitted by the machinery, where the A-weighted emission sound pressure level at workstations exceeds 80 dB(A)		N/A
7.12.ZE2	The instructions include a warning to disconnect the appliance from its power source during service and when replacing parts		N/A
	If the removal of the plug is foreseen, it is clearly indicated that the removal of the plug is such that an operator can check from any of the points to which he has access that the plug remains removed		N/A
	If this is not possible, due to the construction of the appliance or its installation, a disconnection with a locking system in the isolated position is provided		N/A
19.11.4.8	The appliance continues to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage fluctuation occurred, or		N/A
	a manual operation is required to restart it		N/A
20.1	Appliances and their components and fittings have adequate mechanical stability during transportation, assembly, dismantling and any other action involving the appliance		N/A

ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
20.2	Dangerous moving transmission parts safeguarded either by design or guards		N/A
	When guards are used, they are fixed guards, interlocking movable guards or protective devices		N/A
	Moving parts directly involved in the function of the appliance which cannot be made completely inaccessible fitted with:		—
	- fixed guards or interlocking movable guards preventing access to those sections of the parts that are not used in the work, and		N/A
	- adjustable guards restricting access to those sections of the moving parts where access is necessary		N/A
	Interlocking movable guards used where frequent access is required		N/A
21.1	Appliances and their components and fittings have adequate mechanical strength and is constructed to withstand such rough handling that may be expected in normal use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance		N/A
22.ZE.1	For appliances provided with a seat, the seat gives adequate stability		N/A
	The distance between the seat and the control devices capable of being adapted to the operator		N/A
22.ZE.2	For appliances provided with separate devices for the start and the stop functions, the stop function is unambiguously identifiable and does always override the start function		N/A
	For appliances provided with one device performing the start and the stop function, the stop function is unambiguously identifiable and does always override the start function		N/A
22.ZE.3	Appliances designed in such a way that incorrect mounting is avoided, if this can lead to an unsafe situation		N/A
	If this is not possible, information on the correct mounting is given directly on the part and/or the enclosure		N/A
22.ZE.4	Where the weight, size or shape prevents appliances from being moved manually, they are fitted with attachments for lifting gear, or		N/A
	so designed that they can be fitted with such attachments, or		N/A
	be shaped in such a way that standard lifting gear can easily be used		N/A

ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances to be moved manually are constructed or equipped so that they can be moved easily and safely		N/A
22.ZE.5	The fixing systems of fixed guards which prevent access to hazardous moving transmission parts only removable with the use of tools		N/A
	If such guards have to be removed by the user for routine cleaning or maintenance their fixing systems remain attached to the fixed guards or to the machine after removal		N/A
	Where possible, guards are incapable of remaining in place without their fixings		N/A
	This does not apply if, after removal of the screws, or if the component is incorrectly repositioned, the appliance becomes inoperative		N/A
	Movable guards are interlocked		N/A
	The interlocking devices prevent the start of hazardous appliance functions until the guards are fixed in their position, and give a stop command whenever they are no longer closed		N/A
	Where it is possible for an operator to reach the danger zone before the risk due to hazardous appliance functions has ceased, movable guards associated with a guard locking device in addition to an interlocking device that:		—
	- prevents the start of hazardous appliance functions until the guard is closed and locked, and		N/A
	- keeps the guard closed and locked until the risk of injury from the hazardous appliance functions has ceased		N/A
	Interlocking movable guards remain attached to the appliance when open, and		N/A
	they are designed and constructed in such a way that they can be adjusted only by means of an intentional action		N/A
22.ZE.6	Interlocking movable guards designed in such a way that the absence or failure of one of their components prevents starting or stops the hazardous appliance functions		N/A
	The guard is opened to the extent needed to cause the interlocking to operate and is then closed, the number of operations being defined in the specific Part 2		N/A
	After this test any defect that may be expected in normal use is applied to the interlock system, including interruption of the supply, only one defect being simulated at a time		N/A

ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
	After these tests the interlock system is fit for further use		N/A
22.ZE.7	Adjustable guards restricting access to areas of the moving parts strictly necessary for the work are:		—
	- adjustable manually or automatically, depending on the type of work involved, and		N/A
	- readily adjustable without the use of tools		N/A
22.ZE.8	In case of interruption, re-establishment after an interruption or fluctuation in whatever manner of the power supply, the appliance does not restart		N/A
	However, automatic restarting of the operation is allowed if the appliance may continue to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage interruption or fluctuation occurred		N/A
22.ZE.9	Appliances fitted with means to isolate them from all energy sources		N/A
	Such isolators are clearly identified, and		N/A
	they are capable of being locked if reconnection endanger persons		N/A
	After the energy source is disconnected, it is possible to dissipate any energy remaining or stored in the circuits of the appliance without risk to persons		N/A
22.ZE.10	Noise reduction is achieved by applying measures at source to control noise, for example EN ISO 11688-1:2009		N/A
	The success of the applied noise reduction measures is assessed based on the actual noise emission values in relation to other machines of the same type with comparable non-acoustical technical data		N/A
	Compliance is checked by the noise test code, if any, given in part 2		N/A
ZF	ANNEX ZF (INFORMATIVE) CRITERIA APPLIED FOR THE ALLOCATION OF PRODUCTS COVERED BY STANDARDS IN THE EN 60335 SERIES UNDER LVD OR MD		—
	List of standards under CENELEC/TC61 with the allocation under the LVD (Low Voltage Directive) or the MD (Machinery Directive)	LVD	P
ZG	ANNEX ZG (NORMATIVE) UV APPLIANCES		—

ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
	The following modifications to this standard apply to appliances having UV emitters		N/A
	This annex is not applicable to appliances covered by the scopes of IEC 60335-2-27, IEC 60335-2-59 or IEC 60335-2-109		N/A
7.12.ZG	The instructions for appliances incorporating UVC emitters include the substance of the following: WARNING — This appliance contains a UV emitter. Do not stare at the light source		N/A
32	For appliances incorporating UV emitters the manufacturer delivers a declaration providing evidence that the plastic material exposed to the radiation is UV resistant		N/A
ZH	ANNEX ZH (INFORMATIVE) Common plug and socket-outlet types in CENELEC countries		—
	In general, supply cords of single-phase appliances having a rated current not exceeding 16 A are fitted with a plug complying with the following standard sheets:		—
	- for class I appliances or class II appliances with functional earth, standard sheet EU2, EU3 or EU4	EU2 or EU4	P
	- for class II appliances, standard sheet EU5, EU6 or EU7		N/A
	There are exemptions or differences in certain CENELEC countries		P
ZI	ANNEX ZI (INFORMATIVE) Information on the application of A11:2014 to EN 60335-1:2012 CENELEC CLC/TC 61(SEC)2096A		—
	Clarification of the application of parts 2 in conjunction with the 2002 or 2012 version of EN 60335-1		P
ZZA	ANNEX ZZA (INFORMATIVE) RELATIONSHIP BETWEEN THIS EUROPEAN STANDARD AND THE SAFETY OBJECTIVES OF DIRECTIVE 2014/35/EU [2014 OJ L96] AIMED TO BE COVERED		—
	This standard provides one means of conforming to safety objectives of Directive 2014/35/EU		P
	When cited in the Official Journal under that Directive, compliance with the normative clauses of this standard given in Table ZZA.1 confers a presumption of conformity with the safety objectives of that Directive and associated EFTA regulations		P

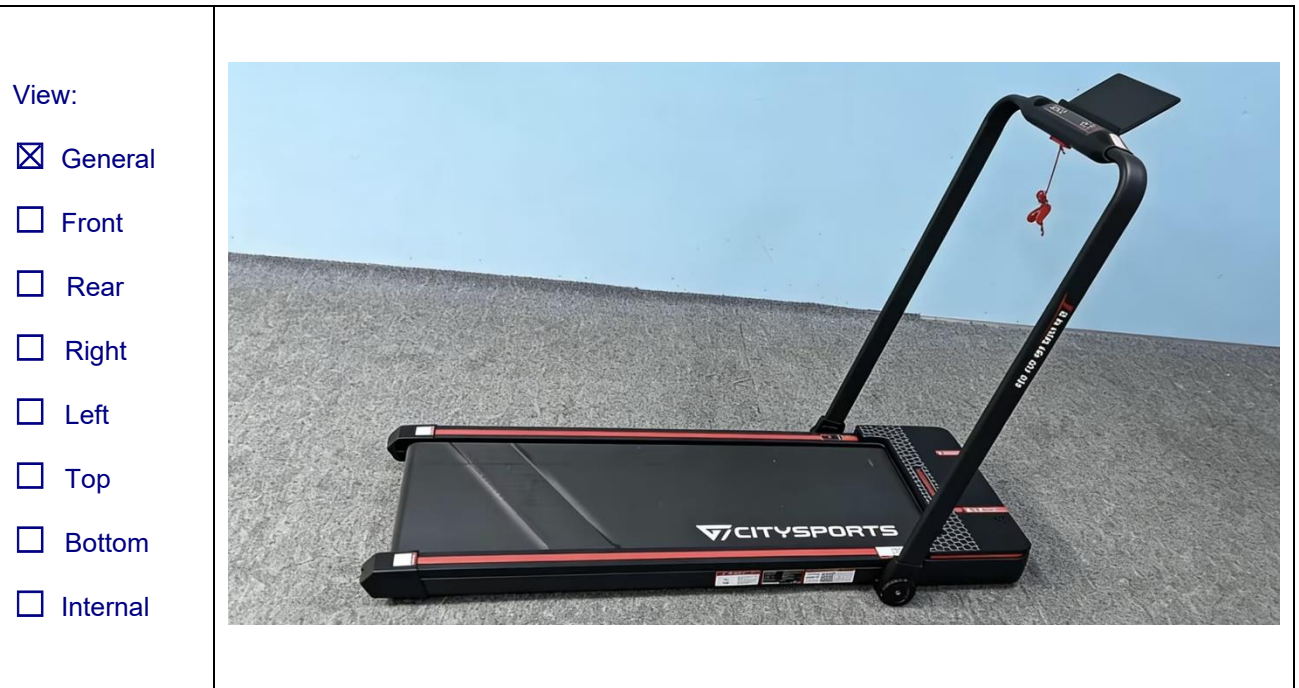
ATTACHMENT TO TRF IEC60335_1X			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance with this Part 1 when used together with the relevant Part 2 provides one means of conformity with the safety objectives		P
ZZB	ANNEX ZZB (INFORMATIVE) RELATIONSHIP BETWEEN THIS EUROPEAN STANDARD AND THE ESSENTIAL REQUIREMENTS OF DIRECTIVE 2006/42/EC AIMED TO BE COVERED		—
	This standard provides one means of conforming to essential requirements of EU Directive 2006/42/EC		N/A
	When cited in the Official Journal under that Directive, compliance with the normative clauses of this standard given in Table ZZB.1 confers a presumption of conformity with the essential requirements of that Directive and associated EFTA regulations		N/A
	Compliance with this Part 1 when used together with the relevant Part 2 provides one means of conformity with the essential health and safety requirements		N/A
	ANNEX EN 62233:2008 + AC:2008 EMF- ELECTROMAGNETICS FIELDS		—
	The tested product also complies with the requirements of EN 62233:2008		—
	Limit100%	Measured max.: 6,2 %	P

— End of This Attachment—

Photo documentation

Type of equipment, model: Motorized Treadmill / P12, T3803D, WFTM015, T3823, T5009, T5006, SP38240/T3837, SP38242/T3807, A4003D, T3899, CS-WP3, TM037

Details of: General view for model CS-WP3



— End of This Attachment—

VERIFICATION OF COMPLIANCE

No.: UKCA LVD GZES2602003567HS
Applicant: Jiangxi EQi Industrial Co., Ltd.
Luliang Avenue, Yining Town, Xiushui County, Jiujiang,
Jiangxi, China
Manufacturer: Same as applicant
Product Name: Household electric treadmill
Product Description: Motorized Treadmill
Model No.: P12, T3803D, WFTM015, T3823, T5009, T5006,
SP38240/T3837, SP38242/T3807, A4003D, T3899, CS-WP3,
TM037
Rating: 220 V – 240 V; 50 Hz - 60 Hz; 551 W
Protection against Electric Shock: Class I
Additional Information: -
Sufficient samples of the product have been tested and found to be in conformity with
Test Standard: EN 60335-1: 2012 + A11: 2014 + A13: 2017 + A1: 2019 + A14:
2019 + A2: 2019 + A15: 2021 + A16: 2023
EN 62233: 2008
as shown in the
Test Report Number(s): GZES250501015601 Amendment 03

This Verification of Compliance has been granted to the applicant based on the results of tests, performed by Laboratory of SGS-CSTC Standards Technical Services Co., Ltd. on sample of the above-mentioned product in accordance with the provisions of the relevant designated standards under UK Legislation - Electrical Equipment (Safety) Regulations 2016. The UKCA marking as shown below can be affixed, under the responsibility of the manufacturer, after completion of a UK Declaration of Conformity and compliance with all relevant UK Legislations.

UK
CA

David Guo
Technical Manager
SGS-CSTC Standards Technical Services Co., Ltd.

2026-04-21

This document is issued by the Company under its General Conditions of Service accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS-CSTC Standards Technical Services Co., Ltd.
16F, Century Yu Hui Mansion, No.73, Fucheng Road, Haidian District, Beijing, 100142, CHINA
www.sgsgroup.com.cn
Member of the SGS Group (SGS SA)