


N64 / M64 HOST EDGE

Same 50-contact interface for both host systems

J1
N64_Cartridge_Edge_50

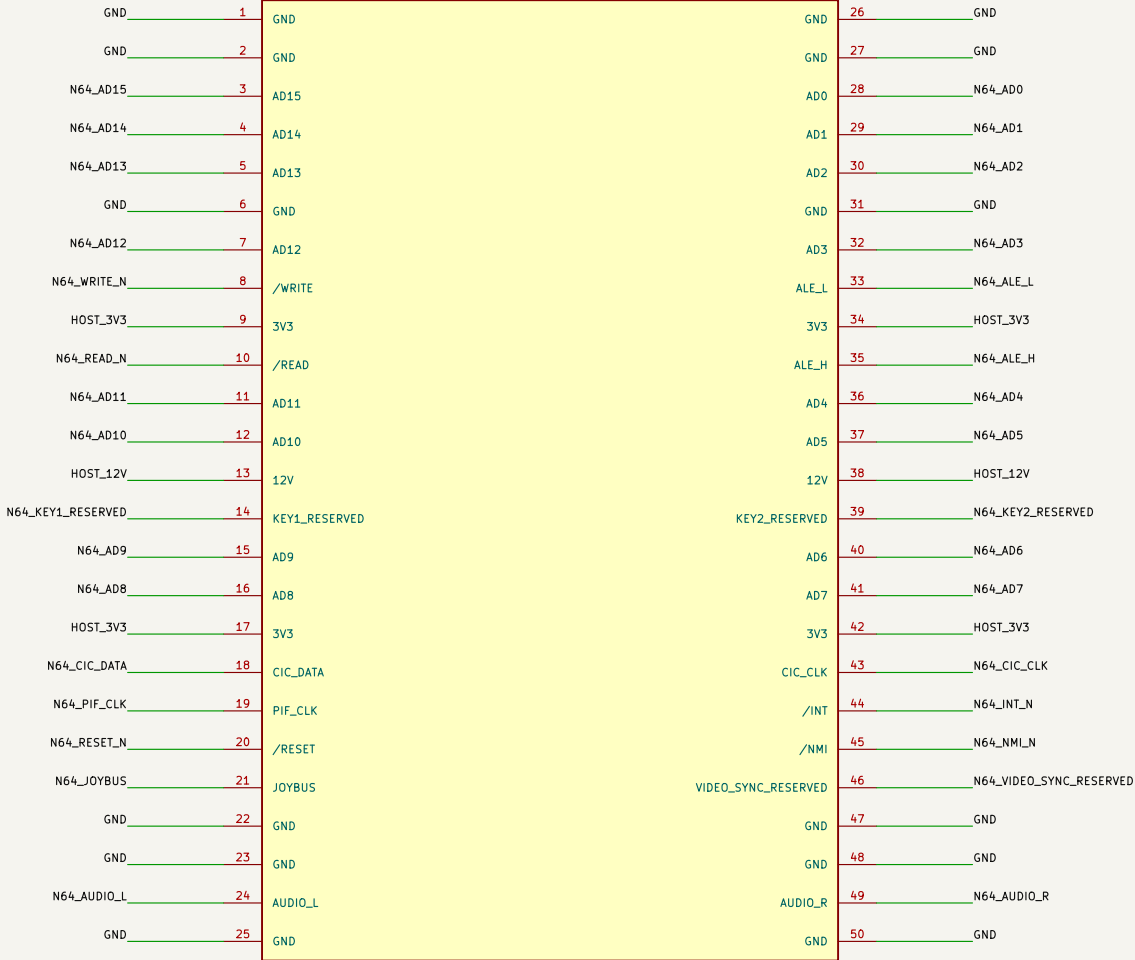


HOST INTERFACE
3.3 V logic; power inputs remain separate from local rails.
AD[15:0] is bidirectional. CIC_DATA / JOYBUS require release.
Reserved contacts and audio are identified only; no drivers fitted.
HOST_12V is reserved, with no selected load. No 5 V edge supply.

SNES / SUPER FAMICOM SOCKET

All 62 contacts retained, including analog cartridge audio

J2
SNES_Female_Slot_62

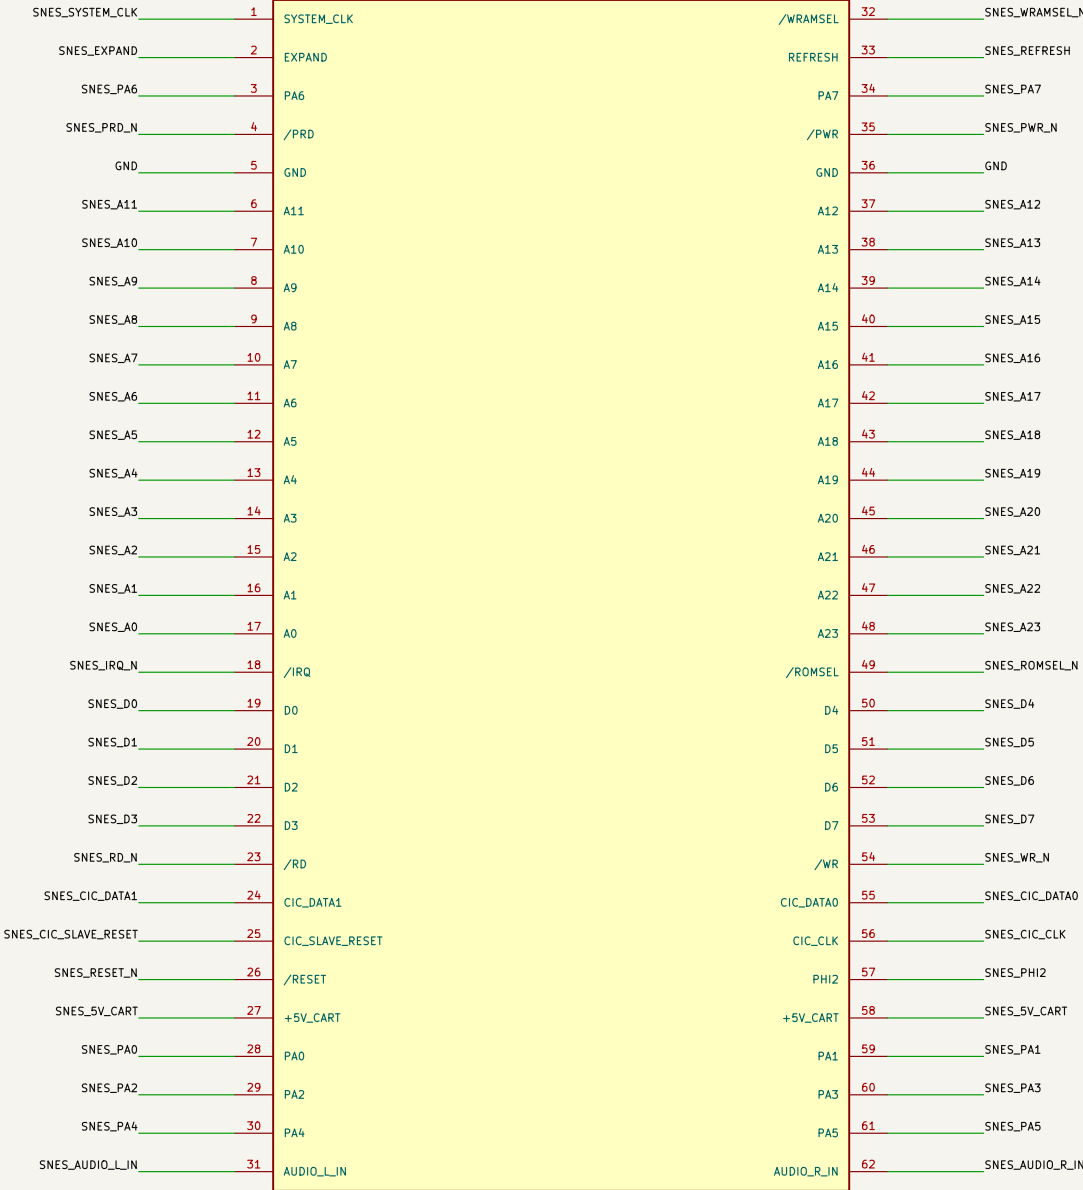

SNES INTERFACE
5 V cartridge logic requires reviewed translation and isolation.
SNES_5V_CART: protected switched supply, default OFF (pending).
System RESET must support cartridge assertion and input sensing.
CIC_SLAVE_RESET is separate; AUDIO_L/R_IN are analog inputs.
No universal NC contacts. Full pin behavior is recorded in the CSV.

DRAFT BOUNDARY: connectors and net identities only. FPGA, power, protection, translators, memory, recovery and A/V circuits are pending.
Only GND is common between the two connectors. Matching names within one domain identify the same net; _N means active low.
Connector pin types are passive; electrical directions and source evidence are in interfaces/*.csv and docs/design/*-interface-notes.md.

Source attribution and limits: hardware/sn64/README.md
INTERFACE DRAFT ONLY – NOT FOR MANUFACTURE

SN 64

Sheet: /
File: sn64.kicad_sch

Title: SN 64 – cartridge interfaces

Size: A3
KiCad E.D.A. 10.0.6

Date: 2026-09-28

Rev: 0.1-interface
Id: 1/1