Impact Influence

Configuration des équipements

Créé par	Date	Version	Commentaire
Alexis Rousseau	10/01/2026	v.1	Finalisation Document

SOMMAIRE

1. Plan d'adressage IP : **3**
2. Configuration DNS : **6**
3. Configuration des routeurs WAN (configuration des interfaces et routage OSPF) **7**
WAN 1 : **7**
WAN 2 : **8**
WAN 3 : **9**
WAN 4 : **10**
WAN 5 : **11**
4. Configuration du routeur du bâtiment GREEN (routage + NAT) : **12**
5. Configuration du routeur du bâtiment BLUE (routage + NAT) : **13**
6. Configuration du bâtiment RED **14**
6.1 Configuration de RED-1 (Routage + NAT) 14
6.2 Configuration de RED-2 (Routage + NAT) 15
6.3 Configuration de D1 (Routage + HSRP + DHCP + Spanning-Tree + Liens trunk 802.1Q + ACL + LACP, VLAN) 16
6.4 Configuration de D2 (Routage + HSRP + DHCP + Spanning-Tree + Liens trunk 802.1Q + ACL + LACP, VLAN) 19
6.5 Configuration des switches d'accès (Spanning-Tree, VLAN, Liens trunk 802.1Q, ports d'accès 22

1. Plan d'adressage IP :

PLAN D'ADRESSAGE IP								
BÂTIMENT RED								
VLAN ID	**VLAN Name**	**Sous-réseaux**	**Masque**	**Gateway**	**Broadcast**	**IP D1**	**IP D2**	**Plage DHCP (PC) First → Last**
2	Direction	10.0.2.0/26	255.255.255.192	10.0.2.1	10.0.2.63	10.0.2.61 (*Actif*)	10.0.2.62 (*Standby*)	10.0.2.2 → 10.0.2.60
3	RH	10.0.3.0/26	255.255.255.192	10.0.3.1	10.0.3.63	10.0.3.61 (*Actif*)	10.0.3.62 (*Standby*)	10.0.3.2 → 10.0.3.60
4	COMMERCIAL	10.0.4.0/26	255.255.255.192	10.0.4.1	10.0.4.63	10.0.4.61 (*Actif*)	10.0.4.62 (*Standby*)	10.0.4.2 → 10.0.4.60
5	FINANCE	10.0.5.0/26	255.255.255.192	10.0.5.1	10.0.5.63	10.0.5.61 (*Standby*)	10.0.5.62 (*Actif*)	10.0.5.2 → 10.0.5.60
99	IT	10.0.99.0/26	255.255.255.192	10.0.99.1	10.0.99.63	10.0.99.61 (*Standby*)	10.0.99.62 (*Actif*)	10.0.99.2 → 10.0.99.60
100	DNS	10.0.100.0/28	255.255.255.240	10.0.100.1	10.0.100.15	10.0.100.13 (*Standby*)	10.0.100.14 (*Actif*)	10.0.100.2 → 10.0.100.12
641	Natif	-	-	-	-	-	-	-
	BÂTIMENT BLUE							
VLAN ID	**VLAN NAME**	**Sous-réseaux**	**Masque**	**Gateway**	**Première IP Utilisable**	**Dernière IP Utilisable**	**Broadcast**	
200	Mail	10.0.200.0/28	255.255.255.240	10.0.200.1	10.0.200.2	10.0.200.14	10.0.200.15	
	BÂTIMENT GREEN							
VLAN ID	**VLAN NAME**	**Sous-réseaux**	**Masque**	**Gateway**	**Première IP Utilisable**	**Dernière IP Utilisable**	**Broadcast**	
210	Web	10.0.210.0/28	255.255.255.240	10.0.210.1	10.0.210.2	10.0.210.14	10.0.210.15	

	IP RÉSERVÉES			
	Bâtiment	**Équipement**	**IP Adresse Statique**	**Masque**
	RED	Serveur DNS	10.0.100.2/28	255.255.255.240
	BLUE	Serveur Mail	10.0.200.2/28	255.255.255.240
	GREEN	Serveur Web	10.0.210.2/28	255.255.255.240
	RED	D1 - Administration	10.0.99.61/26	255.255.255.192
	RED	D2 - Administration	10.0.99.62/26	255.255.255.192
	RED	Switch DNS - Administration	10.0.99.60/26	255.255.255.192
	RED	Switch IT - Administration	10.0.99.59/26	255.255.255.192
	RED	Switch Finance - Administration	10.0.99.58/26	255.255.255.192
	RED	Switch Commercial - Administration	10.0.99.57/26	255.255.255.192
	RED	Switch RH - Administration	10.0.99.56/26	255.255.255.192
	RED	Switch Direction - Administration	10.0.99.55/26	255.255.255.192

Routeur ID - Protocole OSPF		
WAN 1 -> 1.1.1.1	**WAN 3** -> 3.3.3.3	**WAN 5** -> 5.5.5.5
WAN 2 -> 2.2.2.2	**WAN 4** -> 4.4.4.4	

Segmentation WAN								
Réseaux Wan	**Routeur 1**	**Masque**	**IP Utilisé**	→	**Routeur 2**	**Masque**	**IP Utilisé**	
132.186.32.64/30	WAN 1	255.255.255.252	132.186.32.65	→	**RED-1**	255.255.255.252	132.186.32.66	
132.186.32.68/30	WAN 1	255.255.255.252	132.186.32.69	→	WAN 2	255.255.255.252	132.186.32.70	
132.186.32.72/30	WAN 1	255.255.255.252	132.186.32.73	→	WAN 3	255.255.255.252	132.186.32.74	
132.186.32.76/30	WAN 1	255.255.255.252	132.186.32.77	→	WAN 4	255.255.255.252	132.186.32.78	
132.186.32.80/30	WAN 2	255.255.255.252	132.186.32.81	→	**RED-2**	255.255.255.252	132.186.32.82	
132.186.32.84/30	WAN 2	255.255.255.252	132.186.32.85	→	WAN 4	255.255.255.252	132.186.32.86	
132.186.32.88/30	WAN 2	255.255.255.252	132.186.32.89	→	WAN 5	255.255.255.252	132.186.32.90	
132.186.32.92/30	WAN 3	255.255.255.252	132.186.32.93	→	**BLUE**	255.255.255.252	132.186.32.94	**MAIL**
132.186.32.96/30	WAN 3	255.255.255.252	132.186.32.97	→	WAN 4	255.255.255.252	132.186.32.98	
132.186.32.100/30	WAN 4	255.255.255.252	132.186.32.101	→	WAN 5	255.255.255.252	132.186.32.102	
132.186.32.104/30	WAN 5	255.255.255.252	132.186.32.105	→	**GREEN**	255.255.255.252	132.186.32.106	**WEB**

2. Configuration DNS :

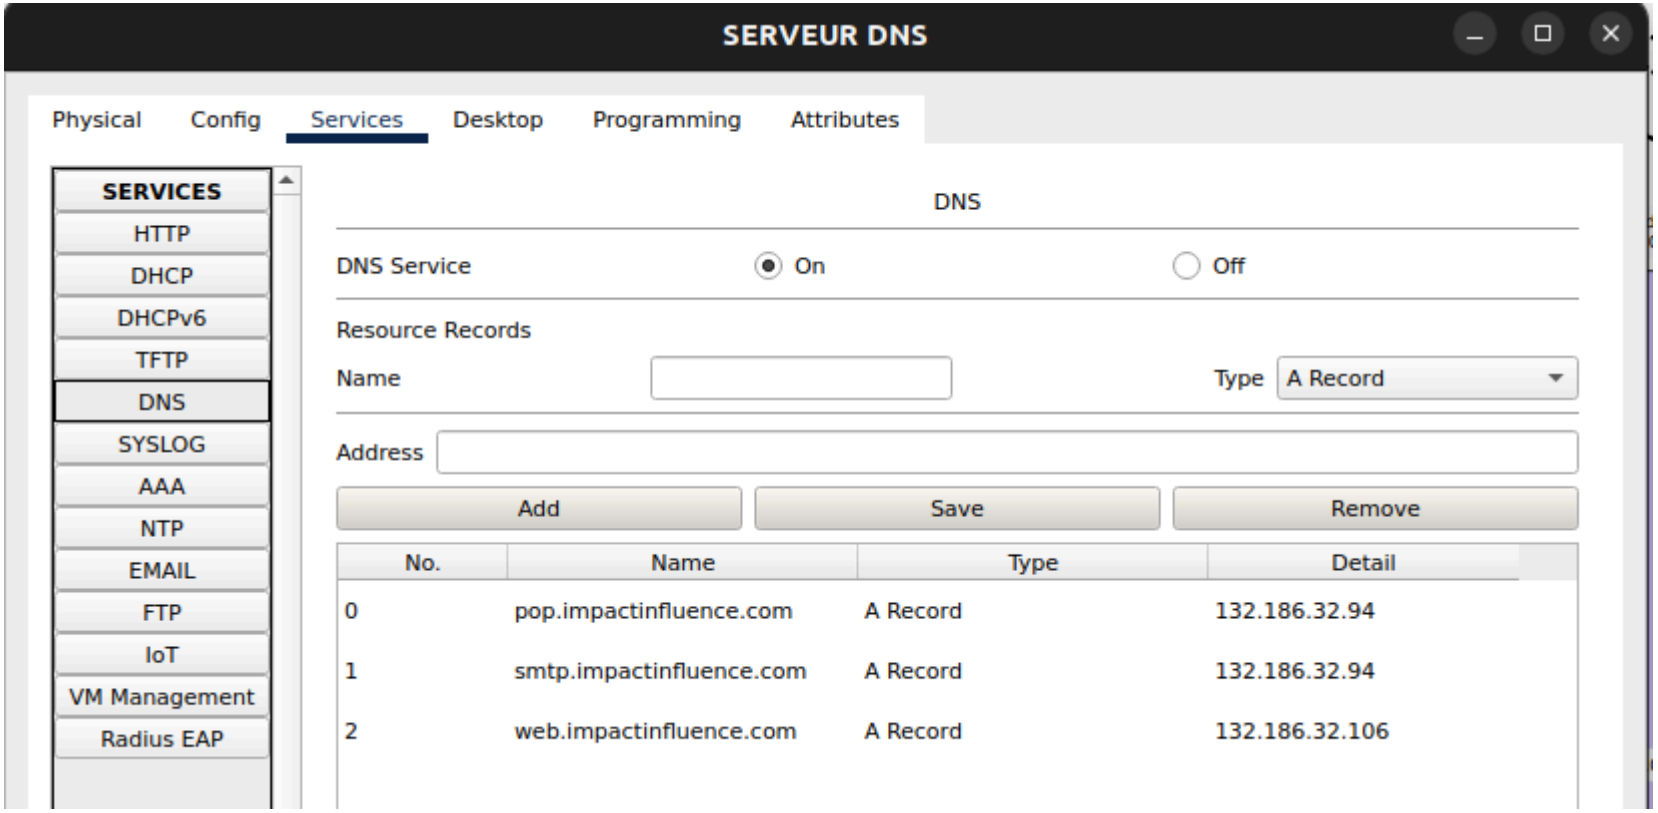

3. Configuration des routeurs WAN (configuration des interfaces et routage OSPF)

WAN 1 :

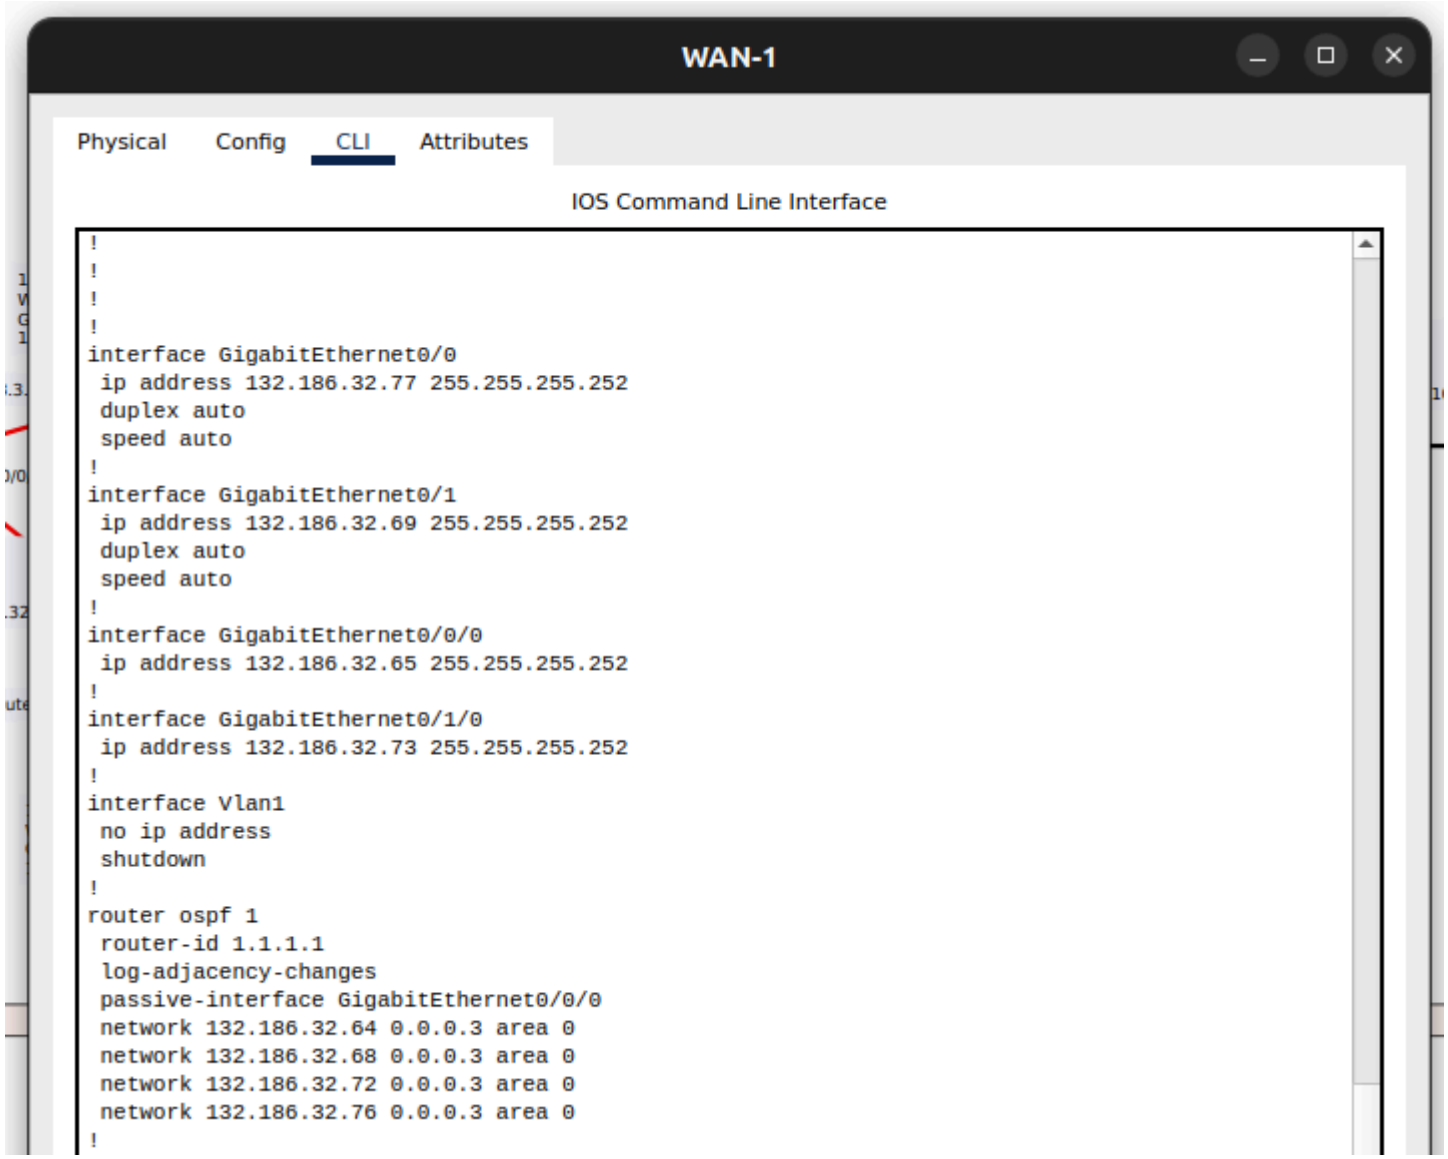


```
!
!
!
!
interface GigabitEthernet0/0
 ip address 132.186.32.77 255.255.255.252
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 132.186.32.69 255.255.255.252
 duplex auto
 speed auto
!
interface GigabitEthernet0/0/0
 ip address 132.186.32.65 255.255.255.252
!
interface GigabitEthernet0/1/0
 ip address 132.186.32.73 255.255.255.252
!
interface Vlan1
 no ip address
 shutdown
!
router ospf 1
 router-id 1.1.1.1
 log-adjacency-changes
 passive-interface GigabitEthernet0/0/0
 network 132.186.32.64 0.0.0.3 area 0
 network 132.186.32.68 0.0.0.3 area 0
 network 132.186.32.72 0.0.0.3 area 0
 network 132.186.32.76 0.0.0.3 area 0
!
```

WAN 2 :

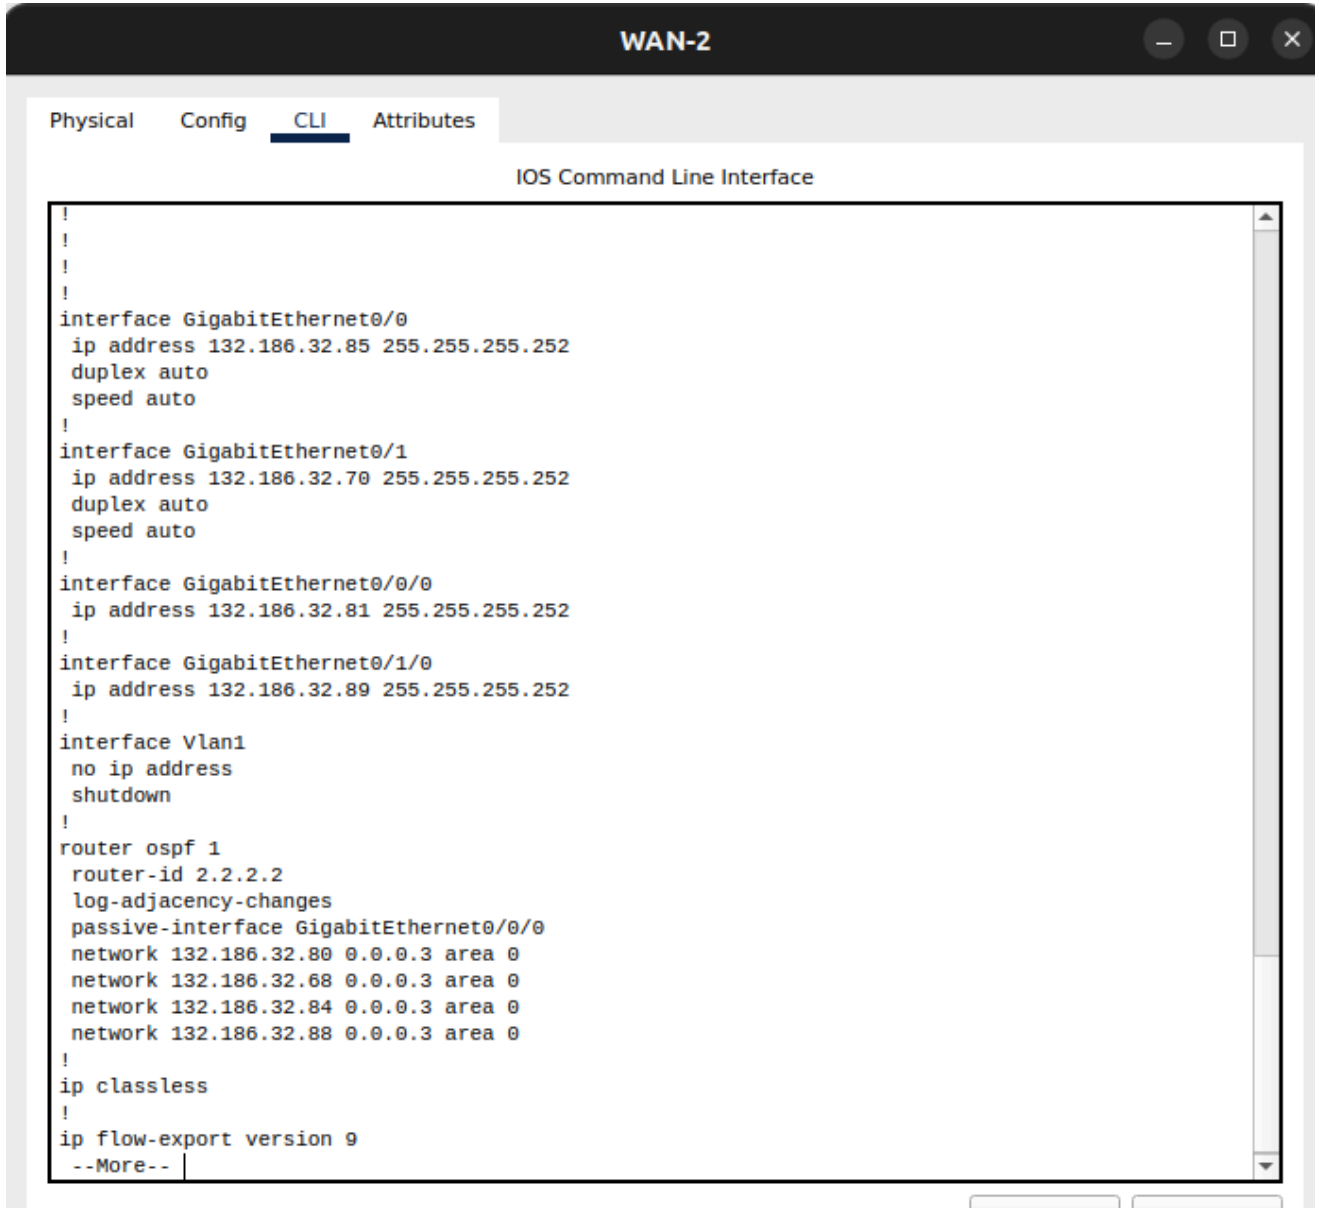


```
!
!
!
!
interface GigabitEthernet0/0
 ip address 132.186.32.85 255.255.255.252
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 132.186.32.70 255.255.255.252
 duplex auto
 speed auto
!
interface GigabitEthernet0/0/0
 ip address 132.186.32.81 255.255.255.252
!
interface GigabitEthernet0/1/0
 ip address 132.186.32.89 255.255.255.252
!
interface Vlan1
 no ip address
 shutdown
!
router ospf 1
 router-id 2.2.2.2
 log-adjacency-changes
 passive-interface GigabitEthernet0/0/0
 network 132.186.32.80 0.0.0.3 area 0
 network 132.186.32.68 0.0.0.3 area 0
 network 132.186.32.84 0.0.0.3 area 0
 network 132.186.32.88 0.0.0.3 area 0
!
ip classless
!
ip flow-export version 9
 --More--
```

WAN 3 :

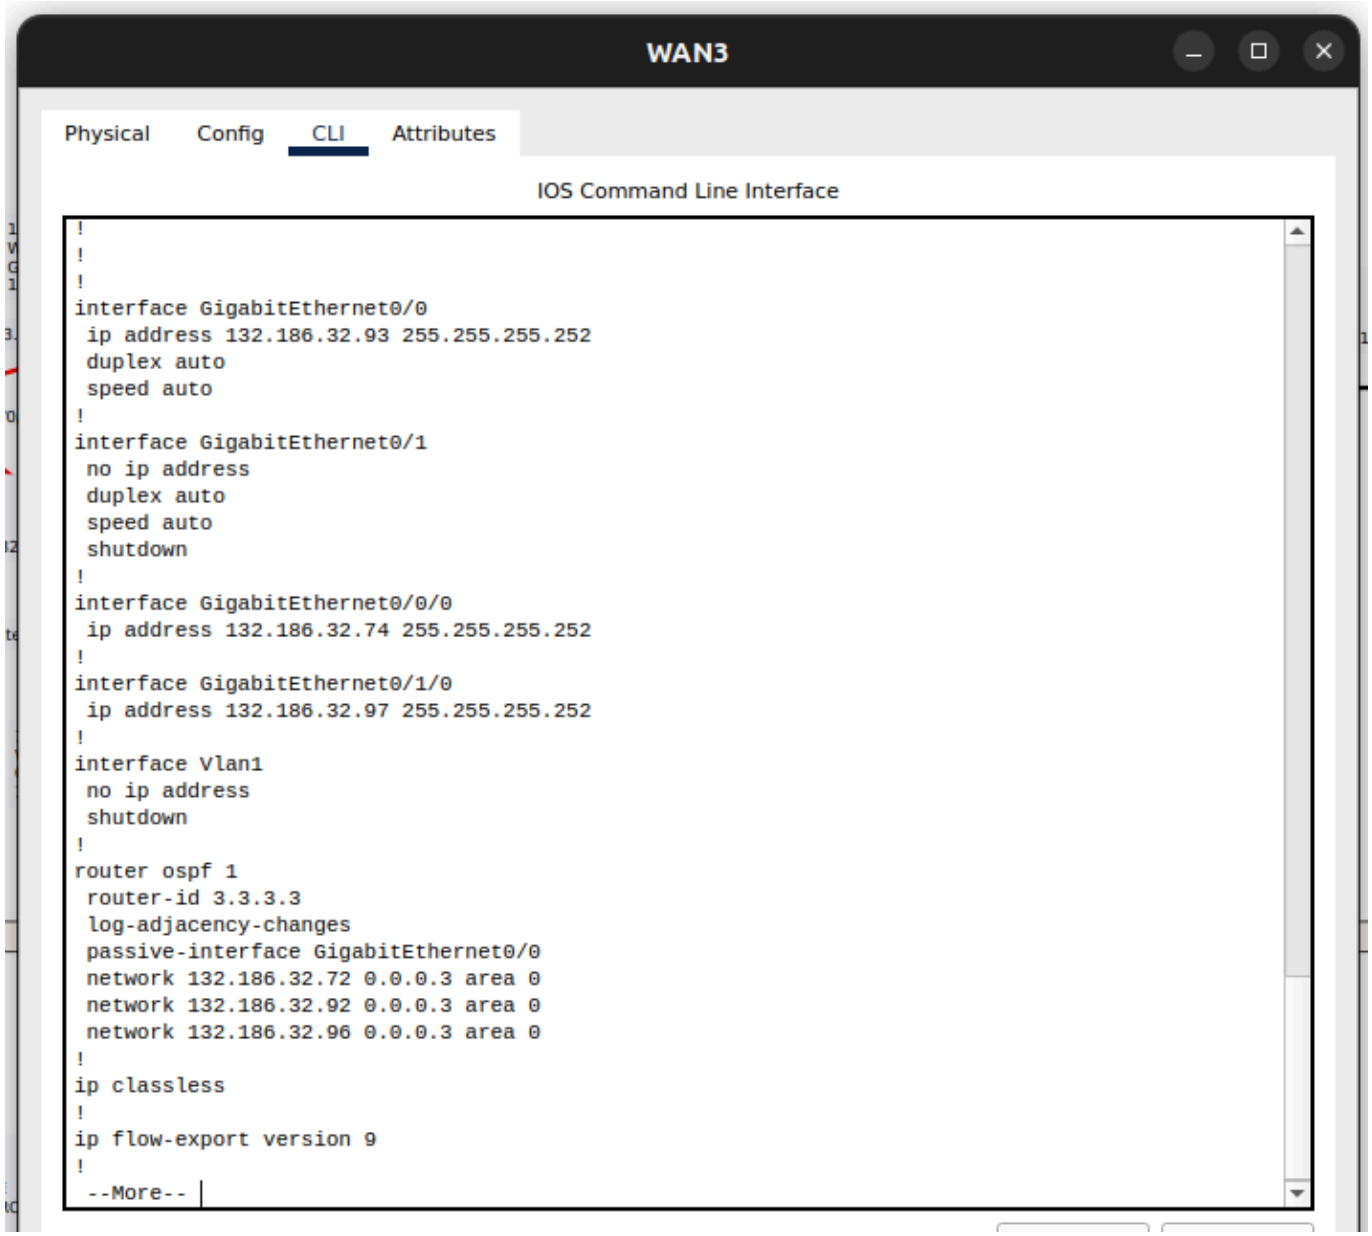


```
!
!
!
interface GigabitEthernet0/0
 ip address 132.186.32.93 255.255.255.252
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface GigabitEthernet0/0/0
 ip address 132.186.32.74 255.255.255.252
!
interface GigabitEthernet0/1/0
 ip address 132.186.32.97 255.255.255.252
!
interface Vlan1
 no ip address
 shutdown
!
router ospf 1
 router-id 3.3.3.3
 log-adjacency-changes
 passive-interface GigabitEthernet0/0
 network 132.186.32.72 0.0.0.3 area 0
 network 132.186.32.92 0.0.0.3 area 0
 network 132.186.32.96 0.0.0.3 area 0
!
ip classless
!
ip flow-export version 9
!
 --More--
```

WAN 4 :

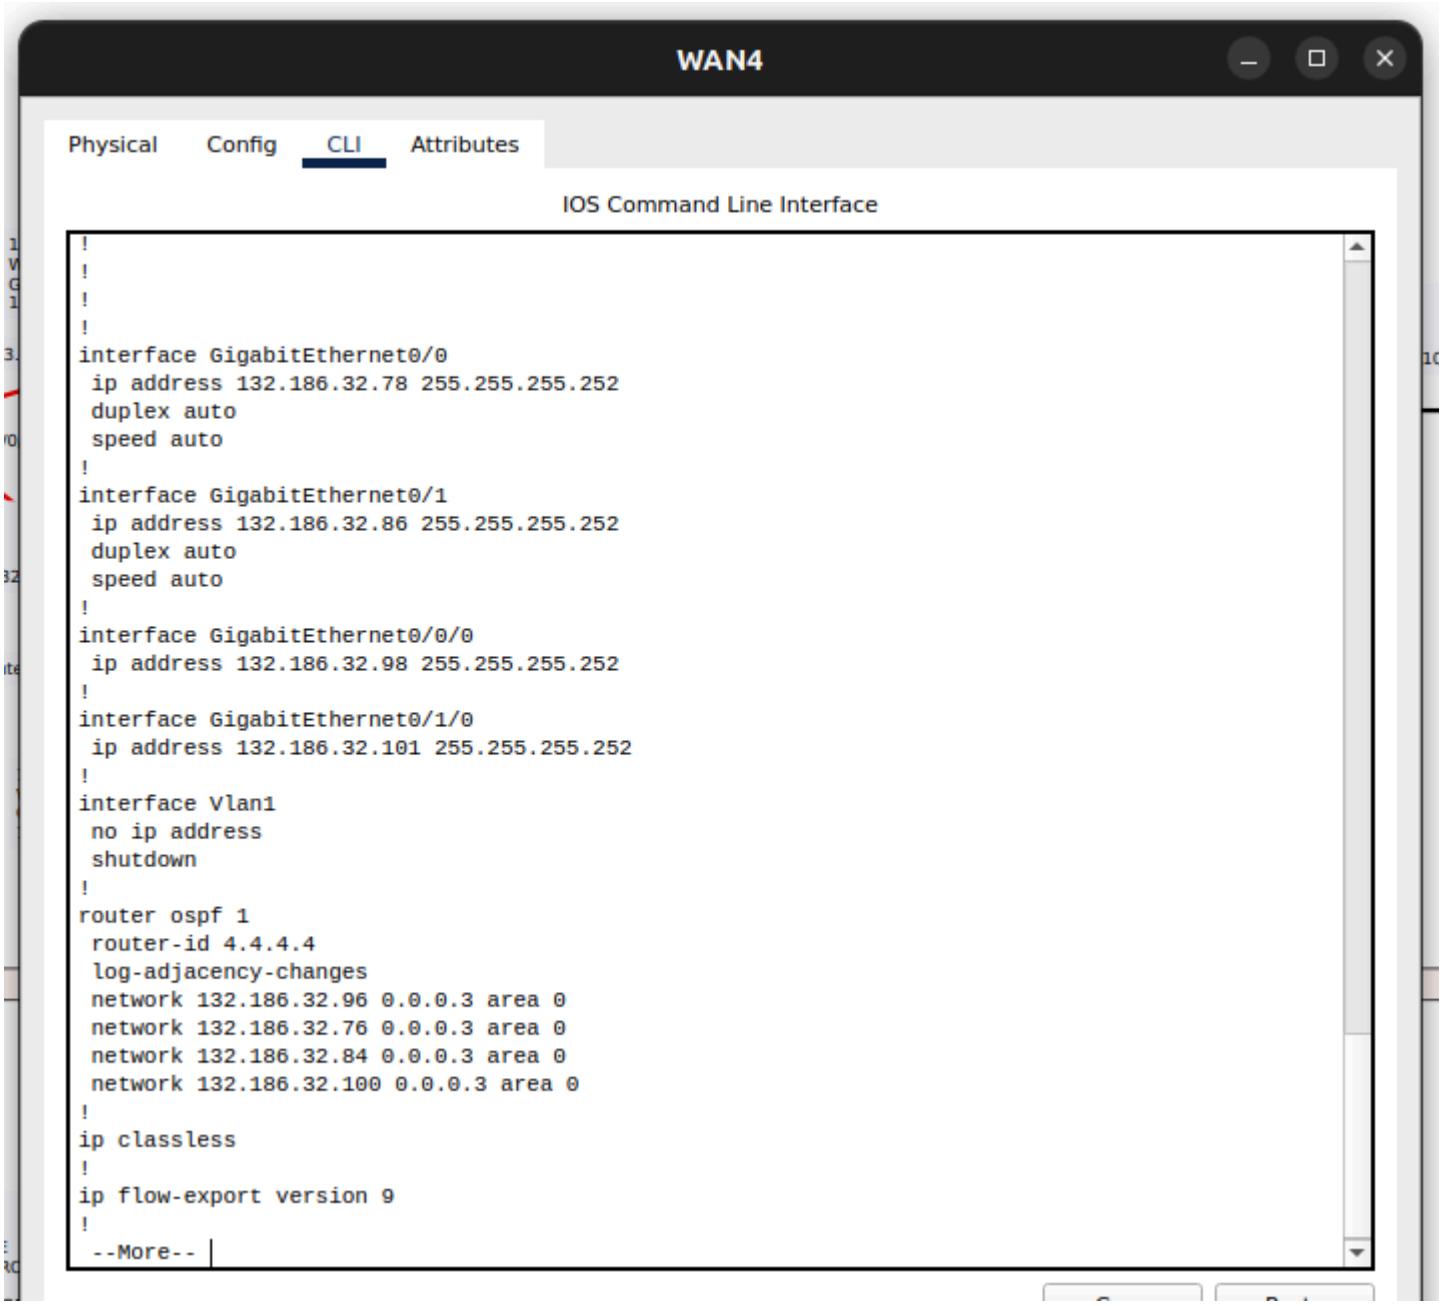


```
!
!
!
!
interface GigabitEthernet0/0
 ip address 132.186.32.78 255.255.255.252
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 132.186.32.86 255.255.255.252
 duplex auto
 speed auto
!
interface GigabitEthernet0/0/0
 ip address 132.186.32.98 255.255.255.252
!
interface GigabitEthernet0/1/0
 ip address 132.186.32.101 255.255.255.252
!
interface Vlan1
 no ip address
 shutdown
!
router ospf 1
 router-id 4.4.4.4
 log-adjacency-changes
 network 132.186.32.96 0.0.0.3 area 0
 network 132.186.32.76 0.0.0.3 area 0
 network 132.186.32.84 0.0.0.3 area 0
 network 132.186.32.100 0.0.0.3 area 0
!
ip classless
!
ip flow-export version 9
!
 --More--
```

WAN 5 :

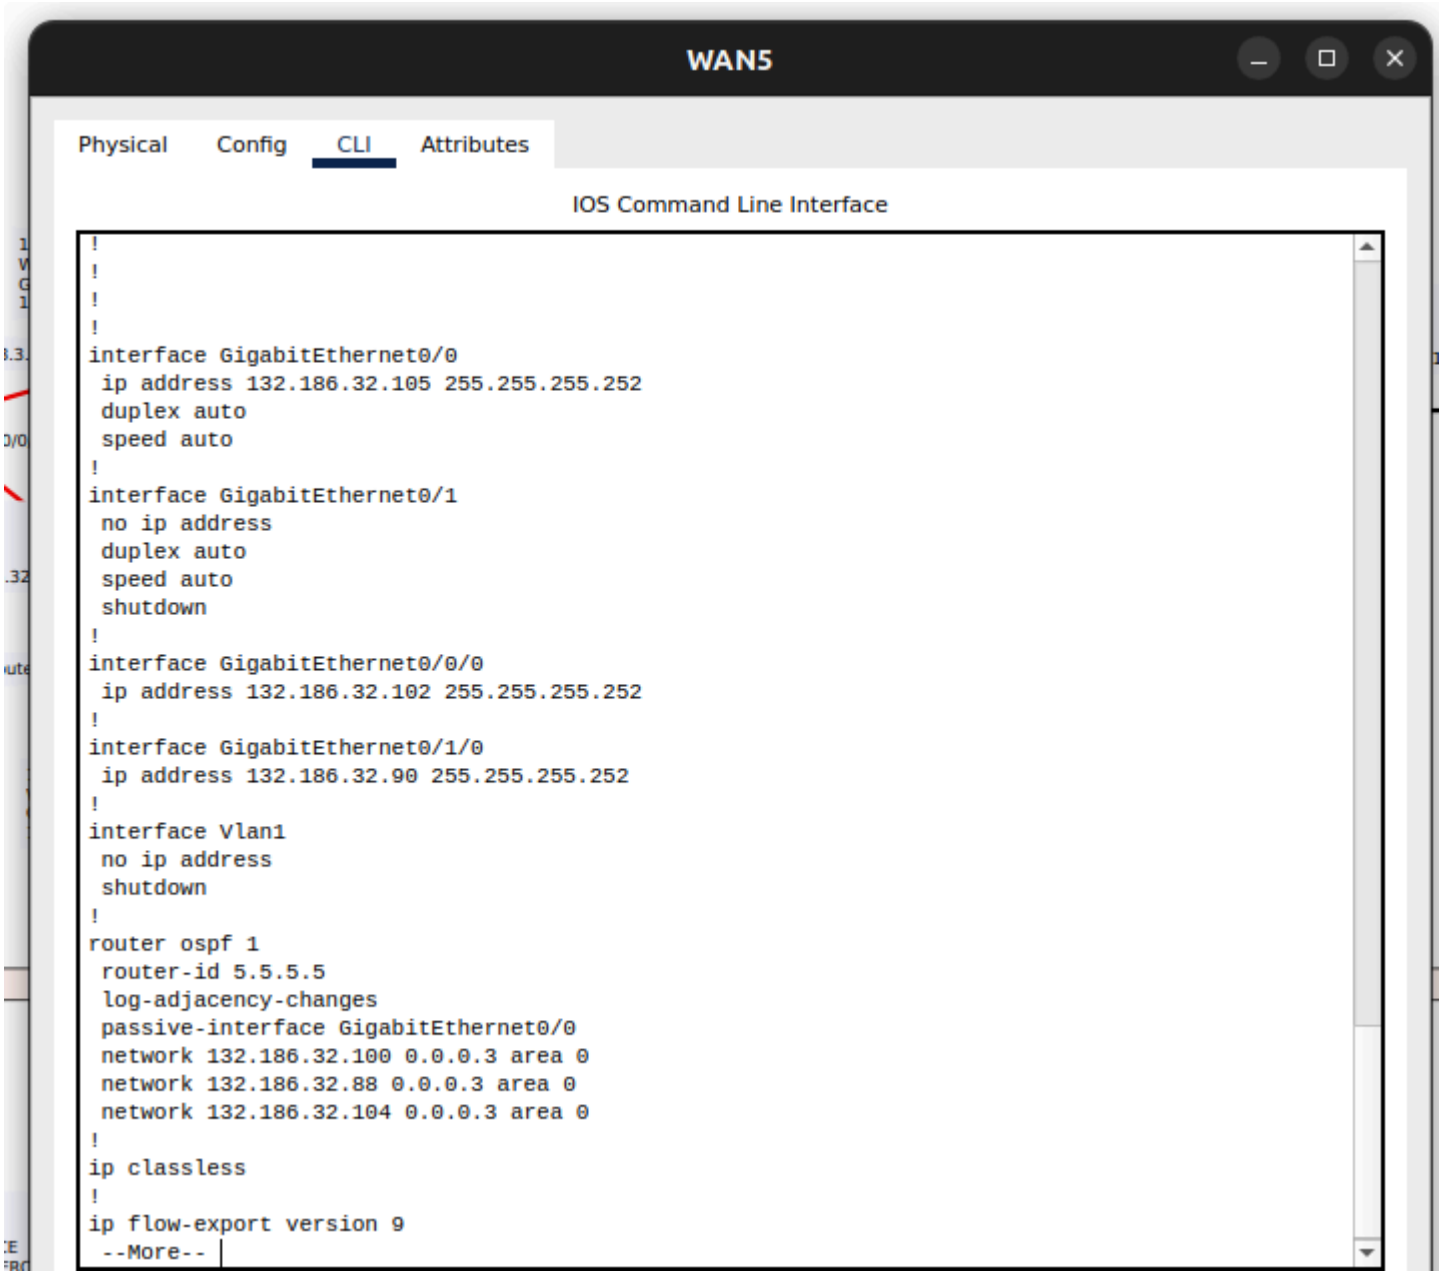


```
!
!
!
!
interface GigabitEthernet0/0
 ip address 132.186.32.105 255.255.255.252
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface GigabitEthernet0/0/0
 ip address 132.186.32.102 255.255.255.252
!
interface GigabitEthernet0/1/0
 ip address 132.186.32.90 255.255.255.252
!
interface Vlan1
 no ip address
 shutdown
!
router ospf 1
 router-id 5.5.5.5
 log-adjacency-changes
 passive-interface GigabitEthernet0/0
 network 132.186.32.100 0.0.0.3 area 0
 network 132.186.32.88 0.0.0.3 area 0
 network 132.186.32.104 0.0.0.3 area 0
!
ip classless
!
ip flow-export version 9
 --More--
```

4. Configuration du routeur du bâtiment GREEN (routage + NAT) :

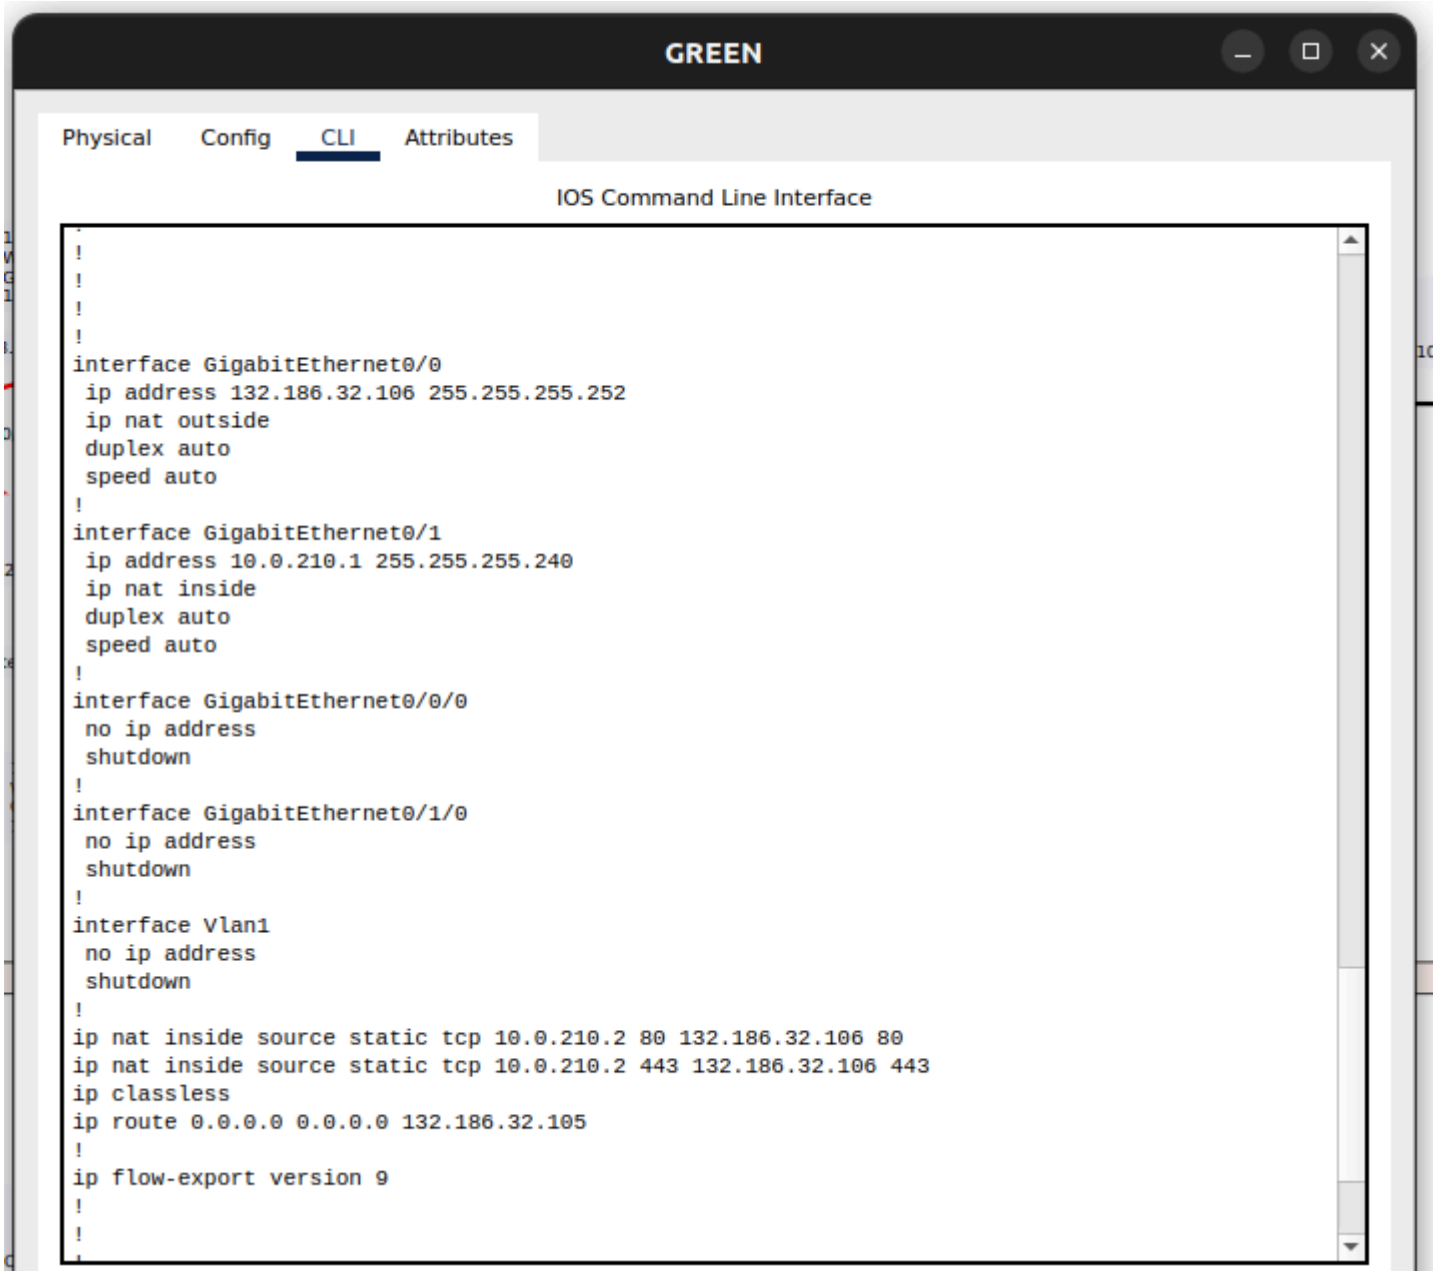


```
!
!
!
!
interface GigabitEthernet0/0
 ip address 132.186.32.106 255.255.255.252
 ip nat outside
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 10.0.210.1 255.255.255.240
 ip nat inside
 duplex auto
 speed auto
!
interface GigabitEthernet0/0/0
 no ip address
 shutdown
!
interface GigabitEthernet0/1/0
 no ip address
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
ip nat inside source static tcp 10.0.210.2 80 132.186.32.106 80
ip nat inside source static tcp 10.0.210.2 443 132.186.32.106 443
ip classless
ip route 0.0.0.0 0.0.0.0 132.186.32.105
!
ip flow-export version 9
!
!
```

5. Configuration du routeur du bâtiment BLUE (routage + NAT) :

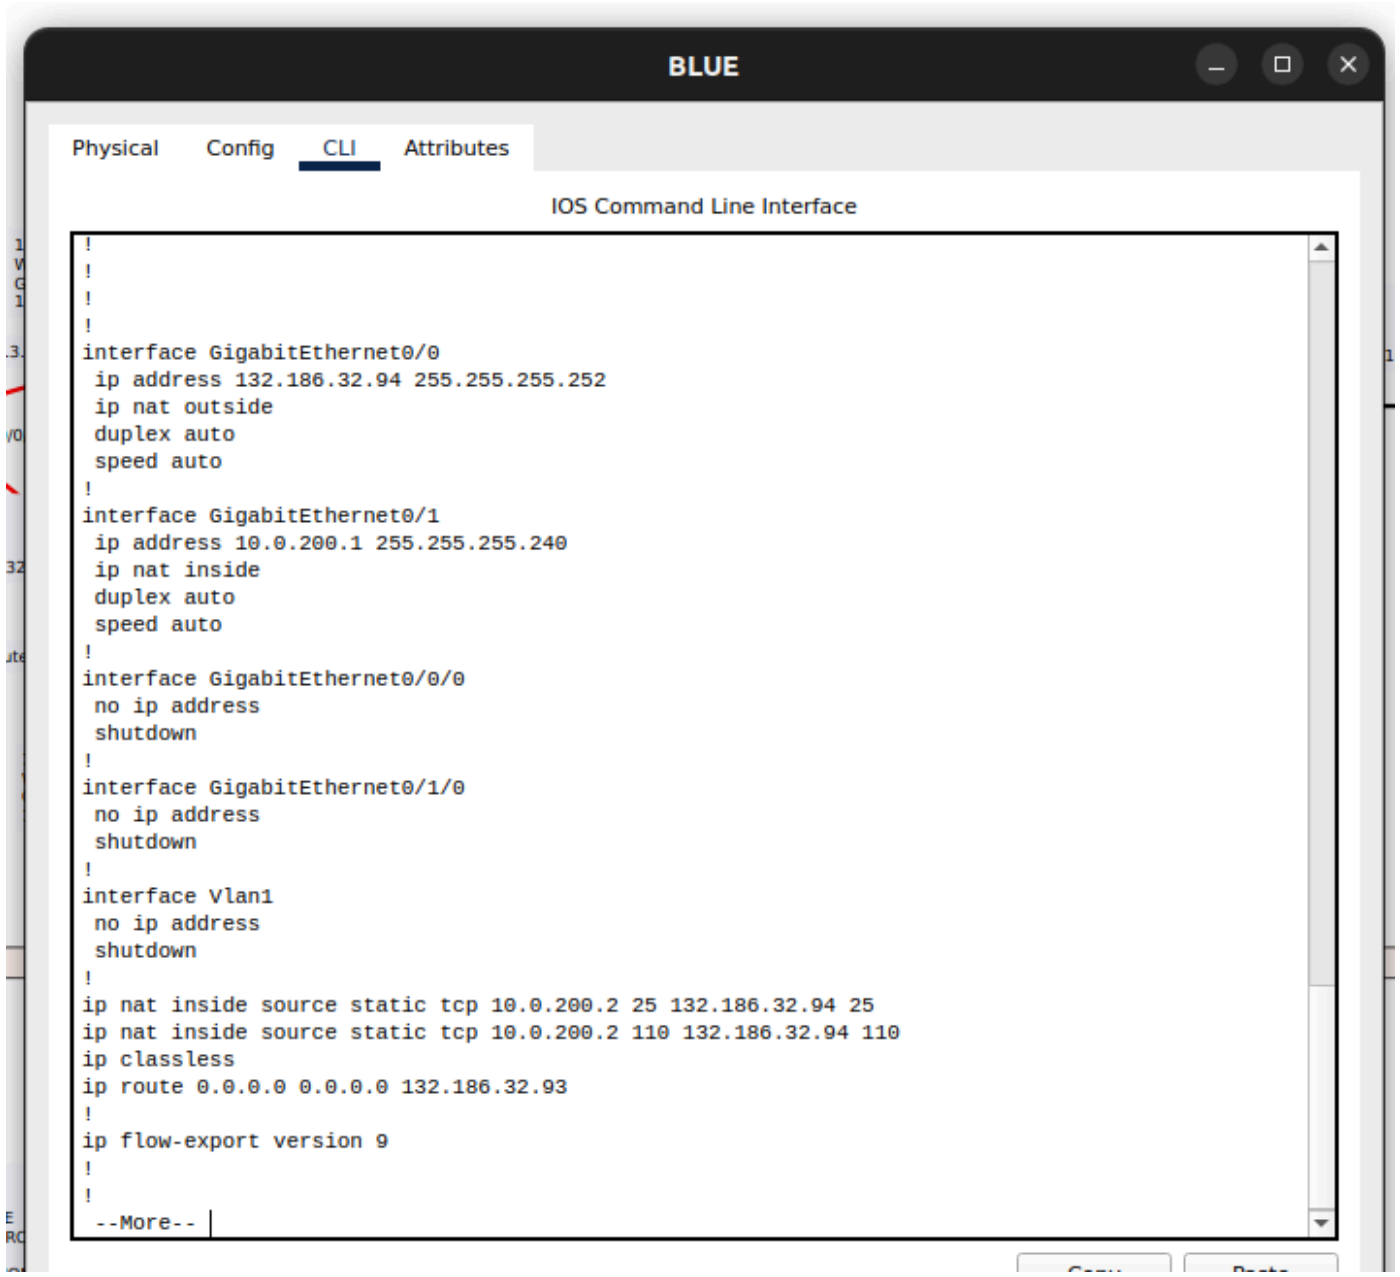


```
!
!
!
!
interface GigabitEthernet0/0
 ip address 132.186.32.94 255.255.255.252
 ip nat outside
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 10.0.200.1 255.255.255.240
 ip nat inside
 duplex auto
 speed auto
!
interface GigabitEthernet0/0/0
 no ip address
 shutdown
!
interface GigabitEthernet0/1/0
 no ip address
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
ip nat inside source static tcp 10.0.200.2 25 132.186.32.94 25
ip nat inside source static tcp 10.0.200.2 110 132.186.32.94 110
ip classless
ip route 0.0.0.0 0.0.0.0 132.186.32.93
!
ip flow-export version 9
!
!
 --More--
```

6. Configuration du bâtiment RED

6.1 Configuration de RED-1 (Routage + NAT)

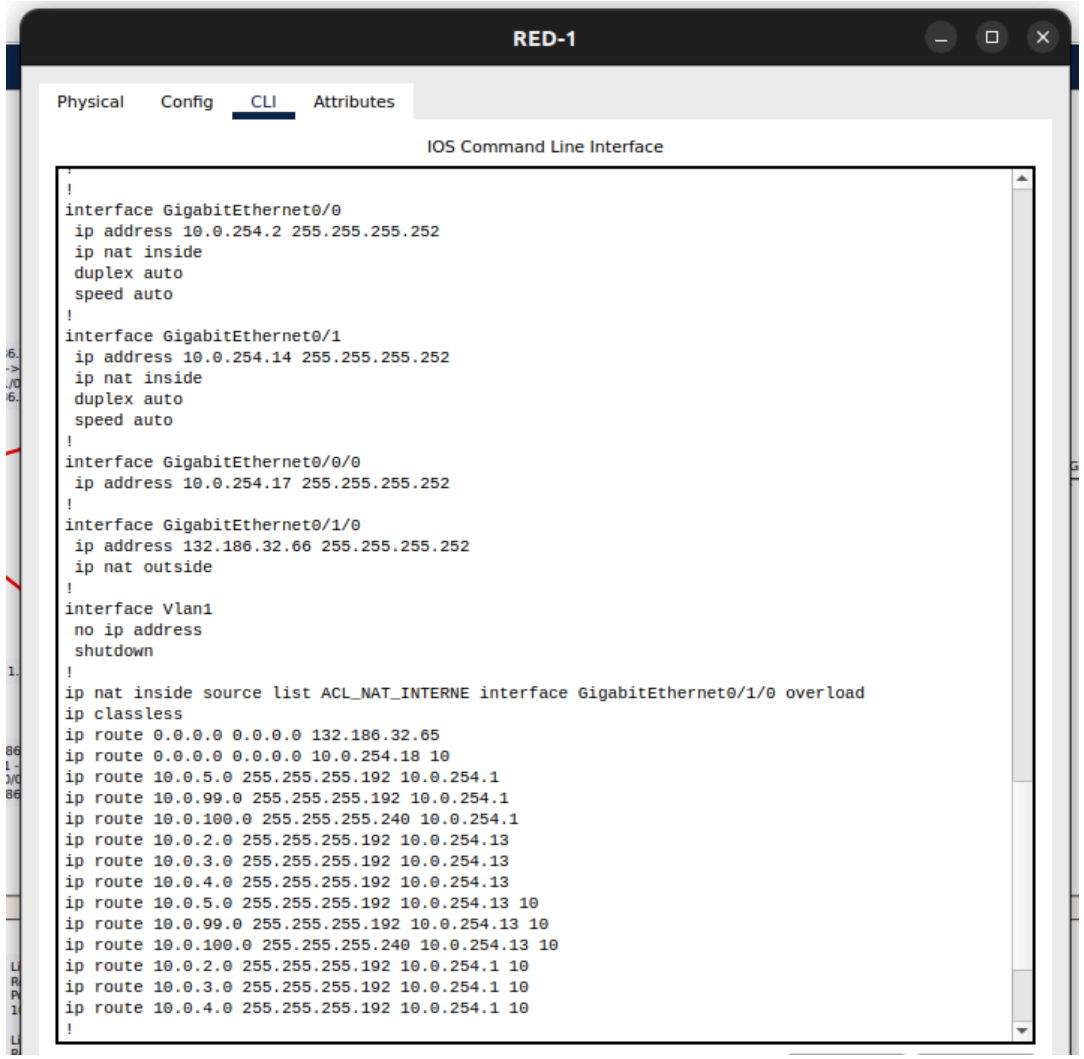


```
!
interface GigabitEthernet0/0
 ip address 10.0.254.2 255.255.255.252
 ip nat inside
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 10.0.254.14 255.255.255.252
 ip nat inside
 duplex auto
 speed auto
!
interface GigabitEthernet0/0/0
 ip address 10.0.254.17 255.255.255.252
!
interface GigabitEthernet0/1/0
 ip address 132.186.32.66 255.255.255.252
 ip nat outside
!
interface Vlan1
 no ip address
 shutdown
!
ip nat inside source list ACL_NAT_INTERNE interface GigabitEthernet0/1/0 overload
ip classless
ip route 0.0.0.0 0.0.0.0 132.186.32.65
ip route 0.0.0.0 0.0.0.0 10.0.254.18 10
ip route 10.0.5.0 255.255.255.192 10.0.254.1
ip route 10.0.99.0 255.255.255.192 10.0.254.1
ip route 10.0.100.0 255.255.255.240 10.0.254.1
ip route 10.0.2.0 255.255.255.192 10.0.254.13
ip route 10.0.3.0 255.255.255.192 10.0.254.13
ip route 10.0.4.0 255.255.255.192 10.0.254.13
ip route 10.0.5.0 255.255.255.192 10.0.254.13 10
ip route 10.0.99.0 255.255.255.192 10.0.254.13 10
ip route 10.0.100.0 255.255.255.240 10.0.254.13 10
ip route 10.0.2.0 255.255.255.192 10.0.254.1 10
ip route 10.0.3.0 255.255.255.192 10.0.254.1 10
ip route 10.0.4.0 255.255.255.192 10.0.254.1 10
!
```

6.2 Configuration de RED-2 (Routage + NAT)

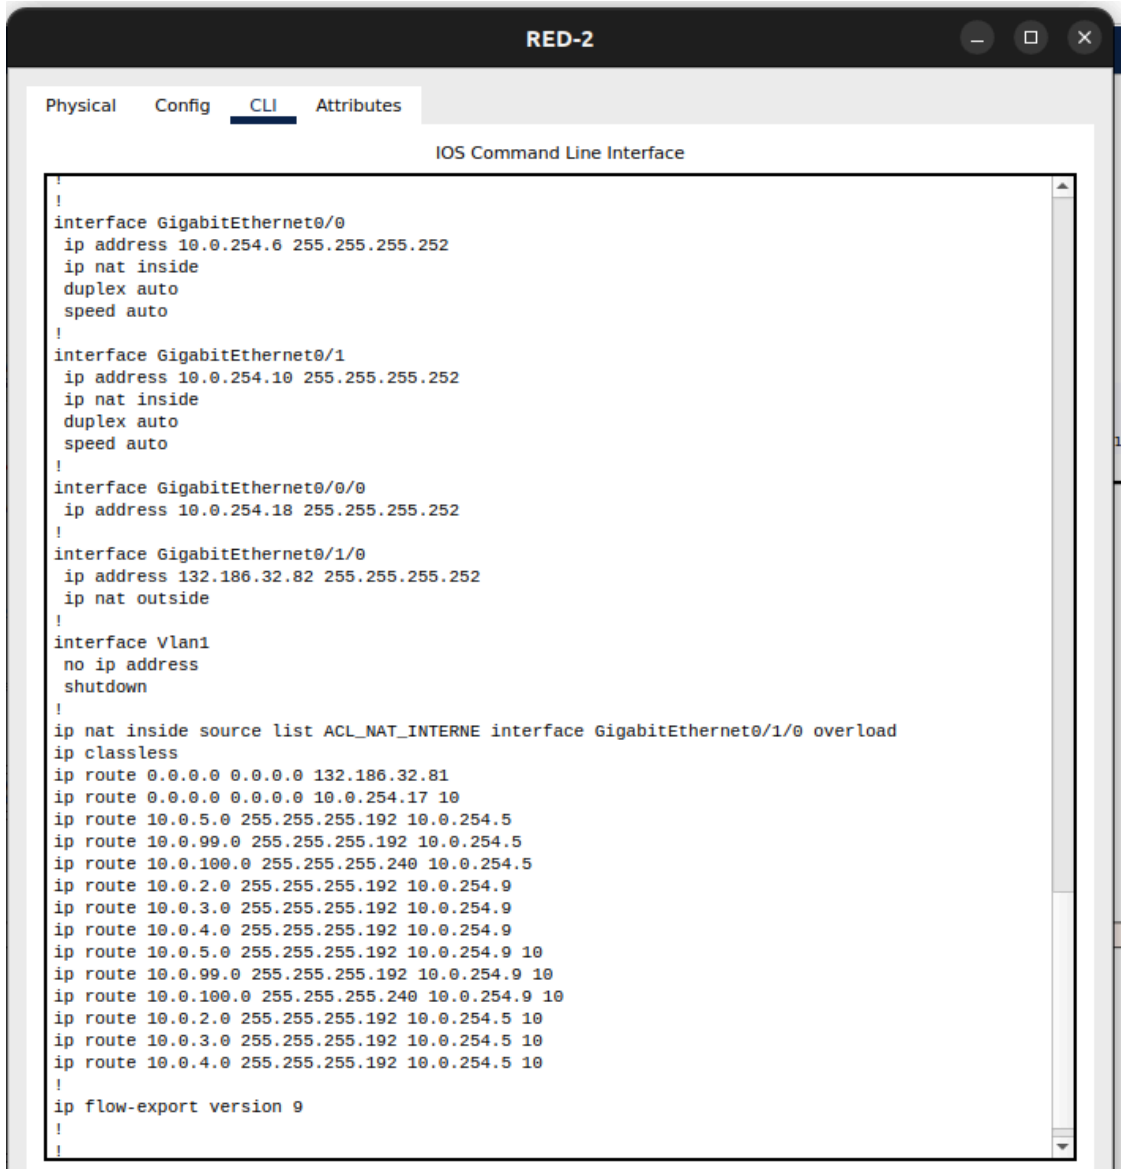


```
!
!
interface GigabitEthernet0/0
 ip address 10.0.254.6 255.255.255.252
 ip nat inside
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 10.0.254.10 255.255.255.252
 ip nat inside
 duplex auto
 speed auto
!
interface GigabitEthernet0/0/0
 ip address 10.0.254.18 255.255.255.252
!
interface GigabitEthernet0/1/0
 ip address 132.186.32.82 255.255.255.252
 ip nat outside
!
interface Vlan1
 no ip address
 shutdown
!
ip nat inside source list ACL_NAT_INTERNE interface GigabitEthernet0/1/0 overload
ip classless
ip route 0.0.0.0 0.0.0.0 132.186.32.81
ip route 0.0.0.0 0.0.0.0 10.0.254.17 10
ip route 10.0.5.0 255.255.255.192 10.0.254.5
ip route 10.0.99.0 255.255.255.192 10.0.254.5
ip route 10.0.100.0 255.255.255.240 10.0.254.5
ip route 10.0.2.0 255.255.255.192 10.0.254.9
ip route 10.0.3.0 255.255.255.192 10.0.254.9
ip route 10.0.4.0 255.255.255.192 10.0.254.9
ip route 10.0.5.0 255.255.255.192 10.0.254.9 10
ip route 10.0.99.0 255.255.255.192 10.0.254.9 10
ip route 10.0.100.0 255.255.255.240 10.0.254.9 10
ip route 10.0.2.0 255.255.255.192 10.0.254.5 10
ip route 10.0.3.0 255.255.255.192 10.0.254.5 10
ip route 10.0.4.0 255.255.255.192 10.0.254.5 10
!
ip flow-export version 9
!
!
```

6.3 Configuration de D1 (Routage + HSRP + DHCP + Spanning-Tree + Liens trunk 802.1Q + ACL + LACP, VLAN)

6.3.1 DHCP (Excluded Address + Pool)

D1

Physical Config CLI Attributes

IOS Command Line Interface

```
hostname D1
!
!
!
ip dhcp excluded-address 10.0.2.1
ip dhcp excluded-address 10.0.2.61 10.0.2.62
ip dhcp excluded-address 10.0.3.1
ip dhcp excluded-address 10.0.3.61 10.0.3.62
ip dhcp excluded-address 10.0.4.1
ip dhcp excluded-address 10.0.4.61 10.0.4.62
ip dhcp excluded-address 10.0.5.1
ip dhcp excluded-address 10.0.5.61 10.0.5.62
ip dhcp excluded-address 10.0.99.1
ip dhcp excluded-address 10.0.99.61 10.0.99.62
ip dhcp excluded-address 10.0.100.1
ip dhcp excluded-address 10.0.100.13 10.0.100.14
ip dhcp excluded-address 10.0.100.2
ip dhcp excluded-address 10.0.99.60
ip dhcp excluded-address 10.0.99.59
ip dhcp excluded-address 10.0.99.58
ip dhcp excluded-address 10.0.99.57
ip dhcp excluded-address 10.0.99.56
ip dhcp excluded-address 10.0.99.55
!
ip dhcp pool POOL_DIRECTION
 network 10.0.2.0 255.255.255.192
 default-router 10.0.2.1
 dns-server 10.0.100.2
ip dhcp pool POOL_RH
 network 10.0.3.0 255.255.255.192
 default-router 10.0.3.1
 dns-server 10.0.100.2
ip dhcp pool POOL_COMMERCIAL
 network 10.0.4.0 255.255.255.192
 default-router 10.0.4.1
 dns-server 10.0.100.2
ip dhcp pool POOL_FINANCE
 network 10.0.5.0 255.255.255.192
 default-router 10.0.5.1
 dns-server 10.0.100.2
ip dhcp pool POOL_IT
 network 10.0.99.0 255.255.255.192
 default-router 10.0.99.1
 dns-server 10.0.100.2
!
!
```

6.3.2 Spanning Tree + Interface

D1

Physical Config CLI Attributes

IOS Command Line Interface

```
!
!
!
!
!
spanning-tree mode rapid-pvst
spanning-tree vlan 5,99-100 priority 24576
spanning-tree vlan 2-4 priority 28672
!
!
!
!
!
!
interface Port-channel1
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2-5,99-100,641
!
interface FastEthernet0/1
 switchport trunk native vlan 641
 switchport trunk allowed vlan 99-100,641
!
interface FastEthernet0/2
 switchport trunk native vlan 641
 switchport trunk allowed vlan 99,641
!
interface FastEthernet0/3
 switchport trunk native vlan 641
 switchport trunk allowed vlan 5,99,641
!
interface FastEthernet0/4
 switchport trunk native vlan 641
 switchport trunk allowed vlan 4,99,641
!
interface FastEthernet0/5
 switchport trunk native vlan 641
 switchport trunk allowed vlan 3,99,641
!
interface FastEthernet0/6
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2,99,641
!
interface FastEthernet0/7
!
interface FastEthernet0/8
!
interface FastEthernet0/9
!
interface FastEthernet0/10
!
```

6.3.3 EtherChannel LACP

Physical Config CLI Attributes

IOS C

```
interface FastEthernet0/18
!
interface FastEthernet0/19
!
interface FastEthernet0/20
!
interface FastEthernet0/21
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2-5,99-100,641
 channel-group 1 mode active
!
interface FastEthernet0/22
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2-5,99-100,641
 channel-group 1 mode active
!
interface FastEthernet0/23
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2-5,99-100,641
 channel-group 1 mode active
!
interface FastEthernet0/24
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2-5,99-100,641
 channel-group 1 mode active
!
```

6.3.4 HSRP + Groupe d'ACL

```
!
interface Vlan2
 mac-address 0001.63c9.0b01
 ip address 10.0.2.61 255.255.255.192
 ip access-group ACL_VLAN_USER in
 standby 2 ip 10.0.2.1
 standby 2 preempt
!
interface Vlan3
 mac-address 0001.63c9.0b02
 ip address 10.0.3.61 255.255.255.192
 ip access-group ACL_VLAN_USER in
 standby 3 ip 10.0.3.1
 standby 3 preempt
!
interface Vlan4
 mac-address 0001.63c9.0b03
 ip address 10.0.4.61 255.255.255.192
 ip access-group ACL_VLAN_USER in
 standby 4 ip 10.0.4.1
 standby 4 preempt
!
interface Vlan5
 mac-address 0001.63c9.0b04
 ip address 10.0.5.61 255.255.255.192
 ip access-group ACL_VLAN_USER in
 standby 5 ip 10.0.5.1
 standby 5 priority 110
 standby 5 preempt
!
interface Vlan99
 mac-address 0001.63c9.0b05
 ip address 10.0.99.61 255.255.255.192
 ip access-group ACL_VLAN_IT in
 standby 99 ip 10.0.99.1
 standby 99 priority 110
 standby 99 preempt
!
interface Vlan100
 mac-address 0001.63c9.0b06
 ip address 10.0.100.13 255.255.255.240
 standby 100 ip 10.0.100.1
 standby 100 priority 110
 standby 100 preempt
!
```

6.3.5 Routage + ACL

```
!
ip classless
ip route 0.0.0.0 0.0.0.0 10.0.254.2
ip route 0.0.0.0 0.0.0.0 10.0.254.6 10
!
ip flow-export version 9
!
!
ip access-list extended ACL_VLAN_USER
 permit udp any any eq bootps
 permit udp any any eq bootpc
 permit udp any any eq 1985
 permit udp any host 10.0.100.2 eq domain
 permit tcp any host 10.0.100.2 eq domain
 permit tcp any host 10.0.210.2 eq www
 permit tcp any host 10.0.210.2 eq 443
 permit tcp any any eq www
 permit tcp any any eq 443
 permit tcp any host 10.0.200.2 eq smtp
 permit tcp any host 10.0.200.2 eq pop3
 permit icmp any any echo-reply
 deny icmp any any echo
 permit ip any any
ip access-list extended ACL_VLAN_IT
 permit udp any any eq bootps
 permit udp any any eq bootpc
 permit udp any any eq 195
 permit icmp any any
 permit ip any any
!
!
!
```

6.4 Configuration de D2 (Routage + HSRP + DHCP + Spanning-Tree + Liens trunk 802.1Q + ACL + LACP, VLAN)

6.4.1 DHCP (Excluded Address + Pool)

D2

Physical Config CLI Attributes

IOS Command Line In

```
!
!
ip dhcp excluded-address 10.0.2.1
ip dhcp excluded-address 10.0.2.61 10.0.2.62
ip dhcp excluded-address 10.0.3.1
ip dhcp excluded-address 10.0.3.61 10.0.3.62
ip dhcp excluded-address 10.0.4.1
ip dhcp excluded-address 10.0.4.61 10.0.4.62
ip dhcp excluded-address 10.0.5.1
ip dhcp excluded-address 10.0.5.61 10.0.5.62
ip dhcp excluded-address 10.0.99.1
ip dhcp excluded-address 10.0.99.61 10.0.99.62
ip dhcp excluded-address 10.0.100.1
ip dhcp excluded-address 10.0.100.13 10.0.100.14
ip dhcp excluded-address 10.0.100.2
ip dhcp excluded-address 10.0.99.60
ip dhcp excluded-address 10.0.99.59
ip dhcp excluded-address 10.0.99.58
ip dhcp excluded-address 10.0.99.57
ip dhcp excluded-address 10.0.99.56
ip dhcp excluded-address 10.0.99.55
!
ip dhcp pool POOL_DIRECTION
 network 10.0.2.0 255.255.255.192
 default-router 10.0.2.1
 dns-server 10.0.100.2
ip dhcp pool POOL_RH
 network 10.0.3.0 255.255.255.192
 default-router 10.0.3.1
 dns-server 10.0.100.2
ip dhcp pool POOL_COMMERCIAL
 network 10.0.4.0 255.255.255.192
 default-router 10.0.4.1
 dns-server 10.0.100.2
ip dhcp pool POOL_FINANCE
 network 10.0.5.0 255.255.255.192
 default-router 10.0.5.1
 dns-server 10.0.100.2
ip dhcp pool POOL_IT
 network 10.0.99.0 255.255.255.192
 default-router 10.0.99.1
 dns-server 10.0.100.2
!
```

6.4.2 Spanning Tree + Interface

D2

Physical Config CLI Attributes

IOS Command Lin

```
!
!
spanning-tree mode rapid-pvst
spanning-tree vlan 2-4 priority 24576
spanning-tree vlan 5,99-100 priority 28672
!
!
!
!
!
!
interface Port-channel1
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2-5,99-100,641
!
interface FastEthernet0/1
 switchport trunk native vlan 641
 switchport trunk allowed vlan 99-100,641
!
interface FastEthernet0/2
 switchport trunk native vlan 641
 switchport trunk allowed vlan 99,641
!
interface FastEthernet0/3
 switchport trunk native vlan 641
 switchport trunk allowed vlan 5,99,641
!
interface FastEthernet0/4
 switchport trunk native vlan 641
 switchport trunk allowed vlan 4,99,641
!
interface FastEthernet0/5
 switchport trunk native vlan 641
 switchport trunk allowed vlan 3,99,641
!
interface FastEthernet0/6
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2,99,641
!
interface FastEthernet0/7
!
interface FastEthernet0/8
!
interface FastEthernet0/9
```

6.4.3 EtherChannel LACP

```
interface FastEthernet0/21
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2-5,99-100,641
 channel-group 1 mode active
!
interface FastEthernet0/22
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2-5,99-100,641
 channel-group 1 mode active
!
interface FastEthernet0/23
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2-5,99-100,641
 channel-group 1 mode active
!
interface FastEthernet0/24
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2-5,99-100,641
 channel-group 1 mode active
!
```

6.4.4 HSRP + Groupe d'ACL

```
 shutdown
!
interface Vlan2
 mac-address 000a.f3a7.2e01
 ip address 10.0.2.62 255.255.255.192
 ip access-group ACL_VLAN_USER in
 standby 2 ip 10.0.2.1
 standby 2 priority 110
 standby 2 preempt
!
interface Vlan3
 mac-address 000a.f3a7.2e02
 ip address 10.0.3.62 255.255.255.192
 ip access-group ACL_VLAN_USER in
 standby 3 ip 10.0.3.1
 standby 3 priority 110
 standby 3 preempt
!
interface Vlan4
 mac-address 000a.f3a7.2e03
 ip address 10.0.4.62 255.255.255.192
 ip access-group ACL_VLAN_USER in
 standby 4 ip 10.0.4.1
 standby 4 priority 110
 standby 4 preempt
!
interface Vlan5
 mac-address 000a.f3a7.2e04
 ip address 10.0.5.62 255.255.255.192
 ip access-group ACL_VLAN_USER in
 standby 5 ip 10.0.5.1
 standby 5 preempt
!
interface Vlan99
 mac-address 000a.f3a7.2e05
 ip address 10.0.99.62 255.255.255.192
 ip access-group ACL_VLAN_IT in
 standby 99 ip 10.0.99.1
 standby 99 preempt
!
interface Vlan100
 mac-address 000a.f3a7.2e06
 ip address 10.0.100.14 255.255.255.240
 standby 100 ip 10.0.100.1
 standby 100 preempt
!
```

6.4.5 Routage + ACL

```
!
ip classless
ip route 0.0.0.0 0.0.0.0 10.0.254.10
ip route 0.0.0.0 0.0.0.0 10.0.254.14 10
!
ip flow-export version 9
!
!
ip access-list extended ACL_VLAN_USER
 permit udp any any eq bootps
 permit udp any any eq bootpc
 permit udp any any eq 1985
 permit udp any host 10.0.100.2 eq domain
 permit tcp any host 10.0.100.2 eq domain
 permit tcp any host 10.0.210.2 eq www
 permit tcp any host 10.0.210.2 eq 443
 permit tcp any any eq www
 permit tcp any any eq 443
 permit tcp any host 10.0.200.2 eq smtp
 permit tcp any host 10.0.200.2 eq pop3
 permit icmp any any echo-reply
 deny icmp any any echo
 permit ip any any
ip access-list extended ACL_VLAN_IT
 permit udp any any eq bootps
 permit udp any any eq bootpc
 permit udp any any eq 1985
 permit icmp any any
 permit ip any any
!
```

6.5 Configuration des switches d'accès (Spanning-Tree, VLAN, Liens trunk 802.1Q, ports d'accès

Switch DNS :

```
!
spanning-tree mode rapid-pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
 switchport access vlan 100
 switchport mode access
!
interface FastEthernet0/2
 switchport trunk native vlan 641
 switchport trunk allowed vlan 99-100,641
 switchport mode trunk
!
interface FastEthernet0/3
 switchport trunk native vlan 641
 switchport trunk allowed vlan 99-100,641
 switchport mode trunk
!
```

```
VLAN Name                             Status    Ports
---- -------------------------------- --------- -----------
1    default                          active    Fa0/4, Fa0/
                                                Fa0/8, Fa0/
                                                Fa0/12, Fa0.
                                                Fa0/16, Fa0.
                                                Fa0/20, Fa0.
                                                Fa0/24, Gig
99   IT                               active
100  DNS                              active    Fa0/1
641  Natif                            active
1002 fddi-default                     active
```

```
!
interface Vlan99
 ip address 10.0.99.60 255.255.255.192
!
!
```

Switch IT :

```
!
!
spanning-tree mode rapid-pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
 switchport access vlan 99
 switchport mode access
 spanning-tree portfast
!
interface FastEthernet0/2
 switchport trunk native vlan 641
 switchport trunk allowed vlan 99,641
 switchport mode trunk
!
interface FastEthernet0/3
 switchport trunk native vlan 641
 switchport trunk allowed vlan 99,641
 switchport mode trunk
!
```

```
VLAN Name                             Status    Ports
---- -------------------------------- --------- -------
1    default                          active    Fa0/4, F
                                                Fa0/8, F
                                                Fa0/12,
                                                Fa0/16,
                                                Fa0/20,
                                                Fa0/24,
99   IT                               active    Fa0/1
641  Natif                            active
1002 fddi-default                     active
```

```
 shutdown
!
interface Vlan99
 ip address 10.0.99.59 255.255.255.192
!
!
```

Switch FINANCE :

```
!
spanning-tree mode rapid-pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
 switchport access vlan 5
 switchport mode access
 spanning-tree portfast
!
interface FastEthernet0/2
 switchport trunk native vlan 641
 switchport trunk allowed vlan 5,99,641
 switchport mode trunk
!
interface FastEthernet0/3
 switchport trunk native vlan 641
 switchport trunk allowed vlan 5,99,641
 switchport mode trunk
```

```
VLAN Name                             Status    Ports
---- -------------------------------- --------- -------
1    default                          active    Fa0/4, F
                                                Fa0/8, F
                                                Fa0/12,
                                                Fa0/16,
                                                Fa0/20,
                                                Fa0/24,
5    FINANCE                          active    Fa0/1
99   IT                               active
641  Natif                            active
```

```
!
interface Vlan99
 ip address 10.0.99.58 255.255.255.192
!
```

Switch COMMERCIAL :

```
!
spanning-tree mode rapid-pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
 switchport access vlan 4
 switchport mode access
!
interface FastEthernet0/2
 switchport trunk native vlan 641
 switchport trunk allowed vlan 4,99,641
 switchport mode trunk
!
interface FastEthernet0/3
 switchport trunk native vlan 641
 switchport trunk allowed vlan 4,99,641
 switchport mode trunk
!
```

```
VLAN Name                             Status    Ports
---- -------------------------------- --------- -------
1    default                          active    Fa0/4, F
                                                Fa0/8, F
                                                Fa0/12,
                                                Fa0/16,
                                                Fa0/20,
                                                Fa0/24,
4    COMMERCIAL                       active    Fa0/1
99   IT                               active
641  Natif                            active
```

```
!
interface Vlan99
 ip address 10.0.99.57 255.255.255.192
!
```

Switch RH :

```
spanning-tree mode rapid-pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
 switchport access vlan 3
 switchport mode access
!
interface FastEthernet0/2
 switchport trunk native vlan 641
 switchport trunk allowed vlan 3,99,641
 switchport mode trunk
!
interface FastEthernet0/3
 switchport trunk native vlan 641
 switchport trunk allowed vlan 3,99,641
 switchport mode trunk
!
```

```
VLAN Name                             Status    Ports
---- -------------------------------- --------- -------
1    default                          active    Fa0/4, F
                                                Fa0/8, F
                                                Fa0/12,
                                                Fa0/16,
                                                Fa0/20,
                                                Fa0/24,
3    RH                               active    Fa0/1
99   IT                               active
641  Natif                            active
1002 fddi-default                     active
```

```
!
interface Vlan99
 ip address 10.0.99.56 255.255.255.192
!
```

Switch DIRECTION

```
!
spanning-tree mode rapid-pvst
spanning-tree extend system-id
!
interface FastEthernet0/1
 switchport access vlan 2
 switchport mode access
!
interface FastEthernet0/2
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2,99,641
 switchport mode trunk
!
interface FastEthernet0/3
 switchport trunk native vlan 641
 switchport trunk allowed vlan 2,99,641
 switchport mode trunk
!
```

```
VLAN Name                             Status    Ports
---- -------------------------------- --------- -------
1    default                          active    Fa0/4,
                                                Fa0/8,
                                                Fa0/12,
                                                Fa0/16,
                                                Fa0/20,
                                                Fa0/24,
2    DIRECTION                        active    Fa0/1
99   IT                               active
641  Natif                            active
1002 fddi-default                     active
```

```
!
interface Vlan99
 ip address 10.0.99.55 255.255.255.192
!
```

Fin de la Documentation de configuration des Équipements,
Merci, Bonne journée