

AdminPC_11


Physical Config Desktop Programming Attributes

SSH Client

```

interface FastEthernet0/19
!
interface FastEthernet0/20
!
interface FastEthernet0/21
!
interface FastEthernet0/22
!
interface FastEthernet0/23
!
interface FastEthernet0/24
!
interface Vlan1
ip address 10.10.3.2 255.255.255.192
!
ip default-gateway 10.10.3.1
!
!
!
line con 0
password 7 0822455D0A16
login
!
line vty 0 4
password 7 0822455D0A16
login
line vty 5 15
login
!
!
!
end
Rayong Switch#
  
```

☐ Top

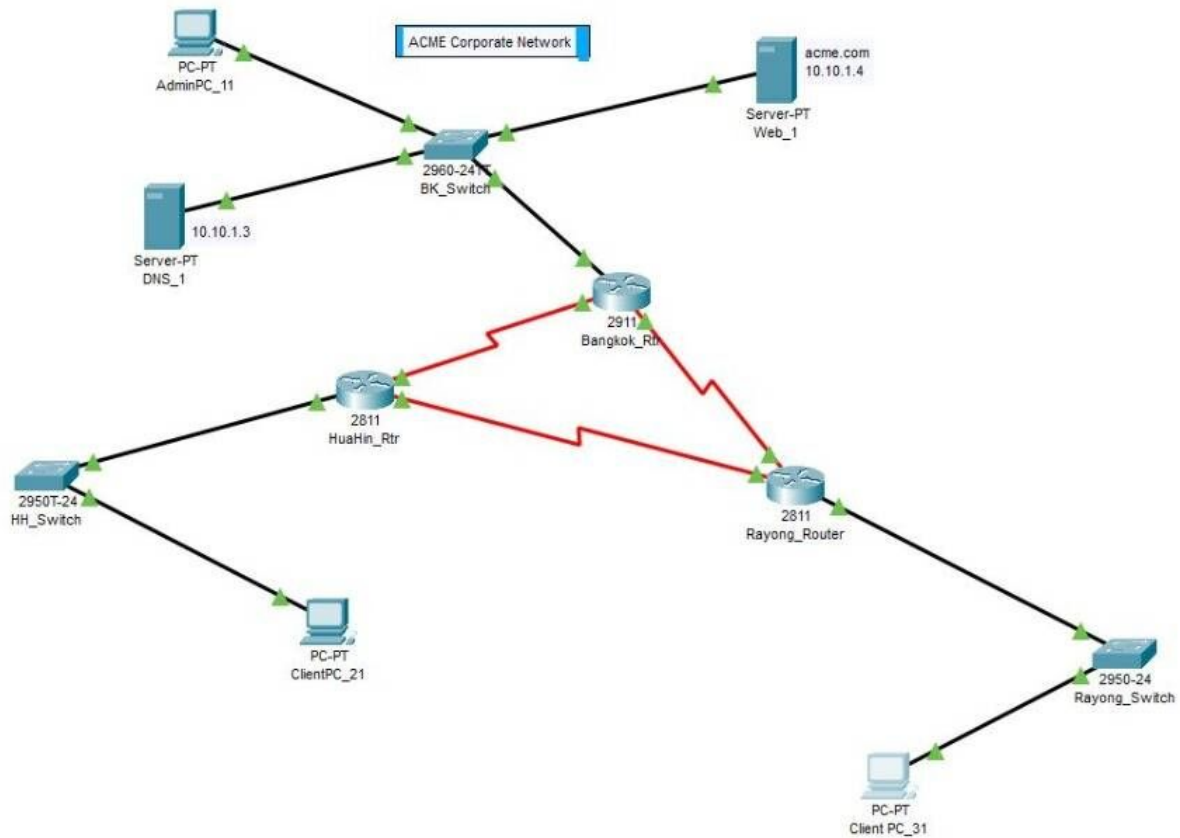

ClientPC_21

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.10.3.31

Pinging 10.10.3.31 with 32 bytes of data:

Reply from 10.10.3.31: bytes=32 time=1ms TTL=126
Reply from 10.10.3.31: bytes=32 time=11ms TTL=126
Reply from 10.10.3.31: bytes=32 time=8ms TTL=126
Reply from 10.10.3.31: bytes=32 time=13ms TTL=126

Ping statistics for 10.10.3.31:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 13ms, Average = 8ms

C:\>
```

Top