


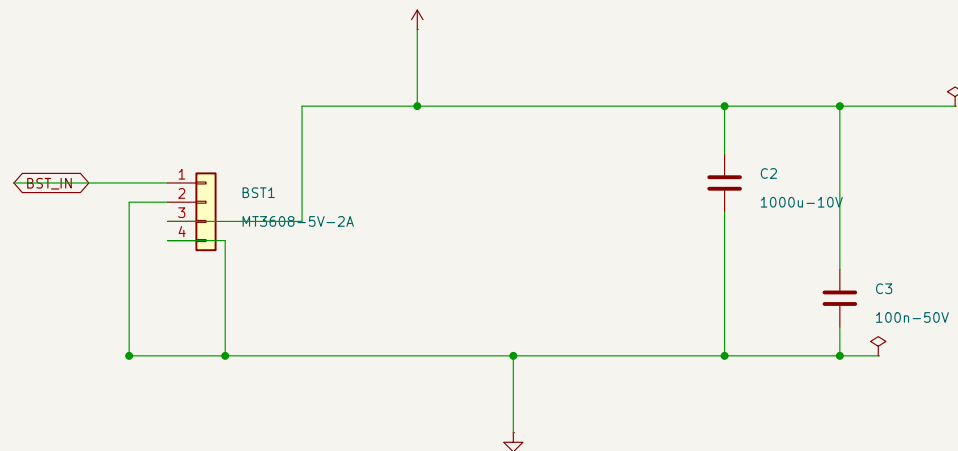

BST1 rev2: >=5A boost (pump+LED interlocked for 2A setting).

Generated with SKIDL


Sheet: /
File: pods_s_boost1.kicad_sch


Title: GrowMate Pods carrier rev A

Size: A4 Date: 2026-09-27

KiCad E.D.A. 10.0.6


Rev:
Id: 1/1

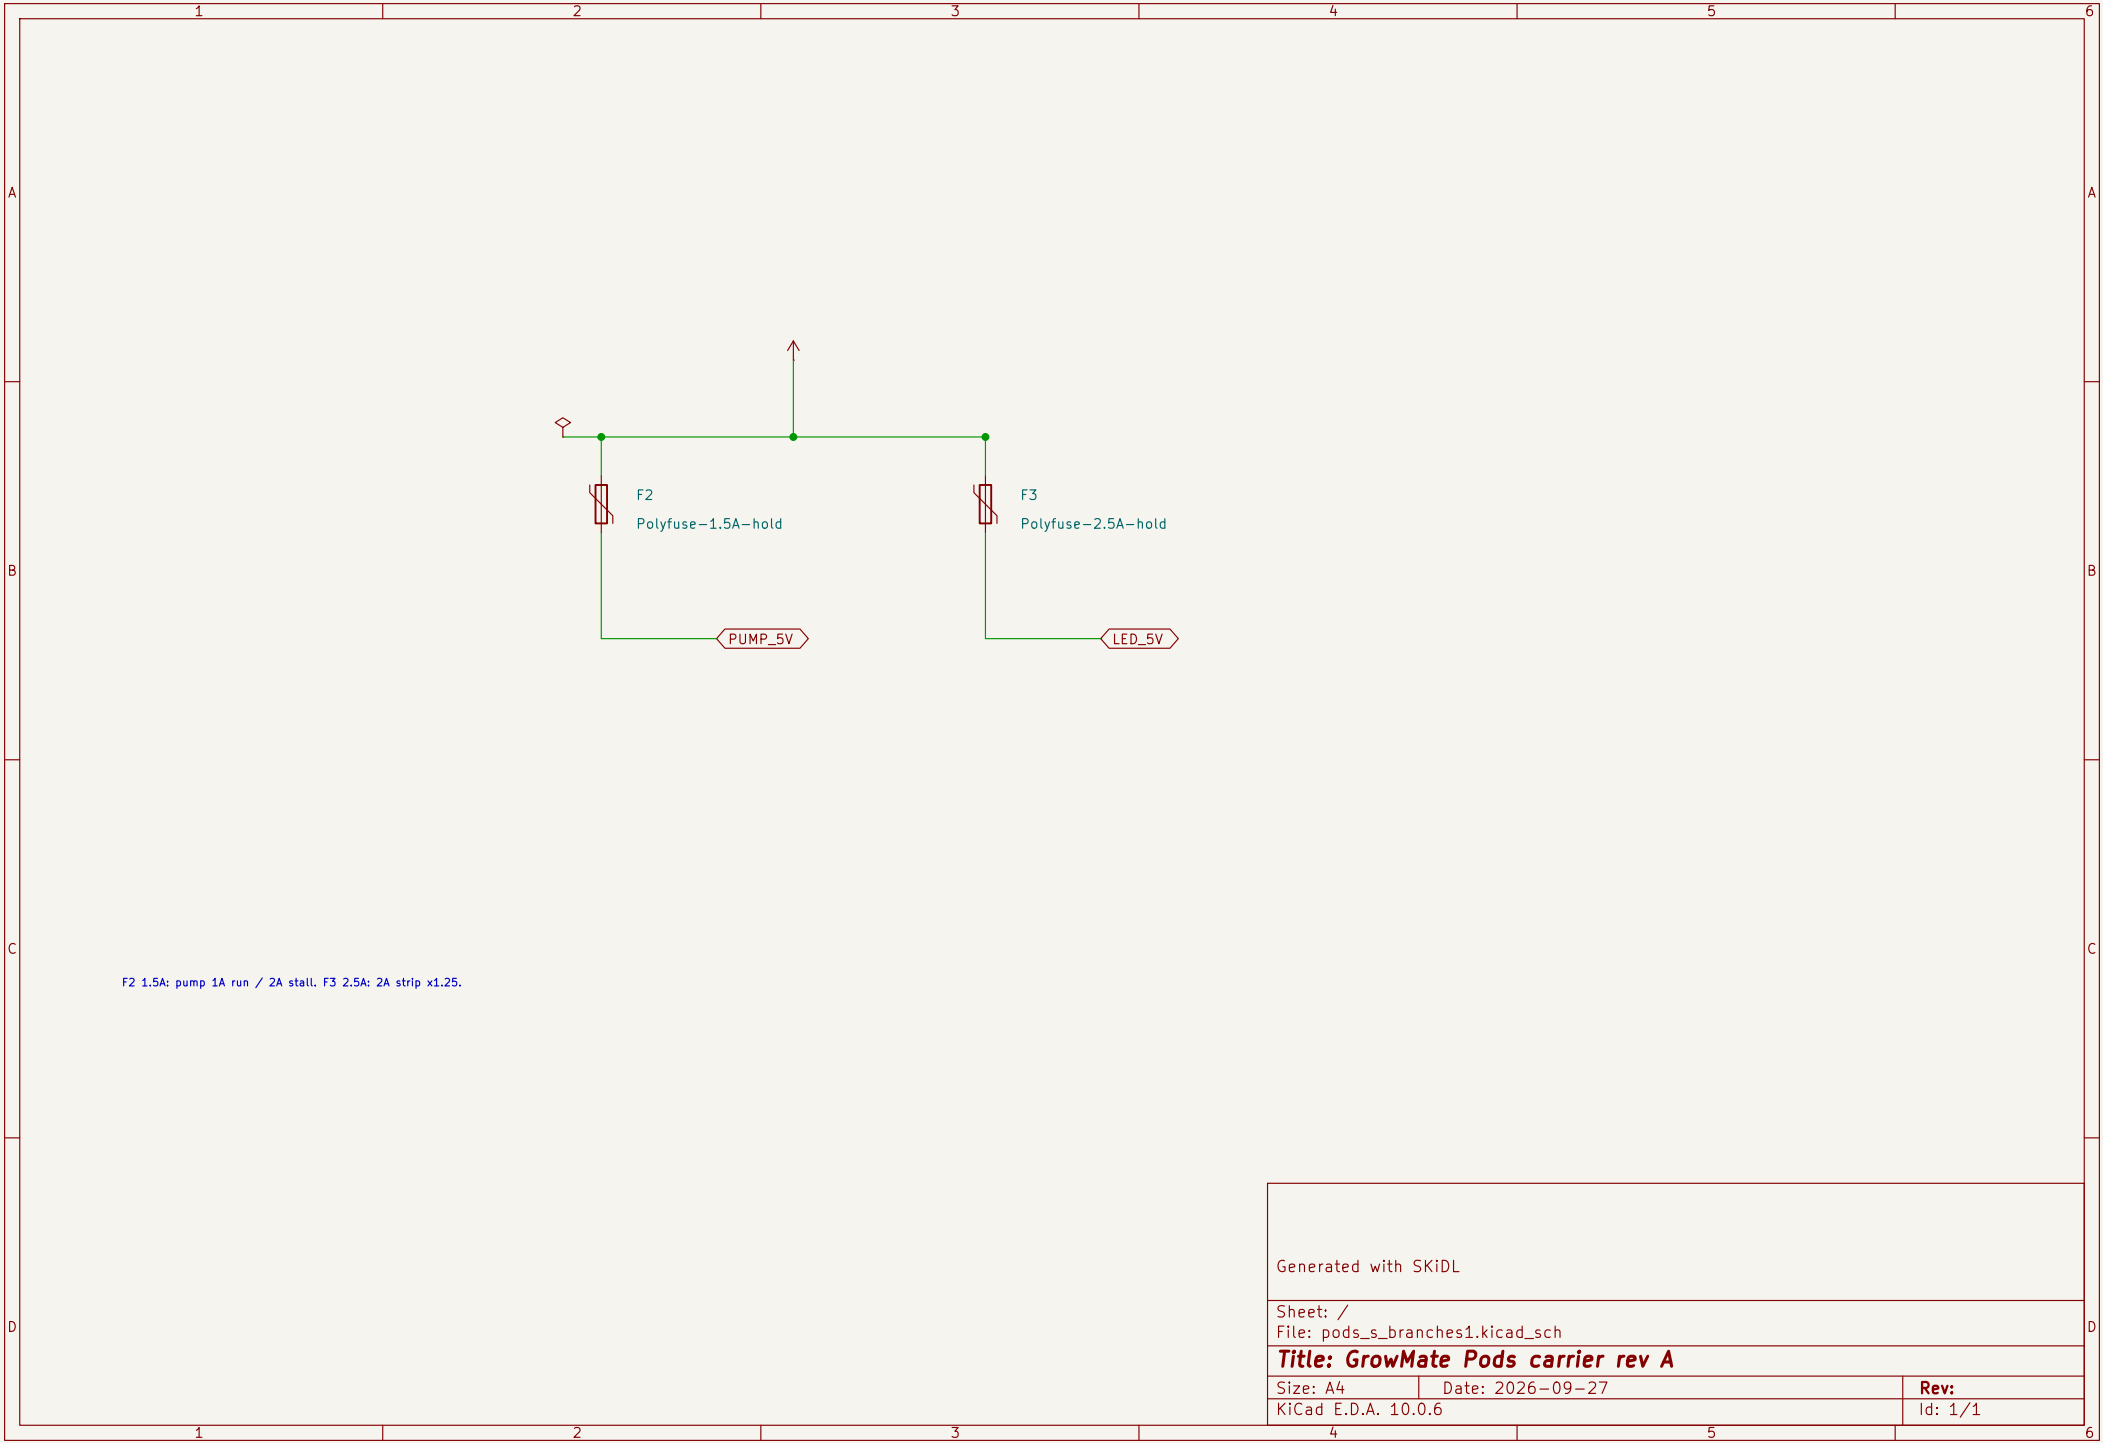

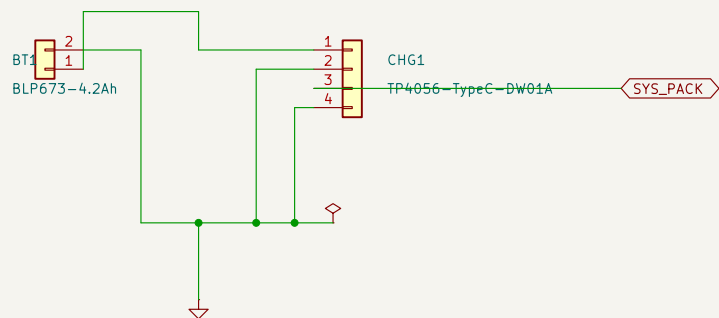


CHG1: 5V enters via on-module USB-C.
Load hangs on OUT+-, never B+- (02-power idle-charge rule).

Generated with SKIDL		
Sheet: /		
File: pods_s_charge1.kicad_sch		
Title: GrowMate Pods carrier rev A		
Size: A4	Date: 2026-09-27	Rev:
KiCad E.D.A. 10.0.6		Id: 1/1

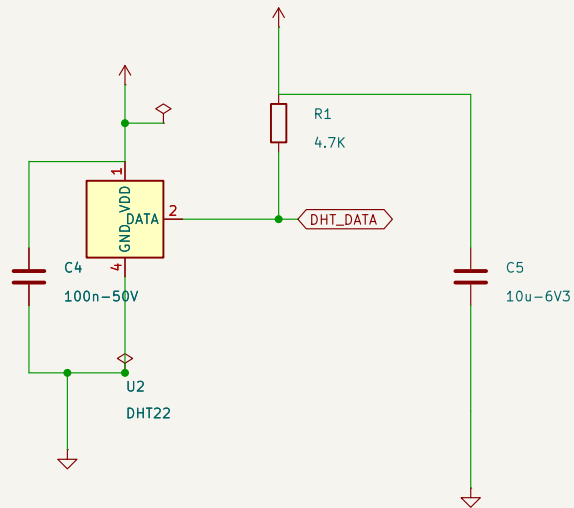

DHT polled with 2 attempts $\geq 2s$ apart; failures omit temperature/air rather than blocking.

Generated with SKIDL		
Sheet: /		
File: pods_s_dht1.kicad_sch		
Title: GrowMate Pods carrier rev A		
Size: A4	Date: 2026-09-27	Rev:
KiCad E.D.A. 10.0.6		Id: 1/1

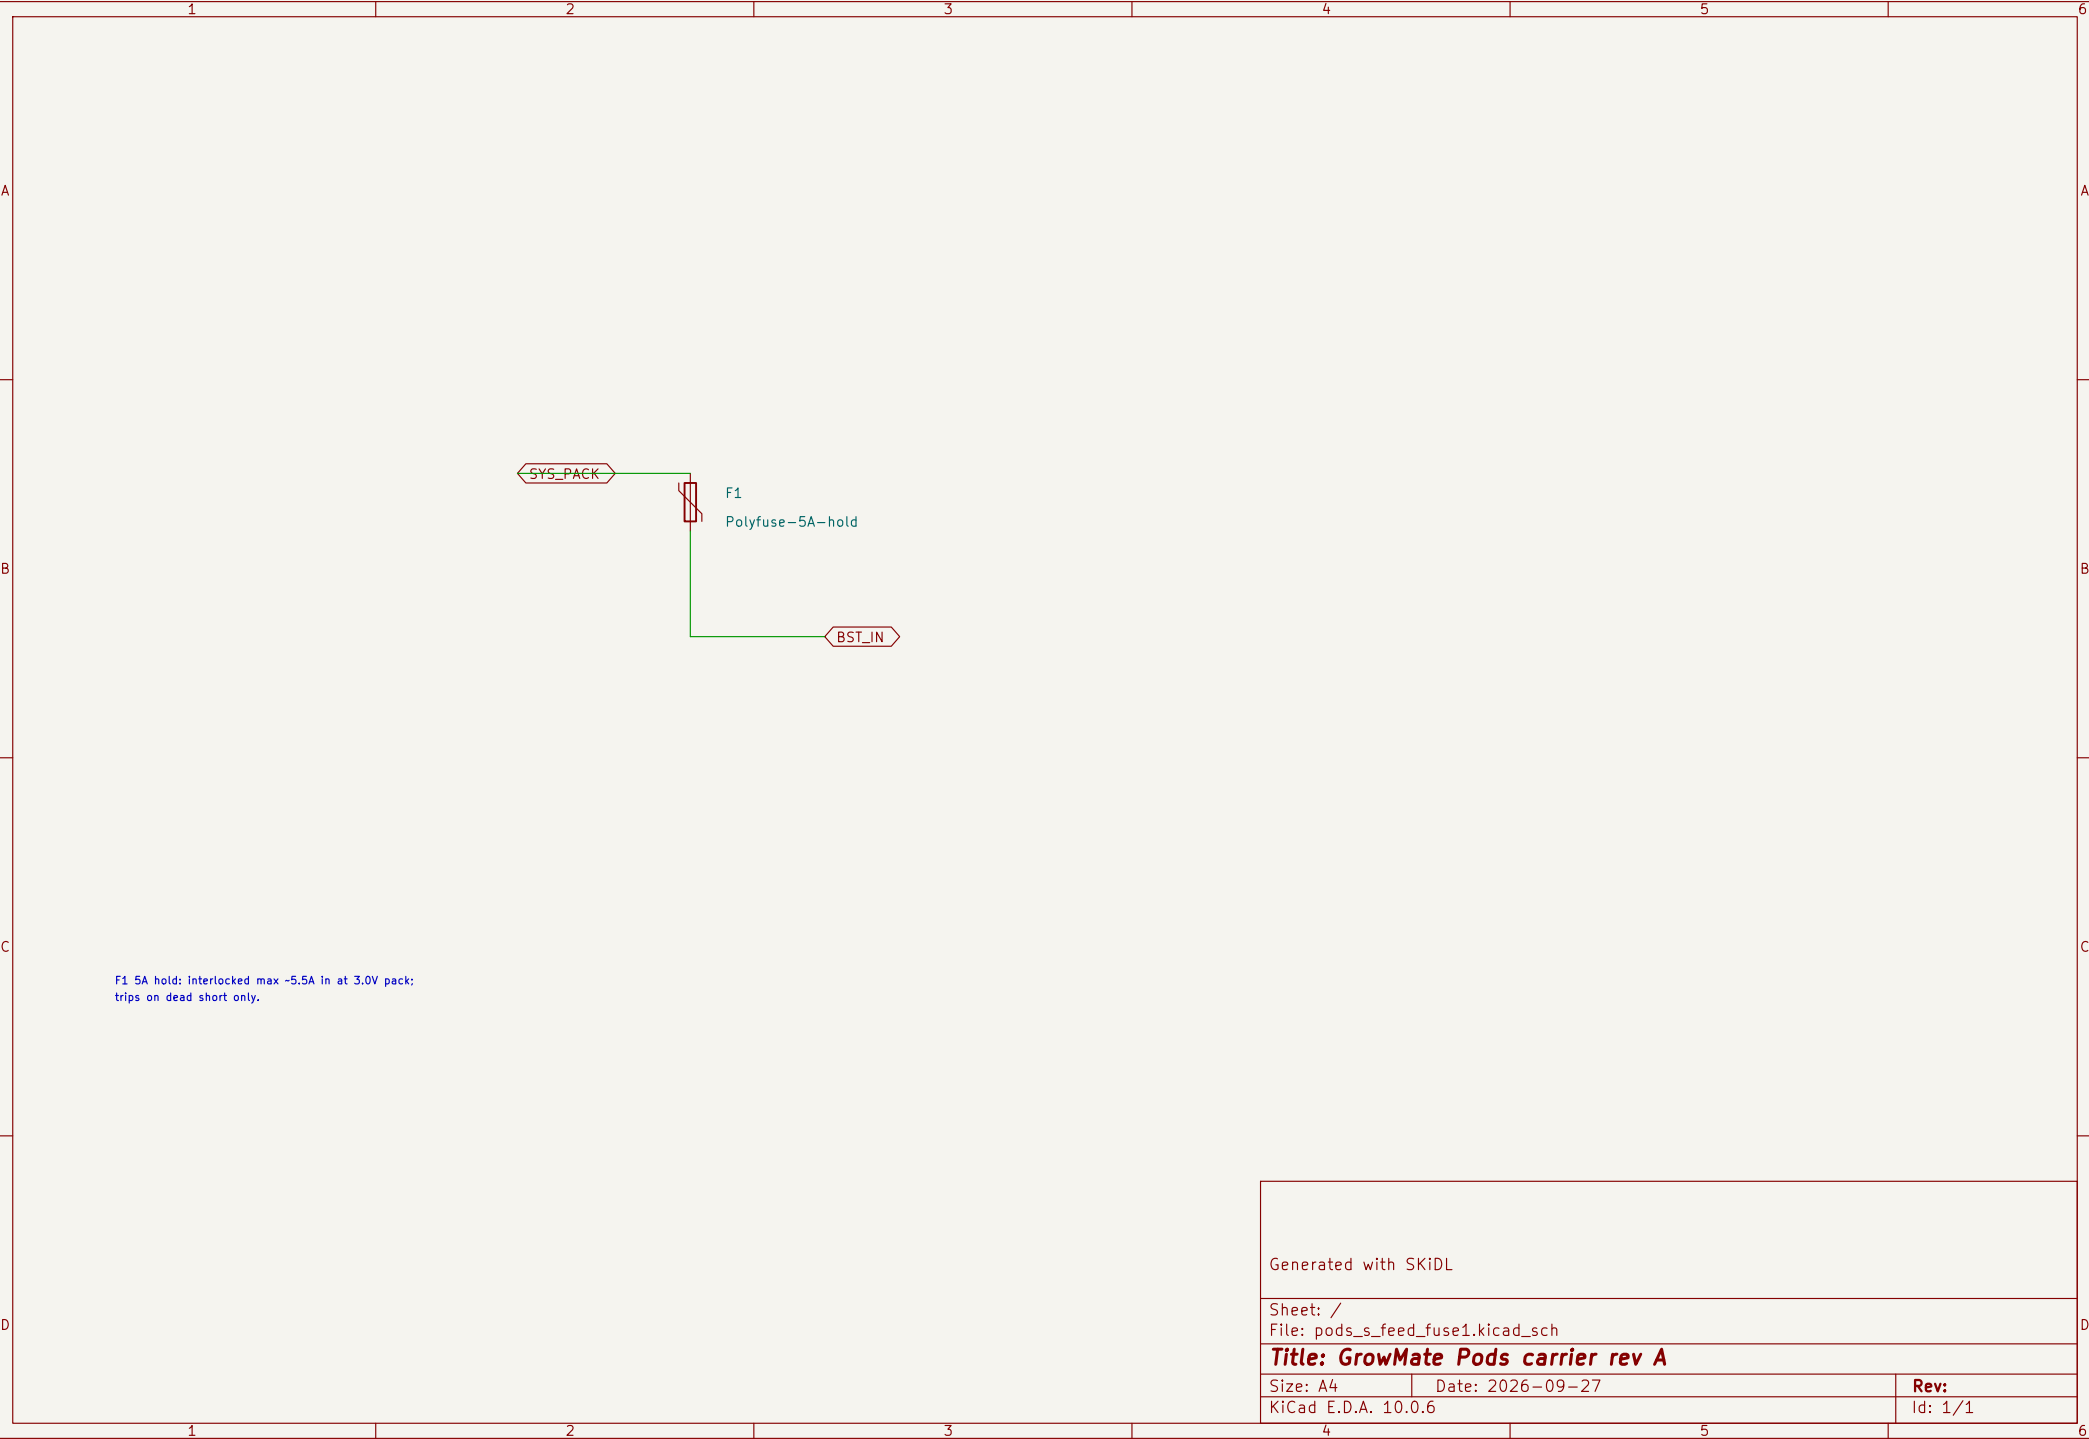

F1 5A hold: interlocked max ~5.5A in at 3.0V pack;
trips on dead short only.

Generated with SKiDL


Sheet: /
File: pods_s_feed_fuse1.kicad_sch

Title: GrowMate Pods carrier rev A

Size: A4	Date: 2026-09-27
----------	------------------

SIZE: A1	DATE: 10/10/2023
KiCad E.D.A. 10.0.6	

Rev:
Id: 1/1

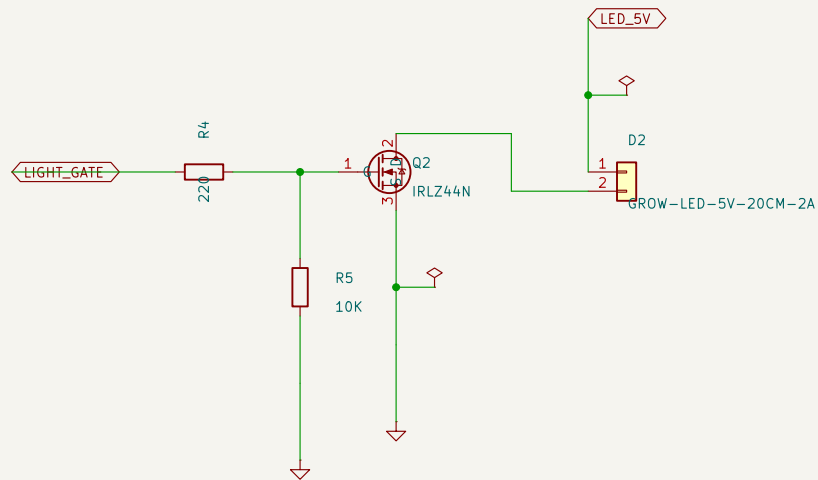

20cm 2A strip on F3 2.5A branch. 24h light failsafe refreshes on every server ON (see 05-firmware).

Generated with SKIDL


Sheet: /
File: pods_s_led1.kicad_sch

Title: GrowMate Pods carrier rev A

Size: A4 Date: 2026-09-27

KiCad E.D.A. 10.0.6


Rev:
Id: 1/1

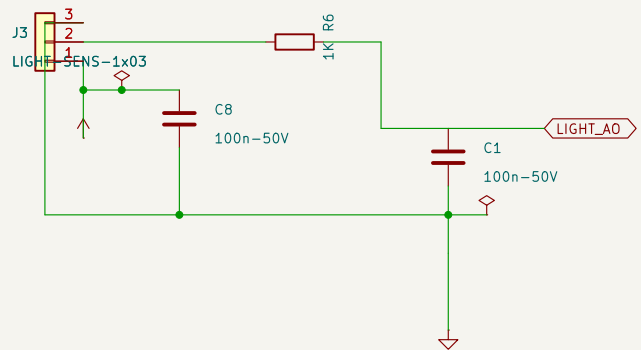

Light scale INVERTED (dark == full-scale). R6 tames
GPIO14 boot-PWM contention. DARK vs BRIGHT ends server-side.

Generated with SKIDL

Sheet: /		
File: pods_s_lightsens1.kicad_sch		
Title: GrowMate Pods carrier rev A		
Size: A4	Date: 2026-09-27	Rev:
KiCad E.D.A. 10.0.6		Id: 1/1

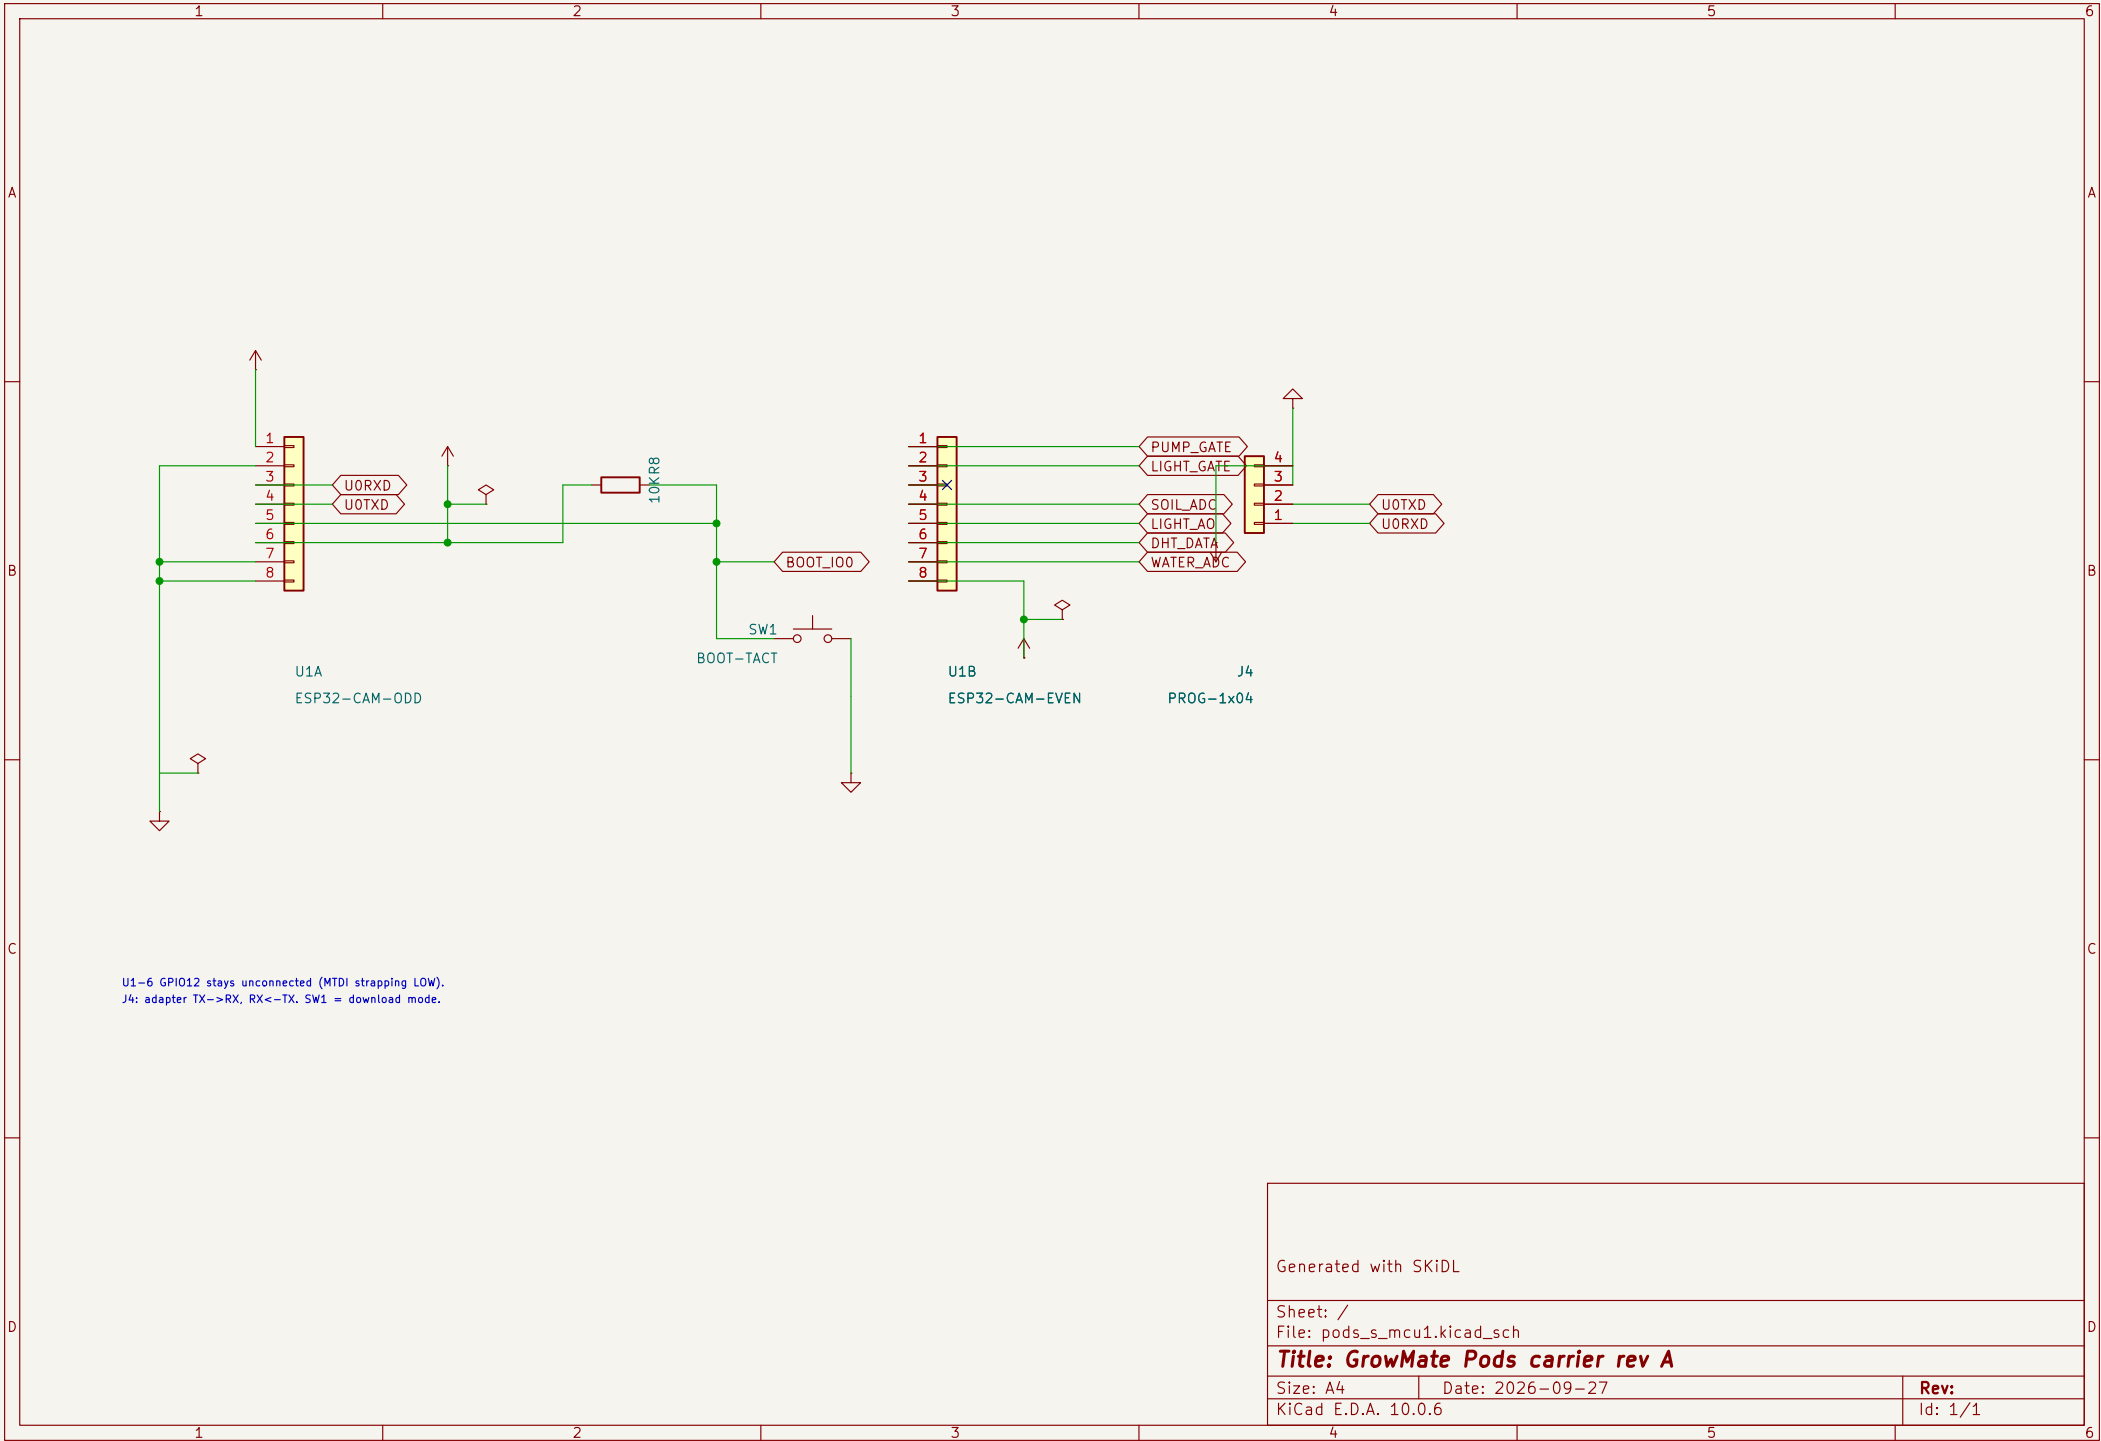

U1-6 GPIO12 stays unconnected (MTDI strapping LOW).
J4: adapter TX->RX, RX<-TX. SW1 = download mode.

Generated with SKIDL


Sheet: /
File: pods_s_mcu1.kicad_sch

Title: GrowMate Pods carrier rev A

Size: A4 Date: 2026-09-27

KiCad E.D.A. 10.0.6

Rev:
Id: 1/1

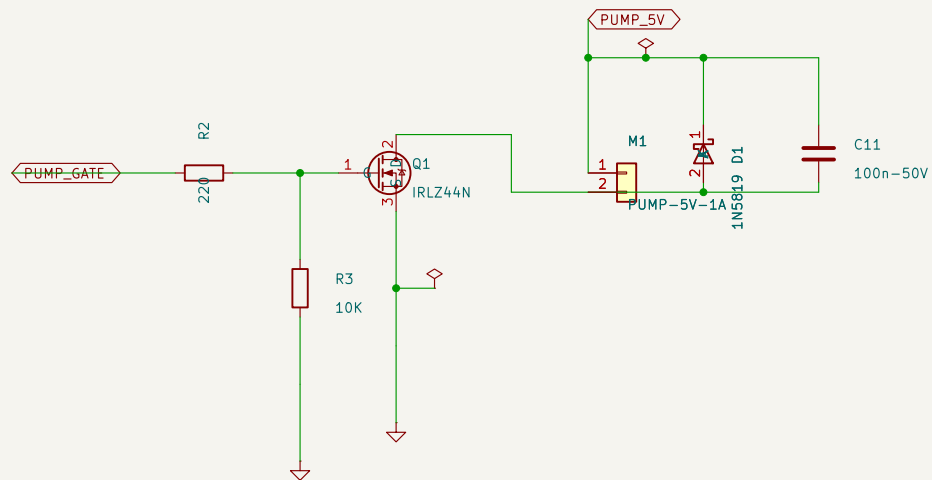

Pump XOR LED interlock (server-paced): combined 3.8A run exceeds the MT3608 2A setting. D1 K faces the fused branch.

Generated with SKIDL

Sheet: /
File: pods_s_pump1.kicad_sch


Title: GrowMate Pods carrier rev A

Size: A4 Date: 2026-09-27

KiCad E.D.A. 10.0.6

Rev:

Id: 1/1

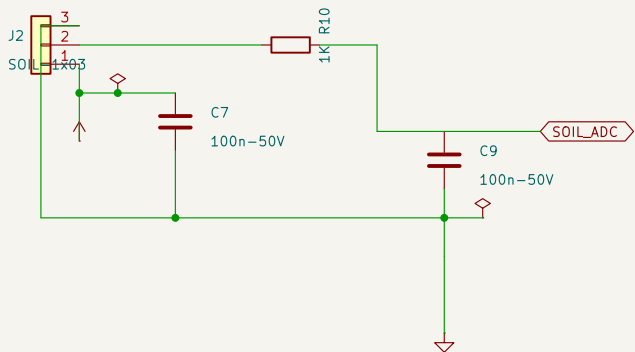

Soil: DRY (air) vs WET (saturated) raw ends, server-side.

Generated with SKIDL


Sheet: /
File: pods_s_soil1.kicad_sch

Title: GrowMate Pods carrier rev A

Size: A4 Date: 2026-09-27

KiCad E.D.A. 10.0.6

Rev:
Id: 1/1

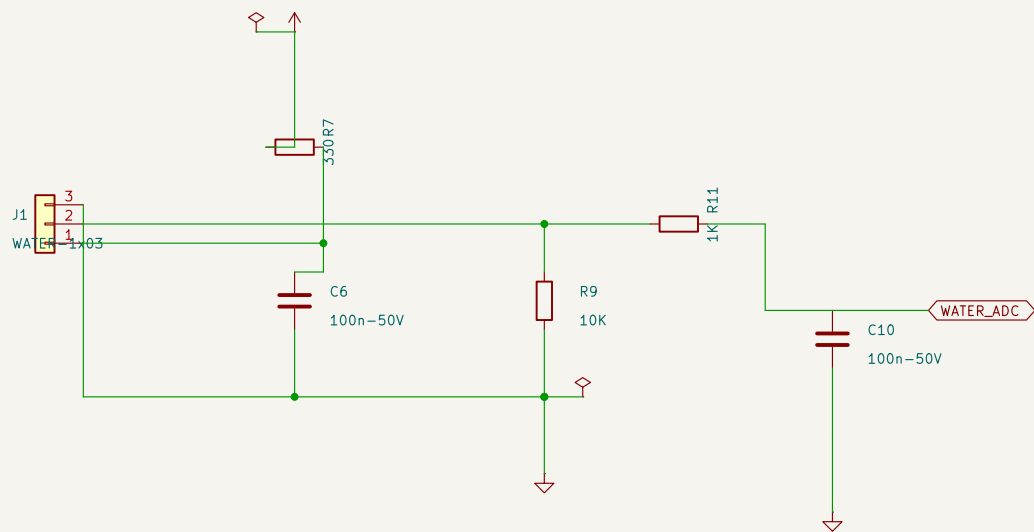

R7 330R: tank-probe VCC series (dead-short -> 10mA).
R9 10K: open probe reads -0 = EMPTY. Continuous-DC probe
is a consumable (rinses + spares, see 02-power).

Generated with SKIDL		
Sheet: /		
File: pods_s_water1.kicad_sch		
Title: GrowMate Pods carrier rev A		
Size: A4	Date: 2026-09-27	Rev:
KiCad E.D.A. 10.0.6	Id: 1/1	