




Electron EL-UHF-RMT01

Modul RFID Reader Writer dengan ukuran kecil dan konsumsi daya rendah. Sudah termasuk USB to TTL untuk memudahkan percobaan di komputer, lalu development bisa dilakukan di microcontroller atau perangkat lain dengan interface TTL 3.3V.

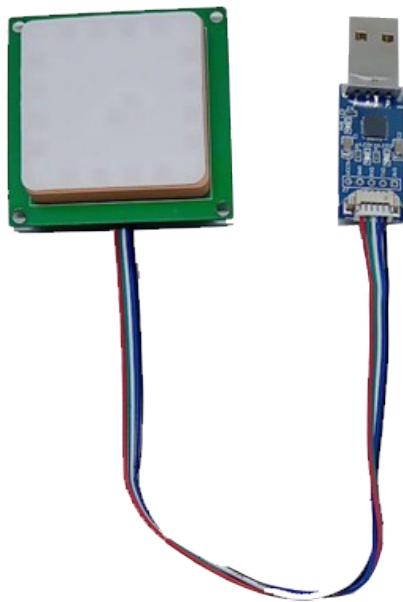

Standar Protokol	EPC Gen2 (EPC ISO18000-6C)
Antenna power output	0 -- 26 dBm (bisa diatur)
Jarak Baca	1.5 meter (tergantung tag dan lingkungan) dengan pembacaan melebar
Kecepatan baca	> 50 tag / detik
Ukuran Modul	50 x 50 x 9,6 mm
Interface Header	5 pin wafer
Panjang kabel	20 cm

PIN Definition

1	GND (Ground)
2	EN (Enable >1.5V)
3	RXD (TTL Level 3.3V)
4	TXD (TTL Level 3.3V)
5	VCC (Power Supply 3-5V)

Operating Voltage	DC 3.5 V -- 5 V
Standby current	<80mA (EN pin high level)
Sleep state current	<100uA (EN pin low level)
Working current	180mA @ 3.5V (26 dBm Output , 25°C) , 110mA @ 3.5V (18 dBm Output, 25°C) .
Start Time	<100ms.
Operating temperature	-20 °C -- 70 °C
Storage temperature	-20 -- 85 °C
Working humidity	<95% (25 °C)
Wireless interface protocol	EPC global UHF Class 1 Gen 2 / ISO 18000-6C
Working Frequency	865-928 MHz
Output power range	15-26 dBm
Output power accuracy	+/- 1dB
Output power flatness	+/- 0.2dB
Receiving sensitivity	< -70dBm
Inventory peak speed	> 50 tags/sec
Tag buffer	200 labels @ 96 bit EPC
RSSI Reading	Supported
Communication Interface	TTL UART
Communication baud rate	115200 bps
Cooling method	Air cooling (no need for external heat sink)

