




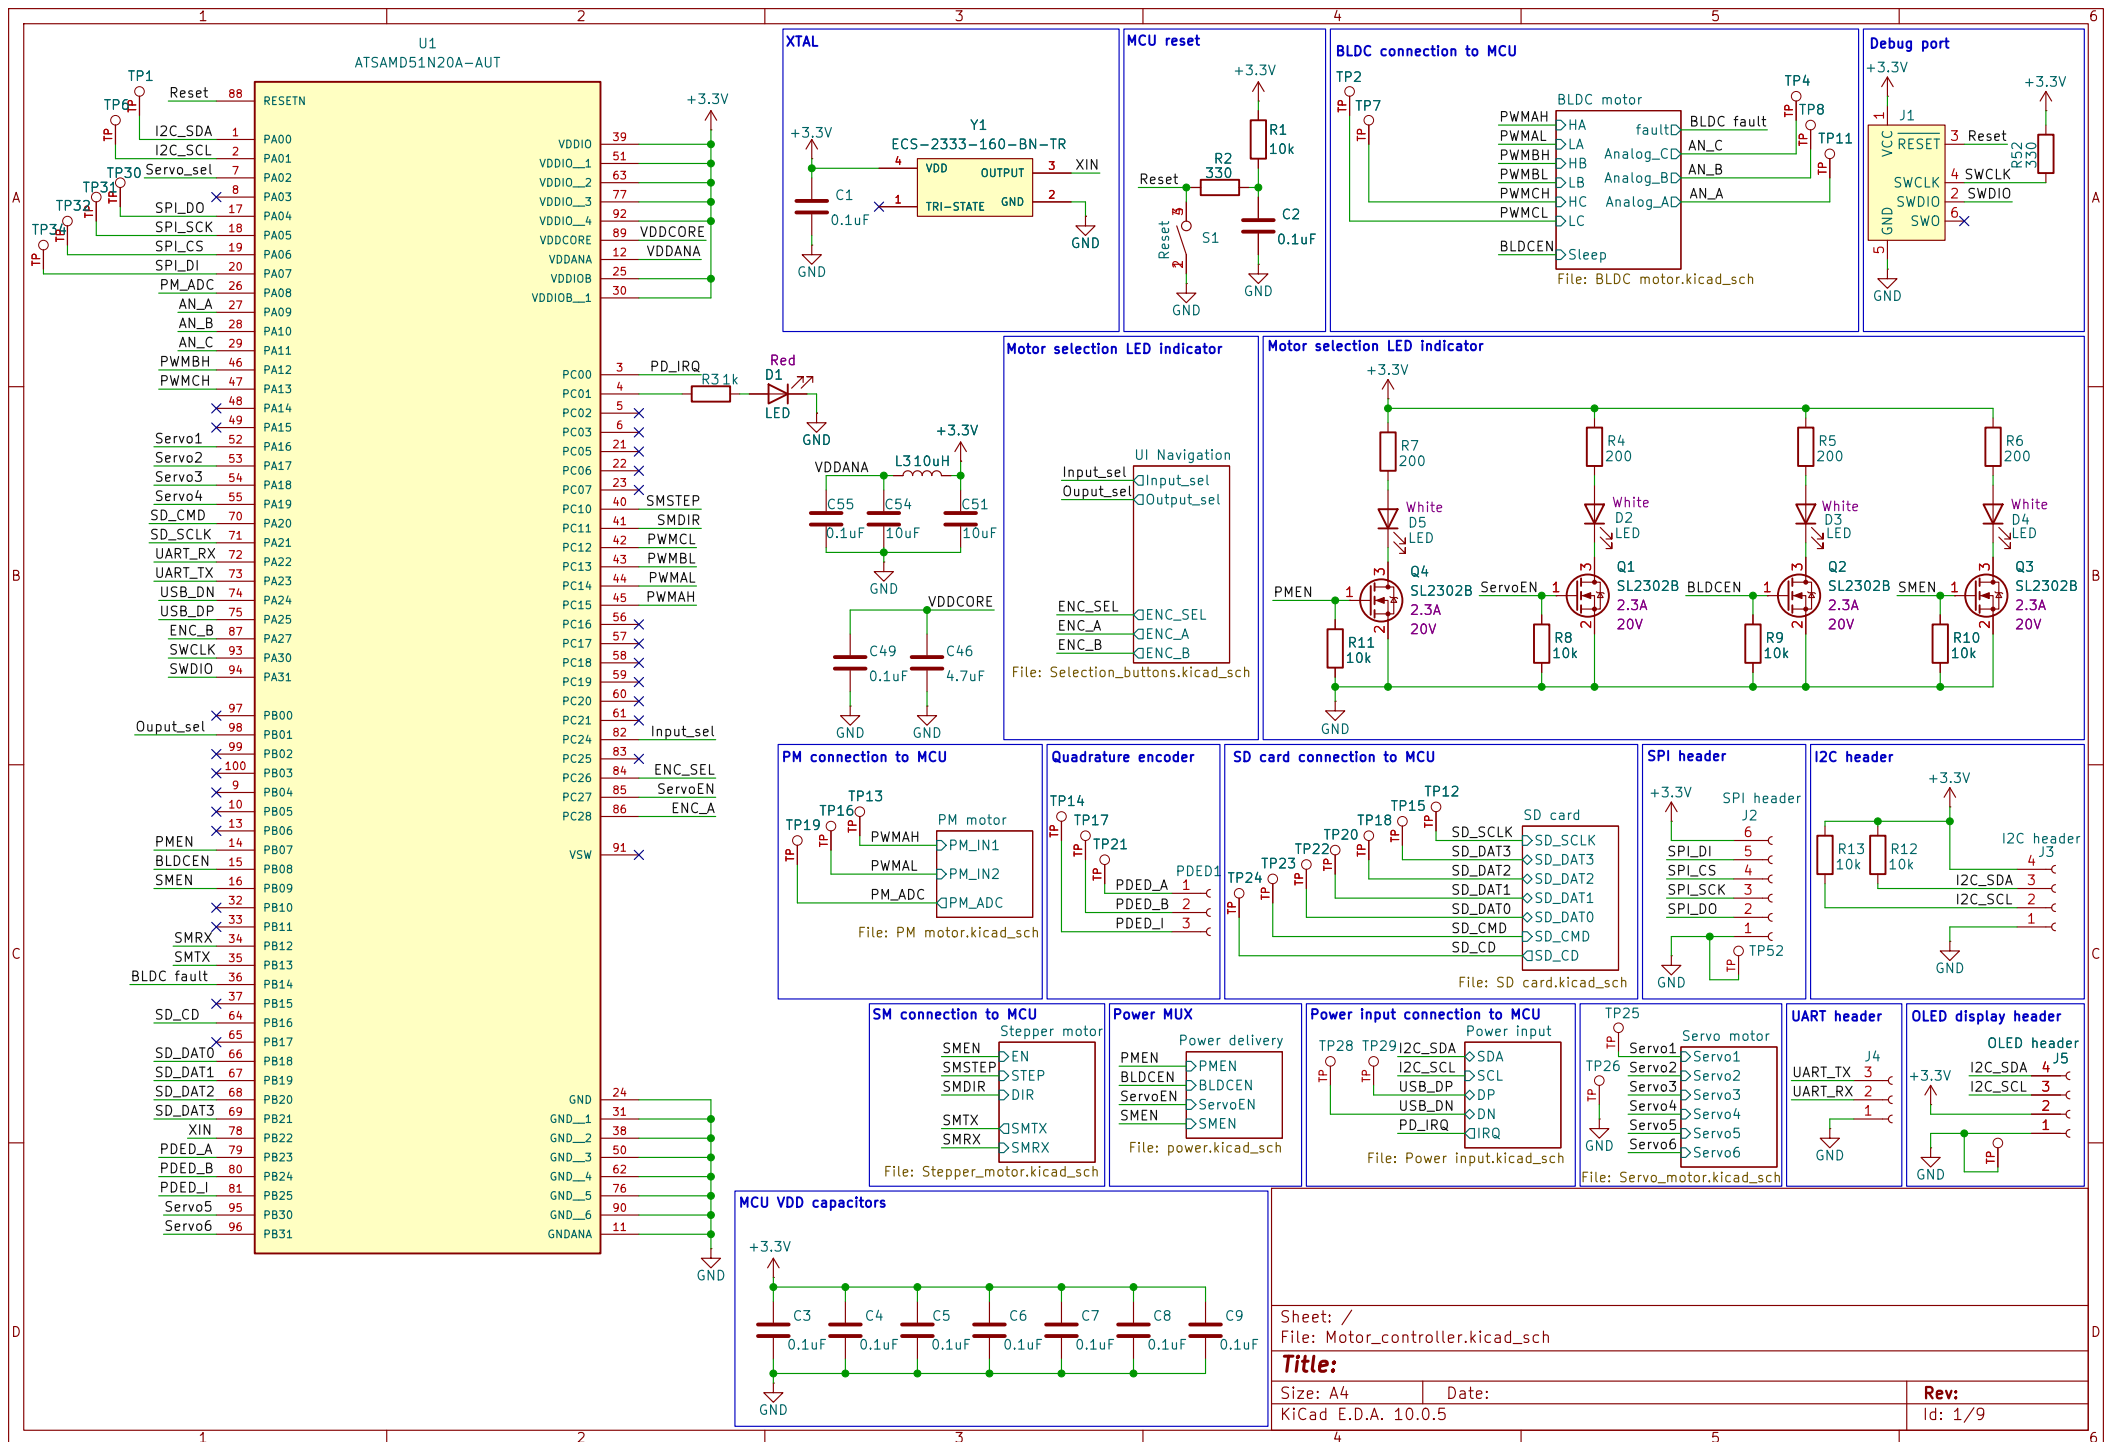


USB type C

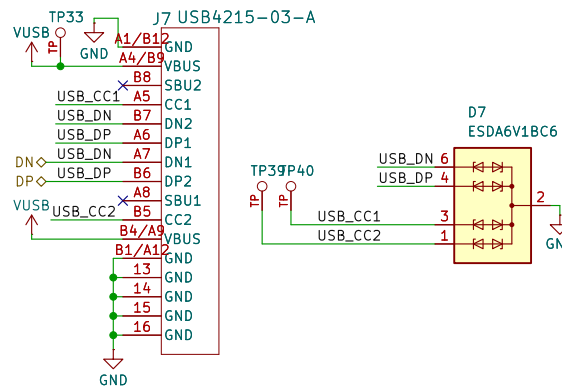


USB PD

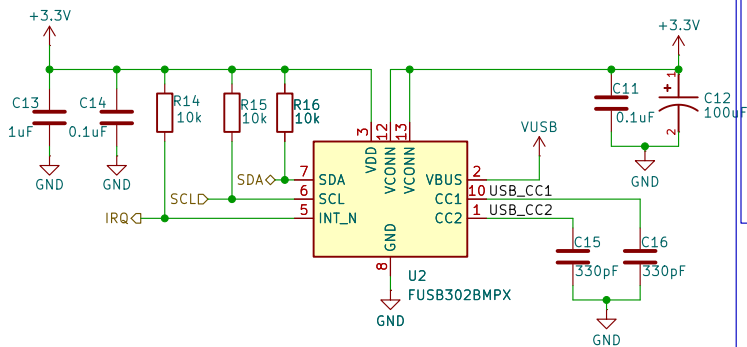

Power jack

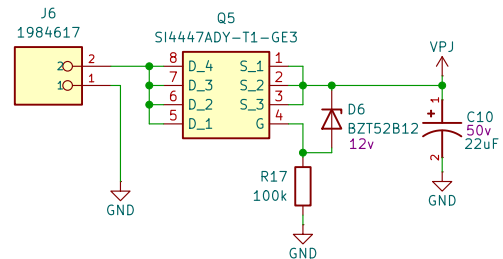

Power line MUX

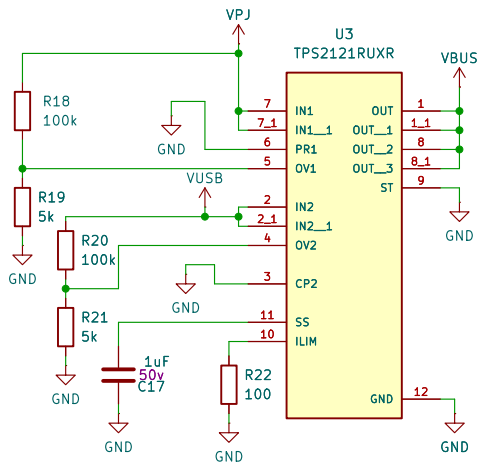

1.06v over voltage (OV) protection assuming max vin = 21v
In rush current limit (ILIM) = 3A [3 ~ 100/59^{0.861})

Sheet: /Power input/
File: Power input.kicad_sch

Title:

Size: A4	Date:
----------	-------


KiCad E.D.A. 10.0.5

Date:


Rev:

Id: 2/9


Logic power

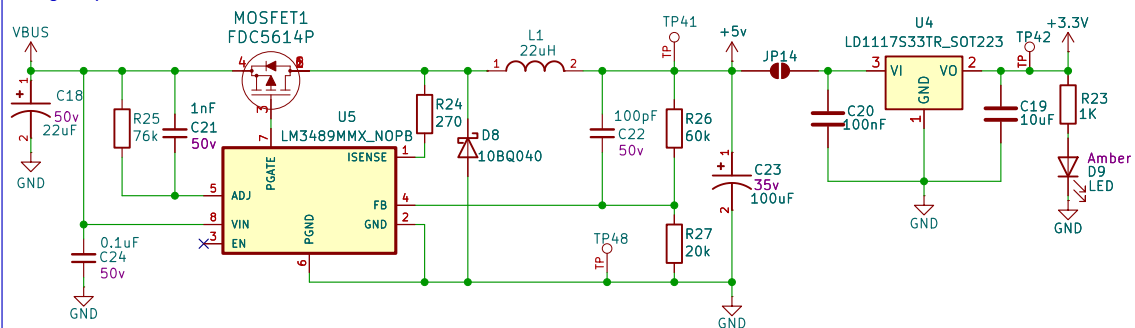


Motor power

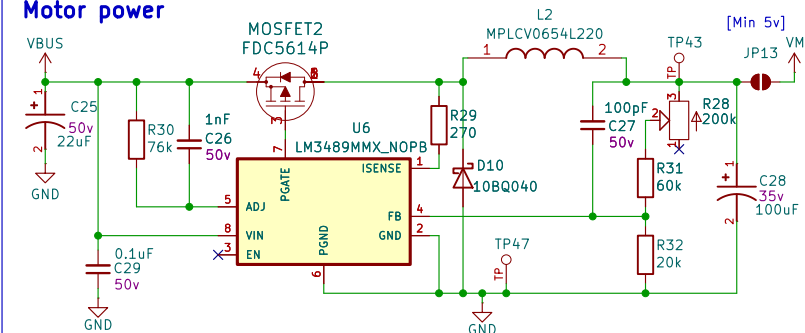


Stepper motor power switch

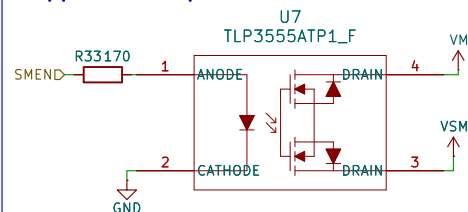


Servo motor power switch

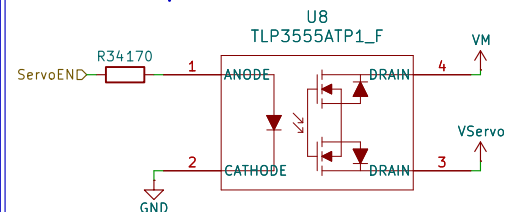

BLDC motor power switch

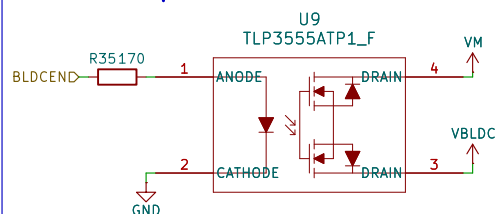

PM motor power switch

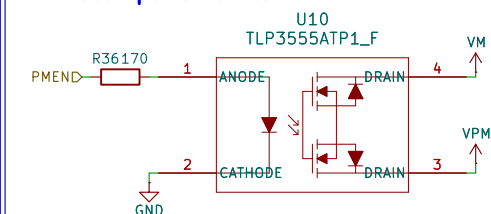

Sheet: /Power delivery/
File: power.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 10.0.5

Rev:

Id: 3/9

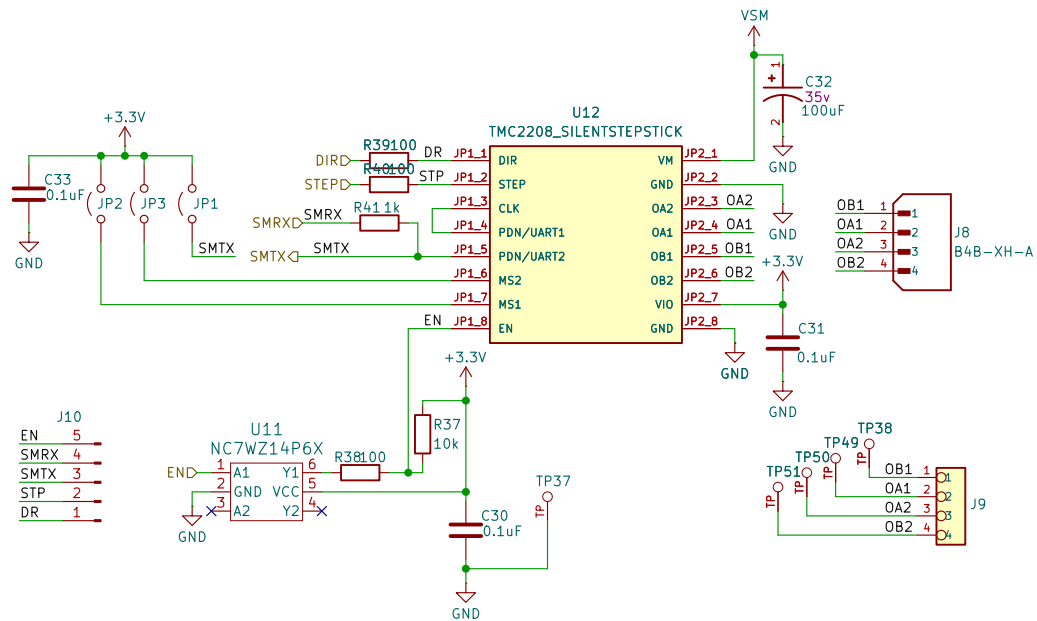

VRef 0...2.5V (0.11 Ohm sense resistor)
 >=2.50V 100% - 1.77A RMS
 1.25V 50% - 0.88A RMS
 0.50V 20% - 0.35A RMS

EN (with pull-up)
 GND driver enabled
 VCC driver disabled

PDN/UART (with pull-down)
 GND automatic standstill current reduction
 VCC automatic standstill power down disable
 optional UART interface

CLK (with pull-down)
 GND internal clock
 optional supply external clock

MS1	MS2	Steps
GND	GND	8
VIO	GND	2
GND	VIO	4
VIO	VIO	16



Sheet: /Stepper motor/
 File: Stepper_motor.kicad_sch

Title:


Size: A4
 KiCad E.D.A. 10.0.5

Date:

Rev:
 Id: 4/9

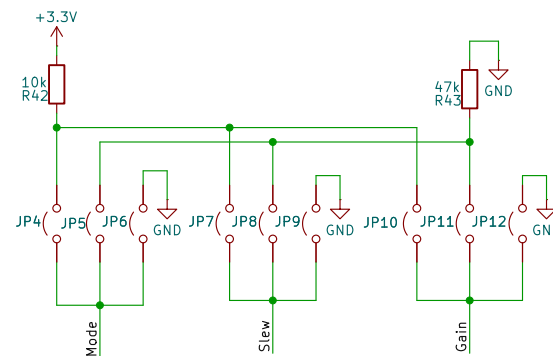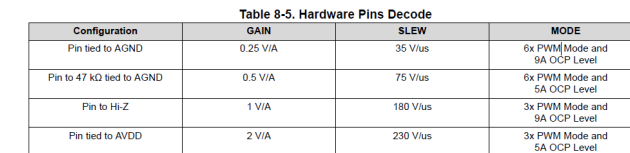

Rev:
Id: 5/9

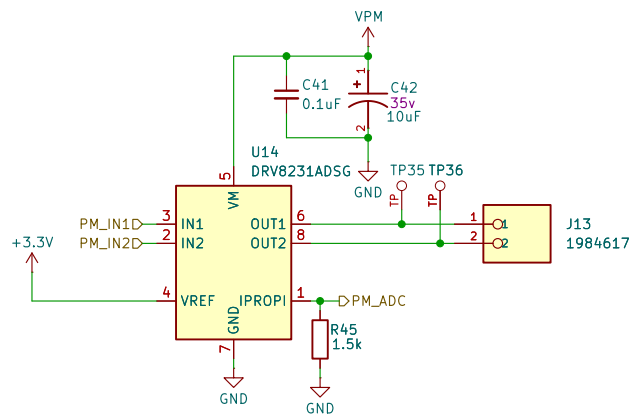

Sheet: /PM motor/
File: PM motor.kicad_sch

Title:



Size: A4

Date:

KiCad E.D.A. 10.0.5

Rev:

Id: 6/9

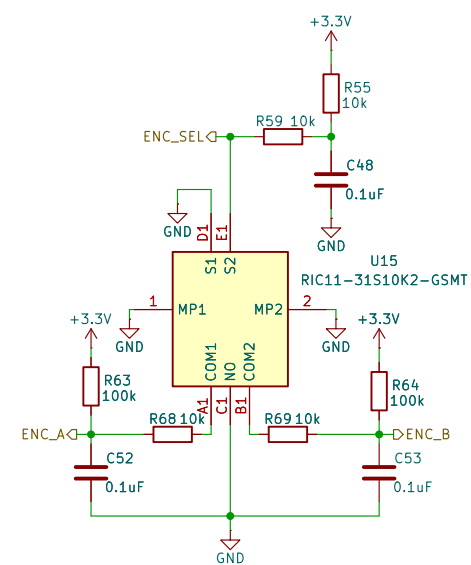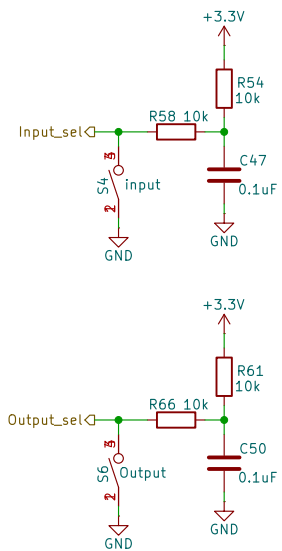

Sheet: /UI Navigation/
File: Selection_buttons.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 10.0.5

Rev:

Id: 8/9

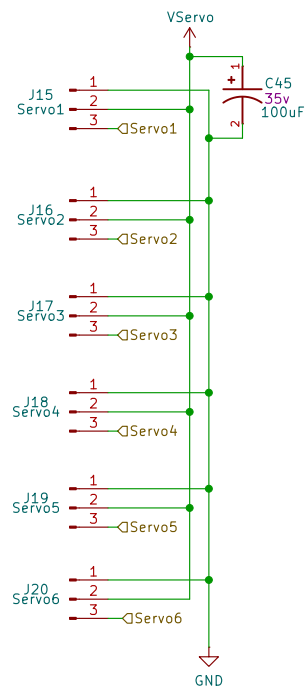

Sheet: /Servo motor/
File: Servo_motor.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 10.0.5

Rev:

Id: 9/9