Power Nano, single-channel ACS724 schematic (thrust stand), rev 2

Dot = wires joined. Hop (little arch) = wires cross, NOT joined.

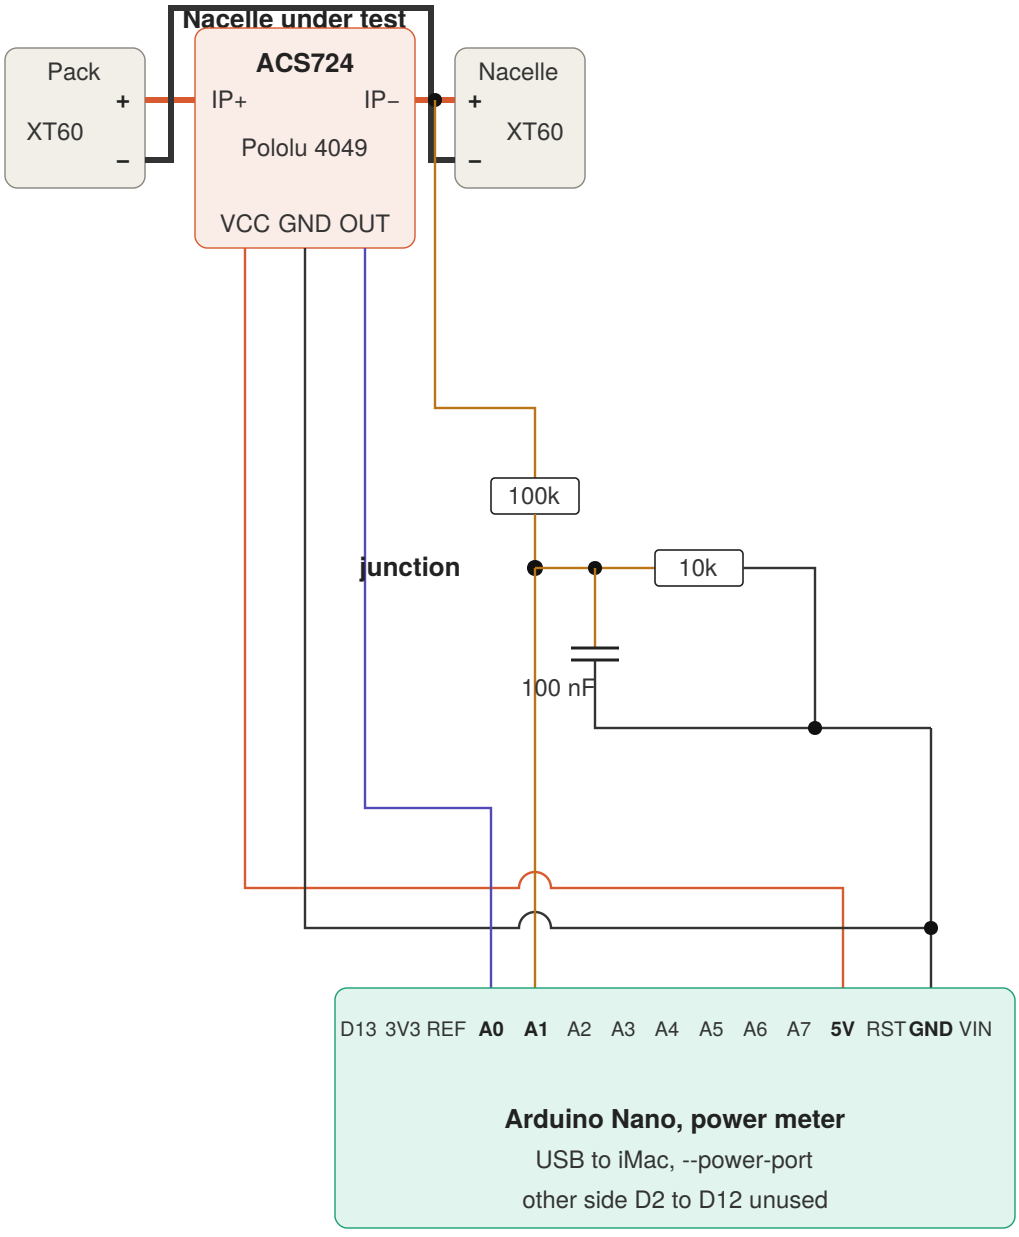

Legend

- Dot: these wires are soldered together (one node)
- Hop: wires cross on the page only, no connection
- Pack positive, 12 AWG, through IP+ then IP–, board arrow toward nacelle
- Pack negative, 12 AWG, straight pack to nacelle, never on the sensor board
- VCC, red 22 to 24 AWG, sensor board to Nano 5V
- GND, black 22 to 24 AWG, sensor board, 10k and cap all to Nano GND
- OUT, current signal, to A0 (port channel in live.py)
- Voltage sense: nacelle-side positive, 100k, junction, 10k to GND. Junction also goes to A1 and to the cap.
  Four things meet at the junction: 100k, 10k, 100 nF cap, A1 wire. Cap's other leg and 10k's other leg go to GND.