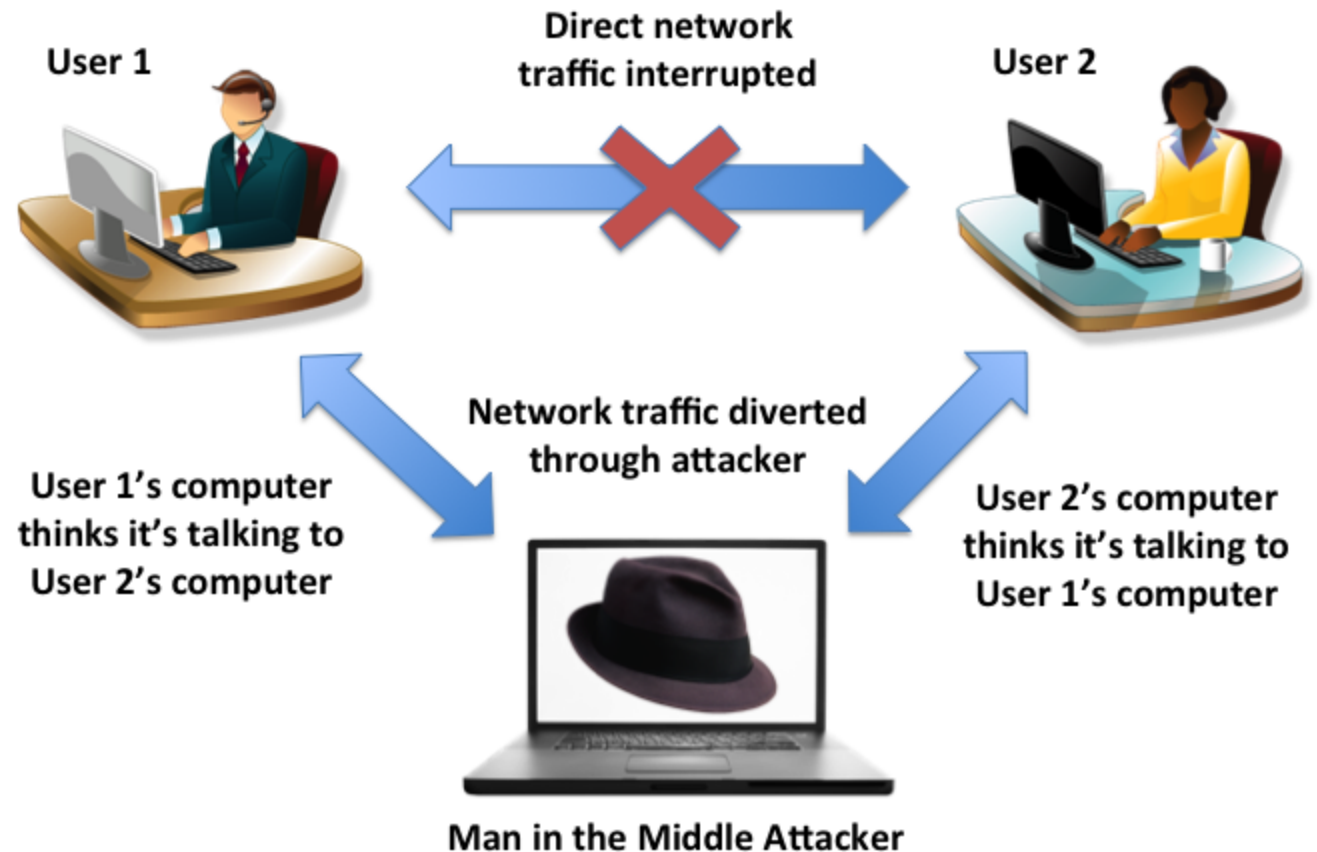# Man-in-the-Middle Attack

Man-in-the-middle (MITM) Attack

Man-in-the-middle attack (MITM) are a common type of cybersecurity attacks that allow attackers to eavesdrop on the communication between two targets. The attack takes place in between two legitimately communicating hosts, allowing the attacker to "listen" to a conversation they should normally not be able to listen to, hence the name "man-in-the-middle."

User 1

Direct network traffic interrupted

User 2

User 1's computer thinks it's talking to User 2's computer

Network traffic diverted through attacker

User 2's computer thinks it's talking to User 1's computer

Man in the Middle Attacker

IP spoofing جعل IP

- IP spoofing is a method adopted by attackers to send forged جعلی address in their attack traffic:
  - i.e., they can send an IP packet with an IP address of their wish!
- Most of the times, spoofing is used by an attacker mainly for the following reasons:
  - To conduct a DDoS (Distributed Denial of Service) attack, and he does not want the response from the target machine to reach him.
  - To compromise source-based authentication.
   به خطر افتادن   احراز هویت
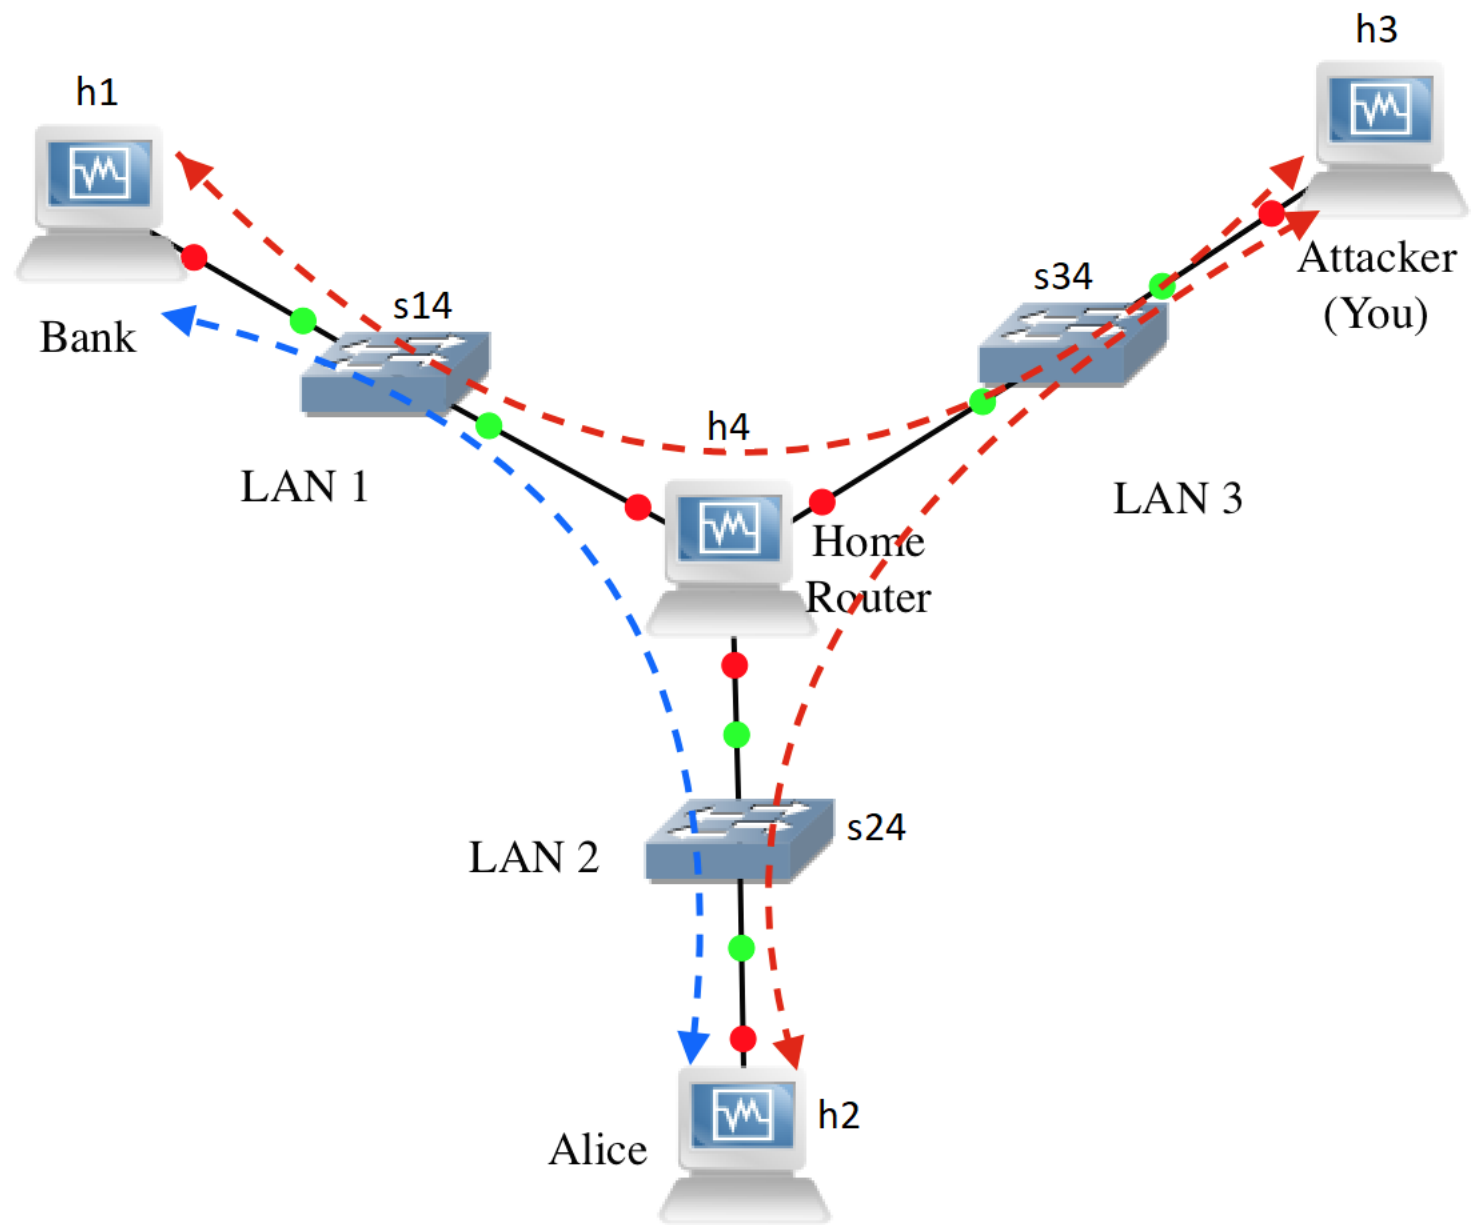
```python
12          "Function definition: This is called from the main function"
13   def firstNetwork():
14
15          "Create an empty network and add nodes to it."
16          net = Mininet()
17          info( '*** Adding controller\n' )
18          net.addController( 'c0' )
19
20          info( '*** Adding hosts\n' )
21          h1 = net.addHost( 'h1', ip='10.10.14.1/24')
22          h2 = net.addHost( 'h2', ip='10.10.24.2/24')
23          h3 = net.addHost( 'h3', ip='10.10.34.3/24')
24          h4 = net.addHost( 'h4', ip='10.10.14.4/24')
25
26          info( '*** Adding switch\n' )
27          s14 = net.addSwitch( 's14' )
28          s24 = net.addSwitch( 's24' )
29          s34 = net.addSwitch( 's34' )
30
31          info( '*** Creating links\n' )
32          net.addLink( h1, s14 )
33          net.addLink( h4, s14 )
34
35          net.addLink( h2, s24 )
36          net.addLink( h4, s24 )
37
38          net.addLink( h3, s34 )
39          net.addLink( h4, s34 )
40
41          h4.cmd('ip addr add 10.10.24.4/24 dev h4-eth1')
42          h4.cmd('ip addr add 10.10.34.4/24 dev h4-eth2')
43          h4.cmd('echo 1 > /proc/sys/net/ipv4/ip_forward')
44   attacker  h3.cmd('echo 1 > /proc/sys/net/ipv4/ip_forward')
45
46          info( '*** Starting network\n')
47          net.start()
48          h1.cmd('ip route add default via 10.10.14.4')
49          h2.cmd('ip route add default via 10.10.24.4')
50          h3.cmd('ip route add default via 10.10.34.4')
51
```
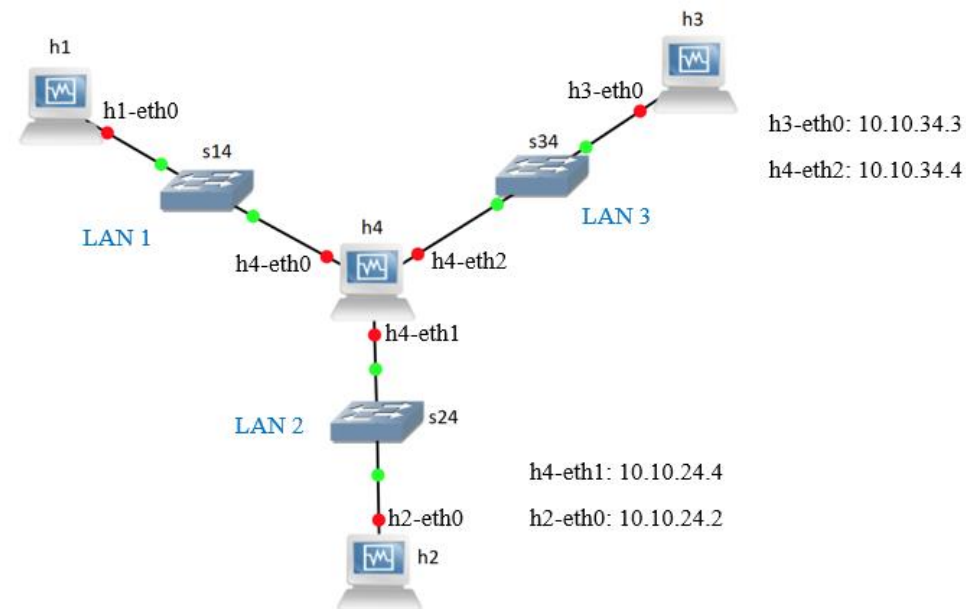
```python
51
52          "This is used to run commands on the hosts"
53
54          info( '*** Starting terminals on hosts\n' )
55          h1.cmd('xterm -xrm "XTerm.vt100.allowTitleOps: false" -T h1 &')
56          h2.cmd('xterm -xrm "XTerm.vt100.allowTitleOps: false" -T h2 &')
57          h3.cmd('xterm -xrm "XTerm.vt100.allowTitleOps: false" -T h3 &')
58          h4.cmd('xterm -xrm "XTerm.vt100.allowTitleOps: false" -T h4 &')
59
60          info( '*** Running the command line interface\n' )
61          CLI( net )
62
63          info( '*** Closing the terminals on the hosts\n' )
64          h1.cmd("killall xterm")
65          h2.cmd("killall xterm")
66          h3.cmd("killall xterm")
67          h4.cmd("killall xterm")
68
69          info( '*** Stopping network' )
70          net.stop()
71
72   "main Function: This is called when the Python file is run"
73   if __name__ == '__main__':
74          setLogLevel( 'info' )
75          firstNetwork()
76
```
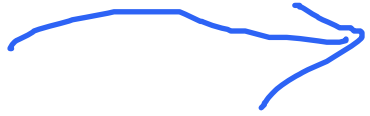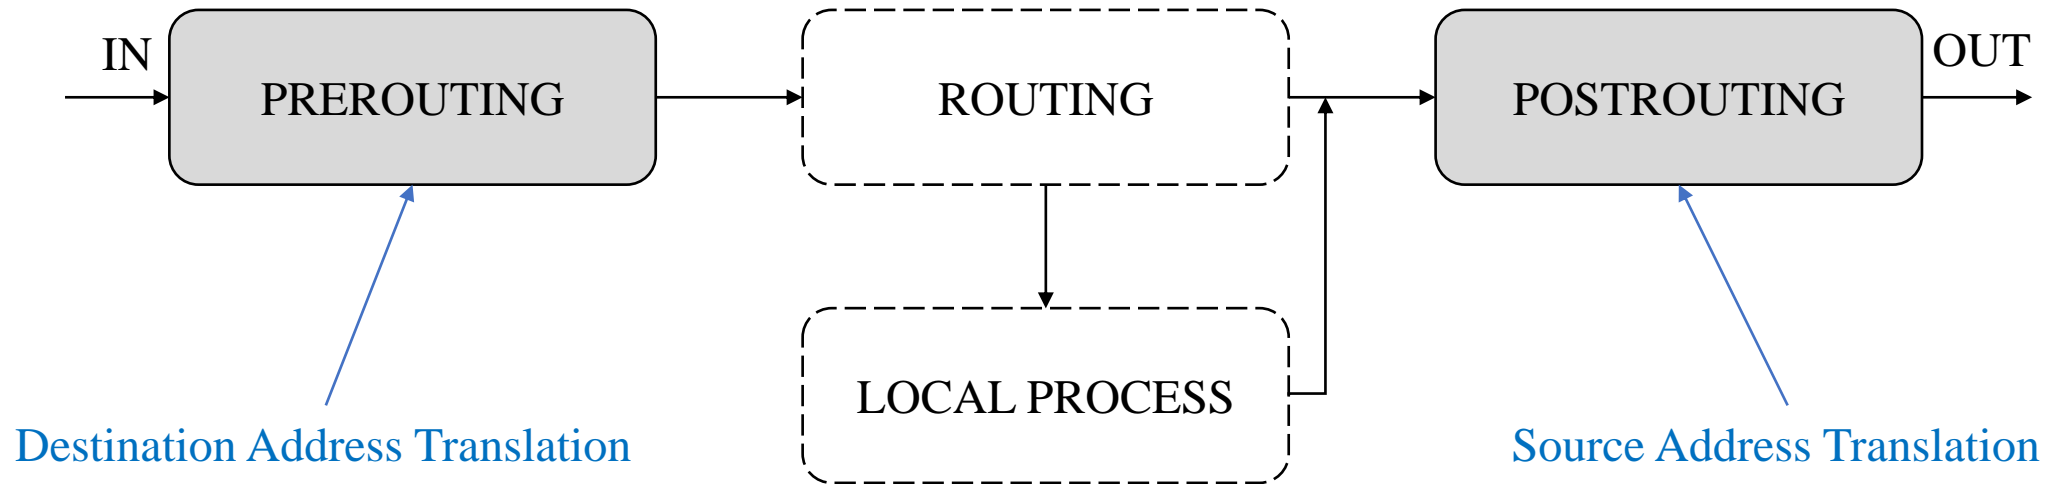
iptables

SDN: switches can route with different rules

controller(routing), switches(forwarding)

- The Linux kernel contains a packet filter framework called **netfilter** which enables a Linux machine to use rule chains and configure the IP packets. When a connection tries to establish itself on your system, iptables looks for a rule in its list to match it to. If it doesn't find one, it resorts to the default action.

- The three types of iptables: Quality of service
    1. Mangle: to manage class-based queuing, modify QoS, TTL, …
    2. NAT: to change the IP addresses of the packets
    3. Filter: to accept or drop packets

- iptables command:
    - $ iptables -t [table] […]

NAT table

- This table has two types of rule chains:
    1. PREROUTING: to modify packets as soon as they arrive at the computer
    2. POSTROUTING: to modify packets that are ready to leave the computer

IN → [PREROUTING] → [ROUTING] → [POSTROUTING] → OUT

[LOCAL PROCESS]

Destination Address Translation

Source Address Translation

Destination NAT

- PREROUTING rules are used for Destination NAT
- # iptables -t nat -A PREROUTING [match pattern] -j [action]
  - -A: Append a rule at the end of the PREROUTING chain
  - [match pattern]:
    - -p [protocol]: -p icmp, -p tcp, -p udp, …
    - -s [source_ip]: -s 192.168.1.1
    - -d [destination_ip]: -d 192.168.2.2
    - -i [incoming_interface_name]: -i h1-eth0, -i h4-eth2
    - (Only for tcp & udp:) --dport [destination_port_number]: --dport 80
  - [action]:
    - DNAT --to [desired_destination_ip]
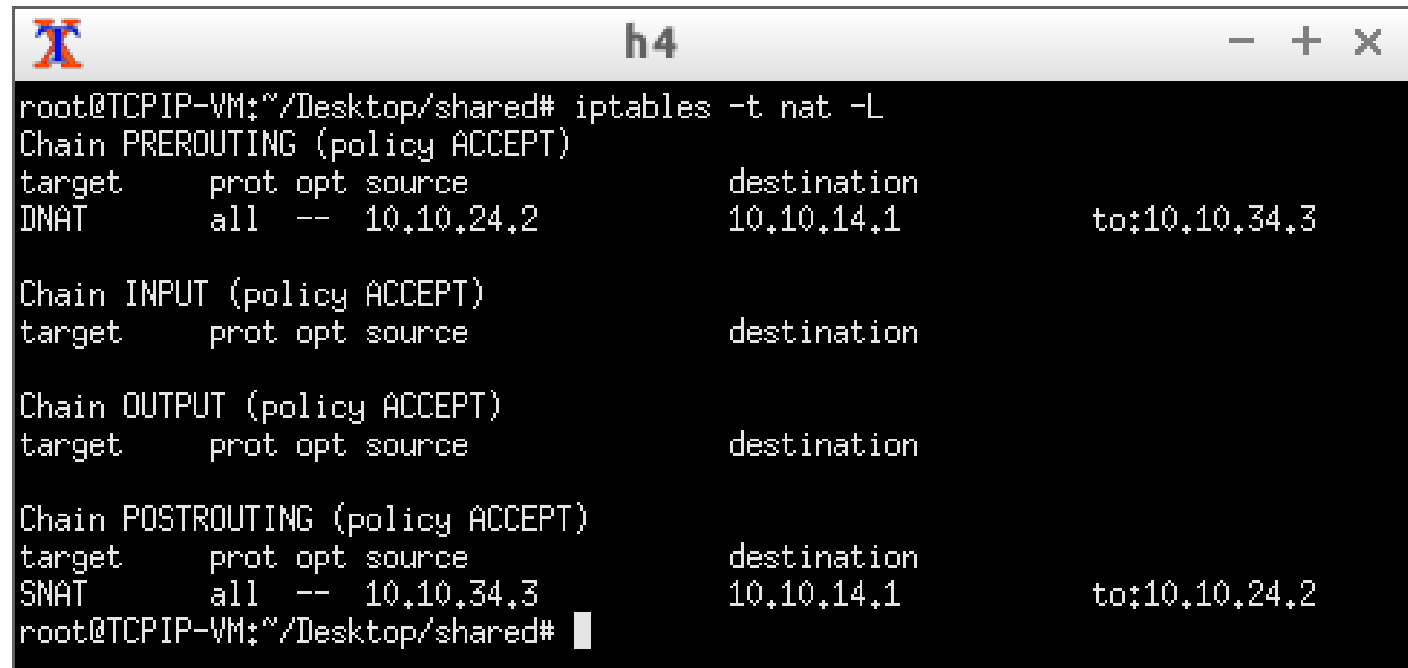
DNAT examples

- *Change destination of TCP packets from 1.1.1.1 into 3.3.3.3:*
  # iptables -t nat -A PREROUTING -p tcp -s 1.1.1.1 -j DNAT --to 3.3.3.3

- *Change destination of TCP packets to 2.2.2.2 into 3.3.3.3:*
  # iptables -t nat -A PREROUTING -p tcp -d 2.2.2.2 -j DNAT --to 3.3.3.3

- *Change destination of packets from 1.1.1.1 to 2.2.2.2 into 3.3.3.3:*
  # iptables -t nat -A PREROUTING -s 1.1.1.1 -d 2.2.2.2 -j DNAT --to 3.3.3.3

Rule chains

- Flush (remove) all rules in a chain:
  - # iptables -t nat -F PREROUTING (POSTROUTING)
- Flush (remove) all rules:
  - # iptables -t nat -F
- List rules:
  - # iptables -t nat -L

```
root@TCPIP-VM:~/Desktop/shared# iptables -t nat -L
Chain PREROUTING (policy ACCEPT)
target     prot opt source               destination
DNAT       all  --  10.10.24.2           10.10.14.1          to:10.10.34.3

Chain INPUT (policy ACCEPT)
target     prot opt source               destination

Chain OUTPUT (policy ACCEPT)
target     prot opt source               destination

Chain POSTROUTING (policy ACCEPT)
target     prot opt source               destination
SNAT       all  --  10.10.34.3           10.10.14.1          to:10.10.24.2
root@TCPIP-VM:~/Desktop/shared#
```
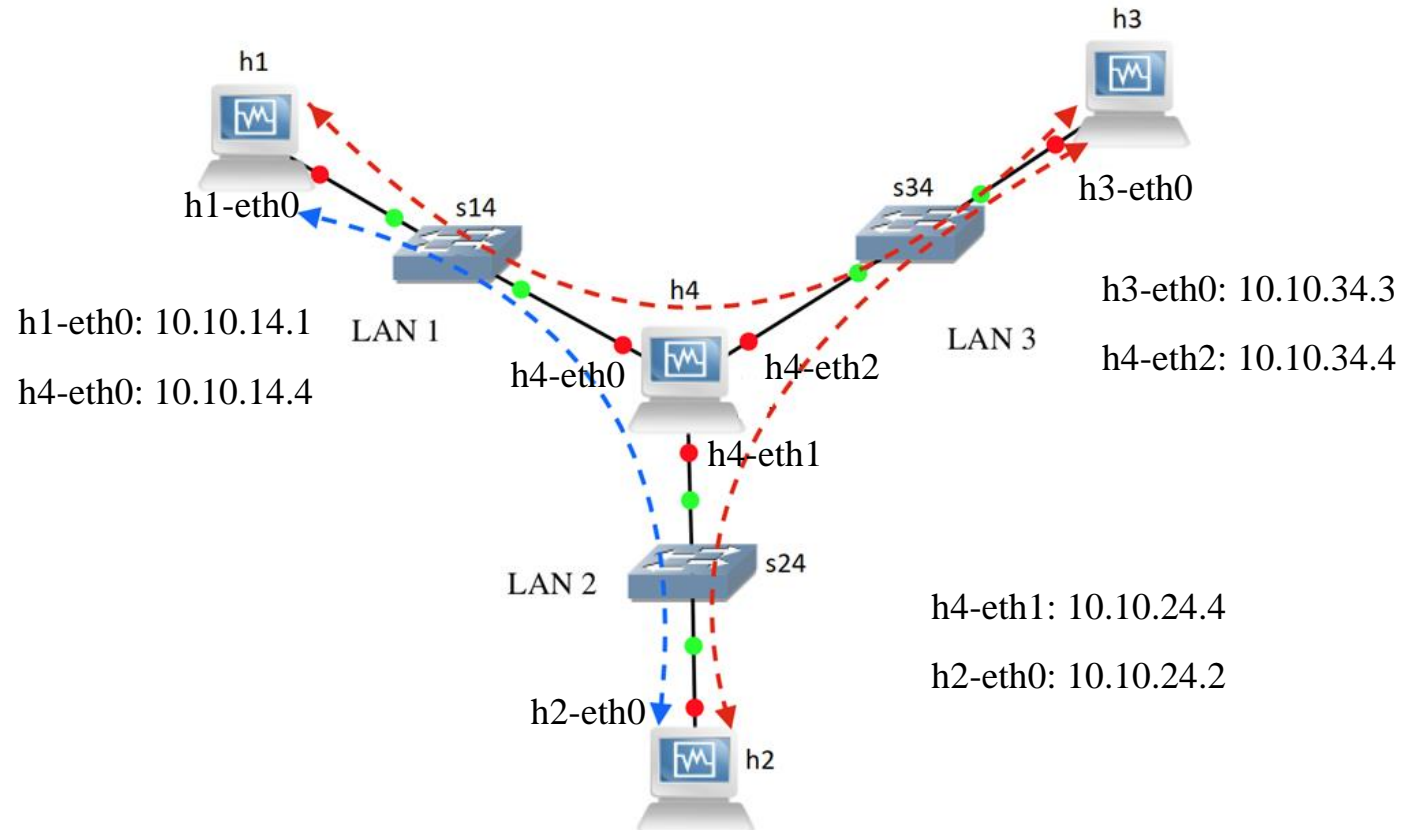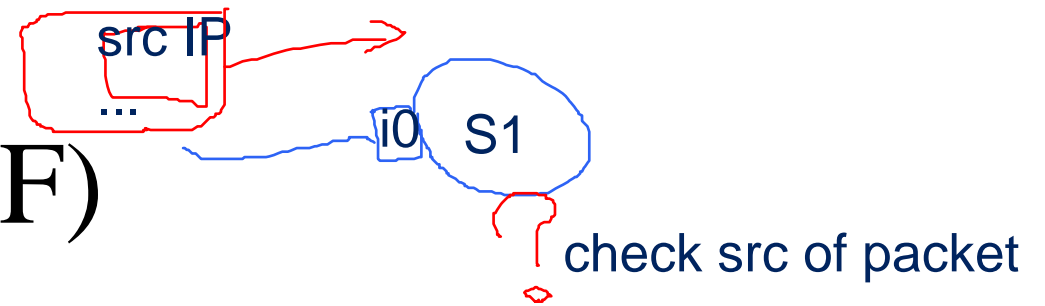
Man-in-the-middle Attack

- # iptables -t nat -A PREROUTING -s [source_ip] -d [destination_ip] -j DNAT --to [desired_destination_ip]

Reverse Path Filtering (RPF)

src IP

...

i0   S1

check src of packet

- Reverse path filtering is a mechanism adopted by the Linux kernel, as well as most of the networking devices out there to check whether a receiving packet source address is routable.

- So in other words, when a machine with reverse path filtering enabled receives a packet, the machine will first check whether the source of the received packet is reachable through the interface it came in.

  - If it is routable through the interface which it came, then the machine will accept the packet.

  - If it is not routable through the interface which it came, then the machine will drop that packet. مشکوکه

- Basically, if the reply to this packet wouldn't go out the interface this packet came in, then this is a bogus packet and should be ignored.

Source NAT

- POSTROUTING rules are used for Source NAT
- # iptables -t nat -A POSTROUTING [match pattern] -j [action]
  - [match pattern]:
    - -p [protocol]: -p icmp, -p tcp, -p udp, …
    - -s [source_ip]: -s 192.168.1.1
    - -d [destination_ip]: -d 192.168.2.2
    - -o [outgoing_interface_name]: -o h1-eth0, -o h4-eth2
    - (Only for tcp & udp:) --sport [source_port_number]: --sport 80
  - [action]:
    - SNAT --to [desired_source_ip]
    - MASQUERADE بالماسکه   مبدا واقعی بسته پوشانده میشه
      - Source IP is replaced with the ip of the host outgoing interface
      - MASQUERADE ≡ SNAT --to [outgoing_interface_ip]

SNAT examples

- *Change source of packets from 1.1.1.1 leaving at h4-eth0 into 3.3.3.3:*
  # iptables -t nat -A POSTROUTING -o h4-eth0 -s 1.1.1.1 -j SNAT --to 3.3.3.3

- *Change source of packets to 2.2.2.2 leaving at h4-eth0 into 3.3.3.3:*
  # iptables -t nat -A POSTROUTING -o h4-eth0 -d 2.2.2.2 -j SNAT --to 3.3.3.3

- *Change source of packets from 1.1.1.1 to 2.2.2.2 into 3.3.3.3:*
  # iptables -t nat -A POSTROUTING -s 1.1.1.1 -d 2.2.2.2 -j SNAT --to 3.3.3.3

Man-in-the-middle Attack

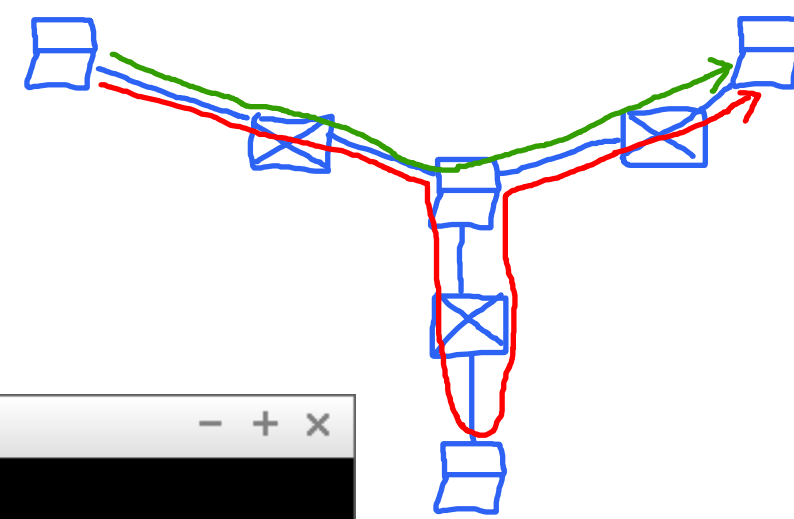- # iptables -t nat -A POSTROUTING -s [source_ip] -d [destination_ip] -j SNAT --to [desired_source_ip]
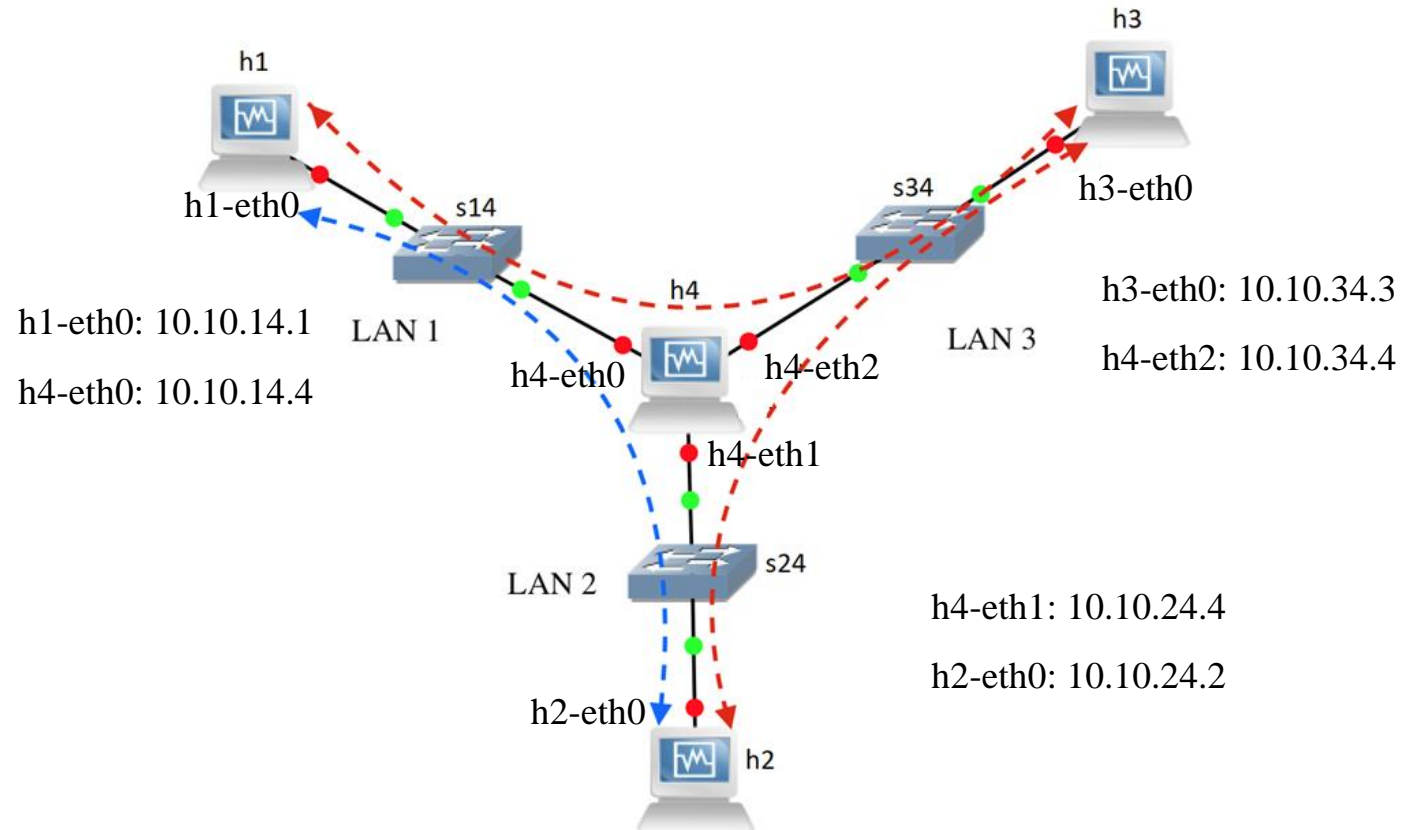
How can Alice notice the attack?

- Before attack:

```
root@TCPIP-VM:~/Desktop/shared# ping 10.10.14.1
PING 10.10.14.1 (10.10.14.1) 56(84) bytes of data.
64 bytes from 10.10.14.1: icmp_seq=1 ttl=63 time=4.63 ms
64 bytes from 10.10.14.1: icmp_seq=2 ttl=63 time=6.00 ms
64 bytes from 10.10.14.1: icmp_seq=3 ttl=63 time=1.12 ms
64 bytes from 10.10.14.1: icmp_seq=4 ttl=63 time=1.24 ms
64 bytes from 10.10.14.1: icmp_seq=5 ttl=63 time=0.152 ms
^C
--- 10.10.14.1 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4006ms
rtt min/avg/max/mdev = 0.152/2.632/6.004/2.269 ms
root@TCPIP-VM:~/Desktop/shared#
```

less ttl

longer rtt

- After attack:

```
root@TCPIP-VM:~/Desktop/shared# ping 10.10.14.1
PING 10.10.14.1 (10.10.14.1) 56(84) bytes of data.
64 bytes from 10.10.14.1: icmp_seq=1 ttl=61 time=8.34 ms
64 bytes from 10.10.14.1: icmp_seq=2 ttl=61 time=10.6 ms
64 bytes from 10.10.14.1: icmp_seq=3 ttl=61 time=2.21 ms
64 bytes from 10.10.14.1: icmp_seq=4 ttl=61 time=0.238 ms
64 bytes from 10.10.14.1: icmp_seq=5 ttl=61 time=0.250 ms
^C
--- 10.10.14.1 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4007ms
rtt min/avg/max/mdev = 0.238/4.330/10.612/4.323 ms
root@TCPIP-VM:~/Desktop/shared#
```