

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

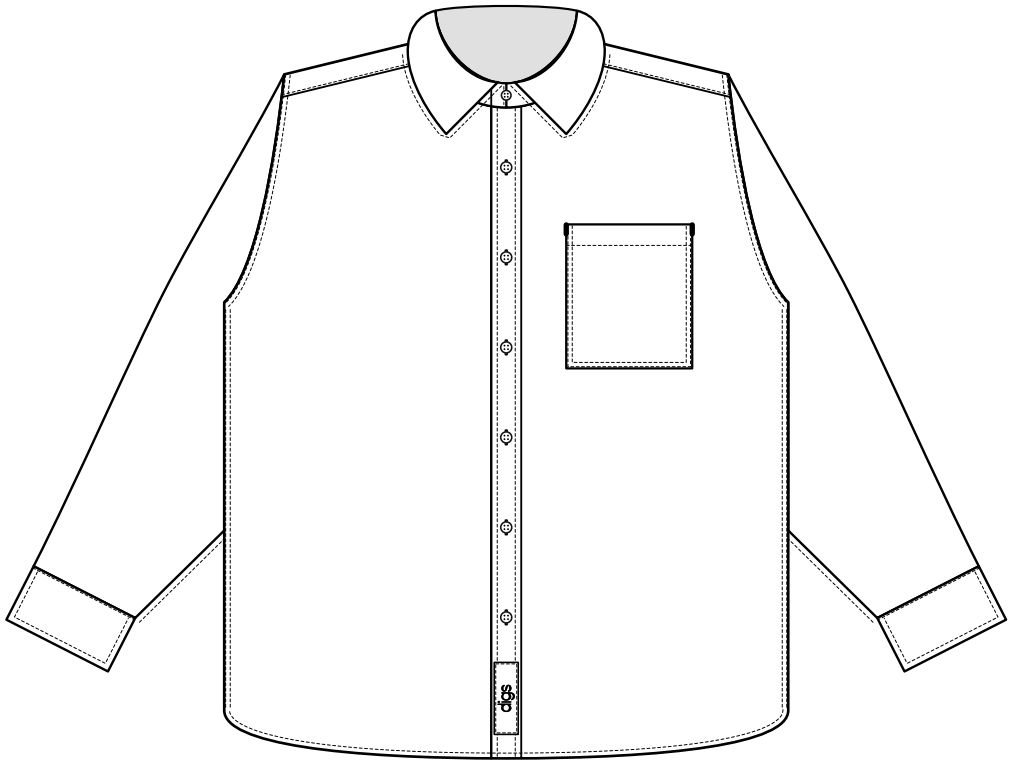

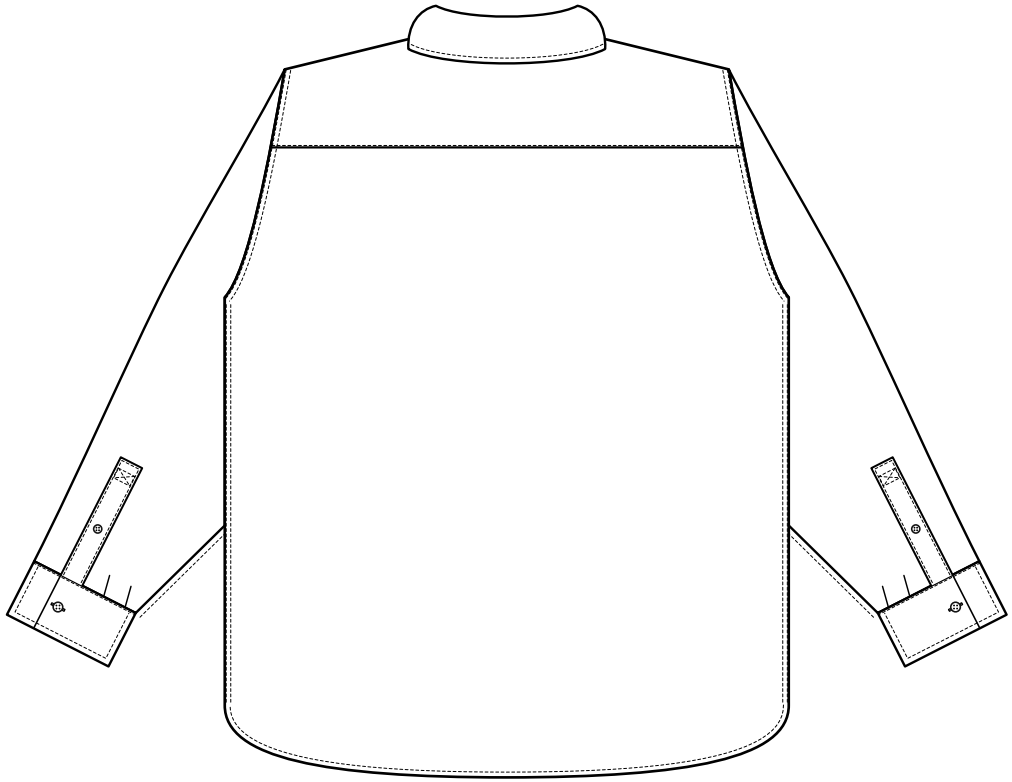

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

15 OCTOBER, 2026 - AC (REV 1)

- Fabric changed to **STRETCH 21 WALE NEEDLECORD**, 99% cotton / 1% elastane, approx. 305gsm × 140cm, 5% weft stretch (ref: Croft Mill). Replaces the Crown Vintage pincord blank.
- Construction follows the **ROWAN NOBEL FINE WALE CORD SHIRT** (see reference image page): point collar on a stand, one chest pocket, square single-button barrel cuff, tower sleeve placket, plain back with yoke, shirttail hem.
- **ONE-PIECE SLEEVE.** Remove the seam that runs down the back of the sleeve on the Rowan reference. Underarm seam only.
- **COLORWAY #1 LIGHT GREY**, from the AI concept images (ref #D0CCCC). The color standard is a physical swatch approved by digs under D65; final approval on a washed garment panel.
- **LOGO MOVED TO A TAG.** No embroidery on the outer back neck or yoke; the AC-LST-001 placement is not used. digs logo tag (L3): vertical woven label 1" x 3" on the face of the buttonhole placket, centered, bottom edge 1" above the hem; wordmark turned to read up toward the collar; sewn on after the wash. See artwork detail page.
- Fusing on the non-face plies only (under collar, inner stand, inner cuff, placket and facing inner plies) to protect the pile.
- Care label updated for 99/1 cotton/elastane: cool wash, do not tumble dry, line dry, cool iron on reverse.

15 OCTOBER, 2026 - AC (REV 0)

- Initial tech pack creation: Crown Vintage blank + 04/21/2025 customizations. Superseded by Rev 1.

OPEN ITEMS - DIGS TO CONFIRM BEFORE PROTO

- **1. Fabric + color.** Croft Mill lists this needlecord in navy and black only. Factory to source an equivalent (99/1, approx. 305gsm, 21 wale, 5% weft stretch) dyed to the light grey standard with a reactive dye that discharges in the permanganate wash. Stock-dyed cloth may not fade (AC-LST-001 wash house; custom dye MOQ 300kg per color).
- **2. Wash.** The ASUTE permanganate snow wash (AC-LST-001) lightly mottles a solid color; the AI images show a flat light grey. Keep ASUTE, or use a softener wash only. Either way, finish with a silicone softener (AC-LST-001 comment, 06/15/2025). The wash trial confirms shrinkage, color and elastane recovery.
- **3. Pockets + cuffs.** The 04/21/2025 customization list called for two pockets and a diagonal-cut cuff. This rev follows Rowan: one pocket, square cuff.
- **4. Fit.** Relaxed with a slight drop shoulder, between Rowan's regular fit and the oversized AI images.
- **5. Country of origin.** L1 and L2 read "Made in China"; change to the factory's country.
- **6. Fabric vs Rowan.** Rowan's Nobel shirt is 100% cotton fine wale with no stretch. This pack specs the 99/1 stretch needlecord.

ROWAN REFERENCE - ONE-PIECE SLEEVE: REMOVE THE SEAM DOWN THE BACK OF THE SLEEVE



COLOR TARGET - LIGHT GREY (AI CONCEPT IMAGES)





#D0CCCC
MEASURED FROM BOTH AI IMAGES; PHYSICAL SWATCH APPROVED UNDER D65 = STANDARD

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

POM	DESCRIPTION	TOL. +/-	M REQUESTED	M ACTUAL	DIFFERENCE	NEW SPEC	NOTES
A	HPS LENGTH AT CENTER FRONT	1/2	30				
A2	HPS LENGTH AT CENTER BACK	1/2	31				
A3	SHIRTTAIL DROP - SIDE SEAM HEM POINT TO CF HEM	1/4	2				
B	1/2 CHEST AT 1" BELOW UNDERARM	1/2	23 1/2				
C	1/2 HEM - STRAIGHT ACROSS AT SIDE SEAM HEM POINTS	1/2	23 1/2				
D	ACROSS SHOULDER	3/8	18 1/2				
E	SHOULDER SLOPE	1/8	1 1/2				
F	NECK WIDTH - HPS TO HPS	1/4	6 1/4				
G	FRONT NECK DROP	1/4	2 7/8				
H	BACK NECK DROP	1/8	3/4				
I	COLLAR STAND LENGTH - BUTTON CENTER TO END OF BUTTONHOLE	1/4	16				
I2	COLLAR STAND HEIGHT AT CB	1/8	1 1/4				
I3	COLLAR HEIGHT AT CB	1/8	1 3/4				
I4	COLLAR POINT LENGTH	1/8	3				
I5	COLLAR POINT SPREAD - TIP TO TIP, BUTTONED	1/4	5				
J	ARMHOLE DEPTH FROM HPS	1/4	11				
K	1/2 BICEP WIDTH AT 1" BELOW UNDERARM	1/4	9 1/4				
L	1/2 ELBOW AT CENTER OF UNDERARM SEAM	1/4	7 3/4				
M	1/2 SLEEVE WIDTH 1" ABOVE CUFF SEAM, SLEEVE PLACKET BUTTONED	1/8	6				
N	CUFF LENGTH - BUTTON CENTER TO END OF BUTTONHOLE	1/4	9 1/2				
O	SLEEVE CUFF HEIGHT	1/8	2 1/2				
P	SLEEVE LENGTH ALONG OUTER FOLD - SHOULDER SEAM TO CUFF EDGE	3/8	25 1/2				
P2	SLEEVE LENGTH FROM CB NECK	1/2	34 3/4				
Q	SLEEVE LENGTH ALONG UNDERARM SEAM	3/8	19 7/8				
R	SLEEVE PLACKET LENGTH - CUFF SEAM TO TOP	1/8	5 1/2				
R2	SLEEVE PLACKET FROM UNDERARM SEAM AT CUFF SEAM	1/8	2 1/2				
S	BACK YOKE DEPTH AT CB	1/8	4				
S2	FRONT YOKE - SHOULDER FOLD TO FRONT YOKE SEAM	1/8	1				
T	FRONT PLACKET WIDTH	1/8	1 1/4				
U	FRONT BUTTON SPACING	1/8	3 3/4				
U2	FIRST BUTTONHOLE BELOW NECK SEAM AT CF	1/8	2 1/2				
V	POCKET WIDTH	1/8	5 1/4				
V2	POCKET HEIGHT	1/8	6				
W	POCKET TOP EDGE BELOW HPS	1/4	7 3/4				
W2	POCKET INNER EDGE FROM CF	1/8	2 1/2				
X	LOGO TAG (L3) - BOTTOM EDGE ABOVE FINISHED HEM AT CF	1/8	1				
X2	LOGO TAG (L3) - CENTERED ON BUTTONHOLE PLACKET	1/16	0				

ALL SPECS ARE AFTER WASH: EVERY PROTO GOES THROUGH THE FULL GARMENT WASH BEFORE IT IS MEASURED.
FACTORY FILLS IN M ACTUAL AND DIFFERENCE; OUT OF TOLERANCE IN RED. LAID FLAT, ALL BUTTONS FASTENED.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

FABRICS:

A
STRETCH 21 WALE NEEDLECORD
MAIN BODY, SLEEVES, YOKE, COLLAR, STAND, CUFFS, PLACKETS, POCKET
99% COTTON/1% ELASTANE | 305GSM*140CM

B
WOVEN FUSIBLE, LOW-TEMP, WASH-RATED
LIGHT: UNDER COLLAR
MEDIUM: INNER STAND, INNER CUFF, PLACKET + FACING INNER PLIES

C
ASUTE GARMENT WASH
SEE ADDITIONAL DETAILS ON REFERENCE IMAGE PAGE

LABELS:

L1
BRAND AND SIZE LABEL
SEW-IN PATCH LABEL
INTERNALLY AT CB, INNER YOKE, 1/2" BELOW COLLAR STAND SEAM

L2
CARE, CONTENT, COO LABEL
SATIN LABEL; INTERNALLY ON WEARER'S LEFT SIDE SEAM


L3
LOGO TAG, VERTICAL
WOVEN LABEL, 1" X 3"
BOTTOM OF BUTTONHOLE PLACKET


TRIMS:

B1
18L COROZO BUTTON, OFF-WHITE
CF PLACKET X6, STAND X1, CUFFS X2

B2
14L COROZO BUTTON, OFF-WHITE
SLEEVE PLACKETS X2

BUTTONS + L3 TAG SEWN ON AFTER THE WASH

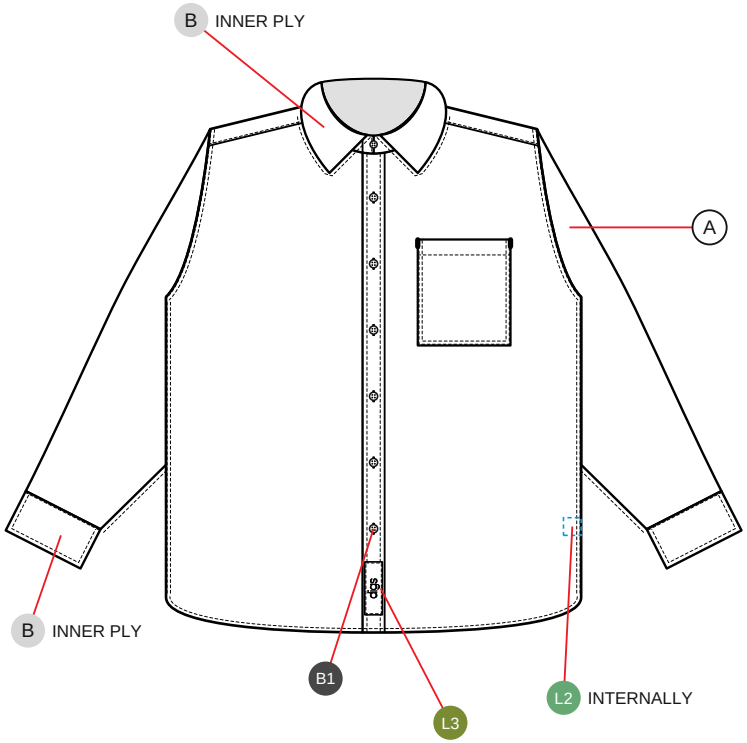

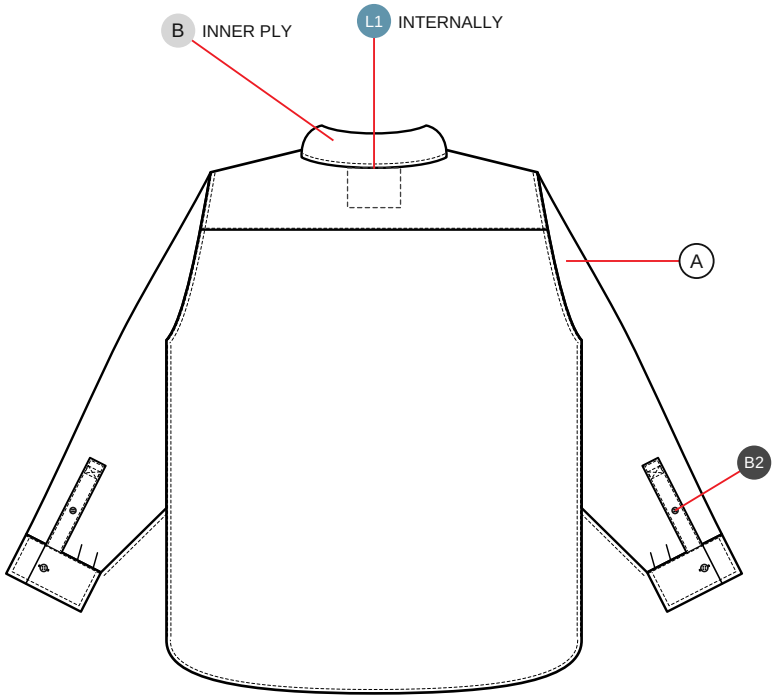

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS


COLLAR STAND, 1/16" EDGESTITCH
B1 BUTTON, HORIZONTAL BUTTONHOLE

POINT COLLAR, NO COLLAR BUTTONS
1/4" TOPSTITCH, ISO #301

FRONT YOKE SEAM
1/16" EDGESTITCH, ISO #301

FLAT-FELLED ARMHOLE
ISO #401, 1/4" NEEDLE SPACING

PATCH POCKET, WEARER'S LEFT
SQUARE CORNERS, 1" TOP HEM
1/16" EDGE + 1/4" ROW, ISO #301

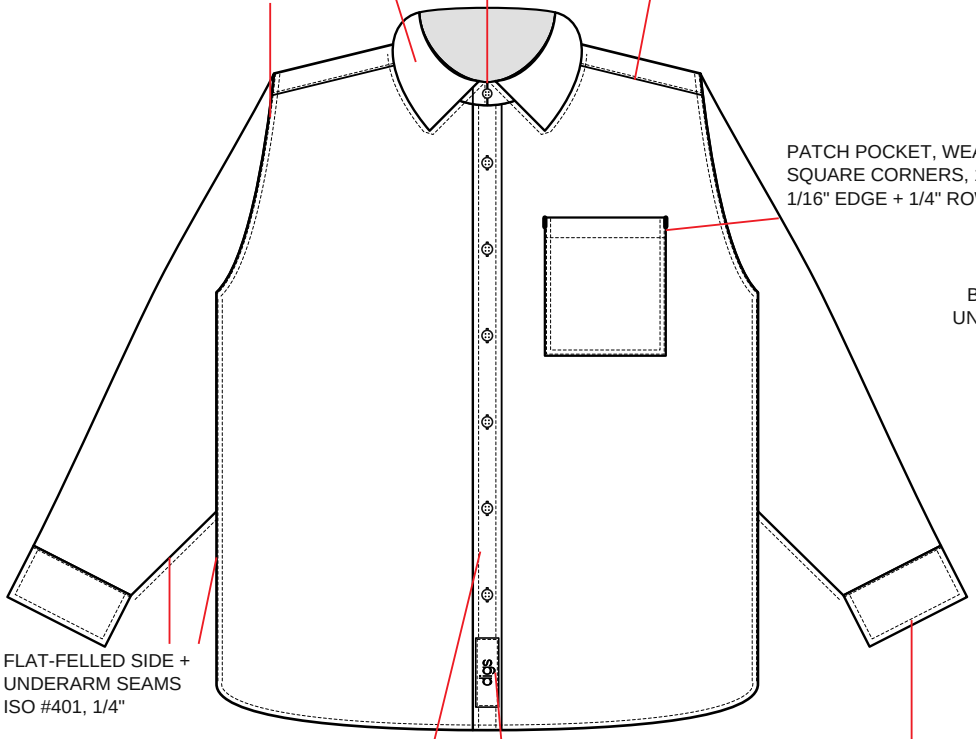

FLAT-FELLED SIDE + UNDERARM SEAMS
ISO #401, 1/4"

BOX PLACKET 1 1/4"
1/4" TOPSTITCH BOTH EDGES
6 X B1 AT 3 3/4" SPACING


LOGO TAG (L3): VERTICAL WOVEN
LABEL 1" X 3", CENTERED ON PLACKET
1" ABOVE HEM; SEWN AFTER WASH

BARREL CUFF 2 1/2", SQUARE CORNERS
1/4" TOPSTITCH, 1/16" AT JOIN
B1 + HORIZONTAL BUTTONHOLE

NO EMBROIDERY ON THE BACK: PLAIN YOKE
LOGO TAG IS ON THE FRONT PLACKET (L3)

TWO-PLY BACK YOKE
1/16" EDGESTITCH, ISO #301

ONE-PIECE SLEEVE:
NO SEAM DOWN THE
BACK OF THE SLEEVE;
UNDERARM SEAM ONLY

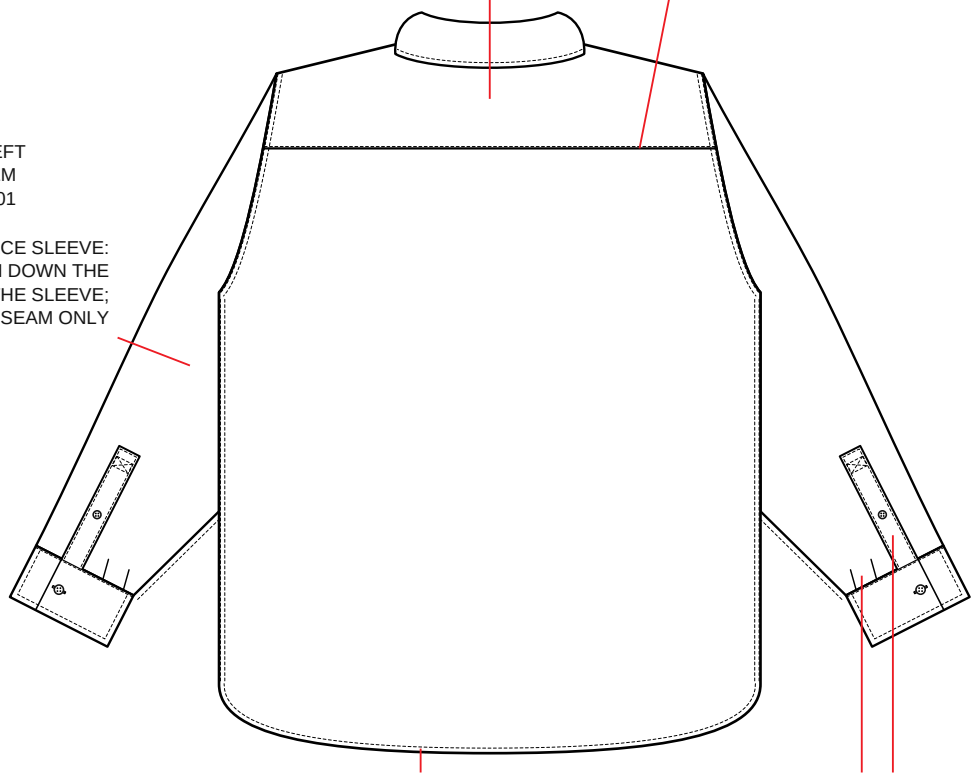


SHIRTTAIL HEM
1/4" DOUBLE TURNED, ISO #301
CB 1" LONGER THAN CF
PLAIN BACK: NO PLEAT, NO LOCKER LOOP

TOWER PLACKET 1" X 5 1/2"
SQUARE TOP, BOX TACK WITH X
B2 BUTTON
2 PLEATS TOWARD PLACKET

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

INSIDE BACK NECK: INNER COLLAR STAND
1/16" EDGESTITCH ALL AROUND, ISO #301

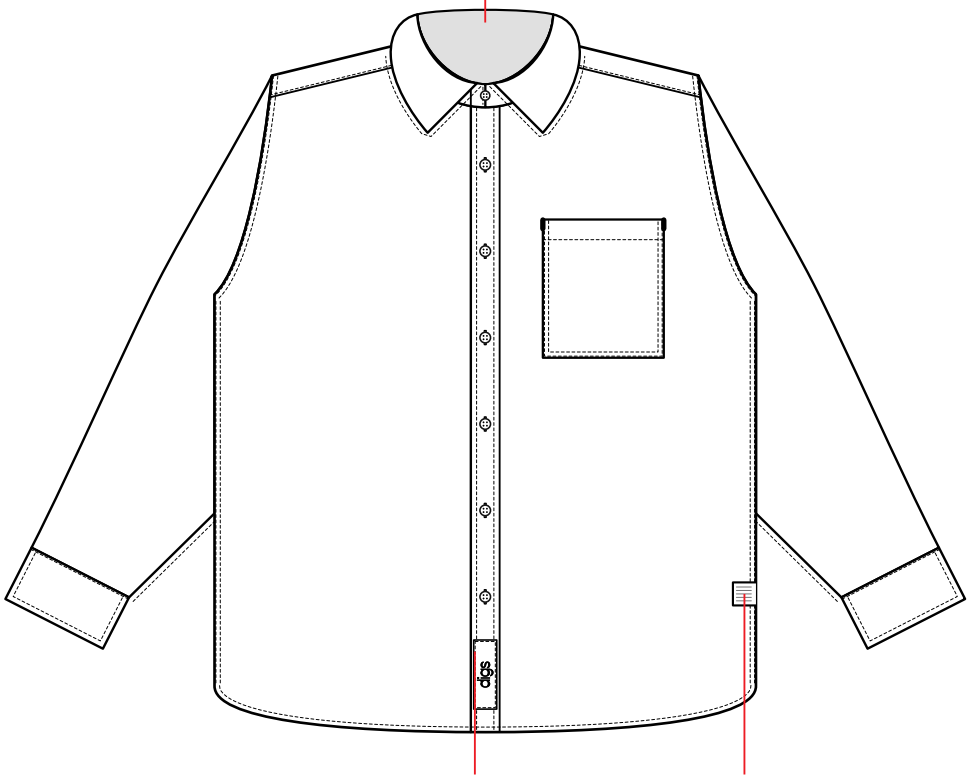


BUTTON SIDE, WEARER'S RIGHT
1 1/4" SELF FACING FOLDED TWICE
FUSED + 1/16" EDGESTITCH AT FOLD

SATIN LOOP LABEL (L2)
CAUGHT IN SIDE SEAM STITCHING
4" ABOVE HEM

SEW-IN PATCH LABEL (L1)
CB INNER YOKE, TOP EDGE 1/2" BELOW STAND SEAM

INTERIOR VIEW
INSIDE OF BACK,
FRONT REMOVED

INNER YOKE, SELF FABRIC
CLEAN FINISH, NO RAW EDGES

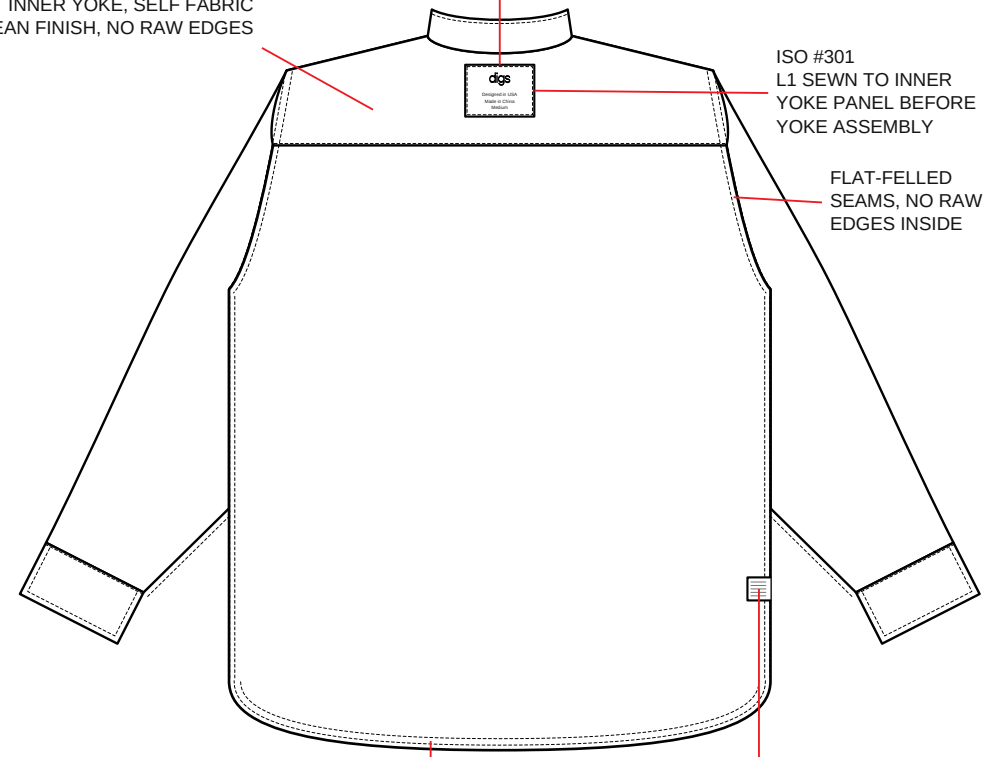

ISO #301
L1 SEWN TO INNER
YOKE PANEL BEFORE
YOKE ASSEMBLY

FLAT-FELLED
SEAMS, NO RAW
EDGES INSIDE

SHIRTTAIL HEM
1/4" DOUBLE TURNED, ISO #301


SATIN LOOP LABEL (L2)
WEARER'S LEFT SIDE SEAM
4" ABOVE HEM

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE


AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

GARMENT STITCH TYPE DETAILS


ISO #301 - LOCKSTITCH, 12 SPI
ALL TOPSTITCHING + EDGESTITCHING
COLLAR, STAND, PLACKETS, POCKET,
CUFFS, YOKE, HEM

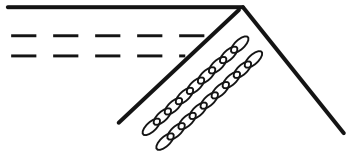

ISO #401 - 2-NEEDLE CHAINSTITCH
1/4" NEEDLE SPACING
FLAT-FELLED SEAMS: ARMHOLES,
SIDE + UNDERARM SEAMS

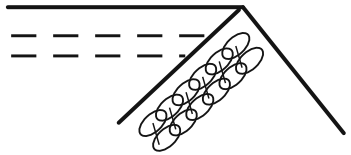


ISO #304 - ZIGZAG LOCKSTITCH
STRAIGHT BUTTONHOLES
SEWN + CUT BEFORE WASH



BUTTON SEWING - LOCKSTITCH
CROSS PATTERN, 16 STITCHES MIN.
SEWN ON AFTER GARMENT WASH



ISO #301 - LOCKSTITCH, 1/16" EDGESTITCH
L1 PATCH LABEL (INNER YOKE PANEL,
BEFORE YOKE ASSEMBLY)
L3 LOGO TAG (PLACKET, AFTER WASH)

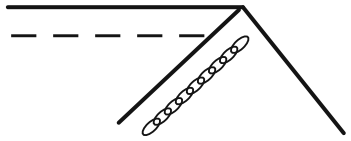

No overlock (ISO #504/#514) anywhere in this garment.

Seam allowance 3/8" (1cm); felled seams per folder. Shirttail hem allowance 1/2" (two 1/4" turns).

Nap + wales: one-way layout. Fronts, back, yoke, sleeves, plackets and pocket: wales vertical, pile running up as worn.

Collar, stand, cuffs: cut with their length on the warp (0% stretch), so the wales run along the piece (around the neck and wrist); nap toward the wearer's left on every ply.


Fusing: non-face plies only: under collar (light), inner stand, inner cuff, placket and facing inner plies (medium). Low-temp woven fusible rated for garment wash, fused on a needle board. Fuse + wash test panel before proto.

Pressing: on the reverse or on a needle board; never press the pile face flat.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE


AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

POINT COLLAR - TOP COLLAR, OUTSIDE FACE UP

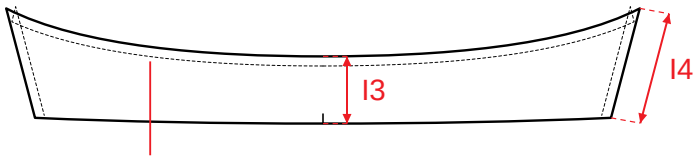


1/4" TOPSTITCH, OUTER + FRONT EDGES; CB NOTCH
LIGHT FUSIBLE (B) ON THE UNDER COLLAR ONLY

COLLAR STAND - OUTER, OUTSIDE FACE UP (WEARER'S LEFT AT LEFT)

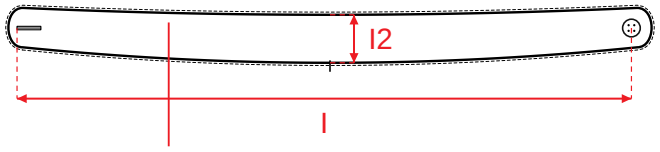


1/16" EDGESTITCH ALL AROUND; MEDIUM FUSIBLE (B) ON INNER STAND
5/8" HORIZONTAL BUTTONHOLE WEARER'S LEFT; B1 WEARER'S RIGHT

CUFF - OUTER, OUTSIDE FACE UP (CUT 4: 2 OUTER, 2 INNER)

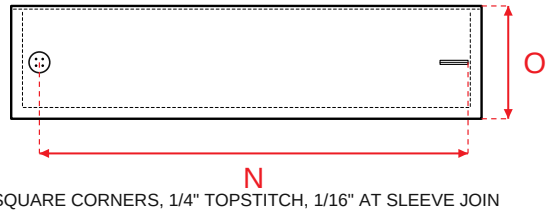

SQUARE CORNERS, 1/4" TOPSTITCH, 1/16" AT SLEEVE JOIN
MEDIUM FUSIBLE (B) IN THE INNER CUFF ONLY
BUTTON ON UNDERLAP END; BUTTONHOLE ON OVERLAP (PLACKET) END
CUT WITH THE LENGTH ON THE WARP: WALES RUN ALONG THE CUFF

SLEEVE END - BACK OF ONE-PIECE SLEEVE

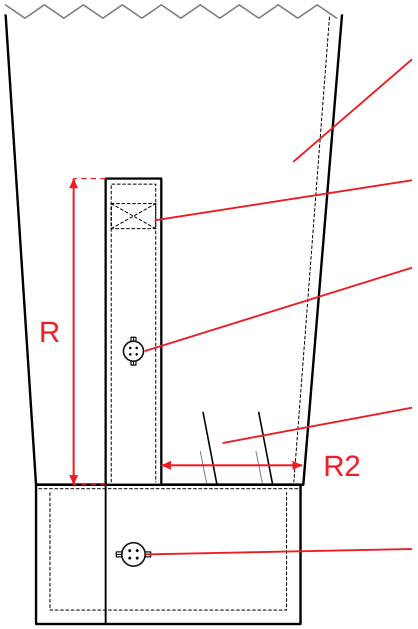

NO SEAM DOWN THE BACK OF THE SLEEVE; FELLED UNDERARM SEAM ONLY


TOWER PLACKET 1" X 5 1/2", SQUARE TOP, BOX TACK WITH X

B2 14L BUTTON, 1/2" VERTICAL HOLE

TWO PLEATS, 5/8" DEEP, FOLDED TOWARD PLACKET; 1ST 1" FROM PLACKET, 2ND 1" FURTHER

B1 THROUGH HORIZONTAL 5/8" HOLE IN LINE WITH THE TOWER PLACKET

CHEST POCKET - WEARER'S LEFT

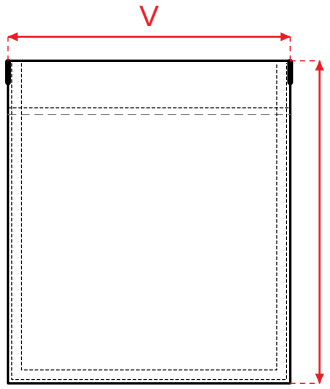

1" DOUBLE-TURNED TOP HEM,
TOPSTITCHED 7/8" FROM THE TOP EDGE
ATTACH WITH 1/16" EDGESTITCH
+ 1/4" SECOND ROW, ISO #301
3/8" BARTACK AT EACH TOP CORNER
PLACEMENT: W, W2 (GRADED SPEC)
MATCH WALES TO THE FRONT

FRONT EDGES

Wearer's left (buttonhole side): 1 1/4" box placket, folded twice to enclose the raw edge, topstitched 1/4" from both edges, medium fusible on the inner ply. 6 vertical 5/8" buttonholes at 3 3/4" spacing (U), first hole 2 1/2" below the neck seam (U2). **L3 logo tag**: vertical, 1" x 3", on the placket face, centered, bottom edge 1" above the hem (X), sewn on after the wash.

Wearer's right (button side): 1 1/4" self facing folded twice to the inside, medium fusible on the inner ply, 1/16" edgestitch along the inner fold (under the placket when buttoned). Buttons on CF.

SEAM CONSTRUCTION - CROSS SECTIONS



FLAT-FELLED SEAM, 1/4" GAUGE
2-NEEDLE ISO #401
ARMHOLES, SIDE + UNDERARM



BACK YOKE SEAM, ENCLOSED
OUTER + INNER YOKE
1/16" EDGESTITCH, ISO #301



SHIRTTAIL HEM
1/4" DOUBLE TURNED
ISO #301, 12 SPI



BOX PLACKET, WEARER'S LEFT
1 1/4", TOPSTITCH 1/4"
FROM BOTH EDGES



BUTTON SIDE, WEARER'S RIGHT
1 1/4" SELF FACING FOLDED TWICE
FUSED + 1/16" EDGESTITCH AT FOLD

DARK = FACE SIDE OF FABRIC A; LIGHT = SECOND PLY. DASHED = NEEDLE LINES.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS







CONSTRUCTION REFERENCE: ROWAN "NOBEL FINE WALE CORD SHIRT" (NOT DIGS PRODUCT)
COPY: POINT COLLAR ON STAND, BOX PLACKET, ONE CHEST POCKET, SQUARE CUFF, TOWER PLACKET, YOKE, SHIRTTAIL HEM
DO NOT COPY: THE SEAM DOWN THE BACK OF THE SLEEVE (RED ARROWS). AC-LSS-001 HAS A ONE-PIECE SLEEVE





COLOR REFERENCE: AI CONCEPT IMAGES
DO NOT COPY THE CHEST GRAPHIC, POCKET FLAP OR NECK LABEL; DIGS LOGO TAG GOES AT THE BOTTOM OF THE BUTTONHOLE PLACKET (L3)

LIGHT GREY
REF #D0CCCC
(MEASURED FROM BOTH AI IMAGES)

PHYSICAL SWATCH APPROVED UNDER D65; FINAL APPROVAL ON A WASHED GARMENT PANEL

Asute Wash process (from AC-LST-001; units normalized, confirm with the wash house)

1. Preparation of medicine: 20-40g/L potassium permanganate and 20g/L phosphoric acid. After weighing the permanganate, dissolve it at 80°C, add phosphoric acid, and adjust the required concentration for use.

2. Add Turkish white stone or foam balls and salt to the snow machine, pour in the prepared potassium permanganate solution, start the machine and run for 2-3 minutes, then add potassium permanganate solution, and then run for another 2-3 minutes, so that the white stone or foam balls completely and evenly absorb the permanganate solution. The humidity is determined according to the required snowflake point size. If it is large, the medium should be wet, and if it is small, it should be dry.

3. Put the prepared fabric to be fried into the snow machine that has been sprinkled with medicine and fry for 3-10 minutes. The time is determined according to the required uniformity. After frying, take out the fabric and dry it for about 20 minutes.


4. Neutralization: Put the fried fabric into the washing machine, add 8g/l of sodium pyrosulfite, and neutralize at room temperature for 10-15 minutes. If the fabric is thick and has a lot of fabric, the neutralization time will be longer.


5. Cleaning: Add 1958 yellowing and brightening powder, 0.5g/l, 50°C x 10 min, and then wash with clean water.

For AC-LSS-001: seam abrasion before the wash on raised seam ridges (collar, stand, placket, yoke, felled seams, pocket, cuffs, hem) for the seam-highlighter look. Fabric dyed with a reactive dye that discharges in the permanganate step. **Finish:** silicone softener after cleaning (AC-LST-001 comment, 06/15/2025). Wash trial on a 1 m panel plus a fused test panel first: report shrinkage (mill allows 2-10%), color vs the approved standard, stretch recovery (1% elastane) and fusing bond. Buttons and the L3 tag go on after the wash.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

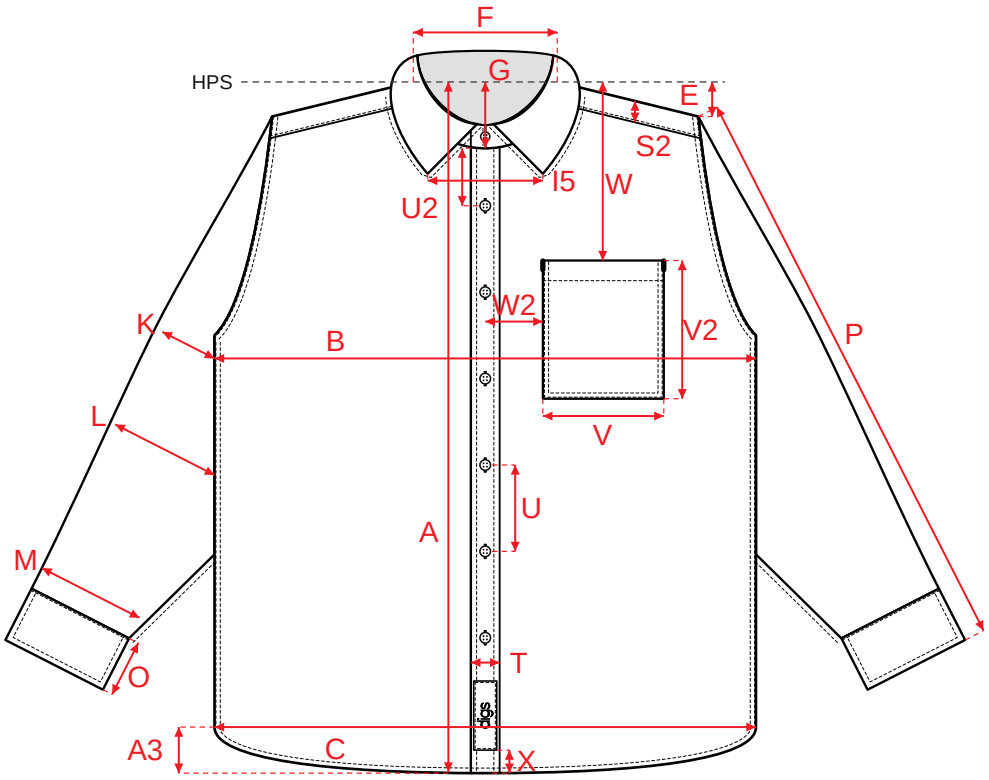

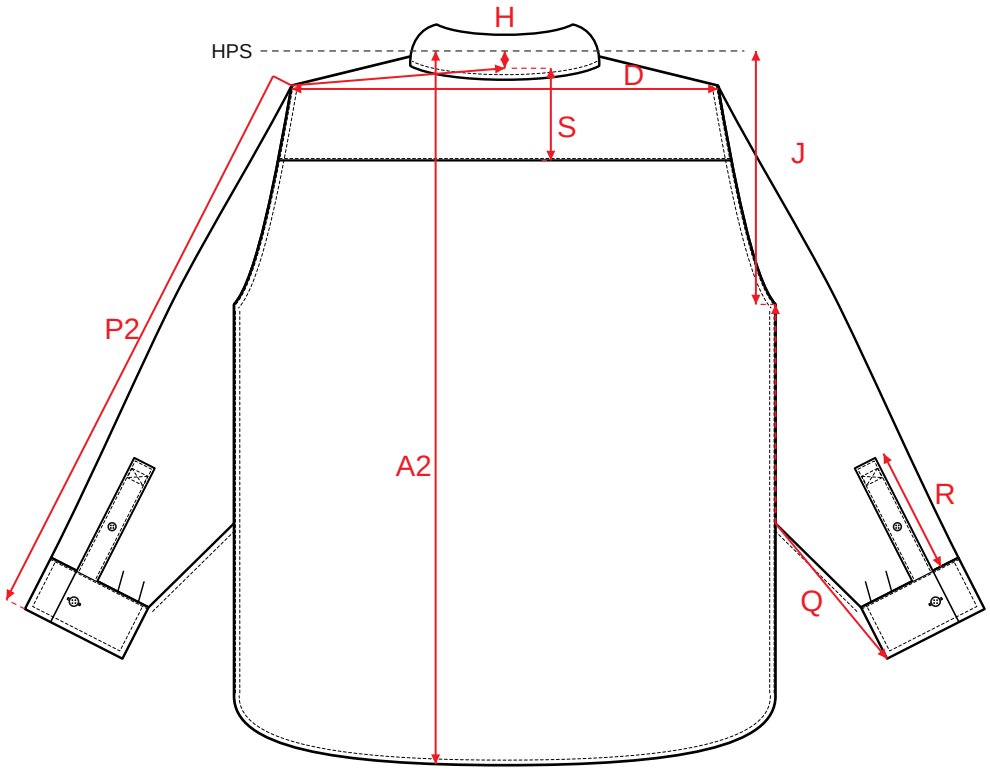

MEASURING RULES

- Measure after the full garment wash, laid flat for 24 hours, no stretching, all buttons fastened.
- HPS = highest point of the neck seam at the shoulder fold. A, A2 from HPS level at CF / CB.
- B, K 1" below underarm; L at center of underarm seam; M 1" above the cuff seam, sleeve placket buttoned.
- P along the outer fold; P2 from the collar stand seam at CB through the shoulder point; Q along the underarm seam.
- I-I4, N, O, R, R2, V, V2: see additional detail page. I5: tip to tip, stand buttoned.
- X, X2 logo tag: tag bottom edge to the hem edge at CF, after wash; see artwork detail page.
- H, S: lift the collar to find the collar stand seam at CB. S2: shoulder fold to the front yoke seam.
- Record every proto on the development sample specs page.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS
SEWING PATTERN AC-LSS-001 TO BE DRAFTED FROM THIS SPEC
PATTERN INCLUDES 3/8" (1CM) ALLOWANCE ALONG ALL SEAMS, FELLED SEAMS PER FOLDER, 1/2" AT SHIRTTAIL HEM
ALL MEASUREMENTS IN INCHES, AFTER GARMENT WASH; PATTERN ENLARGED BY THE MEASURED WASH SHRINKAGE

POM	DESCRIPTION	TOL. +/-	S	M	L	XL
A	HPS LENGTH AT CENTER FRONT	1/2	29	30	31	32
A2	HPS LENGTH AT CENTER BACK	1/2	30	31	32	33
A3	SHIRTTAIL DROP - SIDE SEAM HEM POINT TO CF HEM	1/4	2	2	2	2
B	1/2 CHEST AT 1" BELOW UNDERARM	1/2	22	23 1/2	25	27
C	1/2 HEM - STRAIGHT ACROSS AT SIDE SEAM HEM POINTS	1/2	22	23 1/2	25	27
D	ACROSS SHOULDER	3/8	17 3/4	18 1/2	19 1/4	20 1/4
E	SHOULDER SLOPE	1/8	1 1/2	1 1/2	1 1/2	1 1/2
F	NECK WIDTH - HPS TO HPS	1/4	6	6 1/4	6 1/2	6 3/4
G	FRONT NECK DROP	1/4	2 3/4	2 7/8	3	3 1/8
H	BACK NECK DROP	1/8	3/4	3/4	3/4	3/4
I	COLLAR STAND LENGTH - BUTTON CENTER TO END OF BUTTONHOLE	1/4	15 3/8	16	16 5/8	17 1/4
I2	COLLAR STAND HEIGHT AT CB	1/8	1 1/4	1 1/4	1 1/4	1 1/4
I3	COLLAR HEIGHT AT CB	1/8	1 3/4	1 3/4	1 3/4	1 3/4
I4	COLLAR POINT LENGTH	1/8	3	3	3	3
I5	COLLAR POINT SPREAD - TIP TO TIP, BUTTONED	1/4	4 3/4	5	5 1/4	5 1/2
J	ARMHOLE DEPTH FROM HPS	1/4	10 5/8	11	11 3/8	11 7/8
K	1/2 BICEP WIDTH AT 1" BELOW UNDERARM	1/4	8 3/4	9 1/4	9 3/4	10 3/8
L	1/2 ELBOW AT CENTER OF UNDERARM SEAM	1/4	7 3/8	7 3/4	8 1/8	8 5/8
M	1/2 SLEEVE WIDTH 1" ABOVE CUFF SEAM, SLEEVE PLACKET BUTTONED	1/8	5 7/8	6	6 1/8	6 1/4
N	CUFF LENGTH - BUTTON CENTER TO END OF BUTTONHOLE	1/4	9 1/4	9 1/2	9 3/4	10
O	SLEEVE CUFF HEIGHT	1/8	2 1/2	2 1/2	2 1/2	2 1/2
P	SLEEVE LENGTH ALONG OUTER FOLD - SHOULDER SEAM TO CUFF EDGE	3/8	25 1/8	25 1/2	25 7/8	26 1/4
P2	SLEEVE LENGTH FROM CB NECK	1/2	34	34 3/4	35 1/2	36 3/8
Q	SLEEVE LENGTH ALONG UNDERARM SEAM	3/8	19 1/2	19 7/8	20 1/4	20 5/8
R	SLEEVE PLACKET LENGTH - CUFF SEAM TO TOP	1/8	5 1/2	5 1/2	5 1/2	5 1/2
R2	SLEEVE PLACKET FROM UNDERARM SEAM AT CUFF SEAM	1/8	2 3/8	2 1/2	2 5/8	2 3/4
S	BACK YOKE DEPTH AT CB	1/8	3 7/8	4	4 1/8	4 1/4
S2	FRONT YOKE - SHOULDER FOLD TO FRONT YOKE SEAM	1/8	1	1	1	1
T	FRONT PLACKET WIDTH	1/8	1 1/4	1 1/4	1 1/4	1 1/4
U	FRONT BUTTON SPACING	1/8	3 5/8	3 3/4	3 7/8	4
U2	FIRST BUTTONHOLE BELOW NECK SEAM AT CF	1/8	2 1/2	2 1/2	2 1/2	2 1/2
V	POCKET WIDTH	1/8	5	5 1/4	5 1/2	5 3/4
V2	POCKET HEIGHT	1/8	5 3/4	6	6 1/4	6 1/2
W	POCKET TOP EDGE BELOW HPS	1/4	7 1/2	7 3/4	8	8 1/4
W2	POCKET INNER EDGE FROM CF	1/8	2 3/8	2 1/2	2 5/8	2 3/4
X	LOGO TAG (L3) - BOTTOM EDGE ABOVE FINISHED HEM AT CF	1/8	1	1	1	1
X2	LOGO TAG (L3) - CENTERED ON BUTTONHOLE PLACKET	1/16	0	0	0	0


ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE


AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

TYPE	DESCRIPTION	REF #/VENDOR	PLACEMENT	QTY	COLORWAY #1
FABRIC A	STRETCH 21 WALE NEEDLECORD 99% COTTON / 1% ELASTANE; APPROX. 305gsm*140cm; WEFT STRETCH 5%, WARP 0%	CROFT MILL (REF) CUSTOM COLOR VIA FACTORY	BODY, SLEEVES, YOKE, COLLAR, STAND, CUFFS, PLACKETS, POCKET		LIGHT GREY PHYSICAL STANDARD (REF #D0CCCC)
FABRIC B	WOVEN FUSIBLE, LOW-TEMP, RATED FOR GARMENT WASH LIGHT: UNDER COLLAR / MEDIUM: INNER STAND, INNER CUFF, PLACKET + FACING INNER PLIES	VENDOR SOURCED	NON-FACE PLIES ONLY		WHITE
FABRIC C	FULL GARMENT WASH (ASUTE) + SILICONE SOFTENER FINISH SEE WASH DETAILS ON REFERENCE IMAGE PAGE	VENDOR SOURCED	FULL GARMENT WASH		N/A
THREAD	POLY CORE THREAD TEX 27 SEAMS + BUTTONHOLES / TEX 40 TOPSTITCH	VENDOR SOURCED	ALL NEEDLE THREAD		DTM WASHED STANDARD
THREAD	POLY CORE THREAD	VENDOR SOURCED	ALL LOOPER THREAD (ISO #401)		DTM WASHED STANDARD
TRIM B1	4-HOLE COROZO BUTTON, 18L (11.5MM) SEWN ON AFTER WASH	VENDOR SOURCED	CF PLACKET x6, COLLAR STAND x1, CUFFS x2; SPARE ON L2	9 +1 SPARE	NATURAL OFF-WHITE
TRIM B2	4-HOLE COROZO BUTTON, 14L (9MM) SEWN ON AFTER WASH	VENDOR SOURCED	SLEEVE PLACKETS x2; SPARE ON L2	2 +1 SPARE	NATURAL OFF-WHITE
LABEL L1	BRAND AND SIZE LABEL SEW-IN PATCH LABEL	VENDOR SOURCED	INTERNALLY, CB INNER YOKE, TOP EDGE 1/2" BELOW COLLAR STAND SEAM	1	SEE ARTWORK
LABEL L2	CARE/CONTENT/COO LABEL SATIN LABEL	VENDOR SOURCED	AT WEARER'S LEFT SIDE SEAM	1	WHITE SATIN WITH BLACK PRINT
LABEL L3	LOGO TAG - WOVEN DAMASK LABEL, 100% POLYESTER VERTICAL, 1" x 3" FINISHED, ENDS FOLDED; WORDMARK READS UP; SEWN ON AFTER WASH	VENDOR SOURCED	FACE OF BUTTONHOLE PLACKET, CENTERED, VERTICAL, BOTTOM EDGE 1" ABOVE HEM	1	LIGHT GREY GROUND (DTM) PANTONE 19-3943 TCX BELLWETHER BLUE LOGO
PACKAGING P1	HANGTAG	STILL TBC	ATTACHED THROUGH THE L2 LABEL WITH PLASTIC TACK; DO NOT PIERCE THE CORD	1	SEE ARTWORK
PACKAGING P2	RECYCLED POLYBAG PRESSURE ZIPPER, AIR HOLES, AND SAFETY WARNING - SEE PACKAGING ARTWORK	STILL TBC	GARMENT IS FOLDED AND PLACED IN POLYBAG	1	CLEAR WITH BLACK PRINT
PACKAGING P3	BRAND AND SIZE STICKER	VENDOR SOURCED	STICKER AFFIXED TO POLYBAG	1	WHITE WITH BLACK PRINT

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

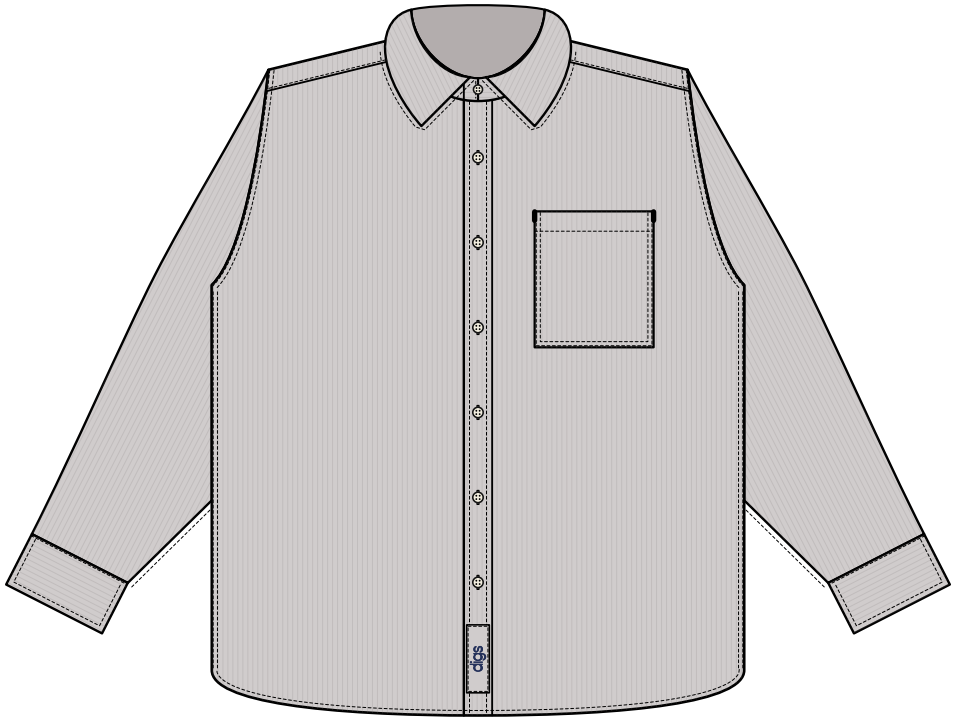

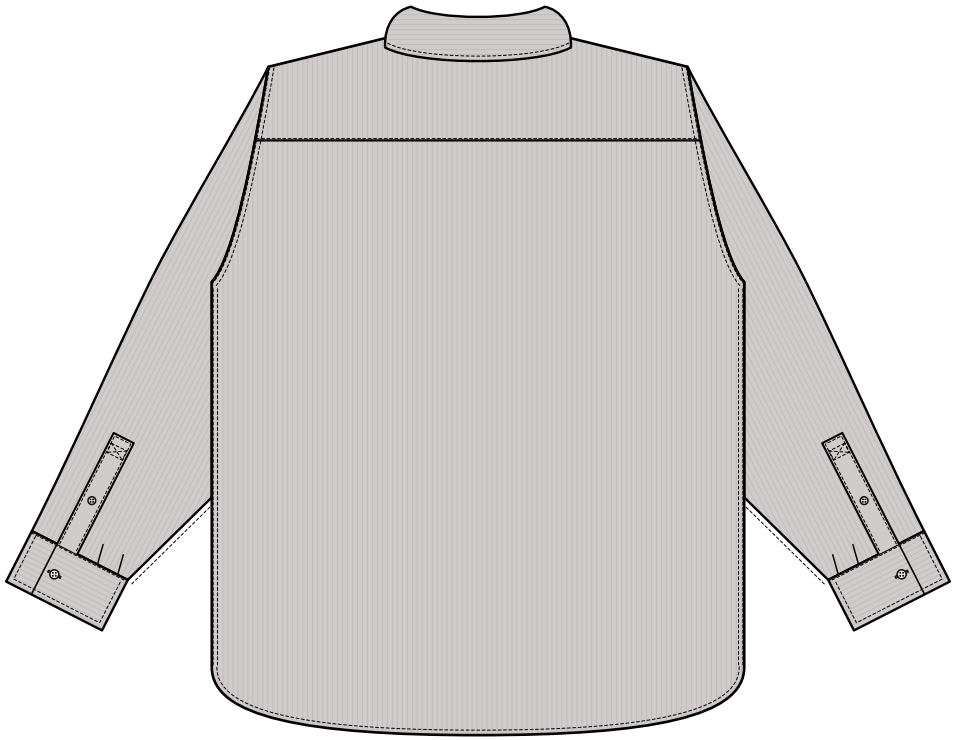

COLORWAY #1


- FABRIC | LIGHT GREY - REF #D0CCCC, FROM THE AI CONCEPT IMAGES
- THREAD | DYE TO MATCH THE WASHED STANDARD
- BUTTONS | NATURAL OFF-WHITE COROZO
- LOGO TAG (L3) | LIGHT GREY GROUND, PANTONE 19-3943 TCX BELLWETHER BLUE LOGO


COLOR APPROVAL

- ☐ PHYSICAL LIGHT GREY STANDARD APPROVED BY DIGS UNDER D65
- ☐ MILL DYES 3 LAB DIPS ON THE NEEDLECORD WITH A DISCHARGEABLE REACTIVE DYE
- ☐ EACH DIP WASHED THROUGH THE PRODUCTION WASH; PICK UNDER D65
- ☐ FINAL APPROVAL ON A WASHED GARMENT PANEL; HEX IS REFERENCE ONLY

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

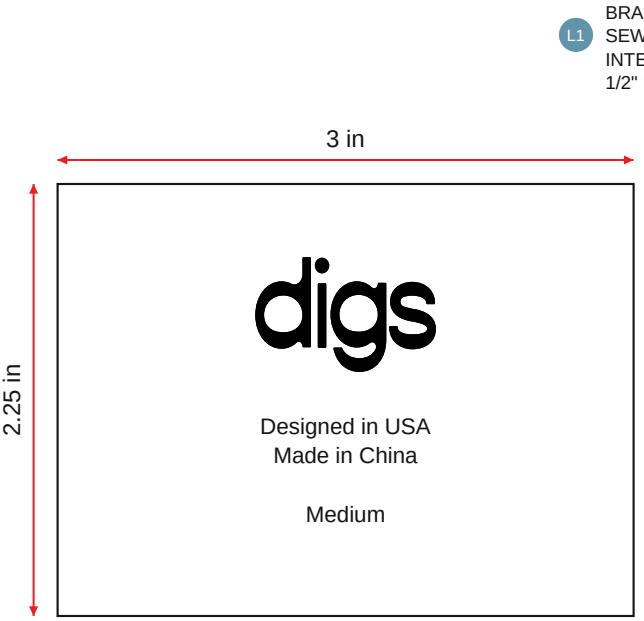

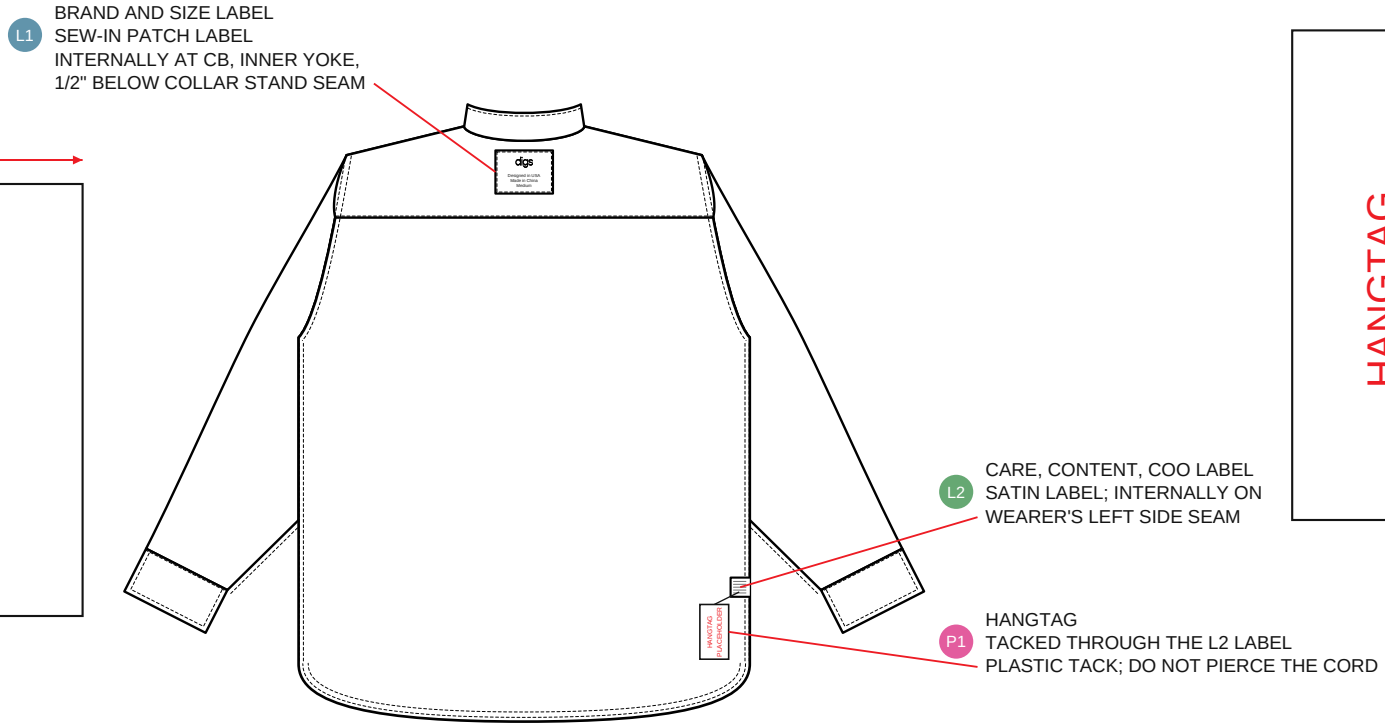


INTERIOR
VIEW BACK BODY

LABELS:

- L1 BRAND AND SIZE LABEL
- L2 CARE, CONTENT, COO LABEL
- L3 LOGO TAG - SEE ARTWORK DETAIL

PACKAGING:


- P1 HANGTAG
- P2 POLYBAG
- P3 BARCODE STICKER

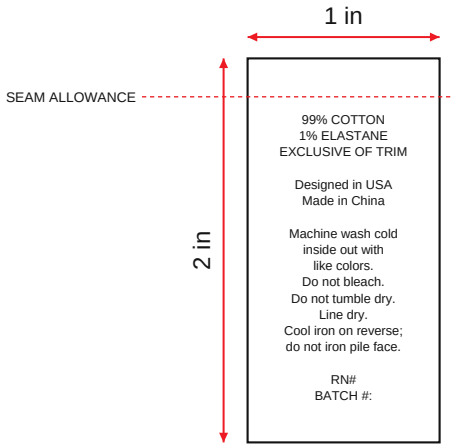

L1 COPY AS AC-LST-001 (06/15/2025); SIZE LINE CHANGES PER SIZE. L2 COMPOSITION + CARE UPDATED FOR 99/1 COTTON/ELASTANE. COUNTRY OF ORIGIN TO MATCH THE FACTORY.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE


AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

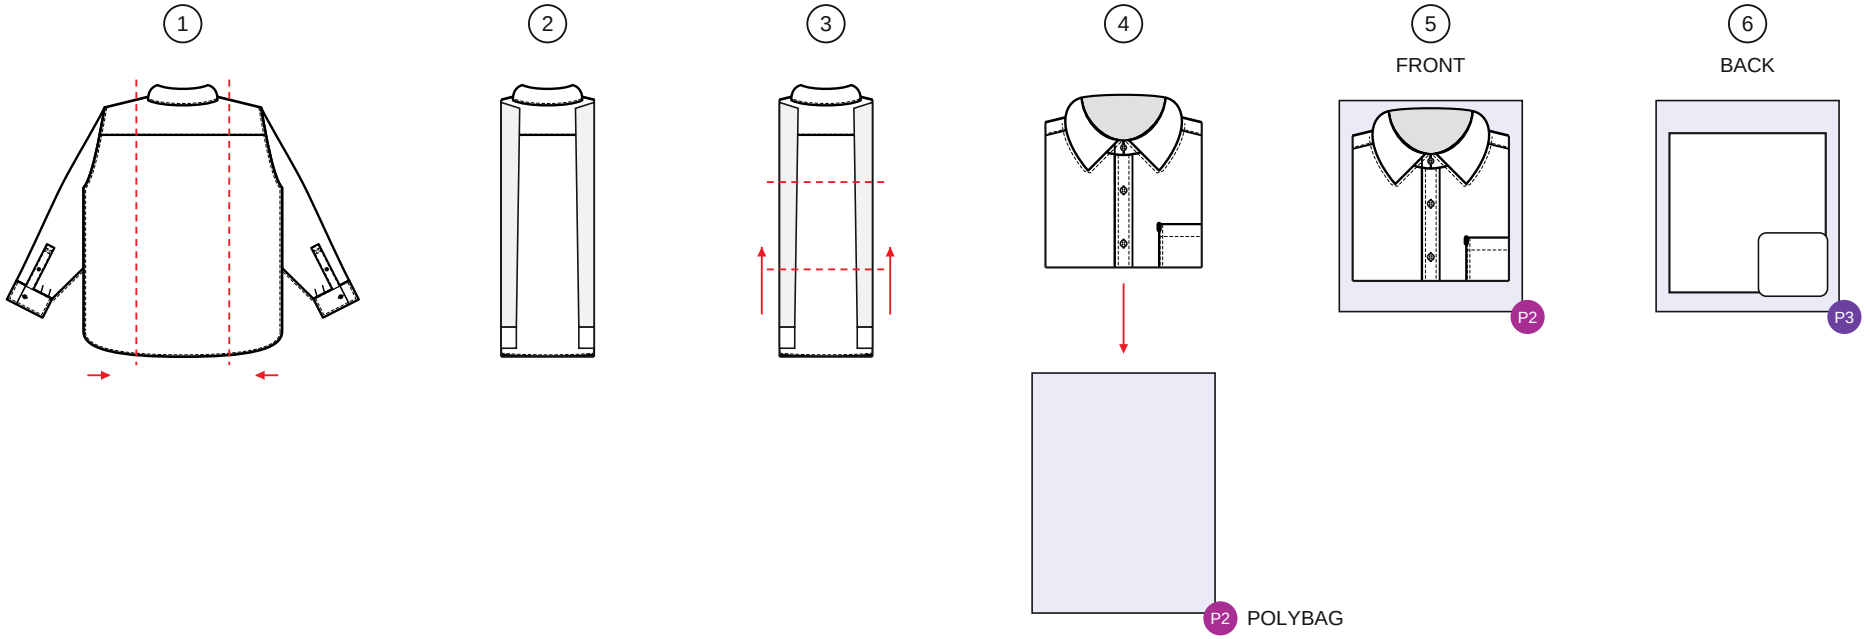

FOLD + PACKAGE INSTRUCTIONS:

1. BUTTON THE COLLAR STAND, ALL FRONT BUTTONS AND BOTH CUFFS; PLACE SHIRT FACE DOWN
2. FOLD EACH SIDE IN TO ABOUT 11" WIDE, SLEEVES BACK ALONG THE SIDES, CUFFS FLAT AT THE HEM
3. FOLD THE BOTTOM THIRD UP, THEN FOLD AGAIN SO THE COLLAR SITS AT THE TOP
4. PLACE THE FOLDED GARMENT INTO THE POLYBAG AND SEAL
5. FRONT OF GARMENT SHOULD FACE FRONT OF BAG WITH ZIPPER EDGE AT TOP
6. AFFIX UPC LABEL TO BACK OF POLYBAG. NO COLLAR STAYS, CARDBOARD OR PINS


BARCODE STICKER SHOULD BE AFFIXED TO POLYBAG



ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE

AC-LSS-001 | LONG SLEEVE SHIRT | SIZE RANGE: S-XL | SAMPLE SIZE: M | STATUS: PROTO | TOPS

ACTUAL SIZE ARTWORK

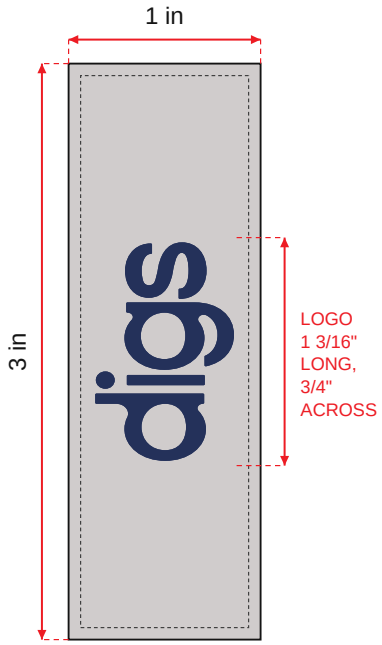

SEWN VERTICAL: WORDMARK READS BOTTOM TO TOP, TOWARD THE COLLAR

GROUND: LIGHT GREY
MATCH THE APPROVED
FABRIC STANDARD

LOGO: PANTONE 19-3943
TCX BELLWETHER BLUE

PRINT AT 100% TO CHECK SIZE

CONSTRUCTION - END FOLD




SHOWN 3:4, FLAT



SIDE VIEW: BOTH ENDS FOLDED UNDER, SEWN FLAT

HD DAMASK, 100% POLYESTER (WASH-FAST YARNS)
WOVEN OR ULTRASONIC-SEALED LONG EDGES
NO STIFFENER, SOFT HAND
APPROVE A 3-TAG STRIP BEFORE BULK

PLACEMENT - BOTTOM OF PLACKET

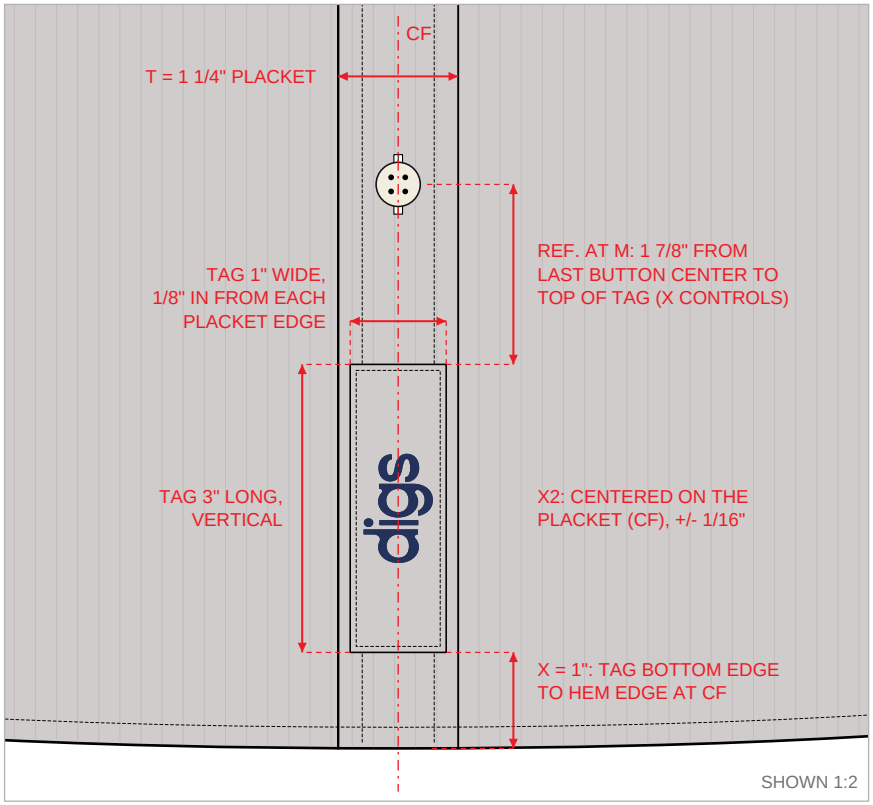

- **No embroidery on the back.** The AC-LST-001 back-neck logo is not used on this style; the digs logo is the L3 tag on the front placket.
- **Position:** vertical on the face of the buttonhole placket (wearer's left front), centered on CF within 1/16" (X2), bottom edge 1" above the finished hem at CF (X), long edges parallel to the placket edges. Wordmark reads bottom to top, toward the collar.
- **Sew on after the garment wash**, with the buttons. The polyester tag does not shrink: sewn on before the wash, the 2-10% shrinkage of the cord would pucker the placket around it, and the permanganate would spot the logo.
- **Stitching:** 1/16" edgestitch all around, ISO #301, 12 SPI, thread DTM to the tag ground, through all placket plies; lock the start and finish. The tag covers the two placket topstitch rows locally.
- **Press** the tag area from the reverse only. The tag lies flat and straight: no ripple, no twist.

ALL INFORMATION IN THIS DOCUMENT IS TO BE CONSIDERED THE CONFIDENTIAL PROPERTY OF DIGS/ANTAEUS COE