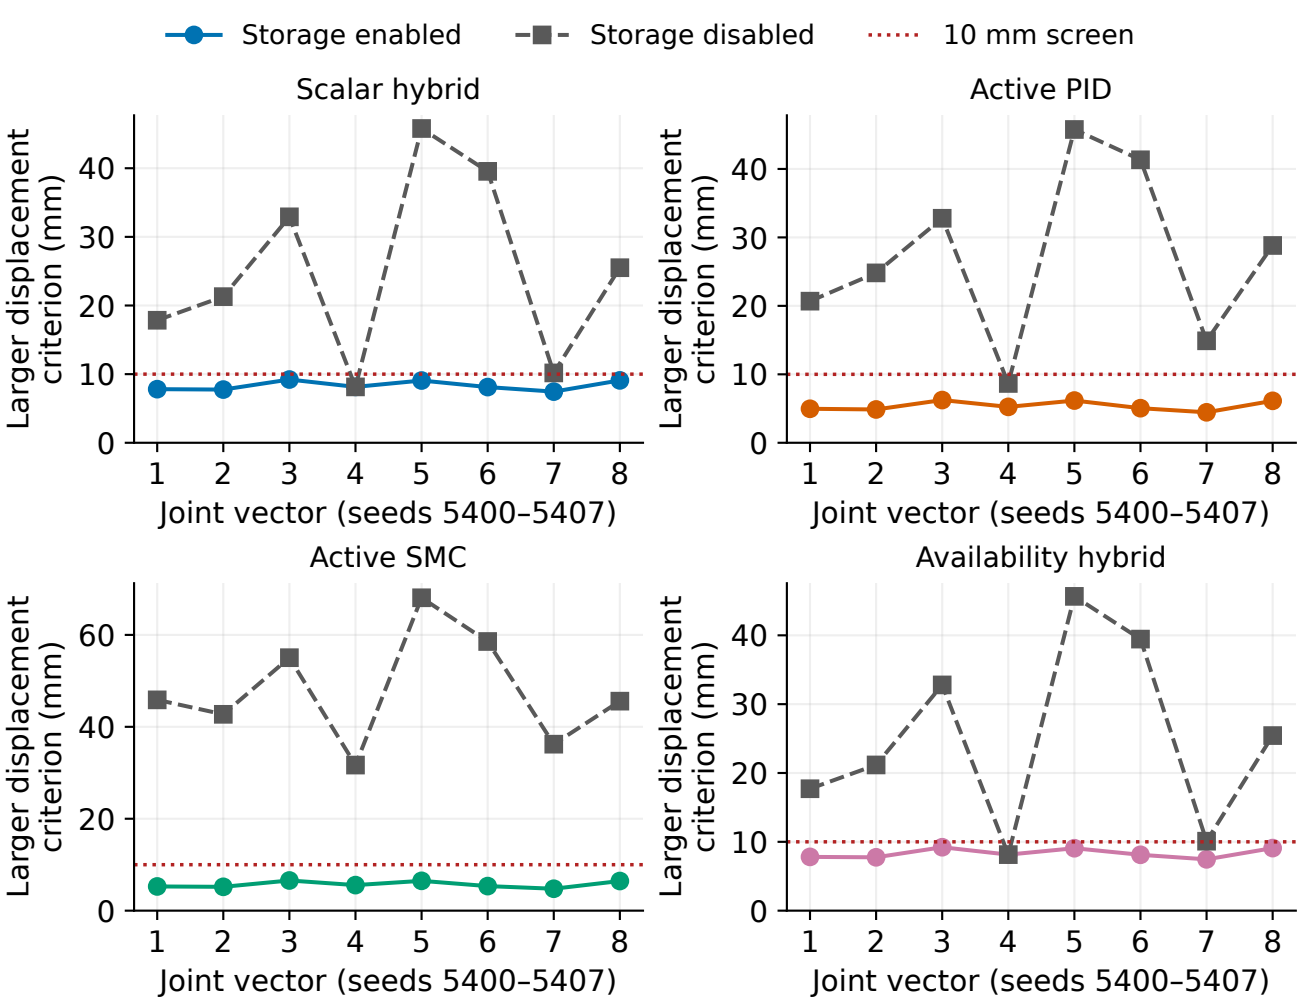
Storage enabled
Storage disabled
10 mm screen
Scalar hybrid
Active PID
Active SMC
Availability hybrid
Larger displacement criterion (mm)
Joint vector (seeds 5400–5407)
0
10
20
30
40
60
1
2
3
4
5
6
7
8