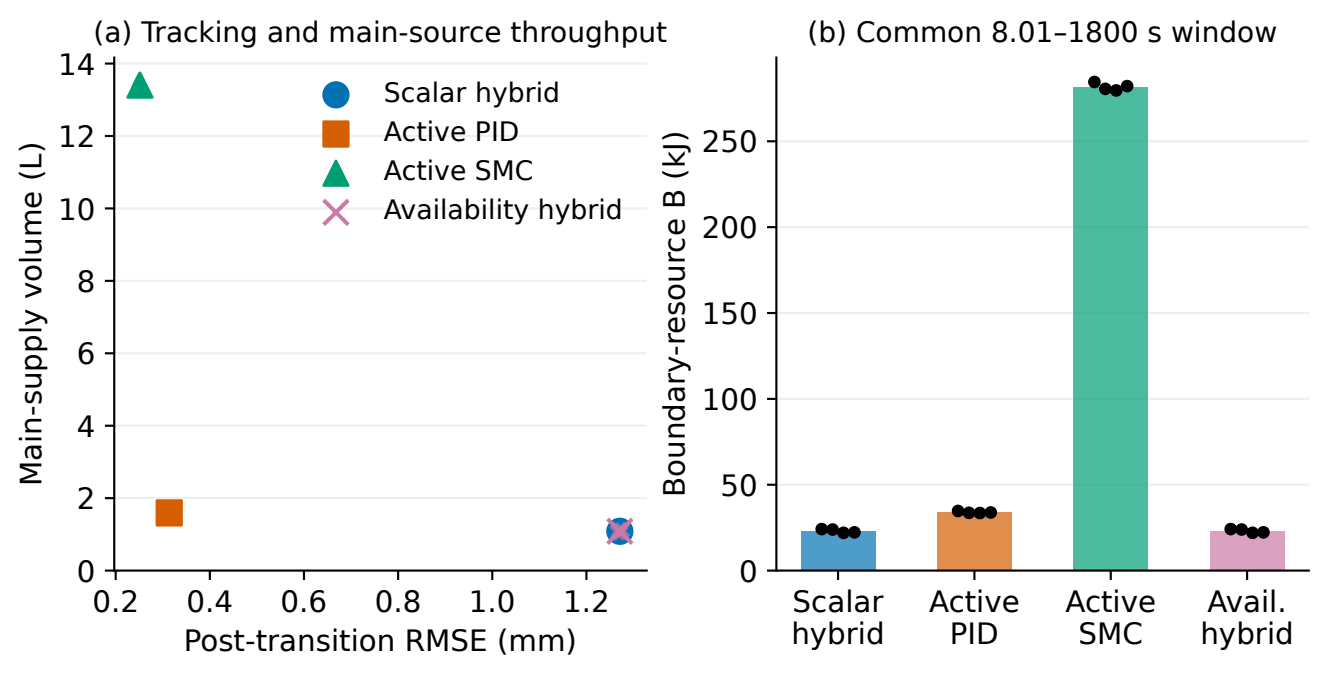
(a) Tracking and main-source throughput
Main-supply volume (L)
Post-transition RMSE (mm)
Scalar hybrid
Active PID
Active SMC
Availability hybrid
0
2
4
6
8
10
12
14
0.2
0.4
0.6
0.8
1.0
1.2
(b) Common 8.01–1800 s window
Boundary-resource B (kJ)
0
50
100
150
200
250
Scalar hybrid
Active PID
Active SMC
Avail. hybrid