

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

TIM3 Mode and Configuration

Mode

Slave Mode

Trigger Source

☒ Internal Clock

Channel1

Channel2

Channel3

Channel4

Combined Channels

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

NVIC Settings

DMA Settings

Parameter Settings

User Constants

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC - 16 bits) 7199

Counter Mode Up

Counter Period (AutoRel) 4999


Internal Clock Division (C. No Division)

auto-reload preload Disable

Trigger Output (TRGO) Para...

Pinout view

System view

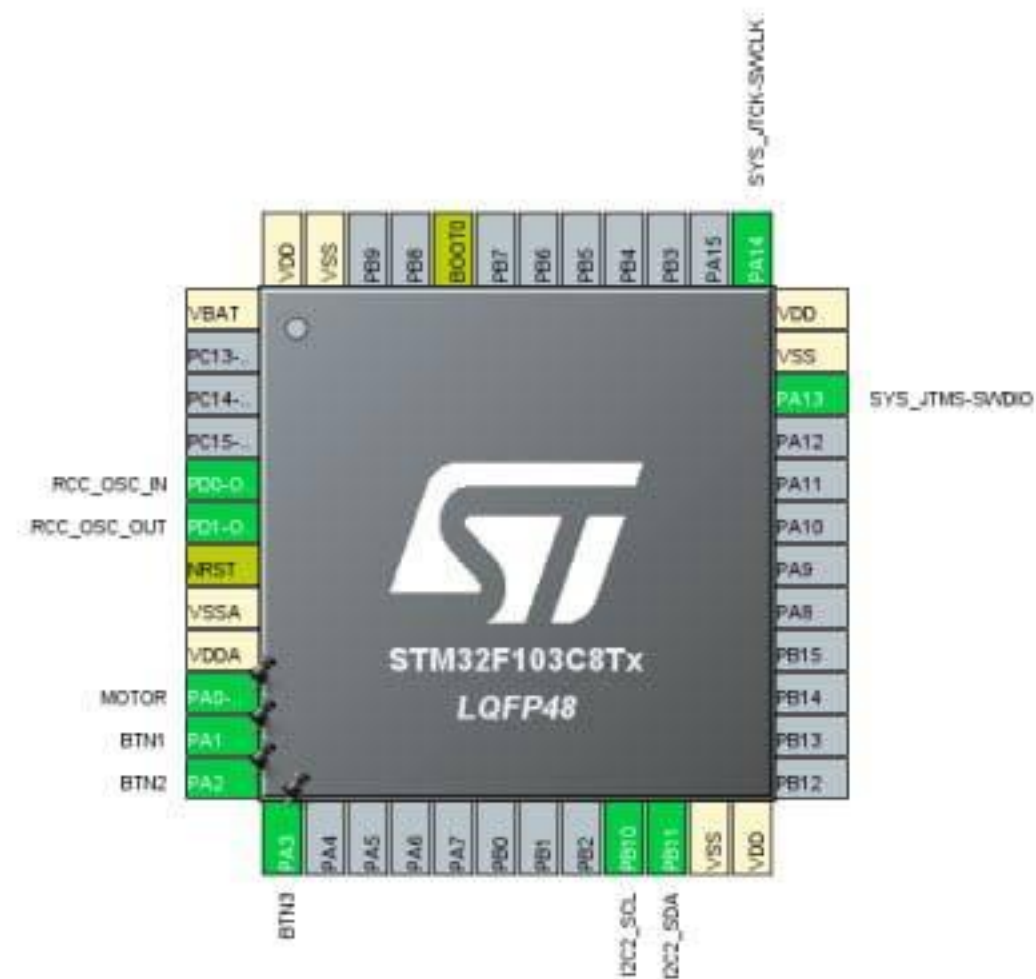


Rotate 90° counter clockwise



Pinout view



System view

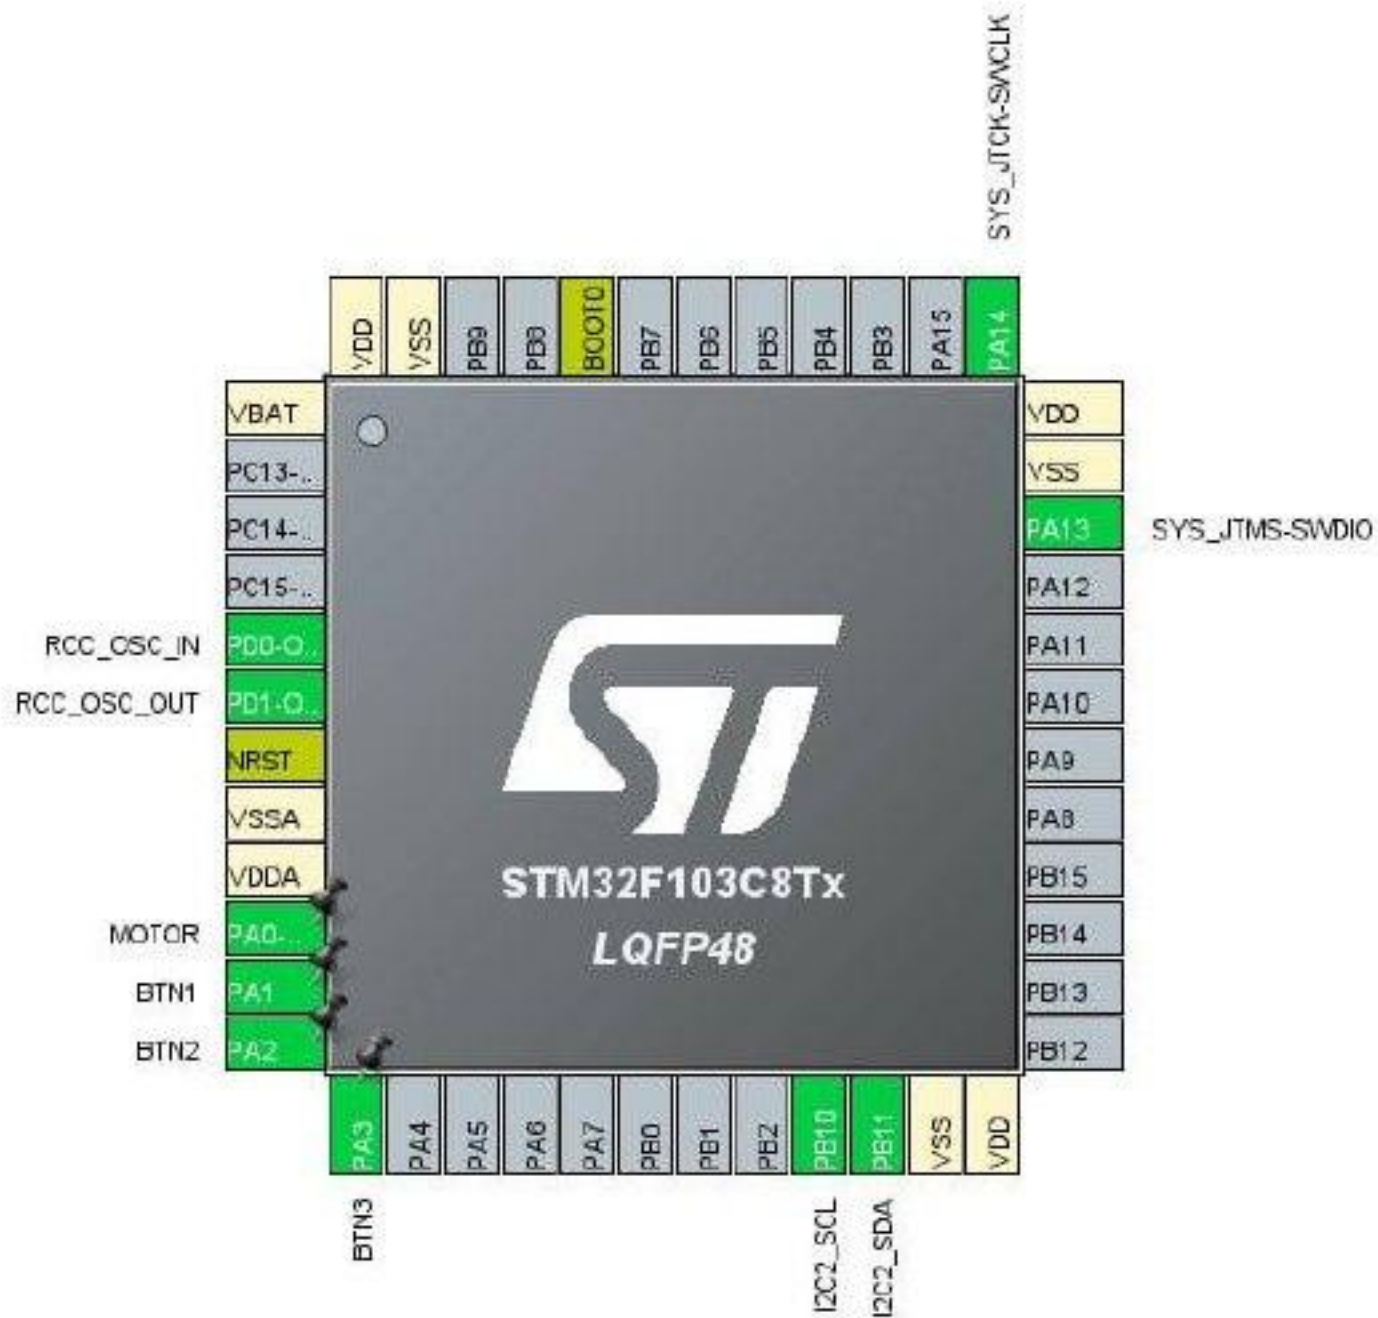

ENG



3:01 AM
6/29/2026



TIM3 Mode and Configuration

Mode

Slave Mode Disable 

Trigger Source Disable 

☒ Internal Clock

Channel1 Disable 

Channel2 Disable 

Channel3 Disable 

Channel4 Disable 

Combined Channels Disable 

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

 User Constants

 NVIC Settings

 DMA Settings

 Parameter Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt		15	0

TIM3 Mode and Configuration

Mode

Slave Mode DisableTrigger Source Disable☒ Internal ClockChannel1 DisableChannel2 DisableChannel3 DisableChannel4 DisableCombined Channels Disable☐ XOR activation☐ One Pulse Mode

Configuration

Reset Configuration

☒ User Constants☒ NVIC Settings☒ DMA Settings☒ Parameter Settings

Configure the below parameters :

Counter Settings

Prescaler (PSC - 16 bits value) 7199

Counter Mode Up

Counter Period (AutoReload Regis.. 4999

Internal Clock Division (CKD) No Division

auto-reload preload Disable

Trigger Output (TRGO) Parameters

I2C2 Mode and Configuration

Mode

I2C

I2C



Configuration

Reset Configuration

✓ NVIC Settings

✓ DMA Settings

✓ GPIO Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :

Search (Ctrl+F)



▼ Master Features

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

▼ Slave Features

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled