


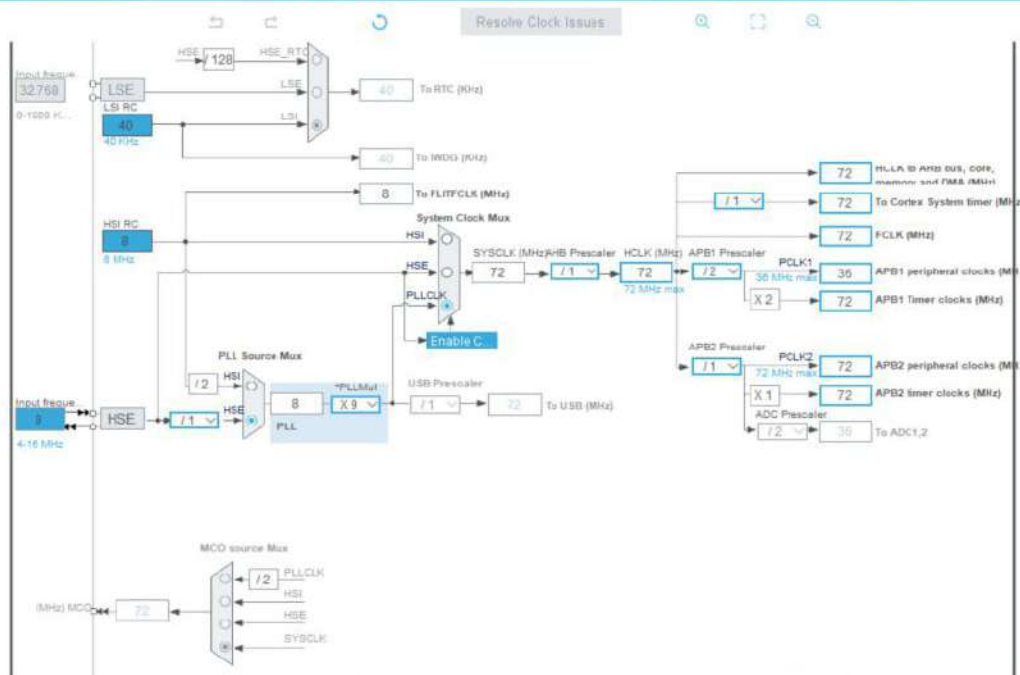

Tools

▼ Pinout

III System new

STM32CubeMX Assignment2.loc: STM32F103C8Tx

File Window Help myST

Home STM32F103C8Tx Assignment2.loc - Pinout & Configuration GENERATE CODE

Pinout & Configuration

Categories A-Z

System Core

- DMA
- GPIO
- IWDG
- NVIC
- RCC
- SYS
- WWDG

Analog

Timers

- RTC
- TIM1
- TIM2
- TIM3**
- TIM4

Connectivity

Computing

Middleware and Software Packs

TIM3 Mode and Configuration

Mode

Slave Mode: Disable

Trigger Source: Disable

☒ Internal Clock

Channel1: Disable

Channel2: Disable

Channel3: Disable

Channel4: Disable

Combined Channels: Disable

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

Parameter Settings User Constants NVIC Settings DMA Settings

Configure the below parameters:

Search (Ctrl+F)

Counter Settings

Prescaler (PSC - 16 bits value)	7199
Counter Mode	Up
Counter Period (AutoReload Reg.)	4999
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
-----------------------------	--

Pinout view

System view

The diagram shows the STM32F103C8Tx microcontroller with the following pins and connections:

- PC13: VDD
- PC14: VSS
- PC15: VSS
- PC16: VSS
- PC17: VSS
- PC18: VSS
- PC19: VSS
- PC20: VSS
- PC21: VSS
- PC22: VSS
- PC23: VSS
- PC24: VSS
- PC25: VSS
- PC26: VSS
- PC27: VSS
- PC28: VSS
- PC29: VSS
- PC30: VSS
- PC31: VSS
- PC32: VSS
- PC33: VSS
- PC34: VSS
- PC35: VSS
- PC36: VSS
- PC37: VSS
- PC38: VSS
- PC39: VSS
- PC40: VSS
- PC41: VSS
- PC42: VSS
- PC43: VSS
- PC44: VSS
- PC45: VSS
- PC46: VSS
- PC47: VSS
- PC48: VSS
- PC49: VSS
- PC50: VSS
- PC51: VSS
- PC52: VSS
- PC53: VSS
- PC54: VSS
- PC55: VSS
- PC56: VSS
- PC57: VSS
- PC58: VSS
- PC59: VSS
- PC60: VSS
- PC61: VSS
- PC62: VSS
- PC63: VSS
- PC64: VSS
- PC65: VSS
- PC66: VSS
- PC67: VSS
- PC68: VSS
- PC69: VSS
- PC70: VSS
- PC71: VSS
- PC72: VSS
- PC73: VSS
- PC74: VSS
- PC75: VSS
- PC76: VSS
- PC77: VSS
- PC78: VSS
- PC79: VSS
- PC80: VSS
- PC81: VSS
- PC82: VSS
- PC83: VSS
- PC84: VSS
- PC85: VSS
- PC86: VSS
- PC87: VSS
- PC88: VSS
- PC89: VSS
- PC90: VSS
- PC91: VSS
- PC92: VSS
- PC93: VSS
- PC94: VSS
- PC95: VSS
- PC96: VSS
- PC97: VSS
- PC98: VSS
- PC99: VSS
- PC100: VSS

35°C

5:12 PM 6/30/2026

35°C 35°C
مشمس
Search
ENG 5:11 PM 6/30/2026

STM32CubeMX Assignment2.loc: STM32F103C8Tx

FileWindowHelpmyST

STM32CubeMX

HomeSTM32F103C8TxAssignment2.loc - Pinout & ConfigurationGENERATE CODE

Pinout & ConfigurationClock ConfigurationProject ManagerTools

Software PacksPinout

GPIO Mode and Configuration

Configuration

Group By Peripherals

GPIOI2CIRCC

Search Signals

Search (Ctrl+F)

Show only Modified Pins

Pin N...	Signal on...	GPIO out...	GPIO mode	GPIO Pul...	Maximu...	User Label	Modified
PA0-WK...	n/a	n/a	Input mode	Pull-up	n/a		☒
PA1	n/a	n/a	Input mode	Pull-up	n/a		☒
PA2	n/a	n/a	Input mode	Pull-up	n/a		☒
PA8	n/a	Low	Output P...	No pull-u...	Low		☐

Select Pins from table to configure them. Multiple selection is Allowed.

Pinout viewSystem view

Pinout diagram of the STM32F103C8Tx LQFP48 package. The diagram shows the chip with its pins and their functions. The pins are labeled as follows:

- Top: VDD, VSS, PB8, PB9, PB10, PB11, PB12, PB13, PB14, PB15, PA15, PA14, PA13, PA12, PA11, PA10, PA9, PA8, PA7, PA6, PA5, PA4, PA3, PA2, PA1, PA0, PA15, PA14, PA13, PA12, PA11, PA10, PA9, PA8, PA7, PA6, PA5, PA4, PA3, PA2, PA1, PA0.
- Bottom: VDD, VSS, PB8, PB9, PB10, PB11, PB12, PB13, PB14, PB15, PA15, PA14, PA13, PA12, PA11, PA10, PA9, PA8, PA7, PA6, PA5, PA4, PA3, PA2, PA1, PA0.
- Left: VBAT, PC13, PC14, PC15, PC16, PC17, PC18, PC19, PC20, PC21, PC22, PC23, PC24, PC25, PC26, PC27, PC28, PC29, PC30, PC31, PC32, PC33, PC34, PC35, PC36, PC37, PC38, PC39, PC40, PC41, PC42, PC43, PC44, PC45, PC46, PC47, PC48.
- Right: VDD, VSS, PB8, PB9, PB10, PB11, PB12, PB13, PB14, PB15, PA15, PA14, PA13, PA12, PA11, PA10, PA9, PA8, PA7, PA6, PA5, PA4, PA3, PA2, PA1, PA0.

35°C

Search

ENG

5:11 PM

6/30/2026

STM32CubeMX Assignment2.loc: STM32F103C8Tx

FileWindowHelpmyST

STM32CubeMX

HomeSTM32F103C8TxAssignment2.loc - Pinout & ConfigurationGENERATE CODE

Pinout & Configuration

Clock Configuration

Project Manager

Tools

CategoriesA-Z

System Core

DMA

GPIO

IWDG

NVIC

RCC

SYS

WWDG

Analog

Timers

Connectivity

Computing

Middleware and Software Packs

NVIC Mode and Configuration

Configuration

Priority Group

Sort by Preemption Priority and Sub Priority

Sort by interrupts na

Search

Show

available interrupts

Force DMA channel

NVIC Interrupt Table	Enabled	Preemption Priority	S
Non maskable interrupt	☒	0	0
Hard fault interrupt	☒	0	0
Memory management fault	☒	0	0
Prefetch fault, memory access fault	☒	0	0
Undefined instruction or illegal state	☒	0	0
System service call via SWI instruction	☒	0	0
Debug monitor	☒	0	0
Pendable request for system service	☒	0	0
Time base: System tick timer	☒	15	0
PVD interrupt through EXTI line 15	☐	0	0
Flash global interrupt	☐	0	0
RCC global interrupt	☐	0	0
TIM3 global interrupt	☒	0	0
I2C2 event interrupt	☐	0	0
I2C2 error interrupt	☐	0	0

☐ EnabledPreemption PrioritySub Priority

Pinout viewSystem view

RCC_OSC_IN

RCC_OSC_OUT

GPIO_Input

GPIO_Input

GPIO_Input

GPIO_Output

I2C2_SCL

I2C2_SDA

VBAT

PC13

PC14

PC15

PD0

PD1

NRST

VSSA

UDDA

PA0

PA1

PA2

PA3

PA4

PA5

PA6

PA7

PA8

PA9

PA10

PA11

PA12

PA13

PA14

PA15

PD4

PD5

PD6

PD7

PD8

PD9

PD10

PD11

PD12

PD13

PD14

PD15

UDD

VSS

UDD

35°C

Search

ENG

5:11 PM

6/30/2026