




```
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#int e0/0
R1(config-if)#ip add 10.0.0.1 255.0.0.0
R1(config-if)#no sh
*Aug 25 01:41:50.962: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#
R1(config)#int e0/1
R1(config-if)#ip add 20.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#
R1(config)#show ip int brief
^
% Invalid input detected at '^' marker.
R1(config)#
```

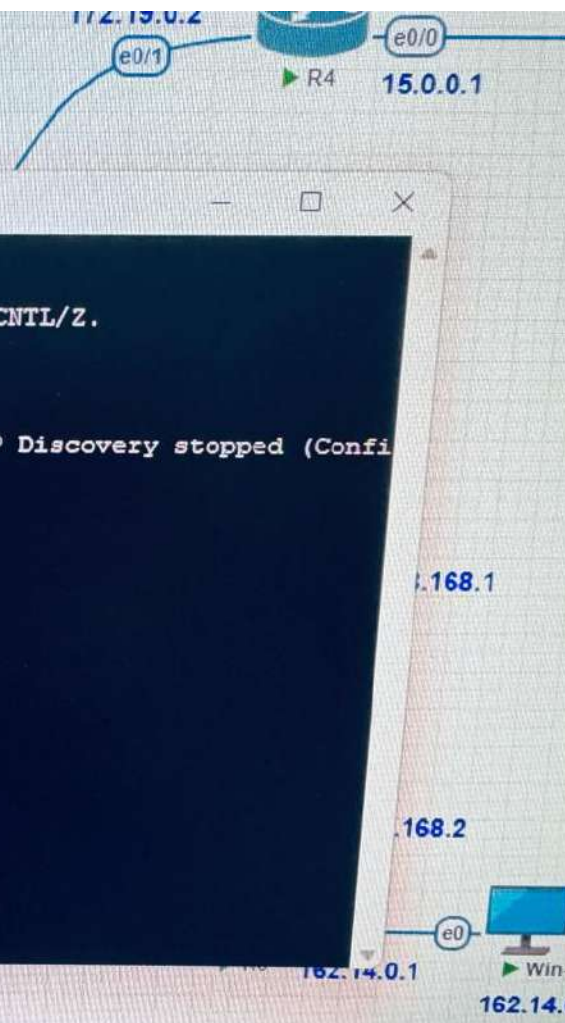

15.0.0.1


 R1[illegible]

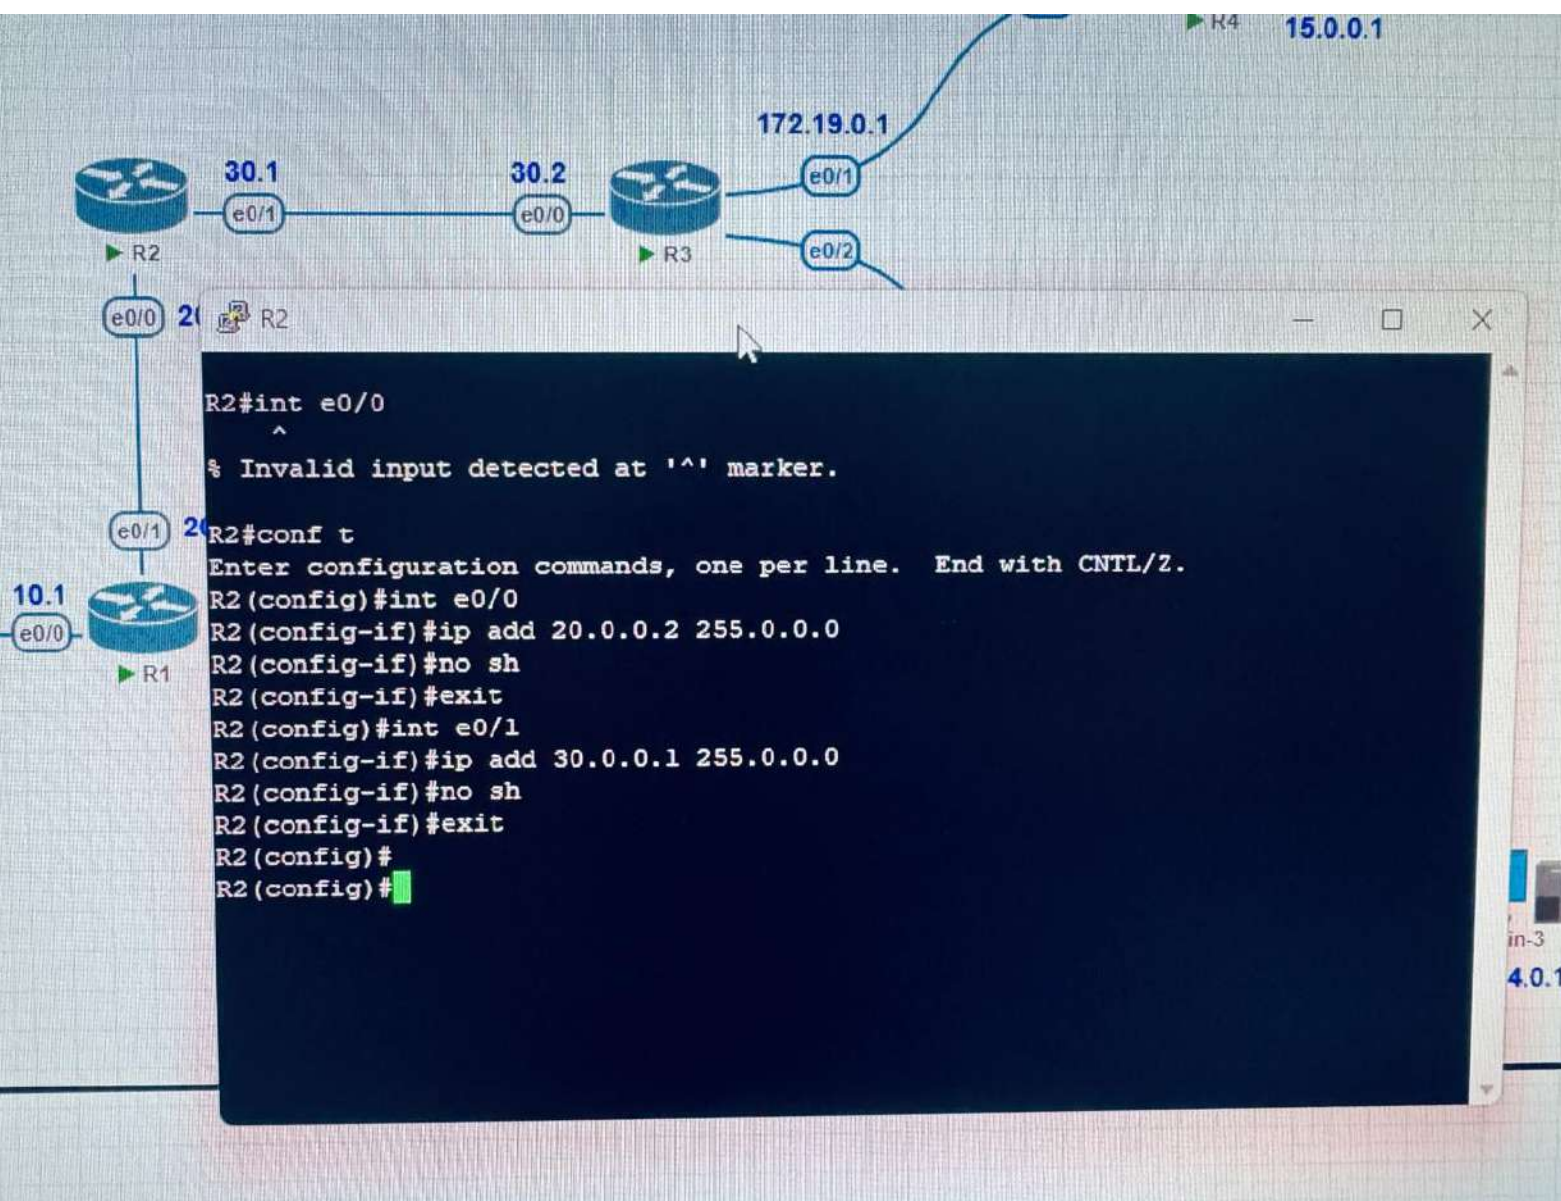


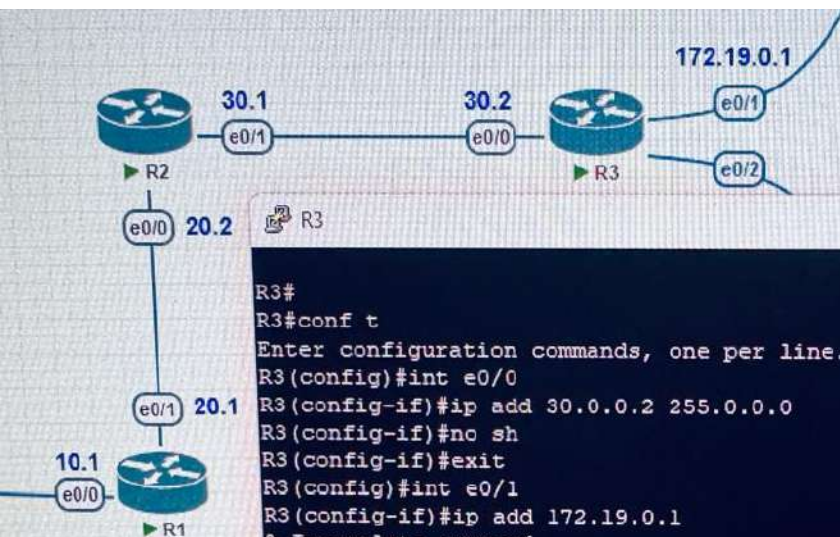

```
R3#
R3#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#int e0/0
R3(config-if)#ip add 30.0.0.2 255.0.0.0
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#int e0/1
R3(config-if)#ip add 172.19.0.1
% Incomplete command.

R3(config-if)#ip add 172.19.0.1 255.0.0.0
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#
*Aug 25 01:53:24.974: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R3(config)#int e0/2
R3(config-if)#ip add 21.0.0.1 255.0.0.0
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#
```

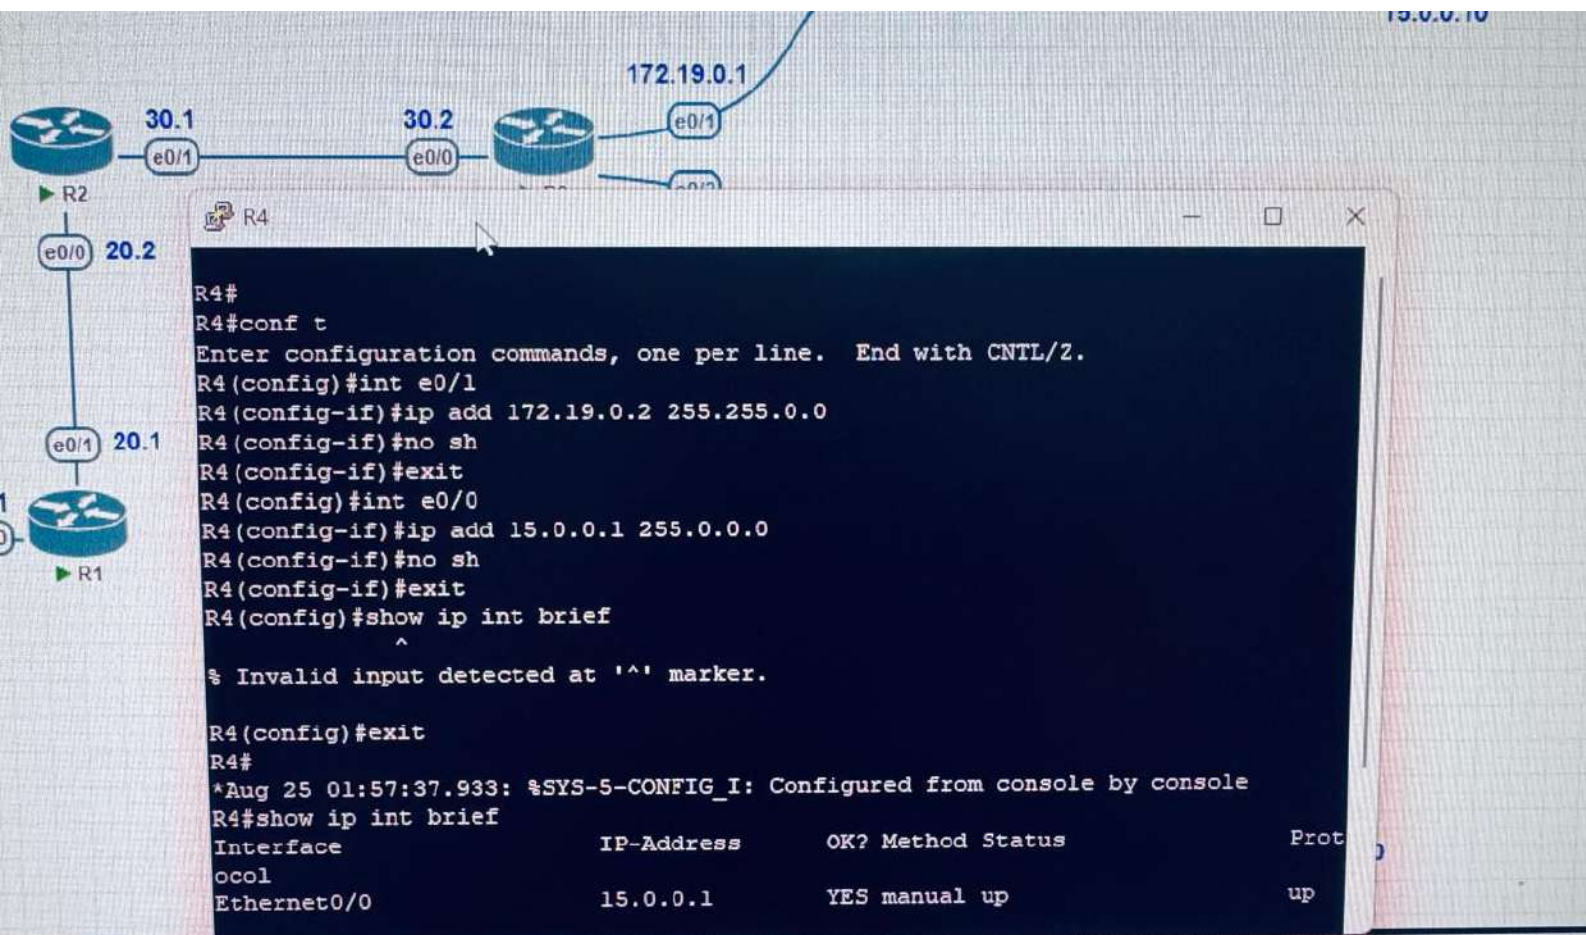

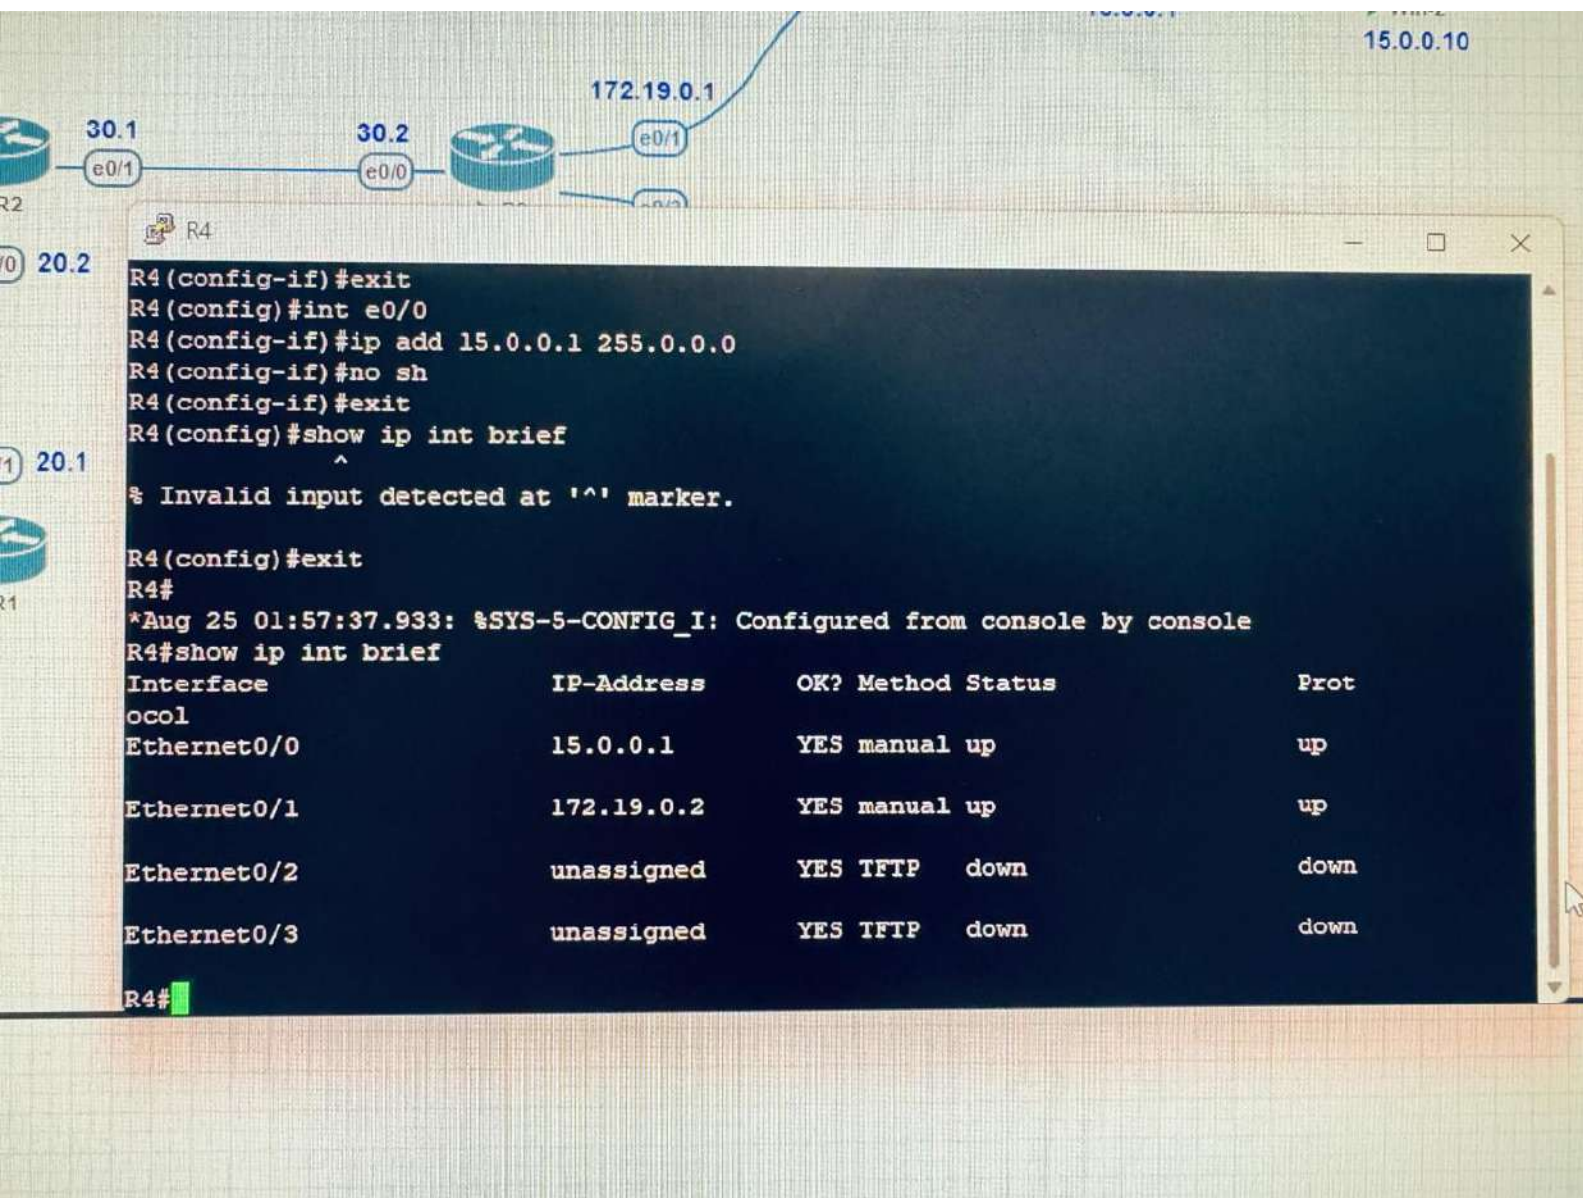R4 15.0.0.1

172.19.0.1

R5

```
R5#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R5(config)#int e0/0
R5(config-if)#ip add 21.
*Aug 25 01:59:07.784: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R5(config-if)#ip add 21.0.0.2 255.0.0.0
R5(config-if)#no sh
R5(config-if)#exit
R5(config)#int e0/1
10 R5(config-if)#ip add 192.168.168.1 255.255.255.0
e0 R5(config-if)#no sh
R5(config-if)#exit
R5(config)#exit
R5#
*Aug 25 02:00:02.956: %SYS-5-CONFIG_I: Configured from console by console
R5#show ip int breif
^
% Invalid input detected at '^' marker.

R5#show ip int brief
Interface                IP-Address      OK? Method Status
GigabitEthernet0/0       21.0.0.2        YES manual up
GigabitEthernet0/1       192.168.168.1   YES manual up
```

168.1

68.2

e0

Prot

1



Win-3

162.14.0.10

172.19.0.1

R5

```
R5(config-if)#exit
R5(config)#int e0/1
R5(config-if)#ip add 192.168.168.1 255.255.255.0
R5(config-if)#no sh
R5(config-if)#exit
R5(config)#exit
R5#
```

*Aug 25 02:00:02.956: %SYS-5-CONFIG_I: Configured from console by console

```
R5#show ip int breif
```

^

% Invalid input detected at '^' marker.

10

e0 R5#show ip int brief

Interface	IP-Address	OK?	Method	Status	Prot
Ethernet0/0	21.0.0.2	YES	manual	up	up
Ethernet0/1	192.168.168.1	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down

R5#

R6#conf t

Enter configuration commands, one per line. End with CNTL/Z.

R6(config)#int e0/1

R6(config-if)#ip add 192.168.168.2 255.255.255.0

R6(config-if)#no sh

R6(config-if)#exit

R6(config)#int e0/0

R6(config-if)#ip add 162.14.0.1 255.255.0.0

R6(config-if)#no sh

R6(config-if)#exit

R6(config)#exit

R6#

*Aug 25 02:02:54.169: %SYS-5-CONFIG_I: Configured from console by console

R6#show ip int brief

Interface	IP-Address	OK?	Method	Status	Prot
Loopback0					
Ethernet0/0	162.14.0.1	YES	manual	up	up
Ethernet0/1	192.168.168.2	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down

e0/1

19

K
IES

172.19.0.2

e0/1



R4

e0/0

15.0.0.1

e0

R1

R1(config)#

R1(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2

R1(config)#ip route 172.19.0.0 255.255.0.0 20.0.0.2

% Invalid input detected at '^' marker.

R1(config)#ip route 172.19.0.0 255.255.0.0 20.0.0.2

R1(config)#ip route 15.0.0.0 255.0.0.0 20.0.0.2

R1(config)#ip route 21.0.0.0 255.0.0.0 20.0.0.2

R1(config)#ip route 192.168.168.0 255.0.0.0 20.0.0.2

%Inconsistent address and mask

R1(config)#ip route 192.168.168.0 255.255.255.0 20.0.0.2

R1(config)#ip route 162.14.0.0 255.255.0.0 20.0.0.2

R1(config)#

R1(config)#

R1(config)#

R1(config)#

R1(config)#show ip route

% Invalid input detected at '^' marker.

R1(config)#exit

R1#

*Aug 25 02:07:37.429: %SYS-5-CONFIG_I: Configured from console by console

e0/0

R6

162.14.0.1

e0

Win-3

162.14.0.10

10.1

e0/0

R1#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.0.0.0/8 is directly connected, Ethernet0/0
L 10.0.0.1/32 is directly connected, Ethernet0/0
S 15.0.0.0/8 [1/0] via 20.0.0.2
C 20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 20.0.0.0/8 is directly connected, Ethernet0/1
L 20.0.0.1/32 is directly connected, Ethernet0/1
S 21.0.0.0/8 [1/0] via 20.0.0.2
S 30.0.0.0/8 [1/0] via 20.0.0.2
S 162.14.0.0/16 [1/0] via 20.0.0.2

--More--

172.19.0.2

e0/1



R4

e0/0

15.0.0.1

e0

R1

10.1

e0/0

R6


e0/0


162.14.0.1

e0

Win-3

162.14.0.10

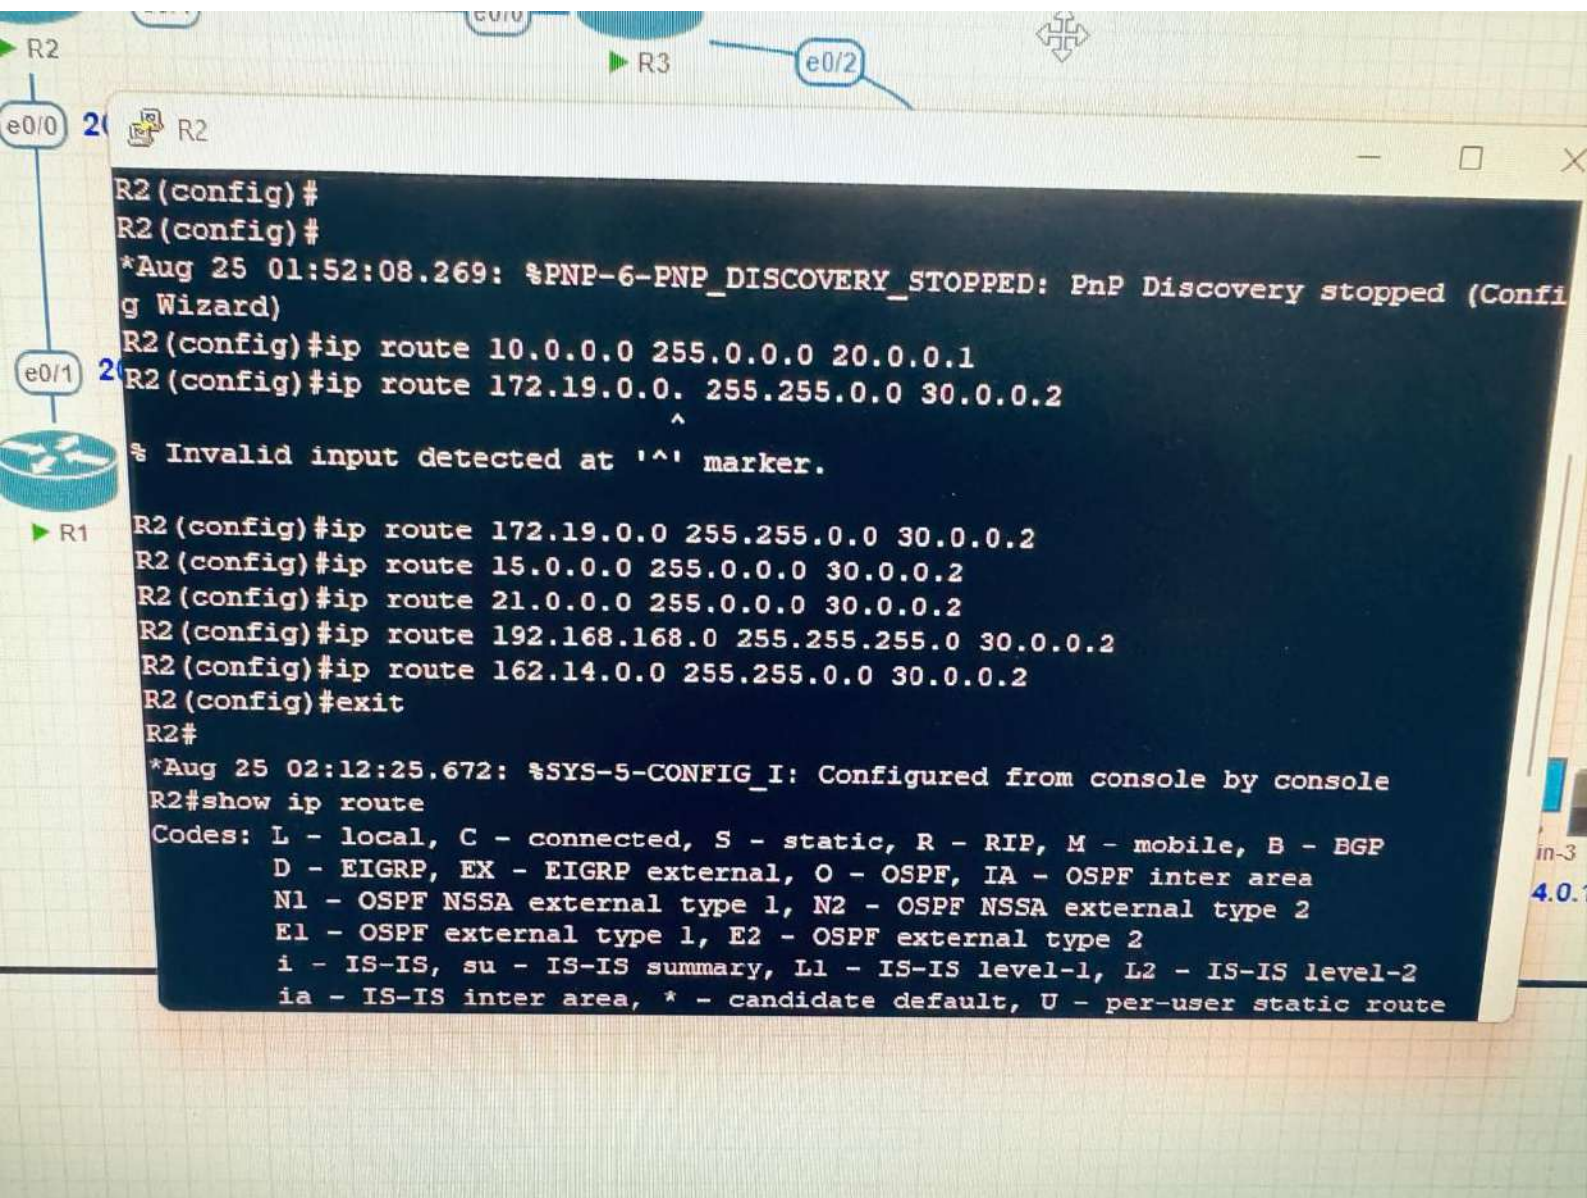

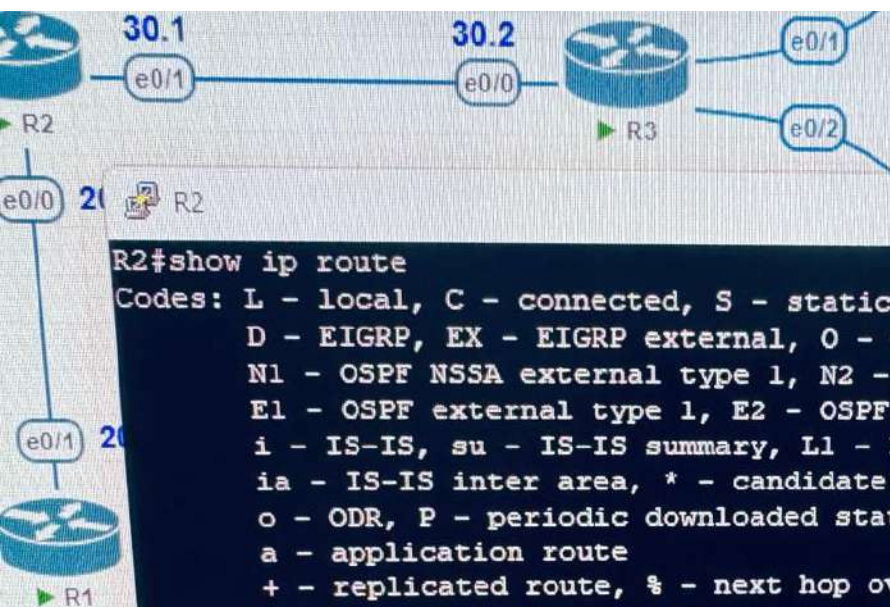

R2#show ip route


Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
 D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
 N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
 E1 - OSPF external type 1, E2 - OSPF external type 2
 i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
 ia - IS-IS inter area, * - candidate default, U - per-user static route
 o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
 a - application route
 + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set


```

S    10.0.0.0/8 [1/0] via 20.0.0.1
S    15.0.0.0/8 [1/0] via 30.0.0.2
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        20.0.0.0/8 is directly connected, Ethernet0/0
L        20.0.0.2/32 is directly connected, Ethernet0/0
S    21.0.0.0/8 [1/0] via 30.0.0.2
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        30.0.0.0/8 is directly connected, Ethernet0/1
L        30.0.0.1/32 is directly connected, Ethernet0/1
S    162.14.0.0/16 [1/0] via 30.0.0.2
  
```

--More--

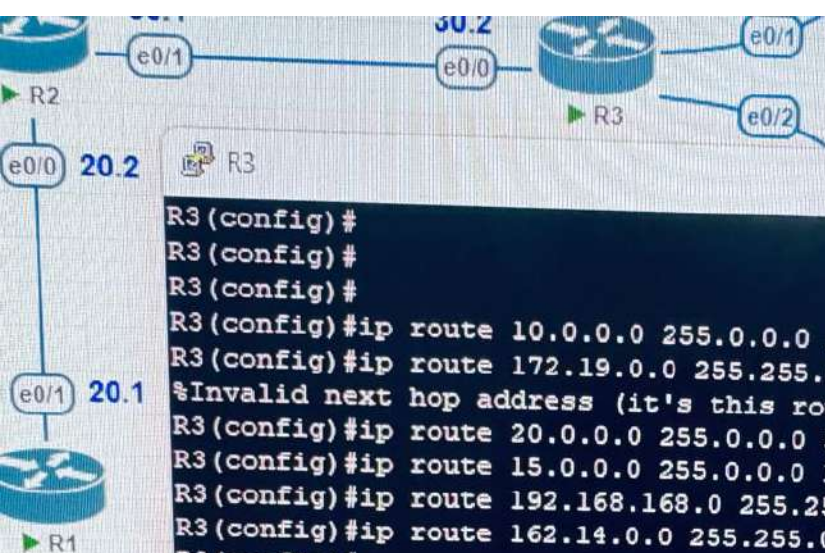

```
R3(config)#
R3(config)#
R3(config)#
R3(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
R3(config)#ip route 172.19.0.0 255.255.0.0 30.0.0.2
R3(config)#ip route 20.0.0.0 255.0.0.0 30.0.0.1
R3(config)#ip route 15.0.0.0 255.0.0.0 172.19.0.2
R3(config)#ip route 192.168.168.0 255.255.255.0 21.0.0.2
R3(config)#ip route 162.14.0.0 255.255.0.0 21.0.0.2
R3(config)#
R3(config)#exit
R3#
*Aug 25 02:17:41.906: %SYS-5-CONFIG_I: Configured from console by console
R3#
R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
```

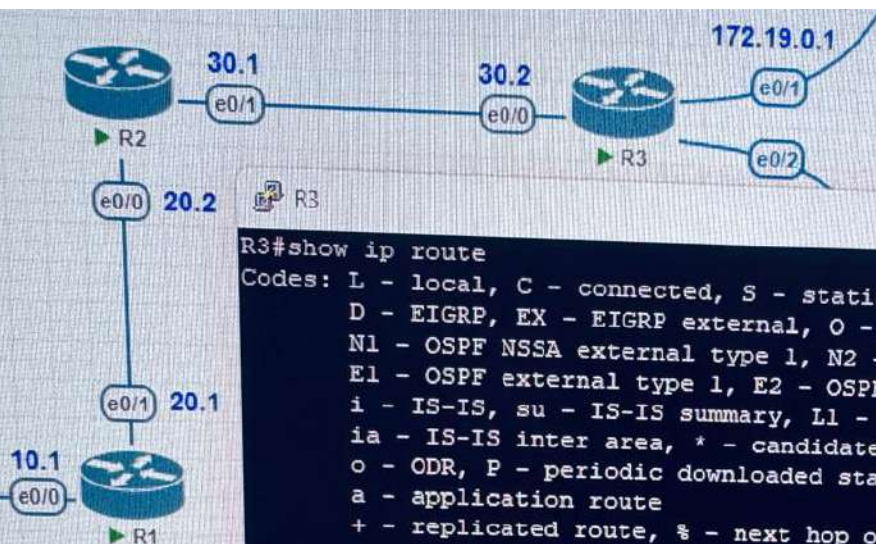R3#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
 D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
 N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
 E1 - OSPF external type 1, E2 - OSPF external type 2
 i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
 ia - IS-IS inter area, * - candidate default, U - per-user static route
 o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
 a - application route
 + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

```


S    10.0.0.0/8 [1/0] via 20.0.0.1
S    15.0.0.0/8 [1/0] via 172.19.0.2
S    20.0.0.0/8 [1/0] via 30.0.0.1
    21.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     21.0.0.0/8 is directly connected, Ethernet0/2
L     21.0.0.1/32 is directly connected, Ethernet0/2
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     30.0.0.0/8 is directly connected, Ethernet0/0
L     30.0.0.2/32 is directly connected, Ethernet0/0
S    162.14.0.0/16 [1/0] via 21.0.0.2
  
```

--More--



0.1

```
R4#  
R4#conf t  
Enter configuration commands, one per line. End with CNTL/Z.  
R4(config)#ip route 10.0.0.0 255.0.0.0 172.19.0.1  
R4(config)#ip route 20.0.0.0 255.0.0.0 172.19.0.1  
R4(config)#ip route 30.0.0.0 255.0.0.0 172.19.0.1  
R4(config)#ip route 21.0.0.0 255.0.0.0 172.19.0.1  
R4(config)#ip route 192.168.168.0 255.255.255.0 172.19.0.1  
R4(config)#ip route 162.14.0.0 255.255.0.0 172.19.0.1  
R4(config)#  
R4(config)#  
R4(config)#  
R4(config)#  
R4(config)#  
R4(config)#  
R4(config)#  
R4(config)#  
R4(config)#  
R4(config)#  
R4(config)#exit  
R4#s  
*Aug 25 02:21:45.984: %SYS-5-CONFIG_I: Configured from console by console
```

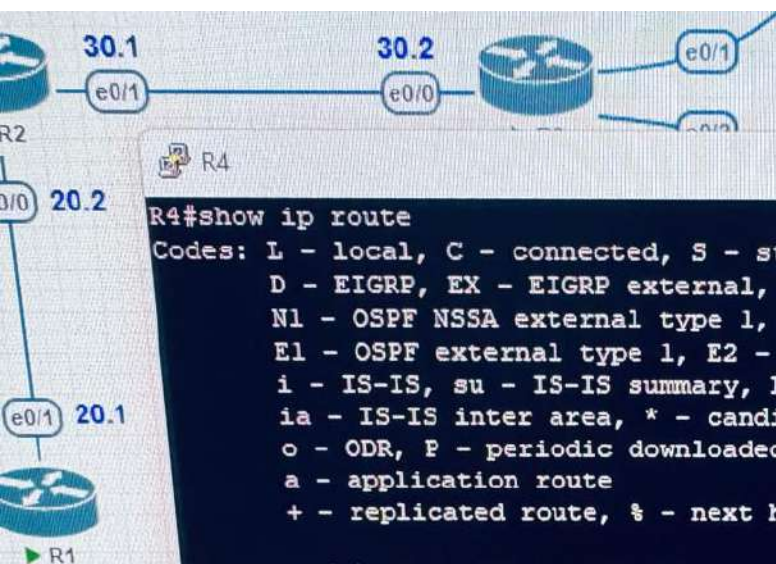R4

R4#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

```
S    10.0.0.0/8 [1/0] via 172.19.0.1
    15.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    15.0.0.0/8 is directly connected, Ethernet0/0
L    15.0.0.1/32 is directly connected, Ethernet0/0
S    20.0.0.0/8 [1/0] via 172.19.0.1
S    21.0.0.0/8 [1/0] via 172.19.0.1
S    30.0.0.0/8 [1/0] via 172.19.0.1
S    162.14.0.0/16 [1/0] via 172.19.0.1
    172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
C    172.19.0.0/16 is directly connected, Ethernet0/1
```

--More--

172.19.0.1

R5

```
R5(config)#
R5(config)#
R5(config)#
R5(config)#
R5(config)#
R5(config)#ip route 10.0.0.0 255.0.0.0 21.0.0.1
R5(config)#ip route 20.0.0.0 255.0.0.0 21.0.0.1
R5(config)#ip route 30.0.0.0 255.0.0.0 21.0.0.1
R5(config)#ip route 15.0.0.0 255.0.0.0 21.0.0.1
R5(config)#ip route 172.19.0.0 255.255.0.0 21.0.0.1
10 R5(config)#ip route 162.14.0.0 255.255.0.0 192.168.168.2
e0 R5(config)#
R5(config)#
R5(config)#exit
R5#
*Aug 25 02:25:02.402: %SYS-5-CONFIG_I: Configured from console by console
R5#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
C      172.19.0.0/16 is directly connected, Ethernet0/1
--More--
```


R5

R5#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

10 Gateway of last resort is not set

e0

```
S 10.0.0.0/8 [1/0] via 21.0.0.1
S 15.0.0.0/8 [1/0] via 21.0.0.1
S 20.0.0.0/8 [1/0] via 21.0.0.1
21.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 21.0.0.0/8 is directly connected, Ethernet0/0
L 21.0.0.2/32 is directly connected, Ethernet0/0
S 30.0.0.0/8 [1/0] via 21.0.0.1
S 162.14.0.0/16 [1/0] via 192.168.168.2
S 172.19.0.0/16 [1/0] via 21.0.0.1
192.168.168.0/24 is variably subnetted, 2 subnets, 2 masks
```

--More--

```
172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
C 172.19.0.0/16 is directly connected, Ethernet0/1
--More--
```

```
R6#
R6#
R6#
R6#
R6#
R6#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R6(config)#ip route 10.0.0.0 255.0.0.0 192.168.168.1
R6(config)#ip route 20.0.0.0 255.0.0.0 192.168.168.1
R6(config)#ip route 30.0.0.0 255.0.0.0 192.168.168.1
R6(config)#ip route 15.0.0.0 255.0.0.0 192.168.168.1
R6(config)#ip route 21.0.0.0 255.0.0.0 192.168.168.1
R6(config)#ip route 172.19.0.0 255.255.0.0 192.168.168.1
R6(config)#
R6(config)#
R6(config)#exit
R6#s
*Aug 25 02:28:15.356: %SYS-5-CONFIG_I: Configured from console by console
R6#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
```



```
R6#show ip route
```

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2  
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
ia - IS-IS inter area, * - candidate default, U - per-user static route  
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP  
a - application route  
+ - replicated route, % - next hop override, p - overrides from PfR
```

```
Gateway of last resort is not set
```


```
S    10.0.0.0/8 [1/0] via 192.168.168.1  
S    15.0.0.0/8 [1/0] via 192.168.168.1  
S    20.0.0.0/8 [1/0] via 192.168.168.1  
S    21.0.0.0/8 [1/0] via 192.168.168.1  
S    30.0.0.0/8 [1/0] via 192.168.168.1  
    162.14.0.0/16 is variably subnetted, 2 subnets, 2 masks  
      C    162.14.0.0/16 is directly connected, Ethernet0/0  
      L    162.14.0.1/32 is directly connected, Ethernet0/0  
S    172.19.0.0/16 [1/0] via 192.168.168.1  
    192.168.168.0/24 is variably subnetted, 2 subnets, 2 masks
```


```
--More--
```




Win-1

10.0.0.10

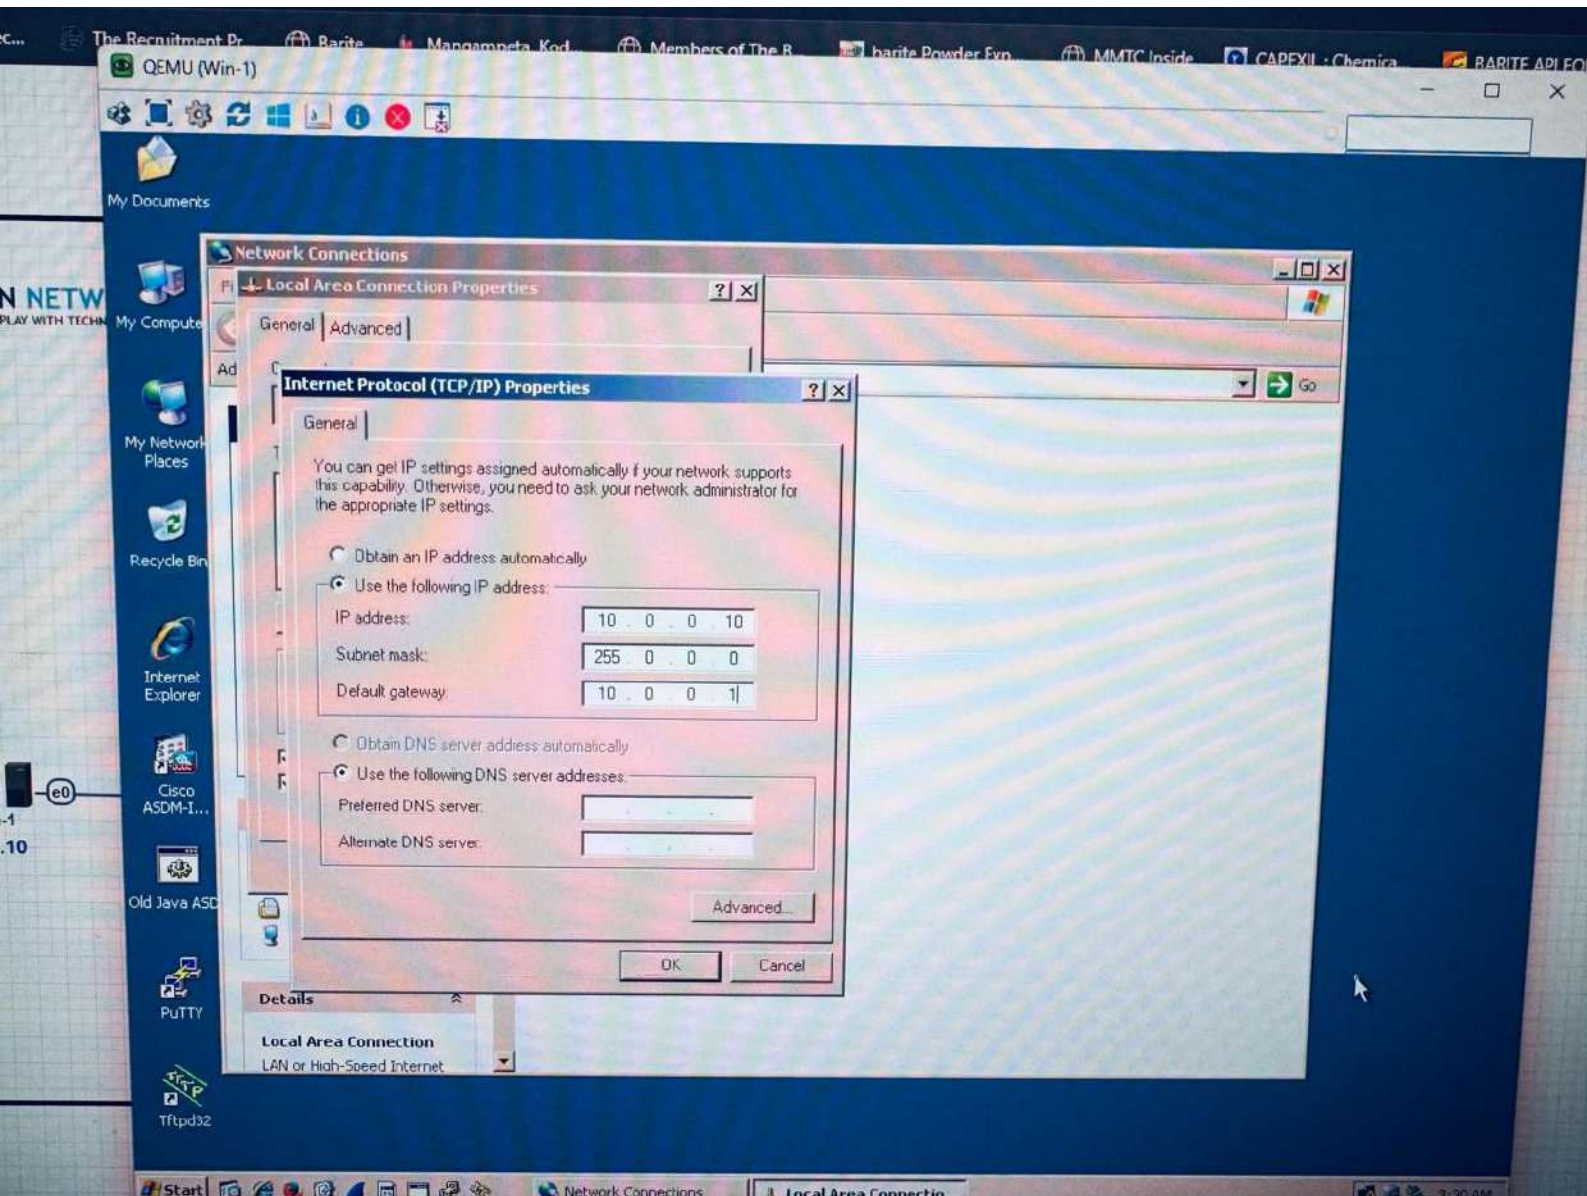


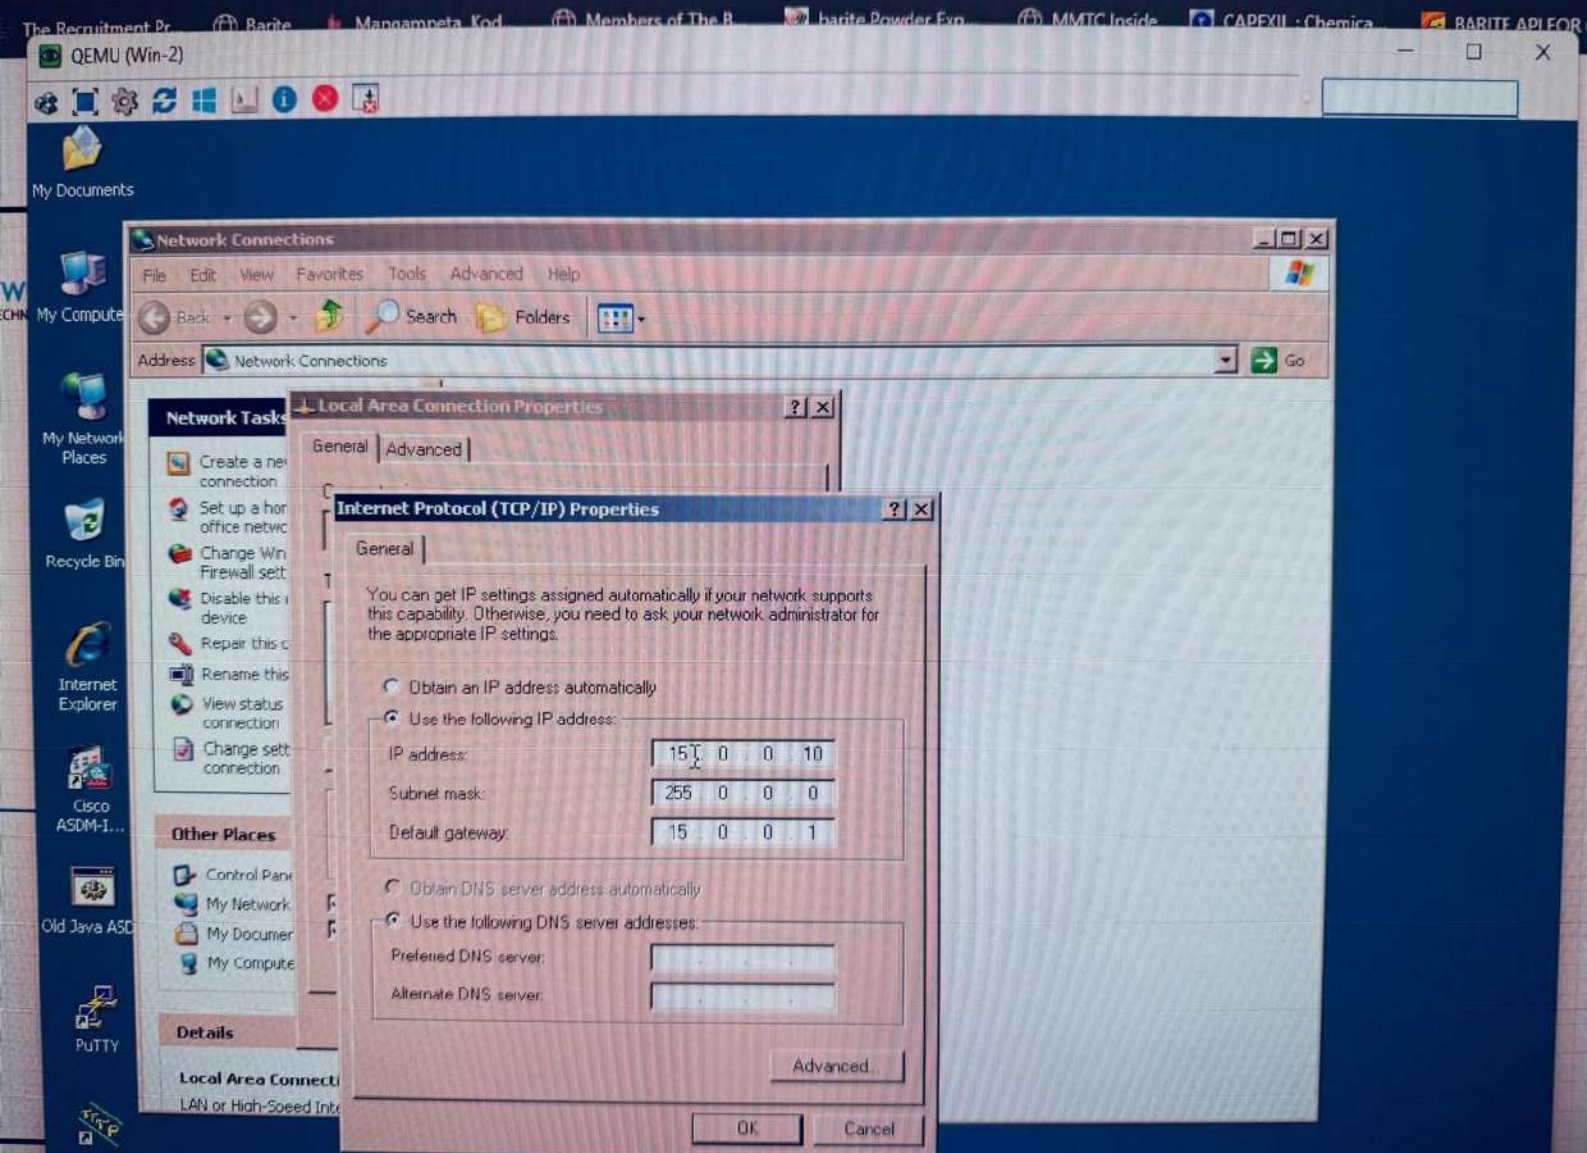

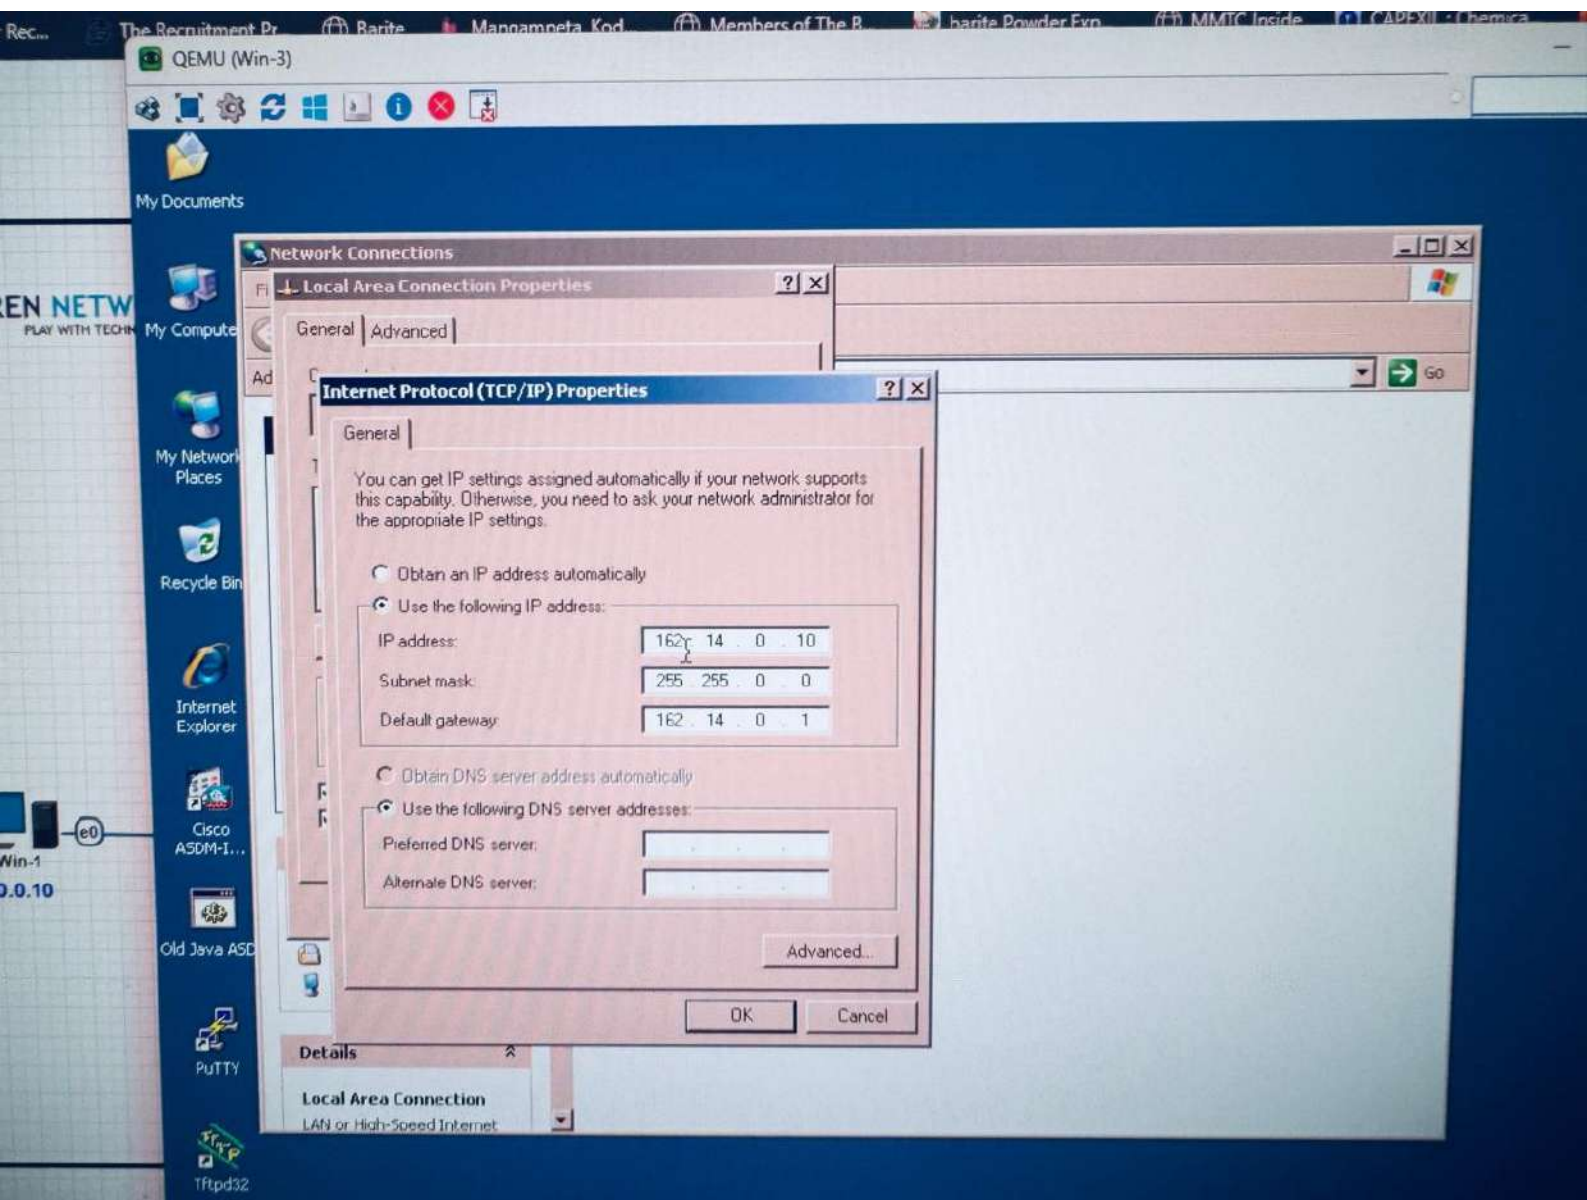

The Recruitment Pr... Barite Mangampeta Kod... Members of The B... barite Powder Exp... MMTIC Inside CAPEXII - Chemica BAR

QEMU (Win-1)

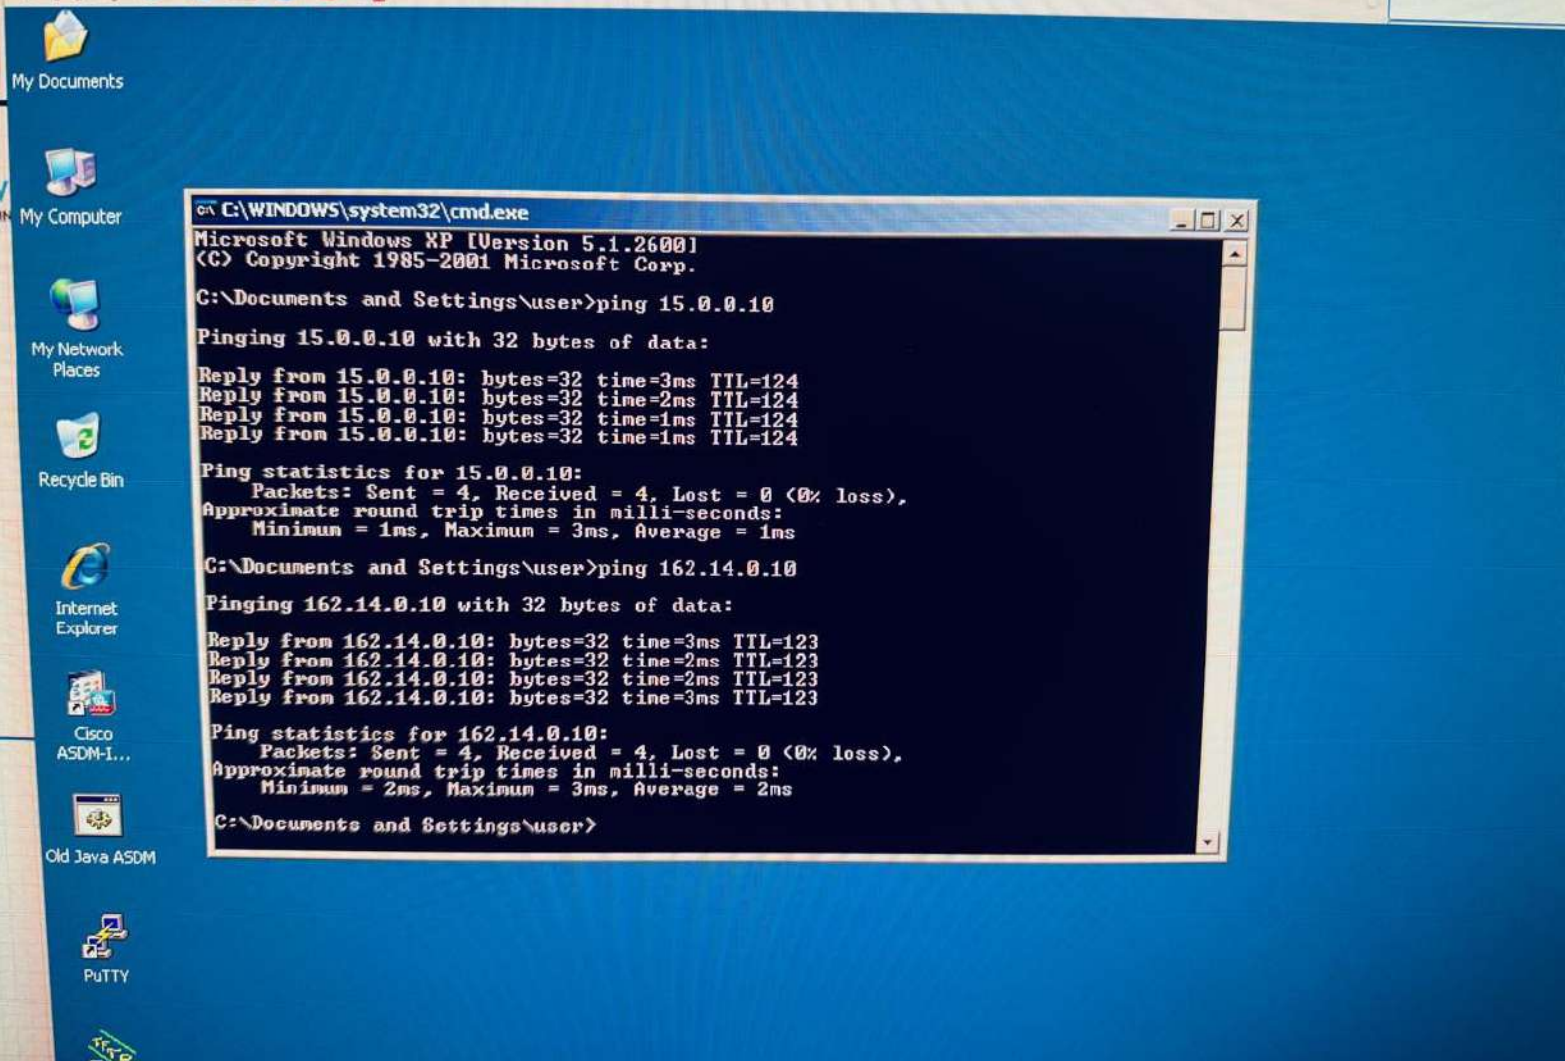

QEMU (Win-2)



My Documents

NETW
WITH TECH

My Computer

My Network
Places

Recycle Bin

Internet
Explorer

Cisco
ASDM-I...

Old Java ASDM

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
<C> Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 162.14.0.10

Pinging 162.14.0.10 with 32 bytes of data:

Reply from 162.14.0.10: bytes=32 time=3ms TTL=124
Reply from 162.14.0.10: bytes=32 time=1ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 162.14.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 10.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 2ms, Average = 2ms

C:\Documents and Settings\user>

