


kudutha fees !!!!!!!

000 RS



```
R1
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#int e0/0
R1(config-if)#ip add 192.50.20.1 255.255.255.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#
R1(config)#int e0/1
R1(config-if)#ip add 12.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#
*Aug 31 23:56:13.238: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1(config)#
```



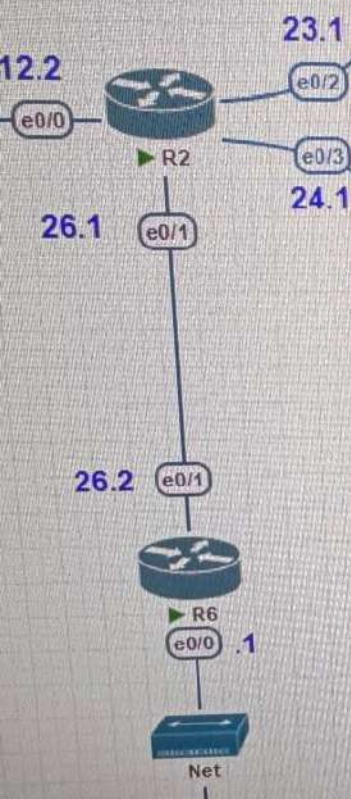

```
R2
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#int e0/0
R2(config-if)#ip add 12.0.0.2 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#
R2(config)#int e0/1
R2(config-if)#ip
*Sep 1 00:04:33.995: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R2(config-if)#ip add 26.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#
R2(config)#int e0/2
R2(config-if)#ip add 23.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#
R2(config)#int e0/3
R2(config-if)#ip add 24.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#
```




12.2 R3#conf t

e0/0

Enter configuration commands, one per line. End with CNTL/Z.

R3(config)#int e0/0

R3(config-if)#ip add 23.0.0.2 255.0.0.0

R3(config-if)#no sh

26 R3(config-if)#exit

R3(config)#

R3(config)#int e0/1

R3(config-if)#ip add 32.0.0.1

*Sep 1 00:09:34.326: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)

R3(config-if)#ip add 32.0.0.1 255.0.0.0

R3(config-if)#no sh

R3(config-if)#exit

20 R3(config)#

R4

```
R4#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R4(config)#int e0/0
R4(config-if)#ip add 24.0.0.2 255.0.0.0
R4(config-if)#no sh
R4(config-if)#exit
R4(config)#
R4(config)#int e0/1
R4(config-if)#ip add 45.0.0.1 255.0.0.0
R4(config-if)#no sh
R4(config-if)#exit
R4(config)#
R4(config)#
```

12.2

e0/0

26.1

e0/0

24.2




e0/1

45.1

26.2

e0/1



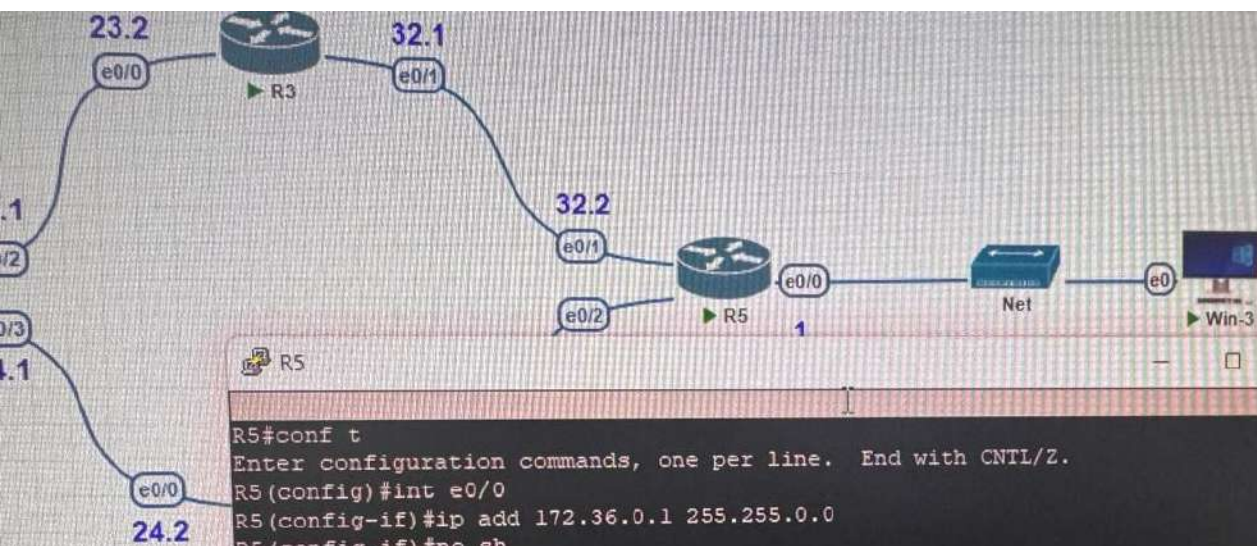

```
R5#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R5(config)#int e0/0
R5(config-if)#ip add 172.36.0.1 255.255.0.0
R5(config-if)#no sh
R5(config-if)#exit
R5(config)#
R5(config)#int e0/1
R5(config-if)#ip add 32.0.0.2 255.0.0.0
R5(config-if)#no sh
R5(config-if)#exit
R5(config)#
R5(config)#int e0/2
R5(config-if)#ip add 45.0.0.2 255.0.0.0
R5(config-if)#no sh
R5(config-if)#exit
```

3.0.50.10

Physical

ENG
IN

eeenga k

10,00

```
R6#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R6(config)#int e0/0
R6(config-if)#ip add 223.0.50.1 255.255.255.0
R6(config-if)#no sh
R6(config-if)#exit
R6(config)#
R6(config)#int e0/1
R6(config-if)#ip add 26.0.0.2 255.0.0.0
R6(config-if)#no sh
R6(config-if)#exit
R6(config)#
R6(config)#
*Sep 1 00:16:57.464: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R6(config)#
```


Net

32.2

e0/1

e0/2

45.2




adutha fees

0 RS



```
R1(config-if)#ip add 192.50.20.1 255.255.255.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#
R1(config)#int e0/1
R1(config-if)#ip add 12.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#exit
R1(config)#
*Aug 31 23:56:13.238: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stoppe
g Wizard)
R1(config)#
R1(config)#ip route 23.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 24.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 26.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 32.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 45.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 172.36.0.0 255.255.0.0 12.0.0.2
R1(config)#ip route 223.0.50.0 255.255.255.0 12.0.0.2
R1(config)#
R1(config)#
R1(config)#
R1(config)#
R1(config)#
```





R1#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 12.0.0.0/8 is directly connected, Ethernet0/1
L 12.0.0.1/32 is directly connected, Ethernet0/1
S 23.0.0.0/8 [1/0] via 12.0.0.2
S 24.0.0.0/8 [1/0] via 12.0.0.2
S 26.0.0.0/8 [1/0] via 12.0.0.2
S 32.0.0.0/8 [1/0] via 12.0.0.2
S 45.0.0.0/8 [1/0] via 12.0.0.2
S 172.36.0.0/16 [1/0] via 12.0.0.2
S 192.50.20.0/24 is variably subnetted, 2 subnets, 2 masks

--More--

26.2 e0/1




```
R2(config)#int e0/2
R2(config-if)#ip add 23.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#
R2(config)#int e0/3
1 R2(config-if)#ip add 24.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#exit
R2(config)#
R2(config)#ip route 192.50.20.0 255.255.255.0 12.0.0.1
R2(config)#ip route 223.0.50.0 255.255.255.0 26.0.0.2
R2(config)#ip route 32.0.0.0 255.0.0.0 23.0.0.2
R2(config)#ip route 45.0.0.0 255.0.0.0 24.0.0.2
R2(config)#
R2(config)#
R2(config)#
R2(config)#
```



!!!!!! Neenga kudutha fees !!!!!


R2

R2#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
 D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
 N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
 E1 - OSPF external type 1, E2 - OSPF external type 2
 i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
 ia - IS-IS inter area, * - candidate default, U - per-user static route
 o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
 a - application route
 + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set


19 12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
 C 12.0.0.0/8 is directly connected, Ethernet0/0
 L 12.0.0.2/32 is directly connected, Ethernet0/0
 23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
 C 23.0.0.0/8 is directly connected, Ethernet0/2
 L 23.0.0.1/32 is directly connected, Ethernet0/2
 24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
 C 24.0.0.0/8 is directly connected, Ethernet0/3
 L 24.0.0.1/32 is directly connected, Ethernet0/3
 26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
 --More--



R3(config-if)#ip add 32.0.0.1
*Sep 1 00:09:34.326: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R3(config-if)#ip add 32.0.0.1 255.0.0.0
R3(config-if)#no sh
R3(config-if)#exit
R3(config)#
R3(config)#ip route 192.50.20.0 255.255.255.0 23.0.0.1
R3(config)#ip route 12.0.0.0 255.0.0.0 23.0.0.1
R3(config)#ip route 172.36.0.0 255.255.0.0 32.0.0.2
^
% Invalid input detected at '^' marker.

R3(config)#ip route 172.36.0.0 255.255.0.0 32.0.0.2
R3(config)#ip route 24.0.0.0 255.0.0.0 23.0.0.1
R3(config)#ip route 26.0.0.0 255.0.0.0 23.0.0.1
R3(config)#ip route 45.0.0.0 255.0.0.0 23.0.0.1
R3(config)#ip route 223.0.50.0 255.255.255.0 23.0.0.1
R3(config)#
R3(config)#
R3(config)#



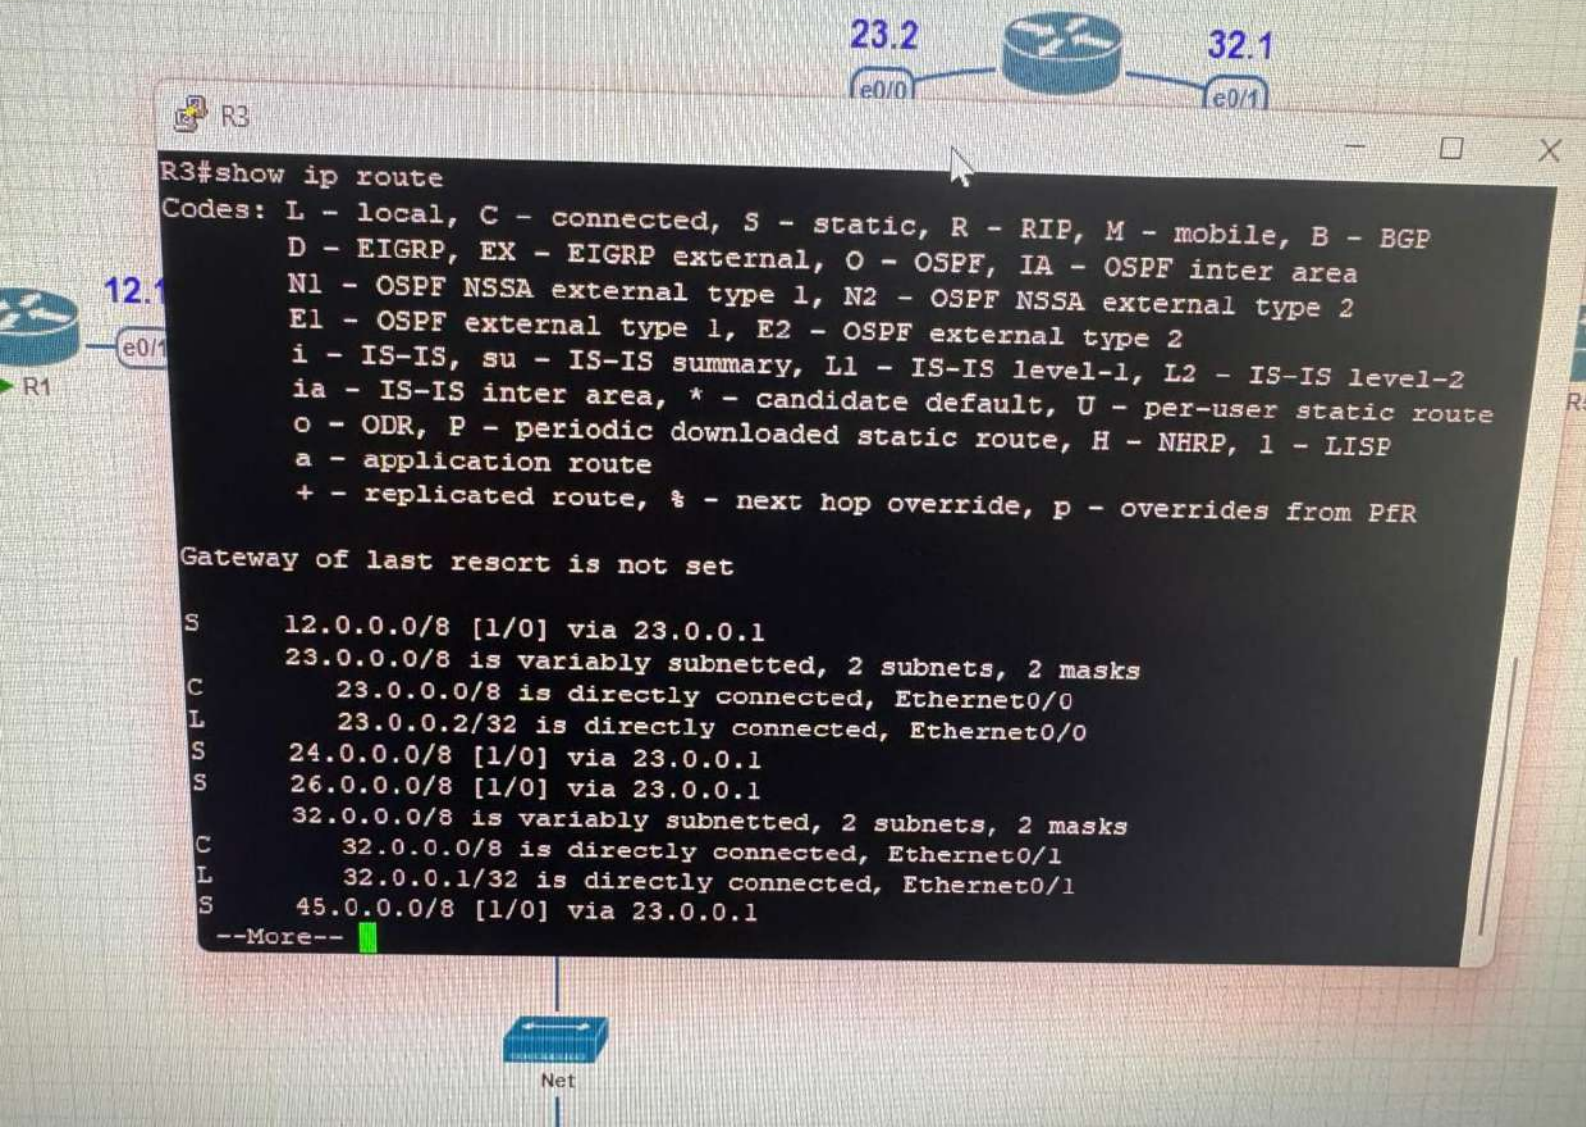

10.000 RS

R4

```
R4(config-if)#no sh
R4(config-if)#exit
R4(config)#
R4(config)#int e0/1
R4(config-if)#ip add 45.0.0.1 255.0.0.0
R4(config-if)#no sh
R4(config-if)#exit
R4(config)#
R4(config)#
*Sep  1 00:14:35.619: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R4(config)#ip route 172.36.0.0 255.255.0.0 45.0.0.2
R4(config)#ip route 192.50.200.0 255.255.255.0 24.0.0.1
R4(config)#ip route 223.0.50.0 255.255.255.0 24.0.0.1
R4(config)#ip route 12.0.0.0 255.0.0.0 24.0.0.1
R4(config)#ip route 23.0.0.0 255.0.0.0 24.0.0.1
R4(config)#ip route 32.0.0.0. 255.0.0.0 45.0.0.2
^
% Invalid input detected at '^' marker.

R4(config)#ip route 32.0.0.0 255.0.0.0 45.0.0.2
R4(config)#ip route 26.0.0.0 255.0.0.0 24.0.0.1
R4(config)#
R4(config)#
```

R6

e0/0

.1



Net

10.000 RS



R4

R4#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

in-1

0.2

Gateway of last resort is not set

S 12.0.0.0/8 [1/0] via 24.0.0.1
S 23.0.0.0/8 [1/0] via 24.0.0.1
24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 24.0.0.0/8 is directly connected, Ethernet0/0
L 24.0.0.2/32 is directly connected, Ethernet0/0
S 26.0.0.0/8 [1/0] via 24.0.0.1
S 32.0.0.0/8 [1/0] via 45.0.0.2
45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 45.0.0.0/8 is directly connected, Ethernet0/1
L 45.0.0.1/32 is directly connected, Ethernet0/1

--More--

R6
e0/0 .1

2

*Sep 1 00:15:43.524: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (g Wizard)

R5(config-if)#exit

R5(config)#

R5(config)#ip route 23.0.0.0 255.0.0.0 32.0.0.1

^

% Invalid input detected at '^' marker.

R5(config)#ip route 23.0.0.0 255.0.0.0 32.0.0.1

R5(config)#ip route 24.0.0.0 255.0.0.0 45.0.0.1

R5(config)#ip route 26.0.0.0 255.0.0.0 45.0.0.1

R5(config)#ip route 12.0.0.0 255.0.0.0 32.0.0.1

^

% Invalid input detected at '^' marker.

R5(config)#ip route 12.0.0.0 255.0.0.0 32.0.0.1

R5(config)#ip route 192.50.20.0 255.255.255.0 32.0.0.1

R5(config)#ip route 223.0.20.0 255.255.255.0 45.0.0.1

R5(config)#

R5(config)#

R5

R5#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from Pfr

Gateway of last resort is not set

```
S    12.0.0.0/8 [1/0] via 32.0.0.1
S    23.0.0.0/8 [1/0] via 32.0.0.1
S    24.0.0.0/8 [1/0] via 45.0.0.1
S    26.0.0.0/8 [1/0] via 45.0.0.1
    32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    32.0.0.0/8 is directly connected, Ethernet0/1
L    32.0.0.2/32 is directly connected, Ethernet0/1
    45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    45.0.0.0/8 is directly connected, Ethernet0/2
L    45.0.0.2/32 is directly connected, Ethernet0/2
```

--More--

R6

R6(config)#

R6(config)#ip route 192.50.20.0 255.255.255.0 26.0.0.1

R6(config)#ip route 172.36.0.0 255.255.0.0 26.0.0.1

R6(config)#ip route 12.0.0.0 255.0.0.0 26.0.0.1

R6(config)#ip route 23.0.0.0 255.0.0.0 26.0.0.1

R6(config)#ip route 24.0.0.0 255.0.0.0 26.0.0.1

R6(config)#ip route 32.0.0.0 255.0.0.0 26.0.0.1

R6(config)#ip route 45.0.0.0 255.0.0.0 26.0.0.1

R6(config)#

R6(config)#

R6

```
R6#show ip route
```

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2  
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
ia - IS-IS inter area, * - candidate default, U - per-user static route  
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP  
a - application route  
+ - replicated route, % - next hop override, p - overrides from PfR
```

```
Gateway of last resort is not set
```

```
S    12.0.0.0/8 [1/0] via 26.0.0.1  
S    23.0.0.0/8 [1/0] via 26.0.0.1  
S    24.0.0.0/8 [1/0] via 26.0.0.1  
      26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks  
C      26.0.0.0/8 is directly connected, Ethernet0/1  
L      26.0.0.2/32 is directly connected, Ethernet0/1  
S    32.0.0.0/8 [1/0] via 26.0.0.1  
S    45.0.0.0/8 [1/0] via 26.0.0.1  
S    172.36.0.0/16 [1/0] via 26.0.0.1  
S    192.50.20.0/24 [1/0] via 26.0.0.1  
--More--
```

26.2 e0/1

QEMU (Win-1)



My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

Cisco ASDM-I...

Old Java ASD

PuTTY

Tftpd32

Network Connections

Local Area Connection Properties

General | Advanced

Internet Protocol (TCP/IP) Properties

General

You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.

☐ Obtain an IP address automatically

☒ Use the following IP address:

IP address:

192 . 50 . 20 . 100

Subnet mask:

255 . 255 . 255 . 0

Default gateway:

192 . 50 . 20 . 1

☐ Obtain DNS server address automatically

☒ Use the following DNS server addresses:

Preferred DNS server:

Alternate DNS server:

Advanced...

OK

Cancel

Details

Local Area Connection

LAN or High-Speed Internet

Start

Network Connections

Local Area Connectio...



Search



My Documents



My Computer

My Network
Places

Recycle Bin

Internet
ExplorerCisco
ASDM-1...


Old Java ASDM



PuTTY



Tftpd32

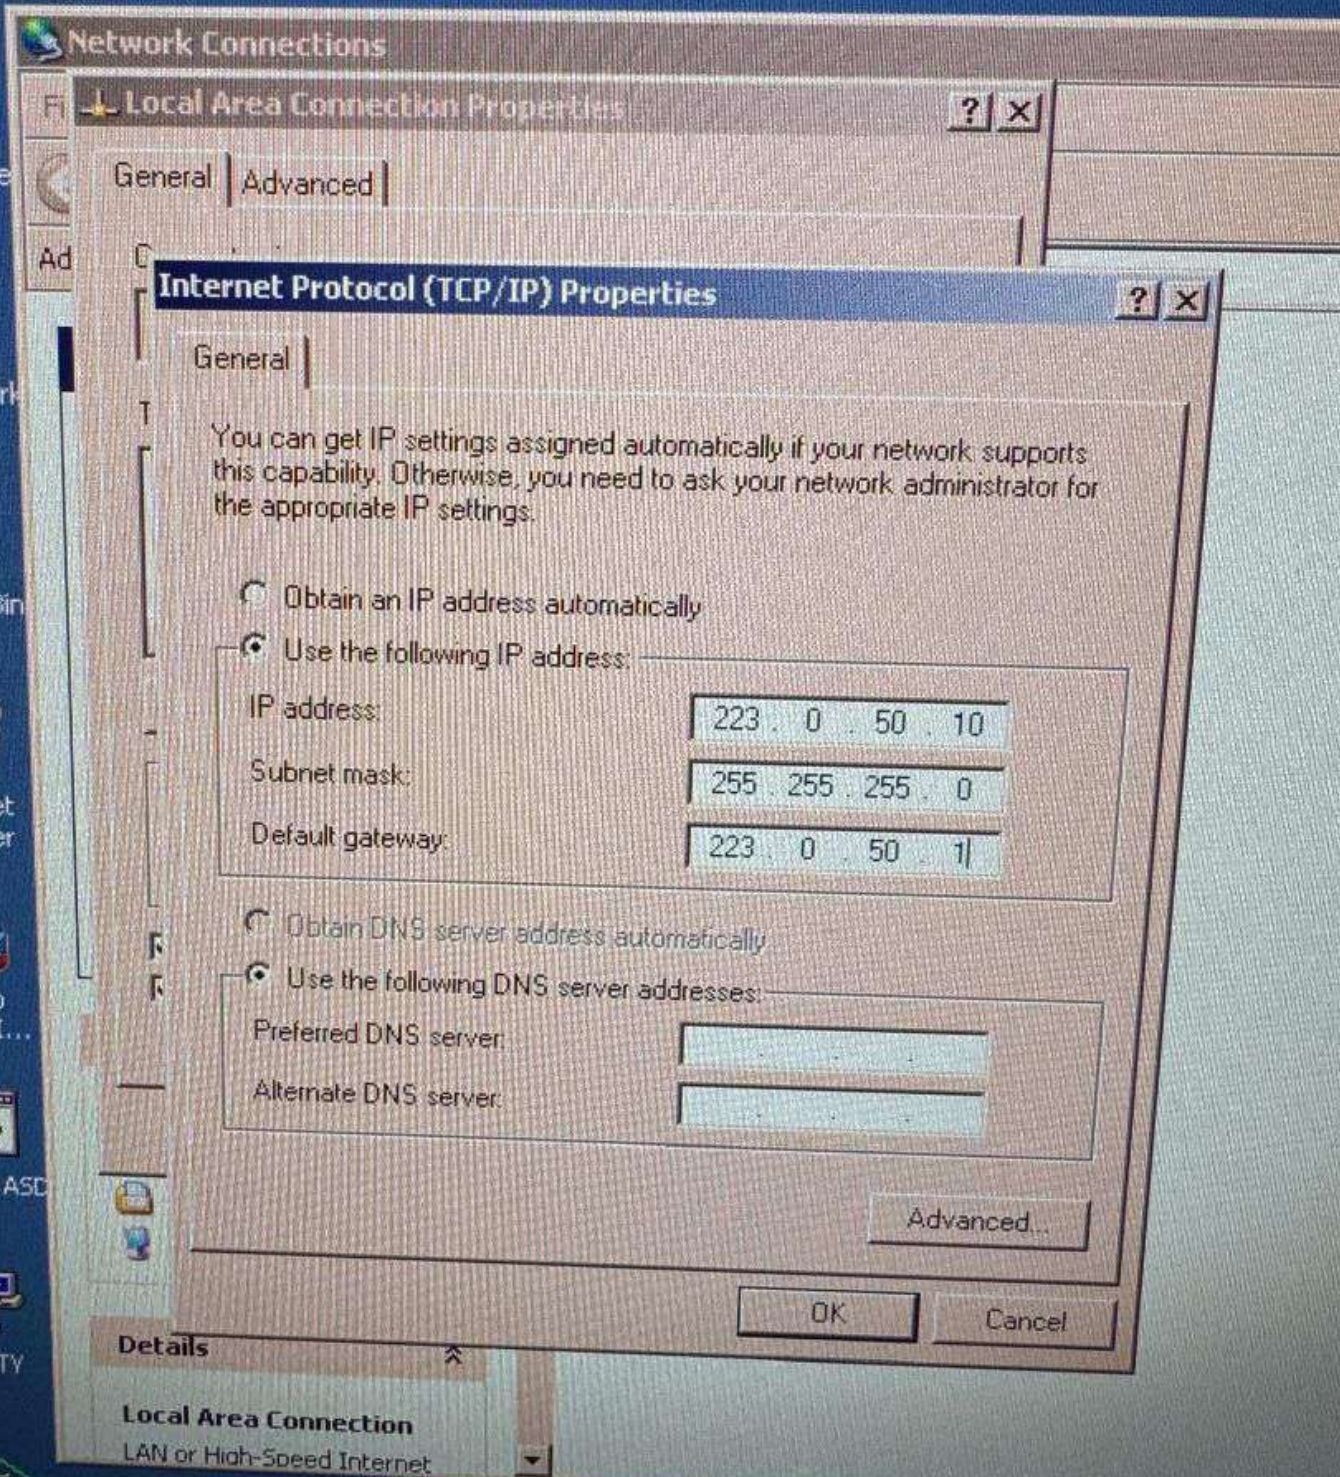



My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

Cisco ASDM-I...

Old Java ASD

PUTTY

TFTPd32

Network Connections

Local Area Connection Properties

General | Advanced

Internet Protocol (TCP/IP) Properties

General

You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.

☐ Obtain an IP address automatically☒ Use the following IP address:

IP address:

172 . 36 . 0 . 10

Subnet mask:

255 . 255 . 0 . 0

Default gateway:

172 . 36 . 0 . 1

☐ Obtain DNS server address automatically☒ Use the following DNS server addresses:

Preferred DNS server:

Alternate DNS server:

Advanced...


OK

Cancel

Details

Local Area Connection

LAN or High-Speed Internet

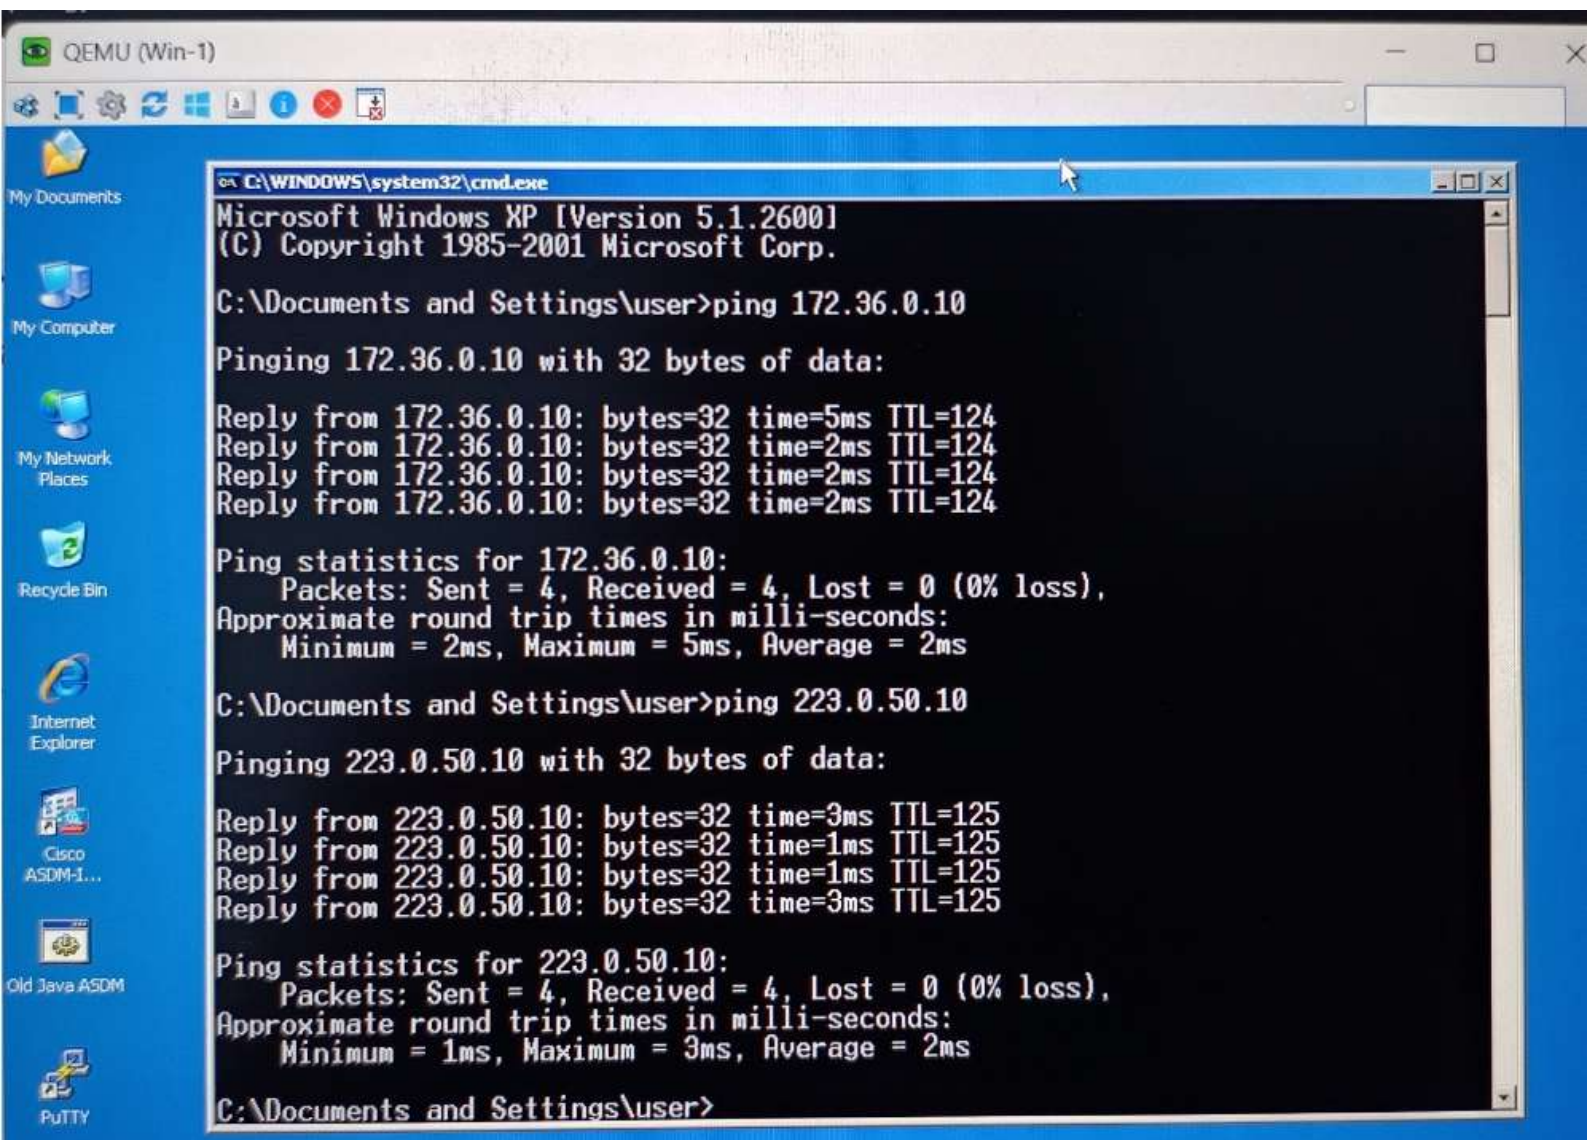

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 172.36.0.10

Pinging 172.36.0.10 with 32 bytes of data:

Reply from 172.36.0.10: bytes=32 time=5ms TTL=124

Reply from 172.36.0.10: bytes=32 time=2ms TTL=124

Reply from 172.36.0.10: bytes=32 time=2ms TTL=124

Reply from 172.36.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 172.36.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 2ms, Maximum = 5ms, Average = 2ms

C:\Documents and Settings\user>ping 223.0.50.10

Pinging 223.0.50.10 with 32 bytes of data:

Reply from 223.0.50.10: bytes=32 time=3ms TTL=125

Reply from 223.0.50.10: bytes=32 time=1ms TTL=125

Reply from 223.0.50.10: bytes=32 time=1ms TTL=125

Reply from 223.0.50.10: bytes=32 time=3ms TTL=125

Ping statistics for 223.0.50.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 1ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>

