TOP VIEW

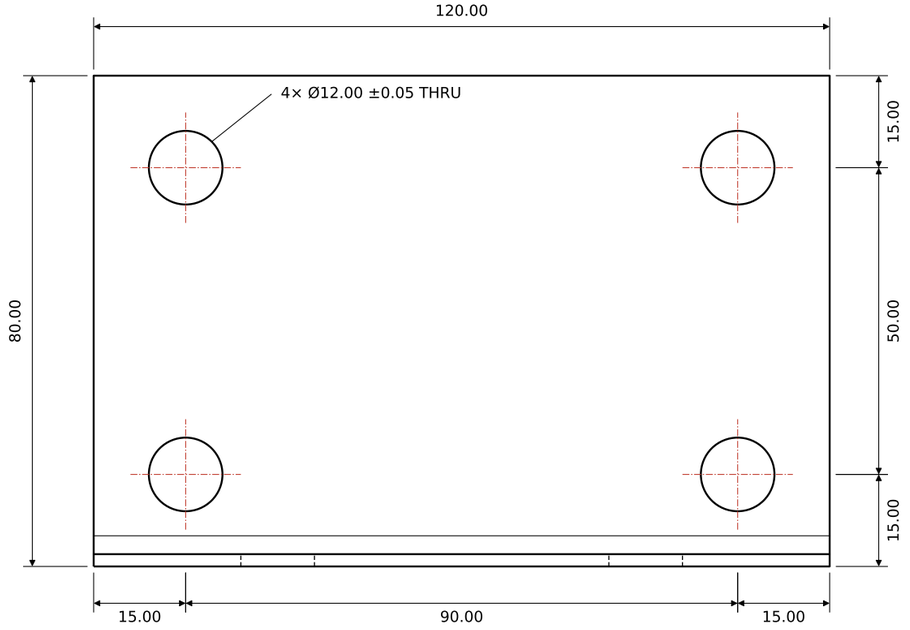

ISOMETRIC VIEW (NOT TO SCALE)

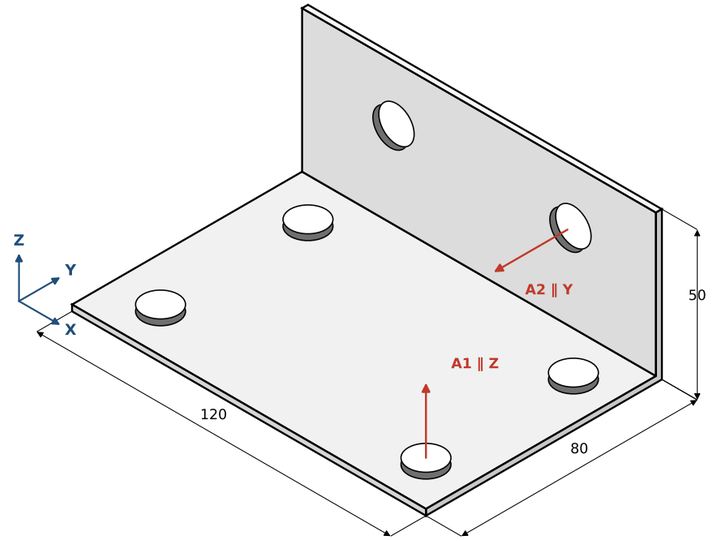

FRONT VIEW (A)

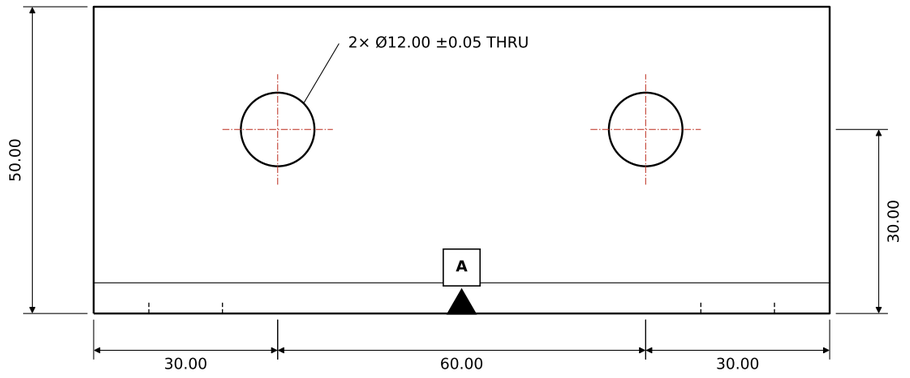

RIGHT SIDE VIEW

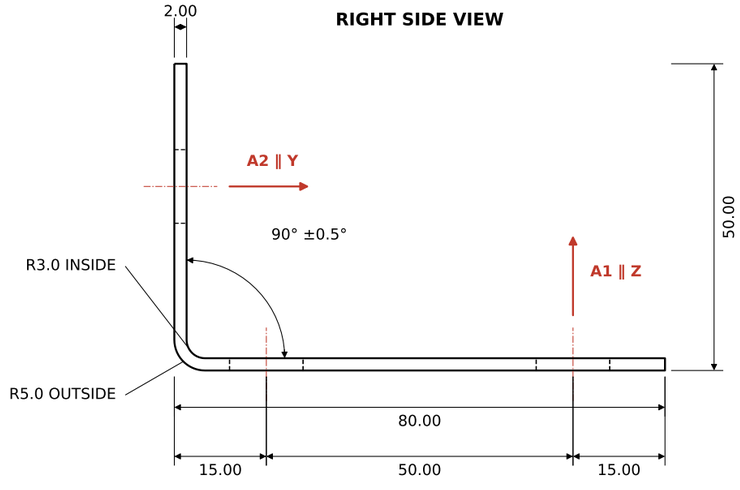

NOTES

1. Material: SPCC cold-rolled steel, 2.0 mm sheet.
2. Unspecified linear tolerance ±0.10 mm.
3. Hole diameter tolerance ±0.05 mm.
4. Bend angle 90° ±0.5°; inside radius R3.0.
5. Break sharp edges 0.2 mm max; deburr holes.
6. Datum A: base underside (marked on front view).
7. Hole axes: A1 (base holes) ∥ Z, A2 (flange holes) ∥ Y.

HOLE AND AXIS SCHEDULE

HOLE	QTY	Ø (mm)	TOL	CENTRE X, Y, Z (mm)	AXIS DIRECTION	∠ TO BASE PLANE	∠ TO FLANGE PLANE	TYPE
H1	4	12.00	±0.05	15/105, 15/65, 0–2	A1 = (0, 0, 1) ∥ Z	90°	0°	THRU, base
H2	2	12.00	±0.05	30/90, 0–2, 30	A2 = (0, 1, 0) ∥ Y	0°	90°	THRU, flange
BEND	1	—	±0.5°	line Y=2…5, along X	axis ∥ X	90° included		R3.0 in / R5.0 out

TITLE

SHEET METAL BRACKET — L-BRACKET WITH 6 SCREW HOLES

PART No.	MATERIAL / THICKNESS		
MS-4505-001	SPCC steel, cold-rolled, 2.0 mm		
UNITS / PROJECTION		REV	SCALE / SHEET
mm | Third angle		**A**	1:1 | 1 of 1