

Belongs to the collections

- Adhoc Rolls

Technical datasheet

Front Label

Reference	COATED 80 FSC™
General characteristics	White coated, calendered, woodfree paper with excellent tensile strength. FSC certification ensures that products are made from responsibly managed forests.
Grammage (g/m ²) ISO 536	80 +/- 3
Thickness (µm) ISO536	70 +/- 4
Whiteness (%) ISO 2470	85 +/- 4

Adhesive

Reference	P7S
General characteristics	Permanent acrylic water based adhesive. Developed for difficult applications where greater adhesion is required. (FTM01)
Tack (N/ pol ²) glass FTM-9	≥ 11
Cohesion (h) 1 kg FTM8	≥ 5
Labelling temperature (°C)	> +5
Service temperature (°C)	0 / +80


Support

Reference	SW60
General characteristics	White calendered paper, translucent, siliconized on one side.
Grammage (g/m ²) ISO 536	55 +/- 3
Thickness (µm) ISO536	50 +/- 5
Opacity (%)	64
Tensile strength MD/CD (N/in) T494	MD>100 / CD>38

LIMITED WARRANTY: All information above regarding ARCONVERT's products is only for guidance. We recommend to adapt the indications on the use of our products to the local conditions, taking into account the materials and / or substrates to be used. Considering the various possible applications, ARCONVERT guarantees the quality of its products according to its specifications, but does not guarantee in any way the final use of them. The user must verify the authenticity of the product as to the specific application and take risks for misuse. If any product is found to be out of specification, ARCONVERT will replace the material and limit its responsible to the value of the product by issuing a credit or replacement of the product. No seller or representative of ARCONVERT is authorized to provide any warranty or make any representation contrary to the document above. We reserve the right to make improvements and modifications to the document and / or product mentioned above without previous notice.



Schemes

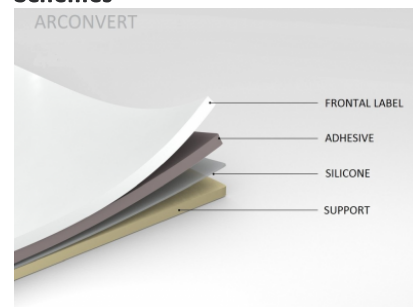

Use and application

Suitable for general purpose labels.

Certification

Fedrigoni Self adhesives has the license FSC - C114507 for trademark use FSC™

Total Weight (g/m²)

160 +/- 8

Total Thickness (µm)

144 +/- 11

Application Instructions

The material must be applied on a clean and dry surface, free of dust, oil and release agent.

Storage Warranty

1 year warranty, under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH). Prolonged storage at higher temperatures and / or humidity levels can shorten the shelf life of the product.