

Belongs to the collections

- Immaculate Greaseproof
- The Book of Labels

Technical datasheet

Front Label

Reference	COATED GREASEPROOF ECO
General characteristics	Coated paper with barrier treatment to oils and greases.
Grammage (g/m ²) ISO 536	80 +/- 3
Thickness (µm) ISO536	78 +/- 5
Dry opacity (%) ISO 2471	≥ 90

Adhesive

Reference	SH6020
General characteristics	Water-based permanent acrylic adhesive. Good adhesion to wet surfaces at low temperatures. Especially designed for glass containers, with excellent resistance to immersion in water/ice. The research centre ISEGA has given the adhesive SH6020 approval according to the European requirements for indirect contact with foodstuffs and compliance with the rules of the Code of Federal Regulations, FDA, 21 CFR Ch.I(April 1, 2013 edition) 175.105. According to the FDA regulations the adhesive must be separated from the foodstuffs by a functional barrier.
Tack (N/ pol ²) glass FTM-9	≥ 11
Cohesion (h) 1 kg FTM8	≥ 2
Labelling temperature (°C)	> +5
Service temperature (°C)	-10 / +75


Support

Reference	CB62
General characteristics	Supercalendered glassine paper, white, siliconized on one side.
Grammage (g/m ²) ISO 536	60 +/- 3
Thickness (µm) ISO536	55 +/- 5
Opacity (%)	58
Tensile strength MD/CD (N/in) T494	MD>114 / CD>40

LIMITED WARRANTY: All information above regarding ARCONVERT's products is only for guidance. We recommend to adapt the indications on the use of our products to the local conditions, taking into account the materials and / or substrates to be used. Considering the various possible applications, ARCONVERT guarantees the quality of its products according to its specifications, but does not guarantee in any way the final use of them. The user must verify the authenticity of the product as to the specific application and take risks for misuse. If any product is found to be out of specification, ARCONVERT will replace the material and limit its responsible to the value of the product by issuing a credit or replacement of the product. No seller or representative of ARCONVERT is authorized to provide any warranty or make any representation contrary to the document above. We reserve the right to make improvements and modifications to the document and / or product mentioned above without previous notice.



Schemes

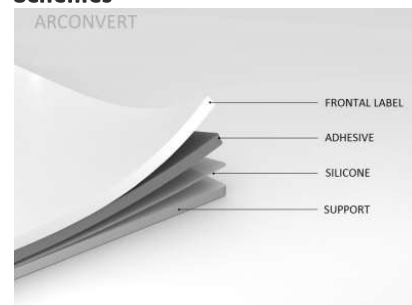

Neck Label

Not recommended

Use and application

Especially developed for labels where resistance to vegetable oil and grease is required.

Total Weight (g/m²)

161 +/- 8

Total Thickness (µm)

158 +/- 13

Grease Resistance



Storage Warranty

2 year warranty, under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH). Prolonged storage at higher temperatures and / or humidity levels can shorten the shelf life of the product.