

# FEDRIGONI

TRANSFER PLUS / AP903 PLUS / SCK55

B1067  
USC:

Edition: 1  
Date of approval: 24/01/2023

Belongs to the collections

- Adhoc Rolls

## Technical datasheet

### Front Label

Reference	TRANSFER PLUS
General characteristics	White matt, woodfree coated paper.
Grammage (g/m <sup>2</sup> ) ISO 536	64 +/- 3
Thickness (µm) ISO536	60 +/- 5

### Adhesive


Reference	AP903 PLUS
General characteristics	Good clarity permanent acrylic adhesive. Excellent adhesion to a wide variety of materials, including apolar substrates (PE and PP). This sticker can be used on slightly rough surfaces. Approved for indirect food contact (FDA 21 CFR 175.105).
Tack (N/ pol <sup>2</sup> ) glass FTM-9	≥ 8
Cohesion (h) 1 kg FTM8	≥ 5
Labelling temperature (°C)	≥ - 10
Service temperature (°C)	-40 / + 120

### Support

Reference	SCK55
General characteristics	White calendered paper, translucent, siliconized on one side.
Grammage (g/m <sup>2</sup> ) ISO 536	55 +/- 3
Thickness (µm) ISO536	50 +/- 5
Opacity (%)	64
Tensile strength MD/CD (N/in) T494	MD>100 / CD>38



## Schemes

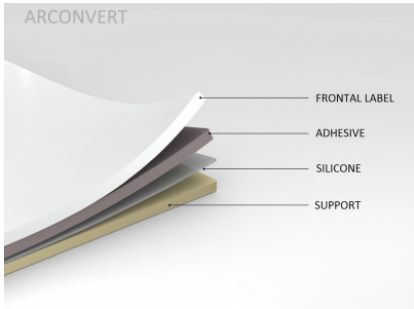

## Use and application

Labels for industrial use. Recommended for thermal transfer printers.

## Certification

Fedrigoni Self adhesives has the license FSC - C114507 for trademark use FSC™

## Total Weight (g/m<sup>2</sup>)

142 +/- 8

## Total Thickness (µm)

132 +/- 12

## Application Instructions

The material must be applied on a clean and dry surface, free of dust, oil and release agent.

## Storage Warranty

1 year warranty, under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH). Prolonged storage at higher temperatures and / or humidity levels can shorten the shelf life of the product.

LIMITED WARRANTY: All information above regarding ARCONVERT's products is only for guidance. We recommend to adapt the indications on the use of our products to the local conditions, taking into account the materials and / or substrates to be used. Considering the various possible applications, ARCONVERT guarantees the quality of its products according to its specifications, but does not guarantee in any way the final use of them. The user must verify the authenticity of the product as to the specific application and take risks for misuse. If any product is found to be out of specification, ARCONVERT will replace the material and limit its responsible to the value of the product by issuing a credit or replacement of the product. No seller or representative of ARCONVERT is authorized to provide any warranty or make any representation contrary to the document above. We reserve the right to make improvements and modifications to the document and / or product mentioned above without previous notice.