

Test report no.: <i>Prüfbericht-Nr.:</i>	CN260M21 001	Order No.: <i>Auftragsnr.:</i>	326196085	Page 1 of 21 <i>Seite 1 von 21</i>
Client reference no.: <i>Kunden-Referenz-Nr.:</i>	N/A	Order date: <i>Auftragsdatum:</i>	2026-07-07	
Client: <i>Auftraggeber:</i>	Shanghai Sonlu Shangling Enterprise Group Co., Ltd. No.999 Zhongqiang Road, Maogang Industry park, Maogang Town, Songjiang City, Shanghai China			
Test item: <i>Prüfgegenstand:</i>	Refrigerator-freezer			
Identification / Type no.: <i>Bezeichnung / Typ-Nr.:</i>	CC-520WEDS-ab (a=M, G; b=E, I)			
Order content: <i>Auftrags-Inhalt:</i>	Type examination			
Test specification <i>Prüfgrundlage:</i>	Resolution 438/2024, IEC 62552:2007 IRAM 2404-2:2000 IRAM 2404-3:2015+M1:2016			
Date of sample receipt: <i>Wareneingangsdatum:</i>	2026-05-28			
Test sample no: <i>Prüfmuster-Nr.:</i>	A00326196085-003 A00326196085-002			
Testing period: <i>Prüfzeitraum:</i>	2026-05-28– 2026-06-24			
Place of testing: <i>Ort der Prüfung:</i>	See testing location			
Testing laboratory: <i>Prüflaboratorium:</i>	TÜV Rheinland (Shanghai) Co., Ltd.			
Test result*: <i>Prüfergebnis*:</i>	Pass			
tested by: Lucy Qi <i>geprüft von:</i>		authorized by: Benny Li <i>genehmigt von:</i>		
Date: 2026-07-20 <i>Datum:</i>		Issue date: 2026-07-20 <i>Ausstellungsdatum:</i>		
Position / Stellung:	PE	Position / Stellung:	Authorizer	
Other: N/A <i>Sonstiges:</i>				
Condition of the test item at delivery: <i>Zustand des Prüfgegenstandes bei Anlieferung:</i>	Test item complete and undamaged Prüfmuster vollständig und unbeschädigt			
* Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet				
This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark. <i>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</i>				

Test report no.: CN260M21 001
Prüfbericht-Nr.:

Page 2 of 21
Seite 2 von 21

Remarks
Anmerkungen

1	The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request. <i>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</i> <i>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</i>
i	As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature <i>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</i>
3	Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report. <i>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</i>
4	The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019. <i>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezueglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</i>

TEST REPORT IRAM 2404-3 Energy efficiency labelling of household refrigerating appliances	
Report Number: CN260M21 001 Date of issue: See cover page Total number of pages: 21	
Testing Laboratory: TÜV Rheinland (Shanghai) Co., Ltd. Address: Workshop 16, Pingqian (Taicang) Modern Industrial Park, No.525, Yuewang Lingang South Road, Shaxi Town, Taicang City, Jiangsu Province, China.	
Applicant's name: Shanghai Sonlu Shangling Enterprise Group Co., Ltd. Address: No.999 Zhongqiang Road, Maogang Industry park, Maogang Town, Songjiang City, Shanghai China	
Manufacturer's name: Shanghai Sonlu Shangling Enterprise Group Co., Ltd. Address: No.999 Zhongqiang Road, Maogang Industry park, Maogang Town, Songjiang City, Shanghai China	
Test specification: Standard: IEC 62552:2007 IEC 62552-2:2000 IEC 62552-3:2015+M1:2016	
Test procedure: Argentinean Energy Efficiency and Noise Non-standard test method: N/A	
Test item description: Refrigerator-freezer Trade Mark:  SHANGLING ,  SONLU Model/Type reference: CC-520WEDS-ab (a=M, G; b=E, I) Ratings: 220-240V, 50Hz R600a, Details see marking plates	
Testing procedure and testing location:	
Testing Laboratory:	See cover page
Testing location/ address:	See cover page
Tested by (name + signature):	See cover page
Reviewed by (name + signature)	See cover page
Witnessed by (name + signature):	See cover page

List of Attachments (including a total number of pages in each attachment):

N/A

Summary of testing:**Relevant tests had tested and passed.**

1. The appliance was tested according to IEC 62552:2007 and IRAM 2404-3:2015+M1:2016.

2. The tests were performed at voltage 220V, 50Hz.

3. Storage temperature test was conducted at 18°C and 43°C according to climate class ST/T.

Energy consumption test, temperature rise test and freezing capacity test was conducted at 25°C according to IRAM 2404-3:2015+M1:2016.

4. The tests were performed on the model CC-520WEDS-GE.

5. Volume test, storage temperature test, energy consumption test, temperature rise test and freezing capacity test were conducted with bottom plastic boxes.

6. Noise test was at 22 ± 3°C, 30% - 85%RH according to IRAM 2404-2:2000.

Testing location:

Workshop 16, Pingqian (Taicang) Modern Industrial Park, No.525, Yuewang Lingang South Road, Shaxi Town, Taicang City, Jiangsu Province, China.

Testing Results Summary:

Model designation	CC-520WEDS-GE
Measured storage volume (L)	443.00
Tested energy consumption (kWh/24h)	0.846
Temperature rise time (h)	8.3
Freezing capacity (kg/24h)	7.5
Energy Efficiency Class	B
Noise (dB(A))	35.80

Copy of marking plate

- The artwork below may be only a draft.

Voltaje nominal(V)	220-240V
Frecuencia nominal(Hz)	50-60
Clasificación de Protección Contra descargas Electricas	I
Potencia nominal de la lámpara (W)	3.0
Clase climática	ST/T
Corriente nominal(A)	1.2
Refrigerante, Carga(g)	R600a,50g
Volumen Total(L)	442
Volumen de almacenamiento del compartimento de alimentos frescos (L)	274
Volumen Neto del Congelador(L)	168
Consumo de Energía(kWh/año)	317
Capacidad de congelación	7.5
Valor de aumento de temperatura	8.0
Agente espumante	Cyclopentane
Calentador de deshielo nominal (W)	160
Potencia nominal (W)	120
Ruido dB(A)	40

**SHANGLING**
Refrigerator-freezer
CC-520WEDS-ab


HECHO EN CHINA

Fabricado Por: Shanghai Sonlu Shangling Enterprise Group Co.,Ltd

No.999 Zhongqiang Road, Maogang Industry park, Maogang Town, Songjiang City, Shanghai China

Voltaje nominal(V)	220-240V
Frecuencia nominal(Hz)	50-60
Clasificación de Protección Contra descargas Electricas	I
Potencia nominal de la lámpara (W)	3.0
Clase climática	ST/T
Corriente nominal(A)	1.2
Refrigerante, Carga(g)	R600a,50g
Volumen Total(L)	442
Volumen de almacenamiento del compartimento de alimentos frescos (L)	274
Volumen Neto del Congelador(L)	168
Consumo de Energía(kWh/año)	317
Capacidad de congelación	7.5
Valor de aumento de temperatura	8.0
Agente espumante	Cyclopentane
Calentador de deshielo nominal (W)	160
Potencia nominal (W)	120
Ruido dB(A)	40



Refrigerator-freezer

CC-520WEDS-ab



HECHO EN CHINA

Fabricado Por: Shanghai Sonlu Shangling Enterprise Group Co.,Ltd

No.999 Zhongqiang Road, Maogang Industry park, Maogang Town, Songjiang City, Shanghai China

Possible test case verdicts:

- test case does not apply to the test object.....: N/A (or N)
- test object does meet the requirement: P (Pass)
- test object does not meet the requirement: F (Fail)

Testing

Date of receipt of test item: See cover page

Date(s) of performance of tests: See cover page

General remarks:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

"(see Enclosure #)" refers to additional information appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a ☐ comma / ☒ point is used as the decimal separator.

Name and address of factory:

Jiangsu Shangling Intelligent Electric Appliance Co., Ltd.
199 West Beijing road, Xinyi Economic Development Zone, Xuzhou, Jiangsu, China

General product information:

- The appliances are type II upright refrigerator-freezer belong to category 7 according to Table 2 of IRAM 2404-3:2015+M1:2016.;
- The appliance is a frost-free refrigerator-freezer. The compressor was supplied through an inverter.

Sample information:

Model	CC-520WEDS-GE
Rate voltage	220-240V, 50Hz
Compressor	VETB100
Climate type	ST/T
Condenser fan motor	N/A
Thermostat	Electrical thermostat
Defrost power input	160

CC-520WEDS-ab(a=M, G; b=E, I), which were identical with each other except for the following differences:

a	'M' means steel door	'G' means glass door
b	'E' means the display PCB is out of food storage compartment	'I' means the display PCB is in the food storage compartment
		

The Alternative handle appearance as below:

1	2	3	4	5	6
					

4	REQUIREMENTS		P
4.1	The label must be legible and must be stuck or placed on the external front part of the appliance, so that it is clearly visible and not hidden.		P
5	ENERGY EFFICIENCY CLASSES		P
5.1	Calculation of the equivalent volume	see Appendix A	P
5.2	Calculation of the energy efficiency index	see Appendix A	P
5.2.1	The Energy Efficiency Index (EEI) %/Class	see Appendix A	P
5.2.2	The annual energy consumption (AE_c) calculated in kWh/year	see Appendix A	P
5.2.3	The standard annual energy consumption (SAE_c) is calculated in kWh/year	see Appendix A	P
6	LABEL		P
6.2	The following information shall be included in the label: I) Product name or trademark; II) Supplier's model identifier; III) The energy efficiency class of the appliance determined in accordance with Chapter 5 and verified pursuant to a B.6. The arrowhead that has this indicating letter must be placed at the same height as the corresponding arrowhead; IV) Energy consumption in accordance with the test method specified in Chapter 15 of IEC 62552, calculated in kWh/year (i.e., 24 h x 365 days) and in accordance with Annex 5.2.2; V) Fresh food volume: sum of the storage volume of all compartments that do not merit a star rating (operating temperature higher than - 6 °C); VI) Volume of frozen food: sum of the storage volume of all frozen-food compartments that merit a star rating (operating temperature higher or equal to - 6 °C); VII) Star rating of the frozen-food compartment in accordance with Table 6 under 7.1 d). When a compartment does not merit a star rating, the space for symbols must be left blank; VIII) The noise level expressed in dB (A), referred to 1 pW and measured according to the provisions of Standard IRAM 2404-2; IX) Climate class In accordance with Table 5.		P
7	TEST METHODS		P

7.2	For appliances classified according to Table 2 (frost-free or not) energy consumption should be measured according to the provisions in Standard IEC 62552 Chapter 15.		P
7.3	Characteristics associated to energy consumption a) Storage volume of the appliance b) The storage volume of any low temperature compartment or of any freezer compartment, together with the climate classification and the classification symbol and the storage volume of any cellar compartment and/or fresh-food compartment, if applicable; c) Indication of “frost-free” appliance when the provisions set forth in Standard IEC 62552, item 3.1.3.1 are met; d) Freezing capacity, if applicable; e) Temperature rise time, if applicable		P
7.3.1	Storage volume/s should be measured according to the provisions set forth in Standard IEC 62552, Chapter 7.		P
7.3.2	The freezing capacity should be measured according to Standard IEC 62552, Chapter 17.		P
7.3.3	The temperature rise time should be measured according to Standard IEC 62552, Chapter 16.		P
7.3.4	The storage temperature should be measured according to Standard IEC 62552, Chapter 13, with deviations set forth in item 7.1 of this standard		P
8	DATA SHEET (to be included in the user manual)		P
	The data sheet must include the following information: a) Supplier's name or trade mark; b) Supplier's model identifier; c) Category of the appliance, according to Table 2; d) Classification of the model according to its energy efficiency in accordance with Table 4, stated as Class of energy efficiency in a scale that ranges from A (most efficient) to G (least efficient) If this information is provided in a chart, it can be stated in any other way provided it is clearly understood that the scale varies from A (most efficient) to G (least efficient); e) Energy consumption according to the test procedures mentioned on Chapter 7 of this standard, calculated in kWh per year (5.2.2).		P

	The following statement should be added: “El consumo de energía real depende de las condiciones de uso del aparato y de su localización”; (Actual Energy consumption will depend on how the appliance is used and where it is placed.) f) Storage volume of each compartment that do not merit a star with operating temperature higher than -6°C. g) Storage volume of each compartment of frozen-food storage that merit a star rating. (Operating temperature less or equal to -6°C.) h) Star classification of the frozen-food compartment, if any; i) the legend “Sin escarcha” (frost-free), may be included here, when applicable, pursuant to the test procedures mentioned in standard IEC 62552; j) Autonomia deh (Autonomy of h) is the period of temperature rise according to the test procedures mentioned in Chapter 7 of this Standard; k) The freezing capacity in kilograms per 24 h is verified according to Chapter 7 herein; l) Climate class as provided in Chapter 7 herein; m) Noise level expressed in dB (A) referred to 1 pW and measured according to IRAM 2404-2 Standard		
--	---	--	--

TABLE: List of critical components					P
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity ¹⁾
Motocompresor	Wanbao Group Compressor Co., Ltd.	VETB100	230VDC; 60- 225Hz; R600a	IEC/EN 60335-1 IEC/EN 60335-2- 24	JPTUV- 169961 Tested with appliance
Condensador <i>Condenser</i>	Various	Galvanized Bundy pipe	Tubing OD: 4.0mm, thickness 0.5mm.	IEC 60335-1 IEC 60335-2-24	Tested with appliance
Evaporador: <i>Evaporator</i>	Various	Aluminum	Tubing OD,8.0 mm;thickness 0.75mm	IEC 60335-1 IEC 60335-2-24	Tested with appliance
Defrost heater	Various	acero inoxidable	220-240V,160W	IEC 60335-1 IEC 60335-2-24	Tested with appliance
Gas refrigerante / masa. <i>Refrigerant gas / mass</i>	/	R600a	50g	/	/

Diámetro, largo y caudal del / los capilar <i>/Diameter, length and flow of the capillary:</i>	/	/	Copper tube OD: 1.8mm Pressure ratio: 7:5.7	/	/
Aislante (masa / densidad): <i>Insulation (mass / density):</i>	/	Polyurethane foam	Thickness: top/sides/bottom/back(mm) 40/40/42/42	/	/
Notes: The Alt. components described above are only alternative components and were not used in the test pre-production sample. The components tested represent the most unfavourable conditions (i.e. highest energy consumption). If the Alternative components had been used, the measured performance and energy efficiency would have been at least as good as that of the test pre-production sample.					

Test 1.	Storage temperature test				P
Test Conditions					
Appliance control settings:		2 for fresh food compartment -24 for frozen food compartment		3 for fresh food compartment -23 for frozen food compartment	
Ambient Temperature		18.0°C		43.0°C	
Power Supply:		220V/50Hz		220V/50Hz	
Other Test Conditions		According to clause 7 of the standard IRAM 2404-3:2015+M1:2016 and clause 8 of the standard IEC 62552:2007.			
Test Results					
		Measuring 1	Measuring 2	Requirement	Verdict
Ambient Temperature		18.0°C	43.0°C	--	--
Fresh food storage compartment temperature	t _{1m} (°C)	4.07	1.68	0≤t _{1m} , t _{2m} , t _{3m} ≤10	P
	t _{2m} (°C)	4.90	1.19	0≤t _{1m} , t _{2m} , t _{3m} ≤10	P
	t _{3m} (°C)	2.55	2.33	0≤t _{1m} , t _{2m} , t _{3m} ≤10	P
	t _{ma} (°C)	3.84	1.73	≤+5	P
Chill compartment temperature	t _{cc,min} (°C)	-	-	-2≤t _{cc} ≤3	N/A
	t _{cc,max} (°C)	-	-	-2≤t _{cc} ≤3	N/A
Frozen food storage or food freezer compartment, cabinet or section highest temp. (°C)	t*** (°C)	-18.89	-20.28	≤-18	P
	t** (°C)	-	-	≤-12	N/A
	t* (°C)	-	-	≤-6	N/A
The duration of 3-star and 4-star compartment, cabinet or section highest temp. between -18°C to -15°C (minutes)		20	20	Period of 20% of the operating cycle of max. 4h	P
The duration of operating cycle (minutes)		1444	1442	--	--

Remark: The temperature sensor in fresh food compartment and loading plan for freezer compartment can refer to Appendix B.

Test 2.		Energy consumption test			P
Test Conditions					
Ambient Temperature:		25°C			
Power Supply:		220V/50Hz			
Other Test Conditions		According to clause 7 of the standard IRAM 2404-3:2015+M1:2016 and clause 8 of the standard IEC 62552:2007.			
Test Results					
Appliance control settings:		3 for fresh food compartment -22 for frozen food compartment	4 for fresh food compartment -20 for frozen food compartment	-	
		Measuring 1	Measuring 2	interpolated	
Fresh Food Storage Compartment Temperature	t _{1m} (°C)	2.80	3.99	-	
	t _{2m} (°C)	4.03	5.23	-	
	t _{3m} (°C)	5.67	6.82	-	
	t _{ma} (°C)	4.17	5.35	5.0	
Chill Compartment Temperature	t _{cc,min} (°C)	N/A	N/A	-2≤t _{cc} ≤3	
	t _{cc,max} (°C)	N/A	N/A	-2≤t _{cc} ≤3	
The maximum temperature of the warmest M-package in the food freezer compartment	t ^{***} (°C)	-18.80	-16.60	-18.0	
The maximum temperature of the warmest M-package in the two-star compartment	t ^{**} (°C)	N/A	N/A	-12.0	
Mean Ambient Temperature(°C)		25.0	25.0	25.0	
The energy consumption result kWh / 24h		0.882	0.783	0.846	
Test period of operating cycle (minutes)		2880	2880	-	
Remark:					
1) The calculated value is less than rated value , which is within the range defined in ANNEX E of IEC 62552:2007.					
2) The temperature sensors in fresh food compartment and loading plan for freezer compartment are identical with storage temperature test.					

Test 3.		Freezing capacity test				P
Test Conditions						
Ambient Temperature:		25°C				
Power Supply:		220V/50Hz				
Appliance control settings:		3 for fresh food compartment -20 for frozen food compartment Fast freeze				
ballast load (kg):		40.50				
light load (kg):		7.5				
Other Test Conditions		According to clause 7 of the standard IRAM 2404-3:2015+M1:2016 and clause 8 of the standard IEC 62552:2007.				
Test Results						
Item				Requirement	Verdict	
Food freezer Compartment	ballast load temperature	t*** _{max} (°C) during test	-18.00	≤-15	P	
		t*** _{max} (°C) upon completion of test	-19.31	≤-18	P	
	light load temperature	Arithmetic mean temperature of light load	-18.00	≤-18	P	
Two star section	light load temperature	Warmest temperature of t** (°C)	N/A	≤-9	N/A	
	light load temperature	Warmest temperature of t** end of the test (°C)	N/A	≤-12	N/A	
Fresh Food Storage Compartment	t1 (°C) range	2.92 - 2.53		0≤t ₁ ≤+10	P	
	t2 (°C) range	3.34 - 2.98		0≤t ₂ ≤+10	P	
	t3 (°C) range	5.36 - 5.24		0≤t ₃ ≤+10	P	
	ta (°C) range	3.87 - 3.58		≤+7	P	
Freezing time (hours)		16.35		-	N/A	
Freezing Capacity ¹⁾ (kg)		7.5		7.5	P	
Remark:						
1) The calculated freezing capacity is greater than rated freezing capacity by 0%, which is within the range defined in ANNEX V, table 1.						
2) Loading plan for freezer compartment can refer to page Appendix B.						

Test 4.	Temperature rise test	P
Test Conditions		
Ambient Temperature:	25°C	

Other Test Conditions	According to clause 7 of the standard IRAM 2404-3:2015+M1:2016 and clause 8 of the standard IEC 62552:2007.
Test Results	
Temperature rise time (h)	8.3h
Remark: Loading plan for freezer compartment can refer to page Appendix B.	

Test 5.	Noise test				P
Test Conditions					
Ambient Temperature and humidity	22 ± 3°C, 30% - 85%RH				
Atmospheric pressure	96 ± 10kPa				
Test voltage/frequency	220V /50Hz				
Measurement surface	parallelepiped				
Measurement distance	d=1m				
Test Results					
Microphone No.	Sound pressure level			Background noise level	Judgment
	1st Time	2nd Time	3rd Time		
Sound power level L _W /dB(A)	36.37	35.71	35.33	—	—
Averaged sound power level L _W /dB(A)	35.80				40
Remark: measurement surface figure of noise test can refer to Appendix C.					

Appendix A - Details of volume and energy efficiency grade calculations**Volume calculation:**

	Storage Volume (Litres)	
	Rated	Measured
Fresh food compartment (limit: >=97% or -1l)	274	274.3
Chill compartment (limit: >=97% or -1l)	N/A	N/A
Frozen food Volume (2-star) (limit: >=97% or -1l)	N/A	N/A
food freezer compartment (4-star) (limit: >=97% or -1l)	168	168.7
TOTAL	442.00	443
Deviation (limit: >=97%)	100.2%	
Remark: the deviation for total storage volume, comply with the standard requirement.		

**Calculation of Energy Efficiency Index according to IRAM 2404-3:2015+M1:2016:
(Based on Rated Value)**

Category	7		
Compartment	Fresh food storage compartment	Frozen food Volume (2-star)	Food freezer compartment
Effective volume (L)	274	N/A	168
Design temperature(°C)	5	N/A	-18
Thermodynamic factor	1.00	N/A	2.15
Total equivalent volume (L)	849		
FF _c	1.0	N/A	1.2
CC	1.2		
BI	1.0		
M	0.777		
N	303		
CH	0		
Standard annual energy consumption (SAEc/ kWh/year)	962.67		
Annual energy consumption (AEc/ kWh/year)	317		
EEI	32.9		
Energy efficiency class according to IRAM 2404-3:2015+M1:2016, clause 5, Table 4	B (22≤EEI<33)		


**Calculation of Energy Efficiency Index according to IRAM 2404-3:2015+M1:2016:
(Based on Measured Value)**

Category	7		
Compartment	Fresh food storage compartment	Frozen food Volume (2-star)	Food freezer compartment
Effective volume (L)	274.3	N/A	168.7
Design temperature(°C)	5	N/A	-18
Thermodynamic factor	1.00	N/A	2.15
Total equivalent volume (L)	851		
Energy consumption result (kWh/24h)	0.846		
FF _c	1.0	N/A	1.2
CC	1.2		
BI	1.0		
M	0.777		
N	303		
CH	0		


Standard annual energy consumption (SAEc/ kWh/year)	964.23
Annual energy consumption (AEc/ kWh/year)	308.79
EEI	32.0
Energy efficiency class according to IRAM 2404-3:2015+M1:2016, clause 5, Table 4	B ($22 \leq EEI < 33$)

Clase de eficiencia energética (IRAM 2404-3:2015)	Índice de eficiencia energética [IEE]	Clase de eficiencia energética actualizada
A+++	$IEE < 22$	A
A++	$22 \leq IEE < 33$	B
A+	$33 \leq IEE < 42$	C
A	$42 \leq IEE < 55$	D
B	$55 \leq IEE < 75$	E
C	$75 \leq IEE < 90$	F
D	$90 \leq IEE$	G

Appendix B - Charge of test packages. Charging plan and Location of temperature sensors
Temperature measurement points in fresh-food storage compartment:

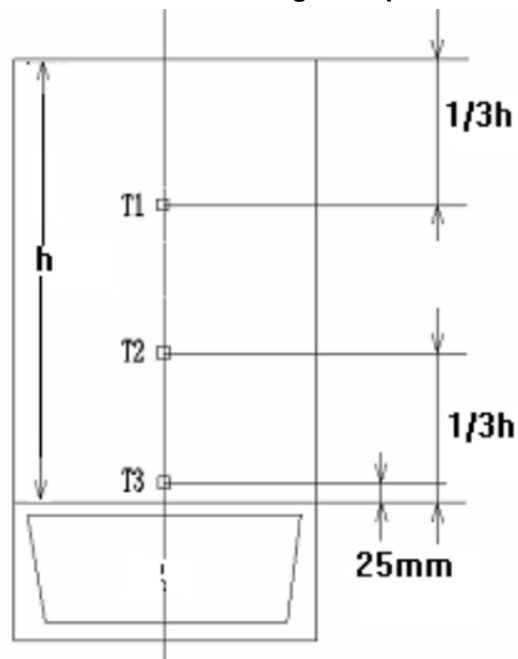


Loading plan for freezer compartment for energy consumption, storage temperature, temperature rise

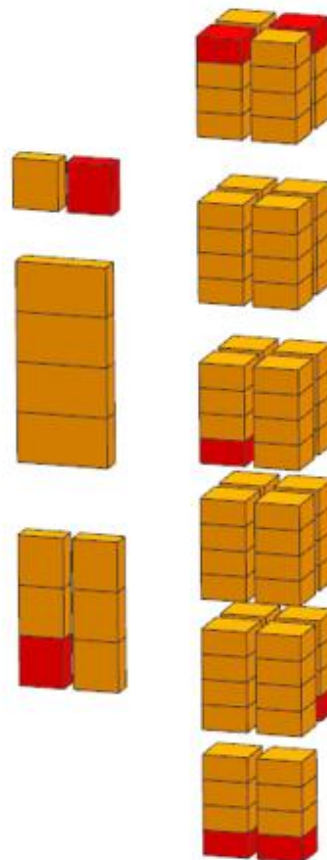

Freezer compartment:

Package code	Size(mm)	Weight(g)
Test Packages	200X100X50	1000
Test Packages	100X100X50	500
M Packages	100X100X50	500


Freezing capacity loading plan for freezer compartment:

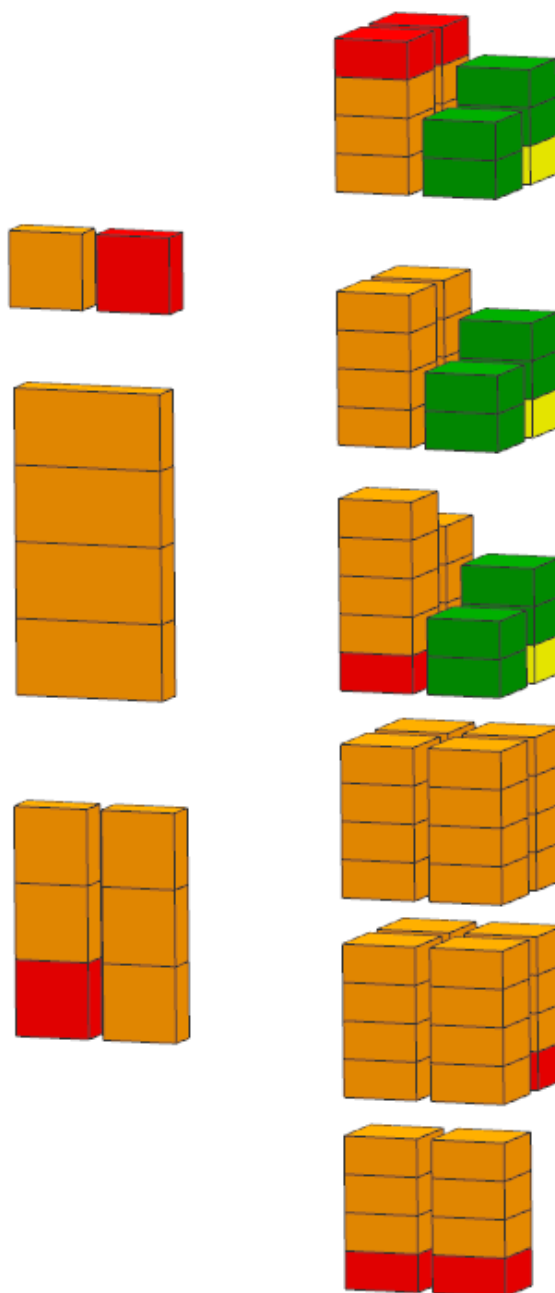

Ballast load		
Package code	Size(mm)	Weight(g)
Test Packages	200X100X50	1000
Test Packages	100X100X50	500
M Packages	100X100X50	500

Light load		
Package code	Size(mm)	Weight(g)
Test Packages	100X100X50	500
M Packages	100X100X50	500

Appendix C - Noise test measurement surface figure

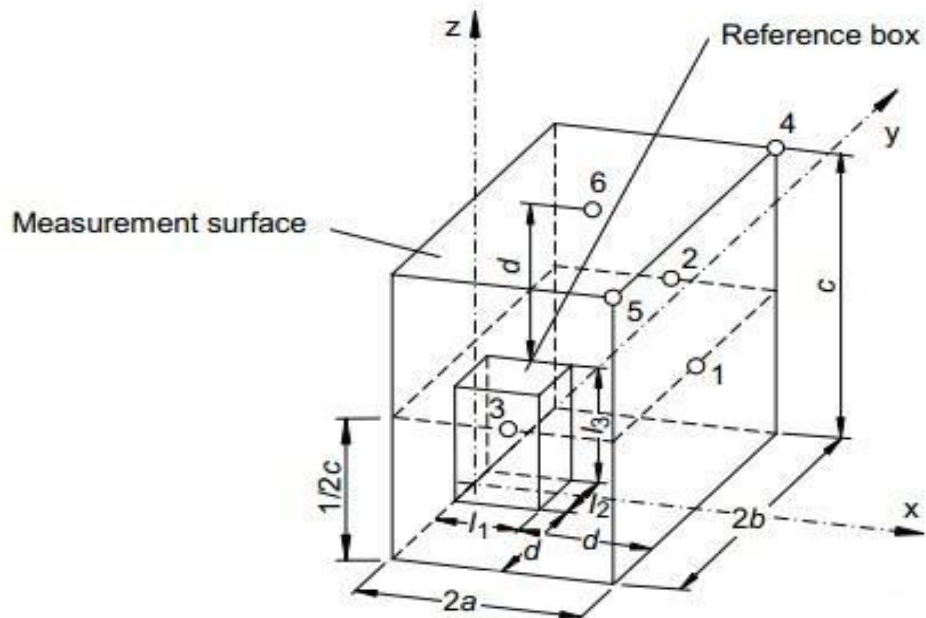

Appendix D - Photos	
Picture 1 Front view 	Picture 2 Interior view 
Picture 3 Rear view 	Picture 4 compressor chamber & Picture 5 compressor 