


Nama: Feriandri Lesmana


Nim: 221011700222

Projek 2


1. Konfigurasi Pada Router 0

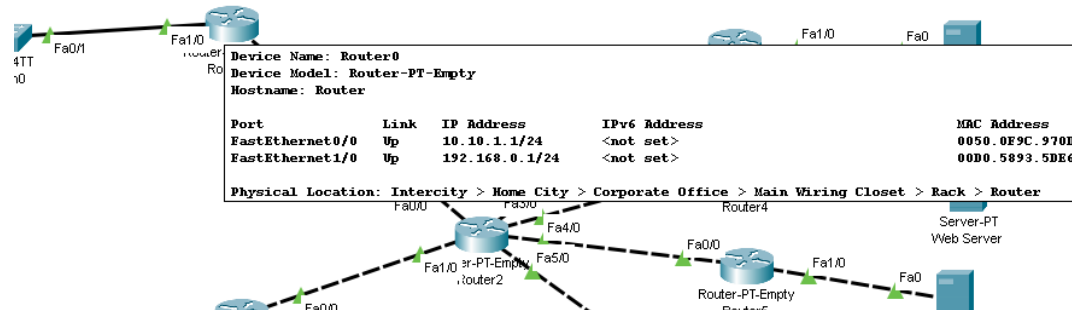

2. Konfigurasi pada Router1

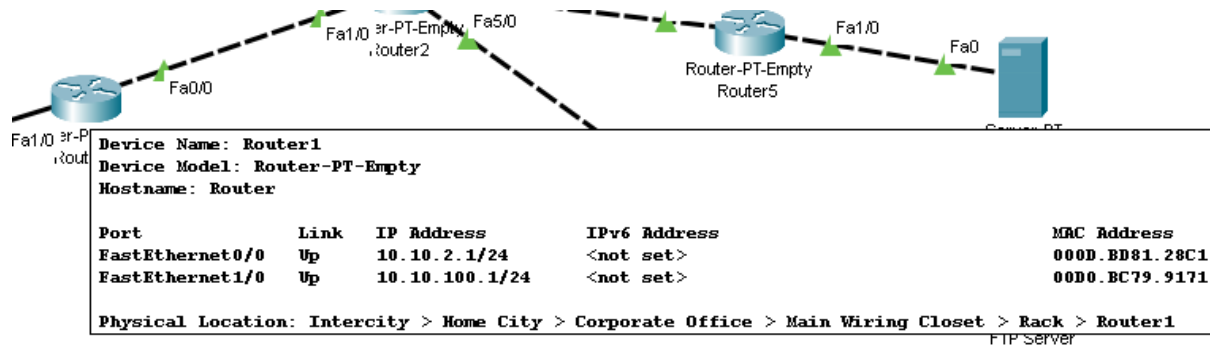

3. Konfigurasi pada Router2



Device Name: Router2
Device Model: Router-PT-Empty
Hostname: Router

Port	Link	IP Address	IPv6 Address	MAC Address
FastEthernet0/0	Up	10.10.1.2/24	<not set>	00D0.D309.470B
FastEthernet1/0	Up	10.10.2.2/24	<not set>	0005.5E44.DCB0
FastEthernet2/0	Up	10.10.3.1/24	<not set>	0050.0E48.0318
FastEthernet3/0	Up	10.10.4.1/24	<not set>	00D0.D37A.D89D
FastEthernet4/0	Up	10.10.5.1/24	<not set>	00E0.8F37.EED9
FastEthernet5/0	Up	10.10.6.1/24	<not set>	0003.E4A1.DA5E

Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Router2

Server-PT
Web Server

4. Konfigurasi pada Router3




Device Name: Router3
Device Model: Router-PT-Empty
Hostname: Router

Port	Link	IP Address	IPv6 Address	MAC Address
FastEthernet0/0	Up	10.10.3.2/24	<not set>	000C.CE78.944D
FastEthernet1/0	Up	10.20.1.1/24	<not set>	0030.A3CB.54AE
FastEthernet2/0	Down	<not set>	<not set>	00D0.FF62.6E5B

Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Router3

PT-Empty Router3
PT-Empty Router4
Router-PT-Empty Router5

5. Konfigurasi pada Router4




Device Name: Router4
Device Model: Router-PT-Empty
Hostname: Router

Port	Link	IP Address	IPv6 Address	MAC Address
FastEthernet0/0	Up	10.10.4.2/24	<not set>	00D0.FF0B.E182
FastEthernet1/0	Up	10.20.2.1/24	<not set>	0001.4226.0E03
FastEthernet2/0	Down	<not set>	<not set>	0007.EC3A.8117

Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Router4

HomeRouter-PT-AC Wireless Router0
Router-PT-Empty Router3
Router-PT-Empty Router5

6. Konfigurasi pada Router5

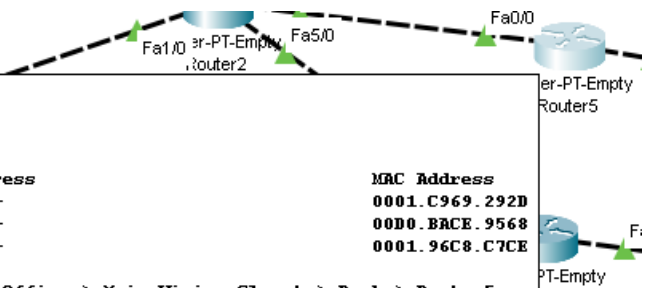


Device Name: Router5
Device Model: Router-PT-Empty
Hostname: Router

Port	Link	IP Address	IPv6 Address	MAC Address
FastEthernet0/0	Up	10.10.5.2/24	<not set>	0001.C969.292D
FastEthernet1/0	Up	10.20.3.1/24	<not set>	00D0.BACE.9568
FastEthernet2/0	Down	<not set>	<not set>	0001.96C8.C7CE

Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Router5

PT
1

7. Konfigurasi pada Router6

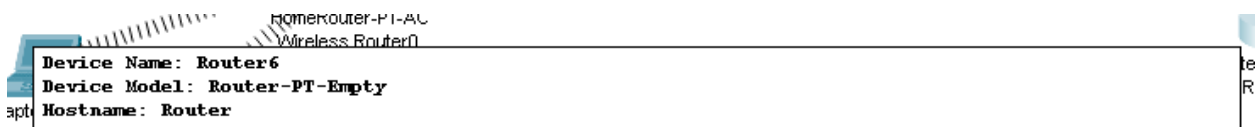

Device Name: Router6
Device Model: Router-PT-Empty
Hostname: Router


Port	Link	IP Address	IPv6 Address	MAC Address
FastEthernet0/0	Up	10.10.6.2/24	<not set>	0001.962C.A266
FastEthernet1/0	Up	10.20.4.1/24	<not set>	0030.F205.92CA
FastEthernet2/0	Down	<not set>	<not set>	0001.C769.4D68

Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Router6

te
R

8. Konfigurasi routing OSPF pada semua router

Contoh routing OSPF pada Router 2 jika berhasil

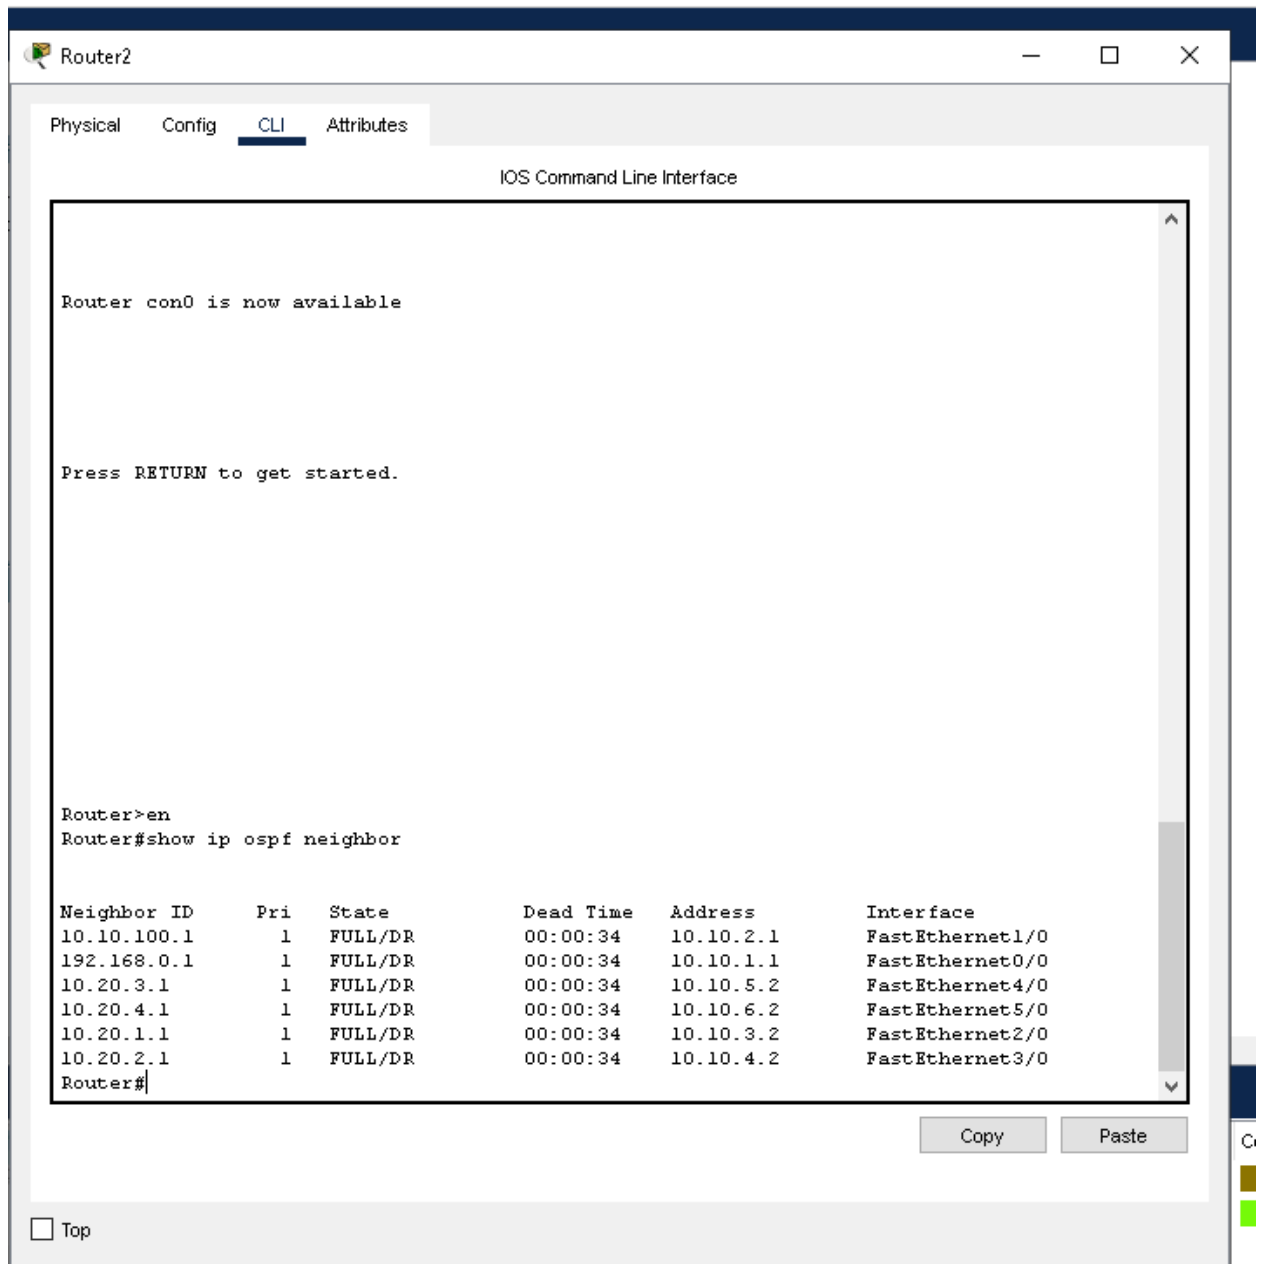

The screenshot shows the CLI interface of Router2. The 'CLI' tab is selected. The interface displays the following text:

```
Router con0 is now available

Press RETURN to get started.

Router>en
Router#show ip ospf neighbor
```

Neighbor ID	Pri	State	Dead Time	Address	Interface
10.10.100.1	1	FULL/DR	00:00:34	10.10.2.1	FastEthernet1/0
192.168.0.1	1	FULL/DR	00:00:34	10.10.1.1	FastEthernet0/0
10.20.3.1	1	FULL/DR	00:00:34	10.10.5.2	FastEthernet4/0
10.20.4.1	1	FULL/DR	00:00:34	10.10.6.2	FastEthernet5/0
10.20.1.1	1	FULL/DR	00:00:34	10.10.3.2	FastEthernet2/0
10.20.2.1	1	FULL/DR	00:00:34	10.10.4.2	FastEthernet3/0

Router#

Buttons: Copy, Paste

Top

9. Ping dari laptop0 ke PC2

Cisco Packet Tracer - C:\Users\user\Cisco Packet Tracer 8.2.2\user\projek2.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x: 340, y: 180

PC Fa0 PC-PT PC1 Fa02 Fa00 J-24TT Fa0/4 310 Fa0/1 PC-PT PC2 Fa0

Laptop-PT Laptop0 Wireless Router0 HomeRouter-PT-A/C

Laptop-PT Laptop1 Laptop-PT Laptop2

Time: 01:02:15

829

33°C Sebagian cerah 2:08 PM 5/21/2025

Laptop0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.4

Pinging 192.168.0.4 with 32 bytes of data:

Reply from 192.168.0.4: bytes=32 time=23ms TTL=124
Reply from 192.168.0.4: bytes=32 time=22ms TTL=124
Reply from 192.168.0.4: bytes=32 time=22ms TTL=124
Reply from 192.168.0.4: bytes=32 time=12ms TTL=124

Ping statistics for 192.168.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 12ms, Maximum = 32ms, Average = 22ms

C:\>
```

Realtime Simulation

Type	Color	Time(sec)	Periodic	Num	Edit	Delete
ICMP		0.000	N	0	(edit)	(delete)
ICMP		0.000	N	1	(edit)	(delete)

Successful Router2 Router1

Toggle PDU List Window

10. Ping dari PC0 ke DNS Server

Cisco Packet Tracer - C:\Users\user\Cisco Packet Tracer 8.2.2\user\projek2.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x: 411, y: 53

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.20.1.2

Pinging 10.20.1.2 with 32 bytes of data:

Reply from 10.20.1.2: bytes=32 time=14ms TTL=125
Reply from 10.20.1.2: bytes=32 time=1ms TTL=125
Reply from 10.20.1.2: bytes=32 time=1ms TTL=125
Reply from 10.20.1.2: bytes=32 time=1ms TTL=125

Ping statistics for 10.20.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 14ms, Average = 4ms

C:\>
```

Time: 01:04:23

33°C Sebagian cerah 2:11 PM 5/21/2025

829

Toggle PC0 List Window

Color	Time(sec)	Periodic	Num	Edit	Delete
0.000	N	0	(edit)	(delete)	
0.000	N	1	(edit)	(delete)	