

PCB MANUFACTURING SPECIFICATIONS

"LTK-MW-DISPLAY"

SPECIFICATIONS

NOTE #	NOTE
1	ALL SPECIFICATIONS REFERENCED ARE OF THE REVISION SPECIFIED IN THE TITLE BLOCK
2	SUPPLIER SHALL NOT MODIFY THE DESIGN OR APPROVED STACK-UP WITHOUT WRITTEN PERMISSION
3	ALL MATERIALS SHALL BE RoHS COMPLIANT AND FINAL PRODUCT SHALL BE ACCEPTABLE TO USE IN RoHS ASSEMBLY. RoHS LOGO SHALL BE MARKED IN SILKSCREEN INK NEAR BY THE SUPPLIER.
4	COPPER FOIL: REFER TO LAYER STACK LEGEND FOR Cu THICKNESS DETAILS. ALL Cu THICKNESSES ARE FINISHED AND INCLUDE BASE FOIL PLUS Cu PLATING ON PLATED LAYERS
5	ELECTRICAL TEST: ALL PRINTED CIRCUITS SHALL BE 100% ELECTRICALLY TESTED FOR OPENS/SHORTS USING PROVIDED NETLIST. REJECTED PRINTED BOARDS MUST BE CLEARLY MARKED WITH NON-CONDUCTIVE, PERMANENT INK.
6	MARKINGS: VENDOR MARKING AND DATE/LOT CODES SHALL BE LOCATED ON THE BOARD IN THE RESERVED AREA AS SPECIFIED IN THE GERBER LAYER "PCBM_NOTES" BY THE TEXT "YOU CAN PLACE MARKINGS HERE".
7	MARKINGS: THE SIDE ONTO WHICH PLACE THE MARKINGS IS AT THE SUPPLIER DISCRESSION UNLESS OTHERWISE NOTED ONTO THE LAYER "PCBM_NOTES"
8	SUPPLIER SHALL CHECK PCBM_NOTES LAYER BEFORE ASKING FOR CLARIFICATIONS
9	MANUFACTURE TENTED/PLUGGED VIAS AS SPECIFIED IN THE GERBER FILES

SPECIFICATIONS



LENGHT	200
WIDTH	80
LAYERS	2
MATERIAL	FR-4
MATERIAL MIN TG	130-140
TRACK WIDTH/CLEARANCE	8 mils / 8 mils
THICKNESS	1.6mm
COPPER THICKNESS	35um (1oz)
SOLDERMASK	YES, TOP AND BOTTOM
SOLDERMASK COLOR	RED
SILKSCREEN	YES, TOP AND BOTTOM
SILKSCREEN COLOR	WHITE
SURFACE FINISH	HASL LEAD FREE
GOLD FINGERS	NO
CHAMFERING	NO
IMPEDANCE CONTROL	NO
HALF-CUT/CASTELLATED HOLES	NO
BURIED/BLIND VIAS	NO
VIAS FILLED WITH RESIN	NO
CARBON MASK	NO
COUNTERSINKS/COUNTERBORES	NO
Z-AXIS MILLING	NO
PEELABLE SOLDERMASK	NO

Layer Stack Legend


Material	Layer	Thickness	Dielectric Material	Type	Gerber
	Top Overlay			Legend	GTO
Surface Material	Top Solder	0.02mm	Solder Resist	Solder Mask	GTS
Copper	Top Layer	0.03mm		Signal	GTL
		1.50mm	FR-4	Dielectric	
Copper	Bottom Layer	0.03mm		Signal	GBL
Surface Material	Bottom Solder	0.02mm	Solder Resist	Solder Mask	GBS
	Bottom Overlay			Legend	GBO

Total thickness: 1.60mm

NON-COPPER LAYER THICKNESS FOR REFERENCE ONLY
LAYERS OF TYPE "INTERNAL PLANE" ARE NEGATIVE

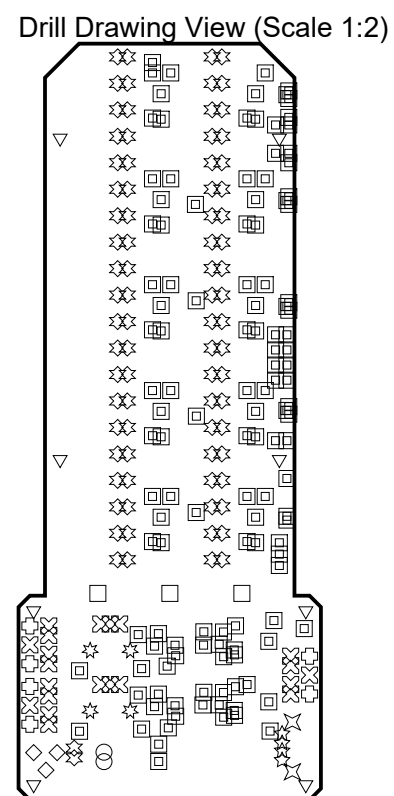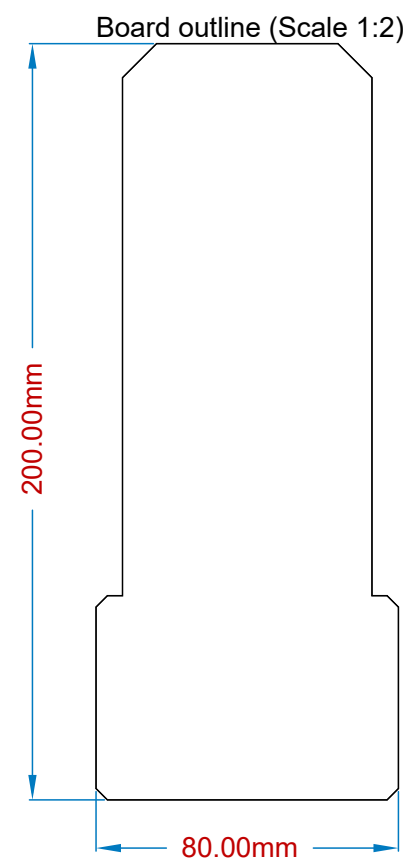


Symbol	Count	Hole Size	Plated	Hole Tolerance
☐	128	0.35mm	Plated	
◇	3	0.80mm	Plated	
○	2	0.85mm	Plated	
✱	82	0.89mm	Plated	
☆	4	0.92mm	Plated	
✕	21	1.20mm	Plated	
⊕	6	1.50mm	Non-Plated	
✳	4	2.20mm	Plated	
✧	2	2.30mm	Plated	
▽	8	3.50mm	Plated	
□	3	6.50mm	Plated	
	263 Total			

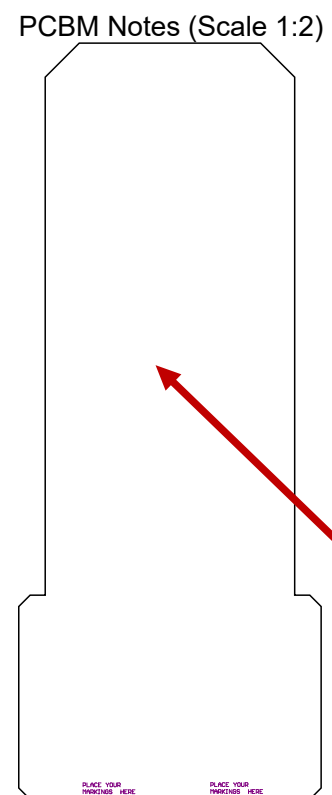


ALWAYS CAREFULLY READ THE INDICATIONS ON THIS LAYER

	A	B	C	D	E	F	G	H	
1									1
2									2
3									3
4									4
5									5
6									6
	A	B	C	D	E	F	G	H	


Top Layer (Scale 1:2)

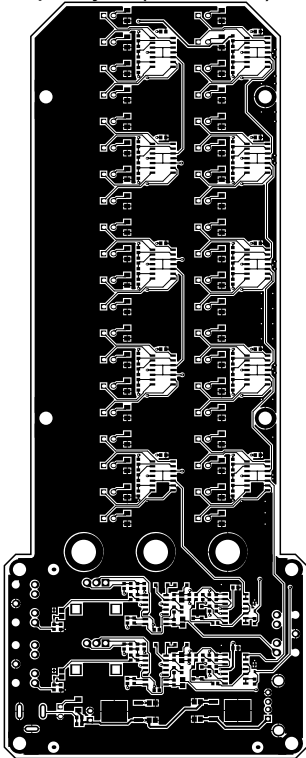


Bottom Layer (Scale 1:2)

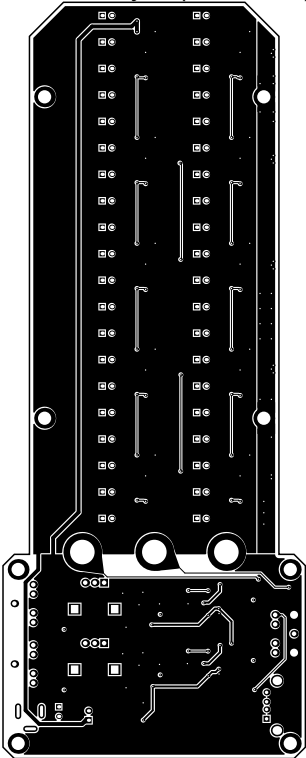


Top Paste (Scale 1:2)

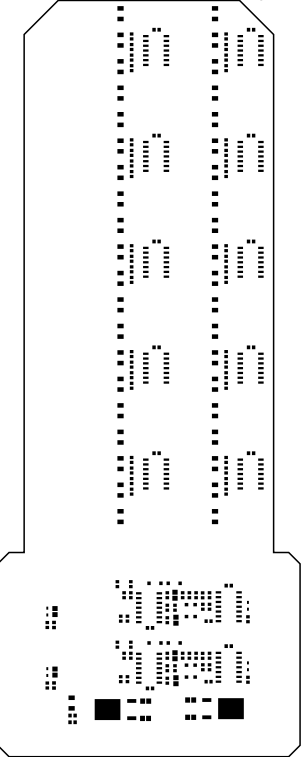


Bottom Paste (Scale 1:2)




Top Solder (Scale 1:2)

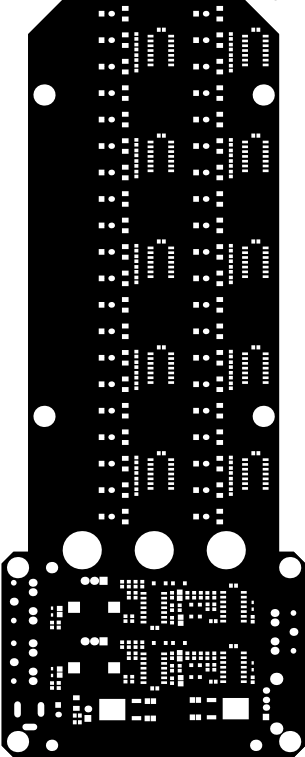

Top Paste (Scale 1:2)

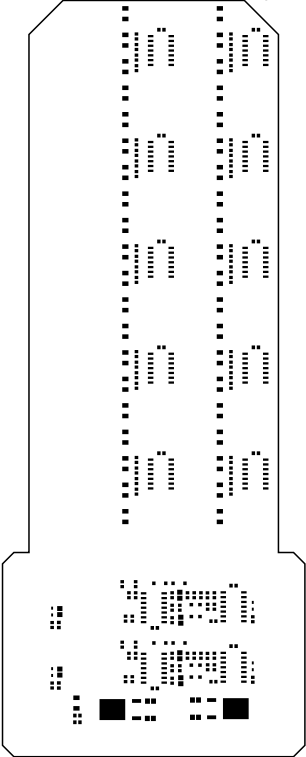

Top Overlay (Scale 1:2)

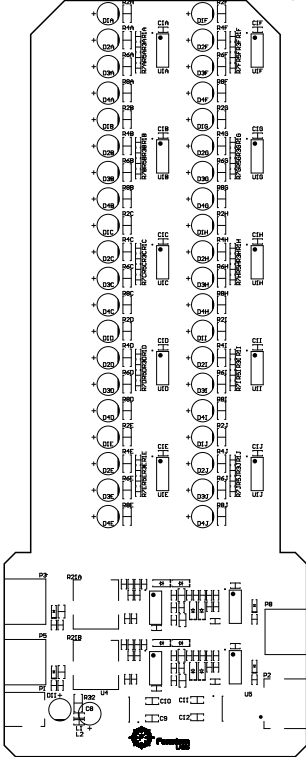

Bottom Overlay (Scale 1:2)

