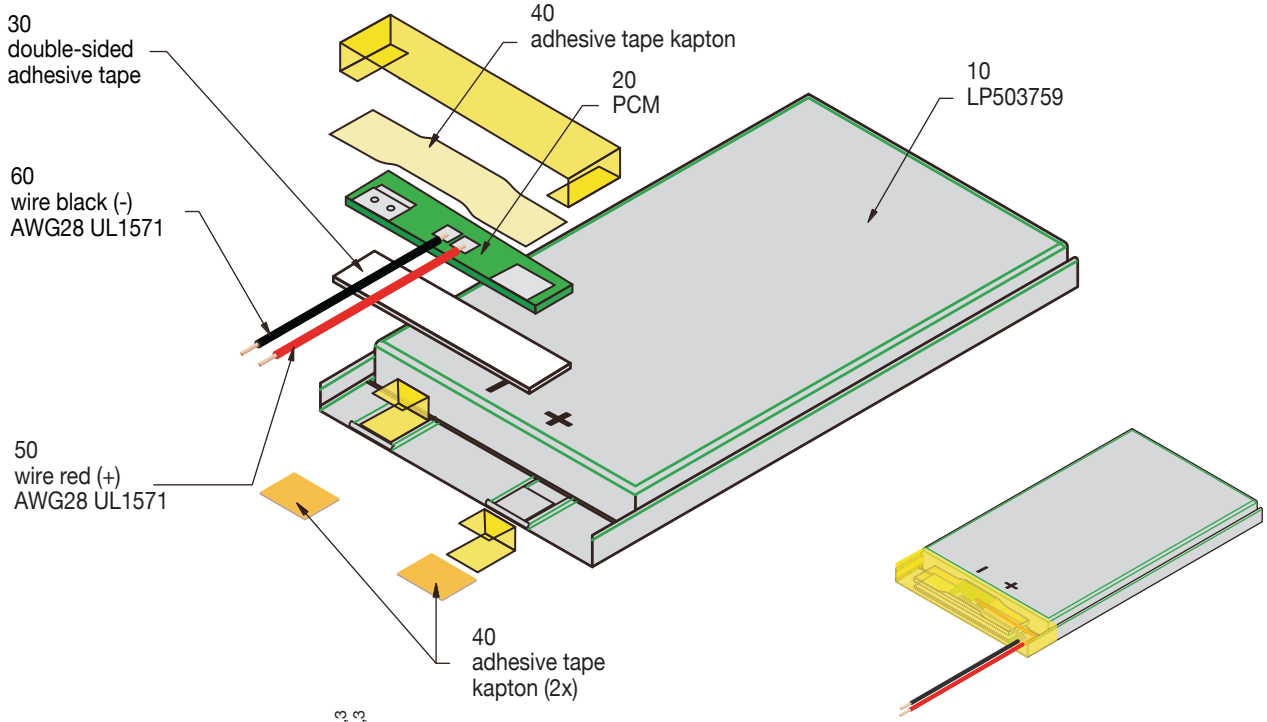

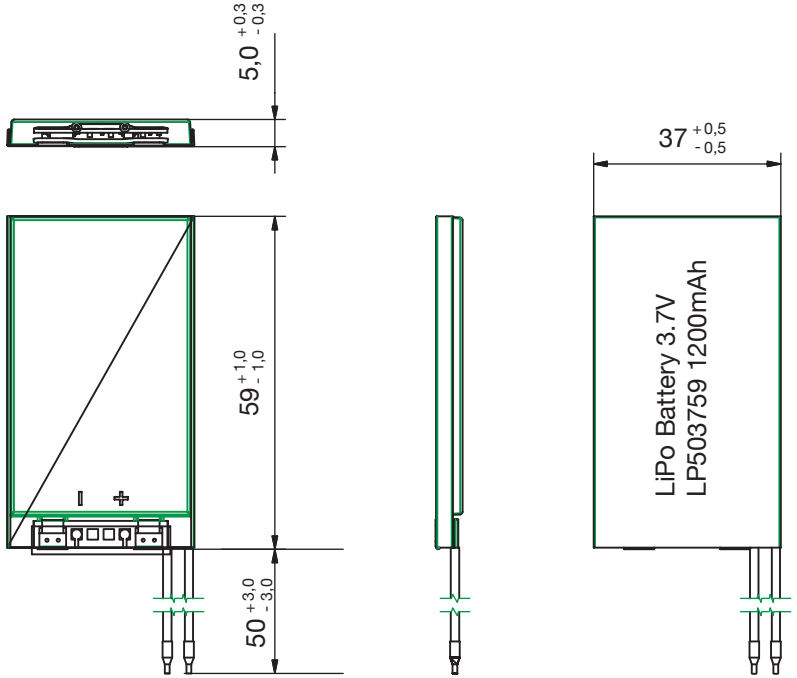

Circuit Diagram



Specification

Lithium Polymer Battery Pack LP503759 1200mAh 3.7V with Protection Circuit Module (PCM)
This data sheet describes the requirements and properties of lithium polymer rechargeable battery pack manufactured by LiPol Battery Co., Ltd - China

Mechanical Chracteristics

Cell	► LP503759
PCM	► Yes
NTC	► No
Configuration	► 1S1P
Weight	► appr. 22g

Electrical Specification

Rated Capacity	► 1200mAh min, 1250mAh typ.
Nominal Voltage	► 3.7V
Wat-Hour Rating	► 4.44Wh
Max. Operating Voltage Range	► 2.75V to 4.20V
Max. Charge Voltage	► 4.2V ±50mV
Max. Charge Current	► 600mA
Max. Continuous Discharge Current	► 1200mA
Discharge Cut Off	► 2.75V
Internal Impedance	► <200mΩ
Expected Cycle Life @ (0.5C/0.5C) @ 23±5°C	► 500 cycles ≥ 80%

Cell Protection

Overcharge Detection	► 4.275 ±50mV (0.7 to 1.3sec. delay, release 4.275V ±50mV)
Overdischarge Detection	► 2.75V ±50mV (14 to 26msec. delay, resume 2.50V ±50mV)
Overcurrent Detection	► 2A to 4.5A (8 to 16msec. delay)

Ambient Conditions

Charge Temp. Range	► 0 to +45°C
Discharge Temp. Range	► -20 to +60°C
Storage Temp. Range	► 1 year at -20 to +30°C >70% ► 3 moths at -20 to +45°C >70% ► 1 month at -20 to +60°C >70%
Humidity	► 65 ±20%RH

Environmental and Safety

Please follow LiPol Handling and Safety Precautions for Lithium Polymer Battery. This battery meets the requirements of Battery Directives, and the battery parts are IEC 62133 & RoHS-Compliant. For more satety precautions and performance standards, please go to www.lipolbattery.com/support.html

				Date	Name
Mae in mm All dimensions in mm	Freimatoleranzen Generaltolerances		Erst. / Orig	01.01.2018	Xie Qingfang
Als Betriebsgeheimnis anvertraut, alle Rechte vorbehalten	up to 6	` 0,1	Gepr./Check	01.01.2018	Guo Daxia
	over 6 up to 30	` 0,2			
Proprietary data, company confidential, all rights reserved.	over 30 up to 100	` 0,3	Benennung/ Designation	LP503759	
	over 100	` 0,5	Origin:		

LiPol Battery

Zchng. / Dwg. Nr. 3 FD_3255_70 Index

support@lipolbattery.com www.LiPolBattery.com