


CIRCUIT:

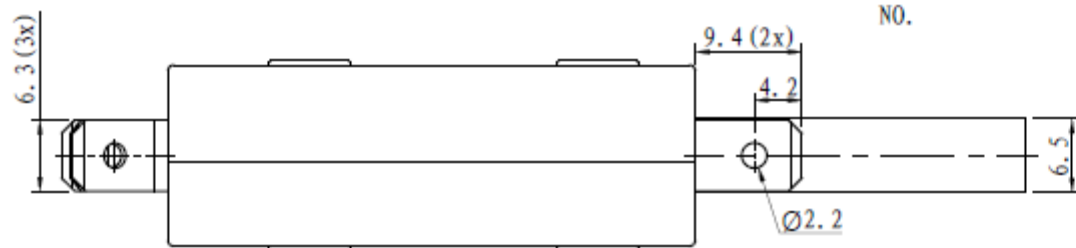

Specifications	
Rating	16A 250VAC/20A 125VAC
Environment Temperature	-25°C ~ 105°C
Contact Resistance	< 30mΩ
Insulation Resistance	> 100MΩ (at 500VDC)
Voltage proof	Terminal-terminal: 500V AC/10mA/5s Terminal-ground: 3000V AC/10mA/5s
Electrical life	50000 Cycles
Operating Force	100gf ± 30gf
OP	9.1 ± 1.2mm
PT max	6.0mm

NOTE:

TOLERANCE UNLESS OTHERWISE SPECIFIED

X. ± 0.20 .X ± 0.15 .XX ± 0.10

