## **GZIPPRUEBA**

Intel Core i5-8350U testing with a LENOVO 20L7002CUS (N22ET82W 1.59 BIOS) and Intel UHD 620 on Arch Linux via the Phoronix Test Suite.

## gzipprueba

Processor: Intel Core i5-8350U @ 3.60GHz (4 Cores / 8 Threads), Motherboard: LENOVO 20L7002CUS (N22ET82W 1.59 BIOS), Chipset: Intel Xeon E3-1200 v6/7th, Memory: 16GB, Disk: SK hynix PC611 NVMe 512GB + 0GB SD/MMC, Graphics: Intel UHD 620, Audio: Realtek ALC257, Network: Intel I219-LM + Intel 8265 / 8275

**OS**: Arch Linux, **Kernel**: 6.16.1-arch1-1 (x86\_64), Display **Server**: X Server 1.21.1.18, **Compiler**: GCC 15.2.1 20250813, **File-System**: ext4, Screen **Resolution**: 1920x1080


Kernel Notes: Transparent Huge Pages: always

Processor Notes: Scaling Governor: intel\_pstate powersave (EPP: balance\_performance) - CPU Microcode: 0xf6

Security Notes: gather\_data\_sampling: Mitigation of Microcode + ghostwrite: Not affected + indirect\_target\_selection: Not affected + itlb\_multihit: KVM: Mitigation of Split huge pages + l1tf: Mitigation of PTE Inversion; VMX: conditional cache flushes SMT vulnerable + mds: Mitigation of Clear buffers; SMT vulnerable + meltdown: Mitigation of PTI + mmio\_stale\_data: Mitigation of Clear buffers; SMT vulnerable + old\_microcode: Not affected + reg\_file\_data\_sampling: Not affected + retbleed: Mitigation of IBRS + spec\_rstack\_overflow: Not affected + spec\_store\_bypass: Mitigation of SSB disabled via prctl + spectre\_v1: Mitigation of usercopy/swapgs barriers and \_user pointer sanitization + spectre\_v2: Mitigation of IBRS; IBPB: conditional; STIBP: conditional; RSB filling; PBRSB-eIBRS: Not affected; BHI: Not affected + srbds: Mitigation of Microcode + tsa: Not affected + tsx\_async\_abort: Mitigation of TSX disabled

## **Gzip Compression**

This test measures the time needed to archive/compress two copies of the Linux 4.13 kernel source tree using Gzip compression.

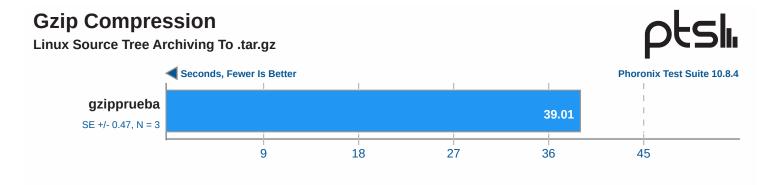

## gzipprueba

Processor: Intel Core i5-8350U @ 3.60GHz (4 Cores / 8 Threads), Motherboard: LENOVO 20L7002CUS (N22ET82W 1.59 BIOS), Chipset: Intel Xeon E3-1200 v6/7th, Memory: 16GB, Disk: SK hynix PC611 NVMe 512GB + 0GB SD/MMC, Graphics: Intel UHD 620, Audio: Realtek ALC257, Network: Intel I219-LM + Intel 8265 / 8275

**OS**: Arch Linux, **Kernel**: 6.16.1-arch1-1 (x86\_64), Display **Server**: X Server 1.21.1.18, **Compiler**: GCC 15.2.1 20250813, **File-System**: ext4, Screen **Resolution**: 1920x1080

Kernel Notes: Transparent Huge Pages: always

Processor Notes: Scaling Governor: intel\_pstate powersave (EPP: balance\_performance) - CPU Microcode: 0xf6

Security Notes: gather\_data\_sampling: Mitigation of Microcode + ghostwrite: Not affected + indirect\_target\_selection: Not affected + itlb\_multihit: KVM: Mitigation of Split huge pages + I1tf: Mitigation of PTE Inversion; VMX: conditional cache flushes SMT vulnerable + mds: Mitigation of Clear buffers; SMT vulnerable + meltdown: Mitigation of PTI + mmio\_stale\_data: Mitigation of Clear buffers; SMT vulnerable + old\_microcode: Not affected + reg\_file\_data\_sampling: Not affected + retbleed: Mitigation of IBRS + spec\_rstack\_overflow: Not affected + spec\_store\_bypass: Mitigation of SSB disabled via prctl + spectre\_v1: Mitigation of usercopy/swapgs barriers and \_\_user pointer sanitization + spectre\_v2: Mitigation of IBRS; IBPB: conditional; STIBP: conditional; RSB filling; PBRSB-eIBRS: Not affected; BHI: Not affected + srbds: Mitigation of Microcode + tsa: Not affected + tsx\_async\_abort: Mitigation of TSX disabled

Testing initiated at 22 August 2025 22:24 by user Fernando.

Phoronix Test Suite 10.8.4 - Generated 22 August 2025 22:27:12