

## Concept Review

# Kinematic Bicycle Model

### How to Describe the Motion of a Vehicle?

---

Depending on the mechanical and geometric constraints of a system a kinematic motion model is an important step in describing the path of a robot in space. Modern vehicles use a kinematic bicycle model to estimate the path taken given a linear velocity and a steering angle. In combination with a driving controller a kinematic model can be used to get an ideal prediction of where a vehicle will be in space. In this module a special focus will be taken in deriving the kinematic bicycle model for the purpose of motion planning.

## Frame of Reference Definition

Inertial frame definition for an object in space:




Figure 1: World Axis definition

The world definition allows us to describe the position of an object based on the kinematic properties of the system. From a 2D perspective the location of any object in this world can be uniquely described as:

$$P^I = \begin{bmatrix} X^I \\ Y^I \\ \psi^I \end{bmatrix}$$

## Kinematic Modeling

The next step is to define how the system will move in the 2D world. The definition of such movement is the kinematic model. For the purposes of this document the kinematic model will assume our system uses a front steering 4-wheel platform. The first step is to pick the reference frame of the vehicle's motion called the body frame. For simplicity the wheel steering angle is assumed to be the same for both the right and the left wheel. This assumption is called the kinematic bicycle model.

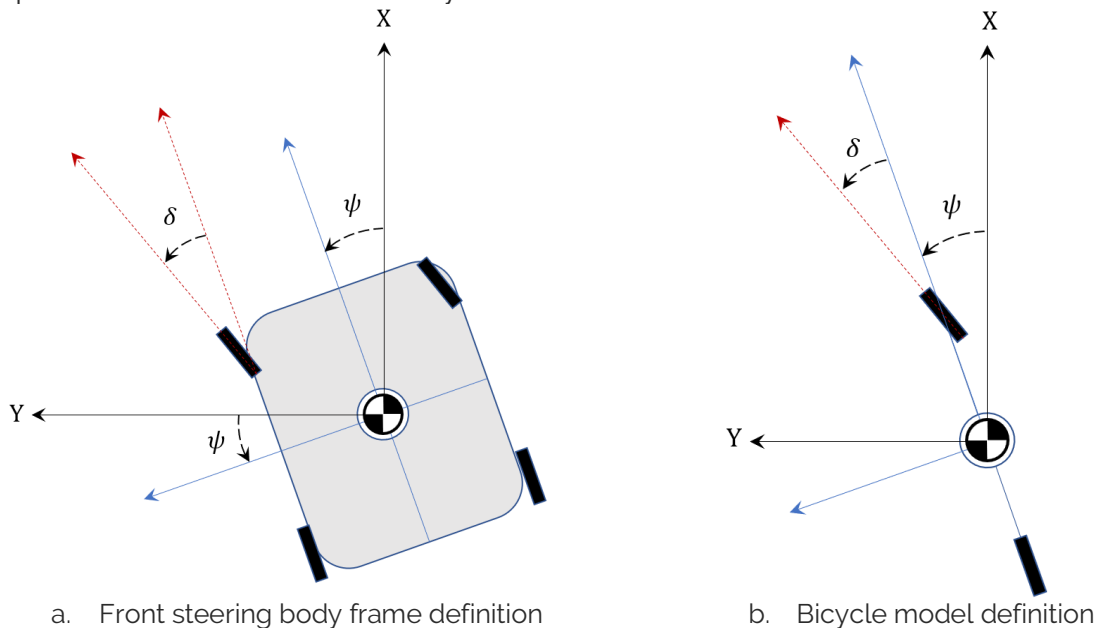


Figure 2: Comparison of a front steering body and bicycle model

Next the bicycle model is represented in the inertial frame  $\{I\}$  and described about the center of gravity of the vehicle  $\{B\}$ . Note the intermediary frame  $\{I'\}$ , which is co-located with  $\{B\}$  and co-oriented with  $\{I\}$ . The position of the vehicle in  $\{I\}$  is determined by the vector  $P^I$ .

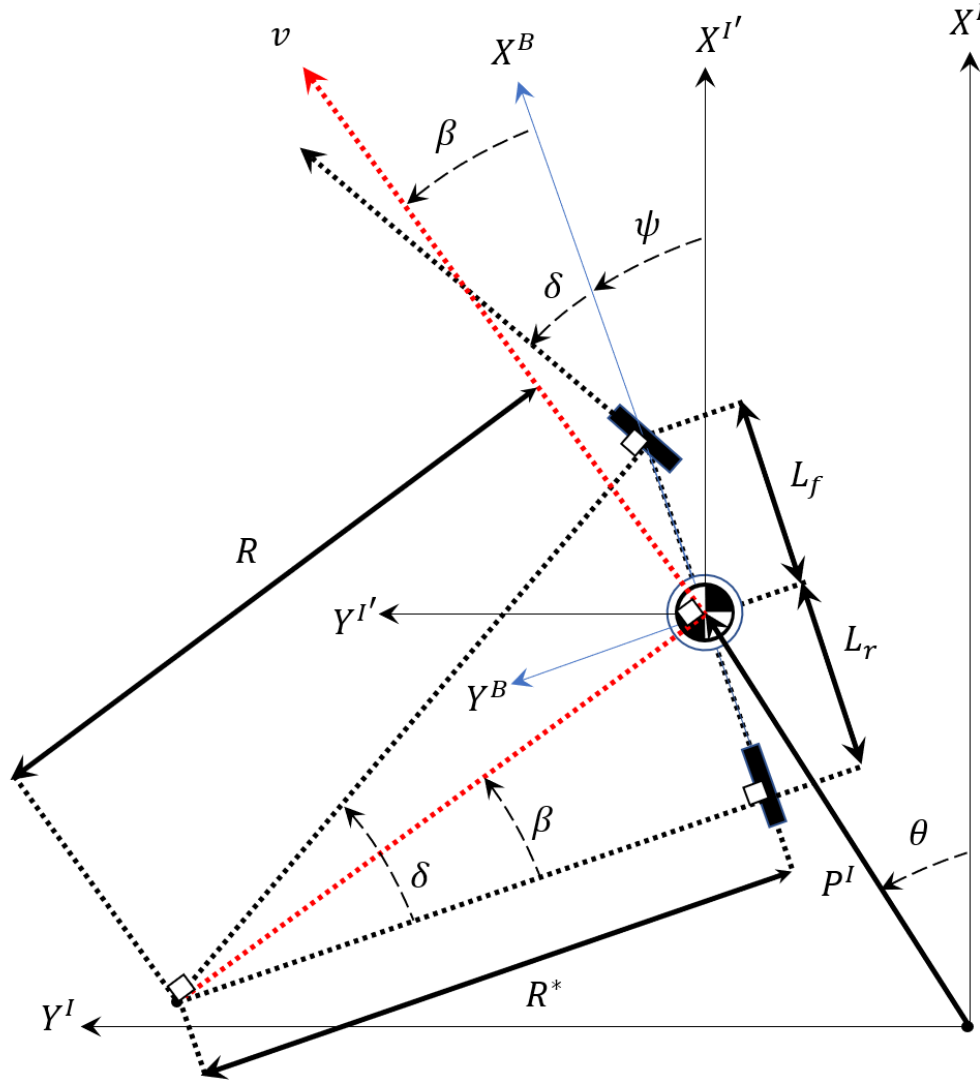


Figure 3: kinematic bicycle model

The body reference frame of the QCar is picked at the geometric center which changes how the linear and angular velocity are calculated. Using the relationship in Figure 3, the 3DOF bicycle model can provide the value of  $\beta$  (vehicle sideslip angle) using geometric relationships and the input steering angle  $\delta$  (vehicle steering).

$$\tan \delta = \frac{L_f + L_r}{R^*} \quad (1)$$

$$\tan \beta = \frac{L_r}{R^*} \quad (2)$$

Combining equations (1) and (2) yields the following relationship,

$$\frac{1}{R^*} = \frac{\tan \delta}{L_f + L_r} = \frac{\tan \beta}{L_r} \quad (3)$$

where  $R$  is the turning radius of the vehicle with respect to the rear axle. Solving for  $\beta$  gives the following sideslip angle calculation,

$$\beta = \tan^{-1} \left( \frac{L_r \tan \delta}{L_f + L_r} \right) \quad (4)$$

Knowing the sideslip angle is important to understand the true turning radius of a vehicle  $R$  at any given steering angle  $\delta$ . Using Figure 3, write the turning radius using the following relationship:

$$R = \frac{R^*}{\cos \beta} \quad (5)$$

Use (2) in (5) to solve for  $R$

$$R = \frac{L_r / \tan \beta}{\cos \beta} = L_r / \sin \beta \quad (6)$$

Understanding the turning radius is important as this defines how tight a turn a vehicle can make when traversing an environment. The sideslip angle is also important to get an estimate of the inertial frame velocity of a vehicle:

$$v^I = \begin{bmatrix} \dot{X}^I \\ \dot{Y}^I \\ \dot{\psi}^I \end{bmatrix} = \begin{bmatrix} v \cos(\beta + \psi) \\ v \sin(\beta + \psi) \\ \dot{\psi} \end{bmatrix}$$



© 2022 Quanser Inc., All rights reserved.

Quanser Inc.  
119 Spy Court  
Markham, Ontario  
L3R 5H6  
Canada

info@quanser.com  
Phone: 19059403575  
Fax: 19059403576  
Printed in Markham, Ontario.

For more information on the solutions Quanser Inc. offers, please visit the web site at:  
<http://www.quanser.com>

This document and the software described in it are provided subject to a license agreement. Neither the software nor this document may be used or copied except as specified under the terms of that license agreement. Quanser Inc. grants the following rights: a) The right to reproduce the work, to incorporate the work into one or more collections, and to reproduce the work as incorporated in the collections, b) to create and reproduce adaptations provided reasonable steps are taken to clearly identify the changes that were made to the original work, c) to distribute and publicly perform the work including as incorporated in collections, and d) to distribute and publicly perform adaptations. The above rights may be exercised in all media and formats whether now known or hereafter devised. These rights are granted subject to and limited by the following restrictions: a) You may not exercise any of the rights granted to You in above in any manner that is primarily intended for or directed toward commercial advantage or private monetary compensation, and b) You must keep intact all copyright notices for the Work and provide the name Quanser Inc. for attribution. These restrictions may not be waived without express prior written permission of Quanser Inc.