





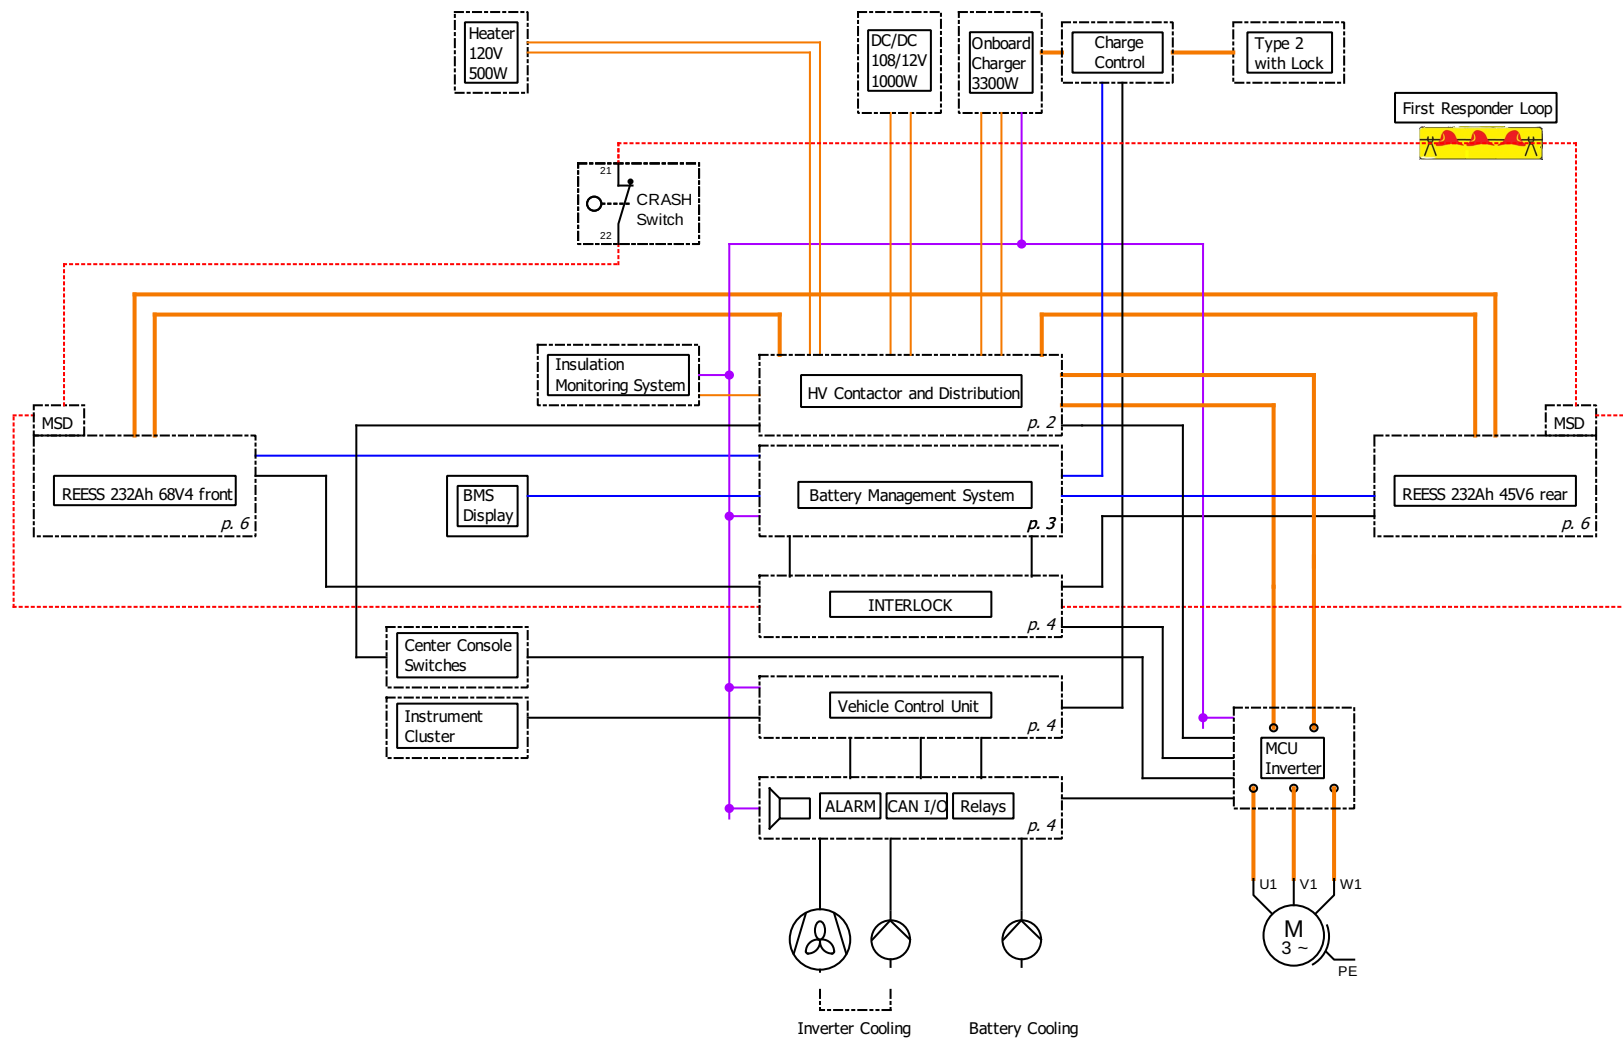

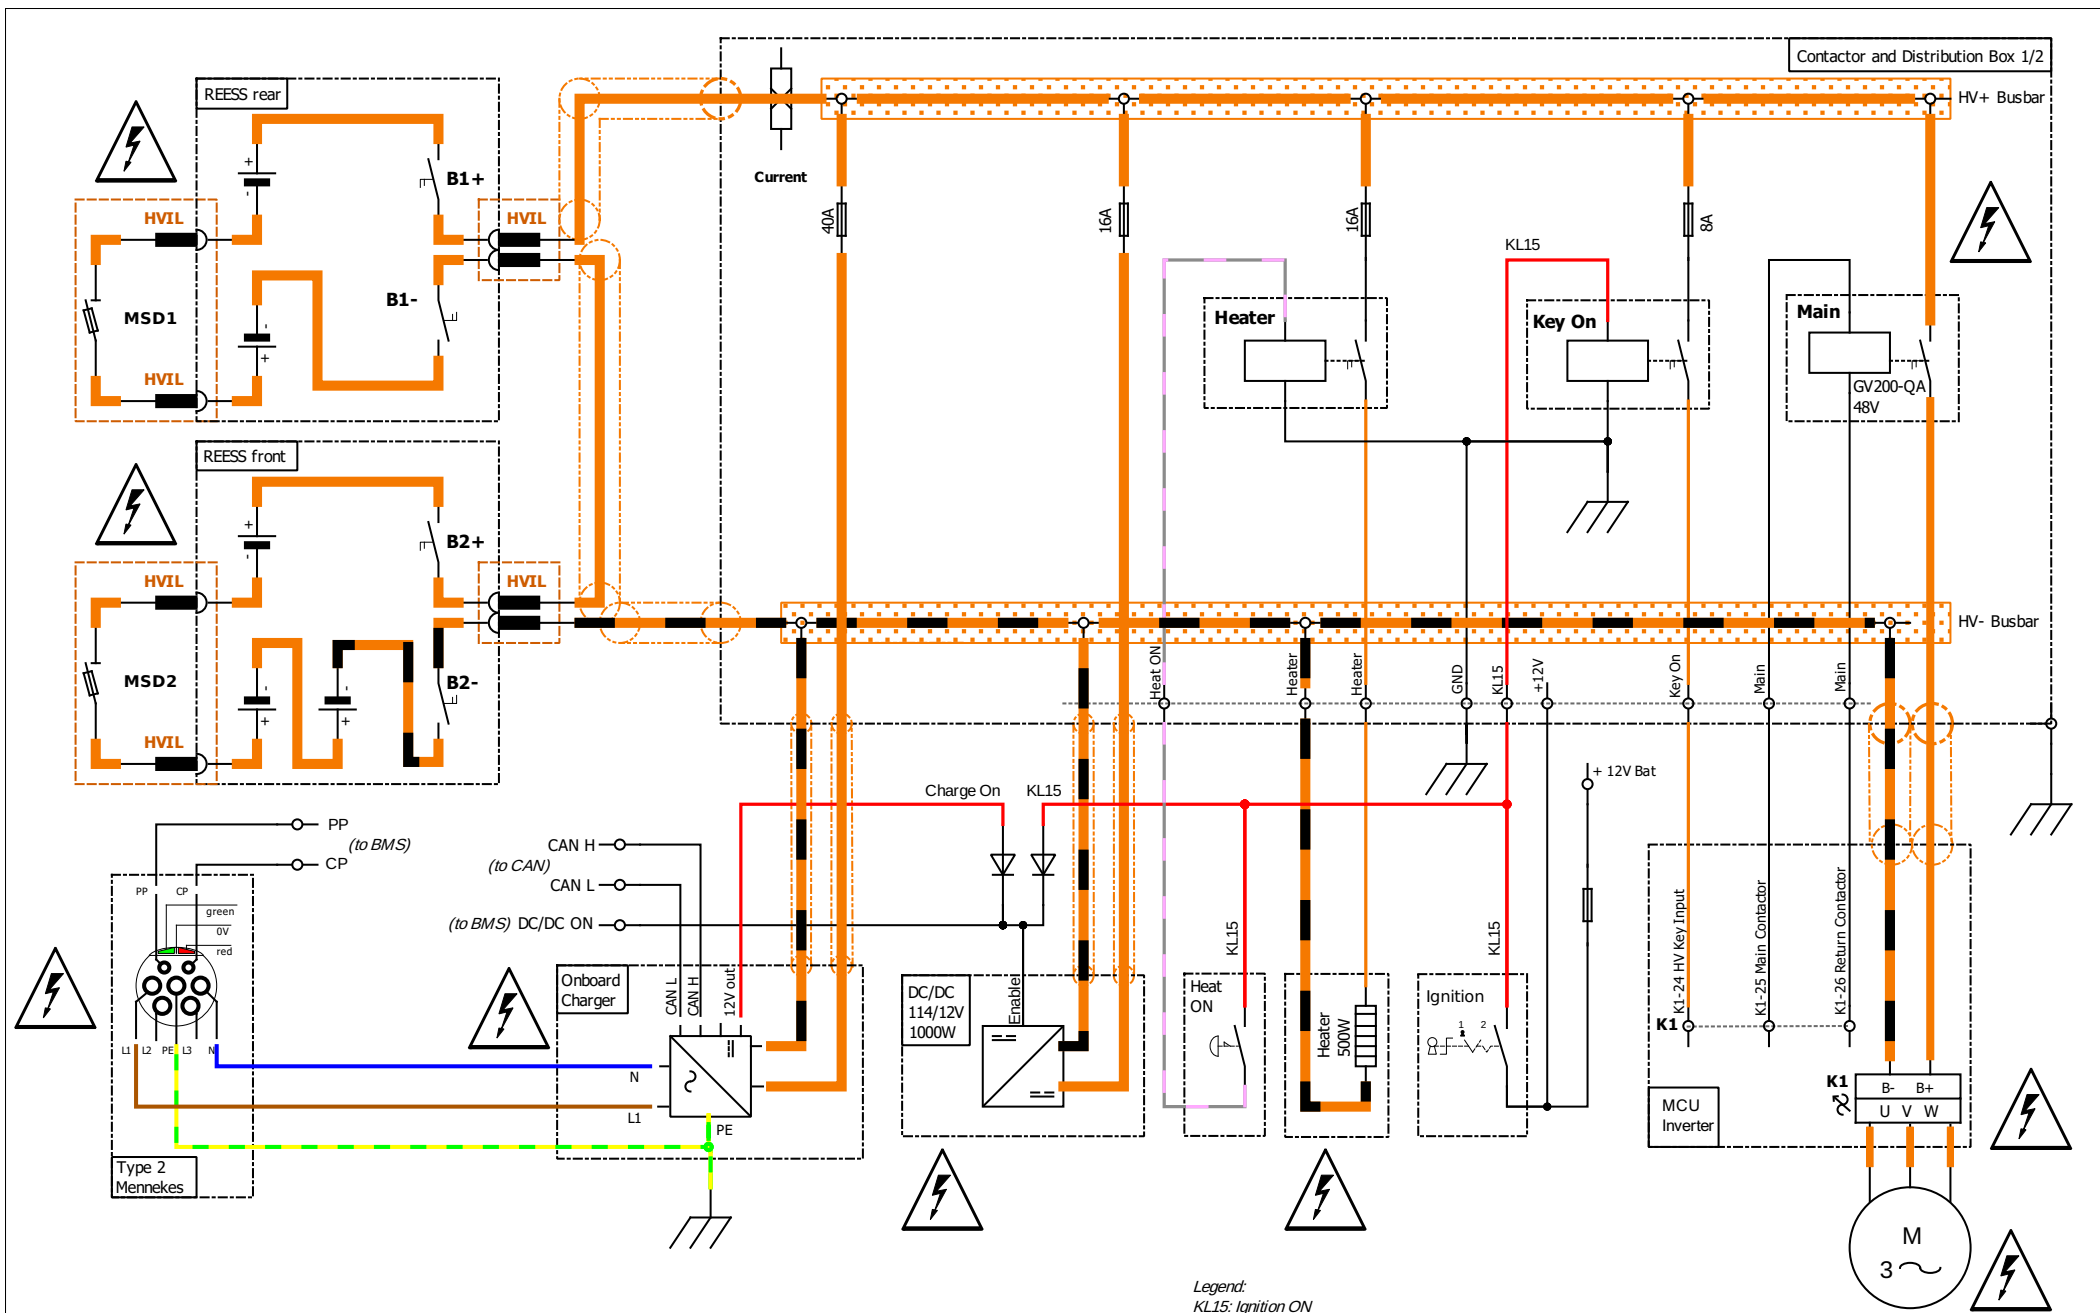

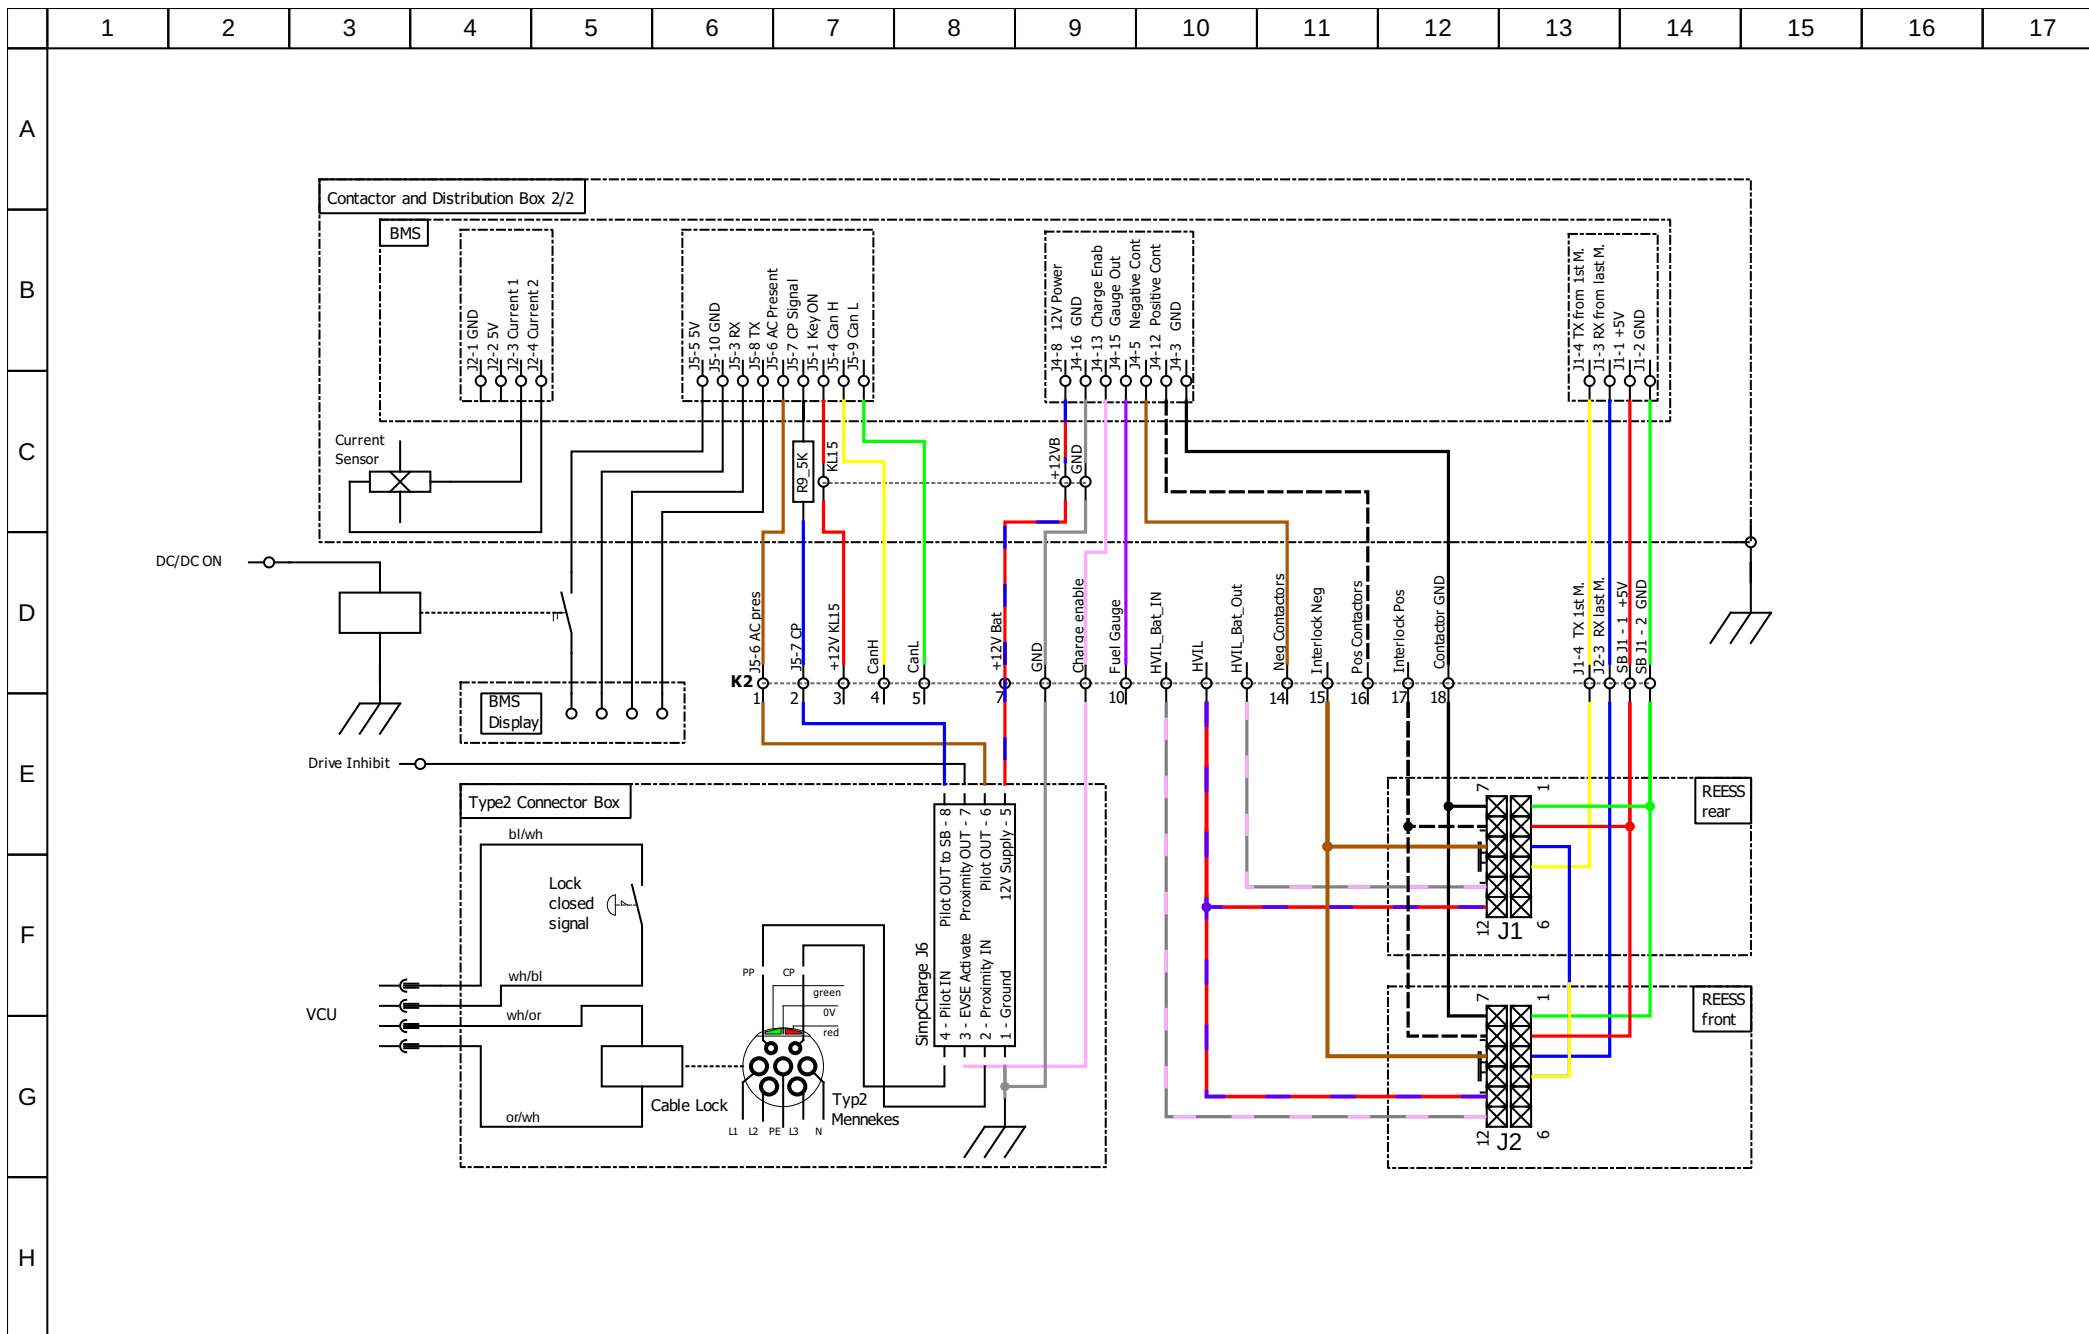

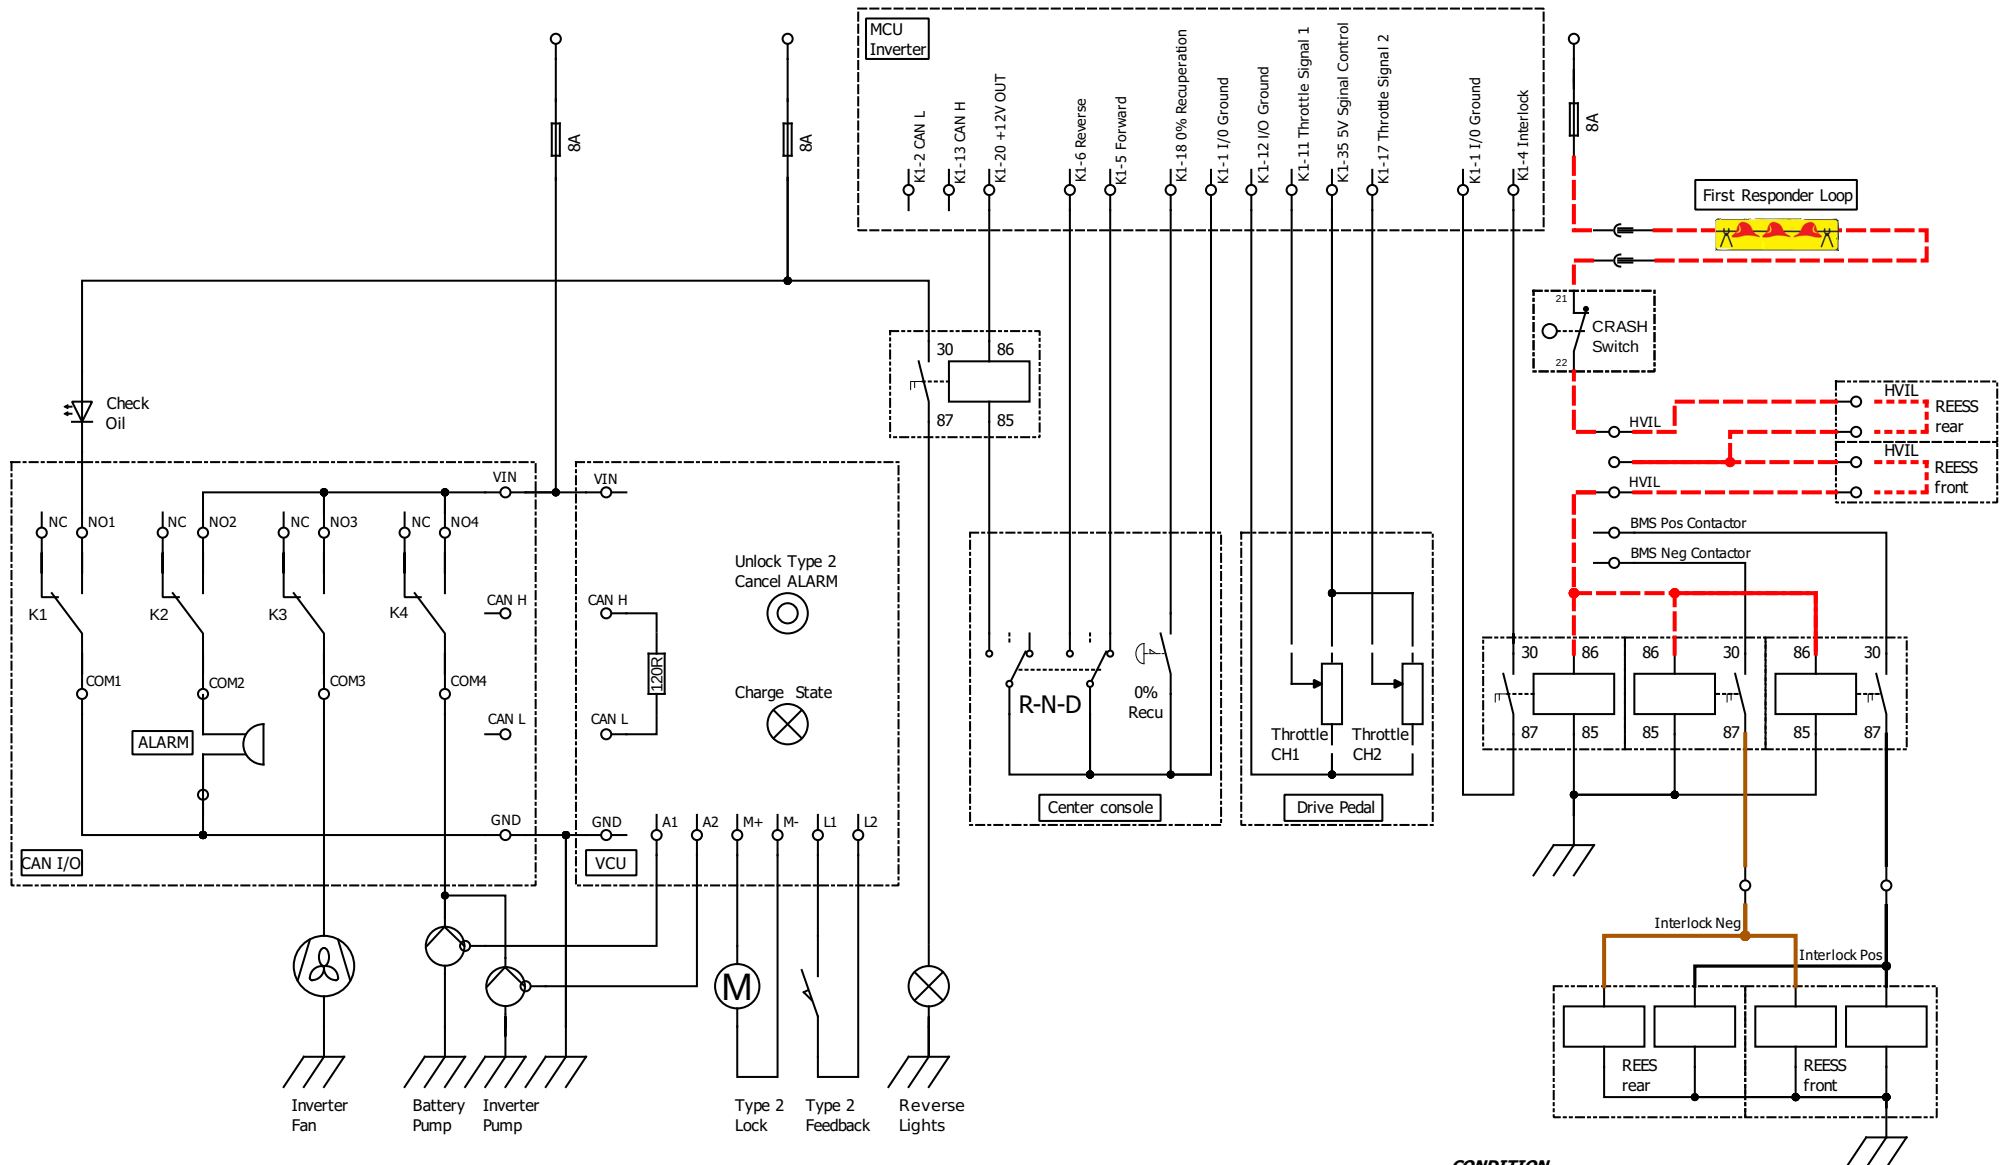

CONDITION

The HVIL Pilotline has to be closed to enable the HV supply from REESS.
 One single missing contact disconnects Negative and Positive Contactors of both REESS Packs at the same time.
 The Interlock signal is monitored by the Inverter and shut off the MAIN contactor.

Autor: Frank Hielscher

Datum:

MCU I/O and HVIL-Pilotline


Datei:

Seite: 4/7


X1/9e
electric speed

Hersteller: Frank Hielscher
97816 Lohr a. Main
Typ: REESS-X1/9e-Front
Serien-Nr.: 2024-001-F
Datum: 2024-05

Nennkapazität: 232 Ah
Nennspannung: 68,4 V DC
Zellchemie: Li-ion (NCA)
Gewicht: 105 kg

Li-ion

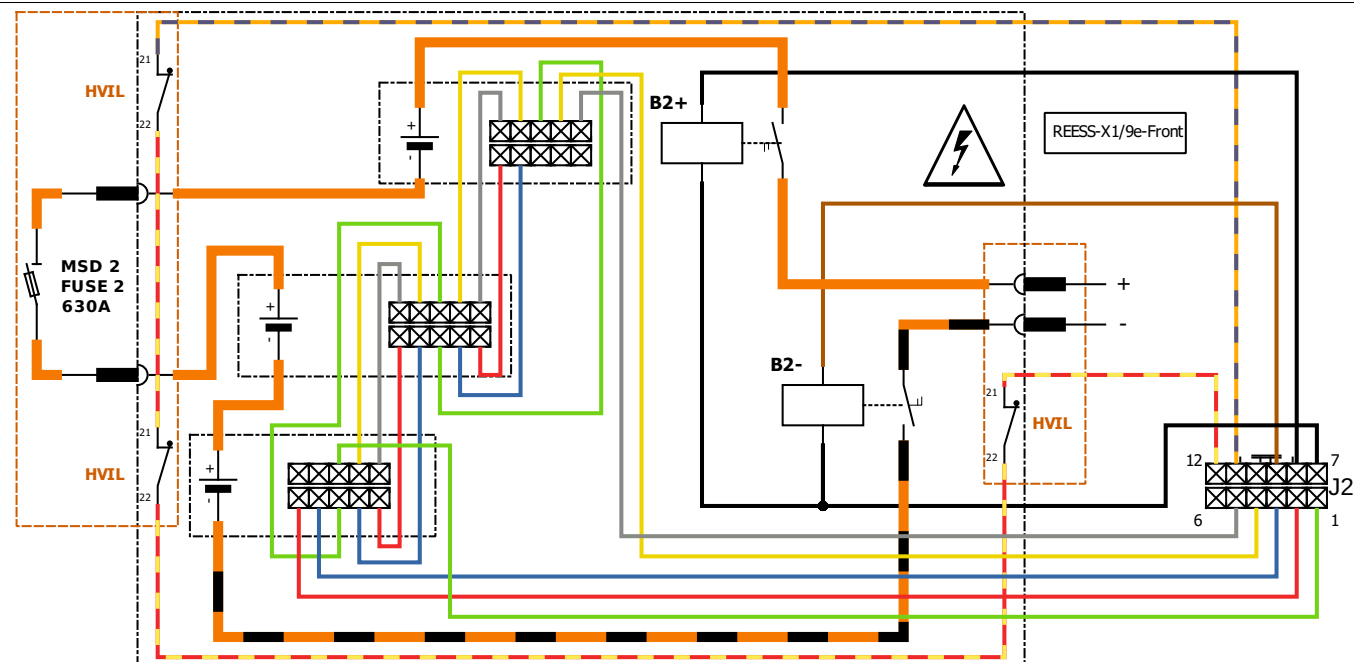


X1/9e
electric speed


Hersteller: Frank Hielscher
97816 Lohr a. Main
Typ: REESS-X1/9e-Rear
Serien-Nr.: 2024-001-R
Datum: 2024-05

Nennkapazität: 232 Ah
Nennspannung: 45,6 V DC
Zellchemie: Li-ion (NCA)
Gewicht: 80 kg

Li-ion



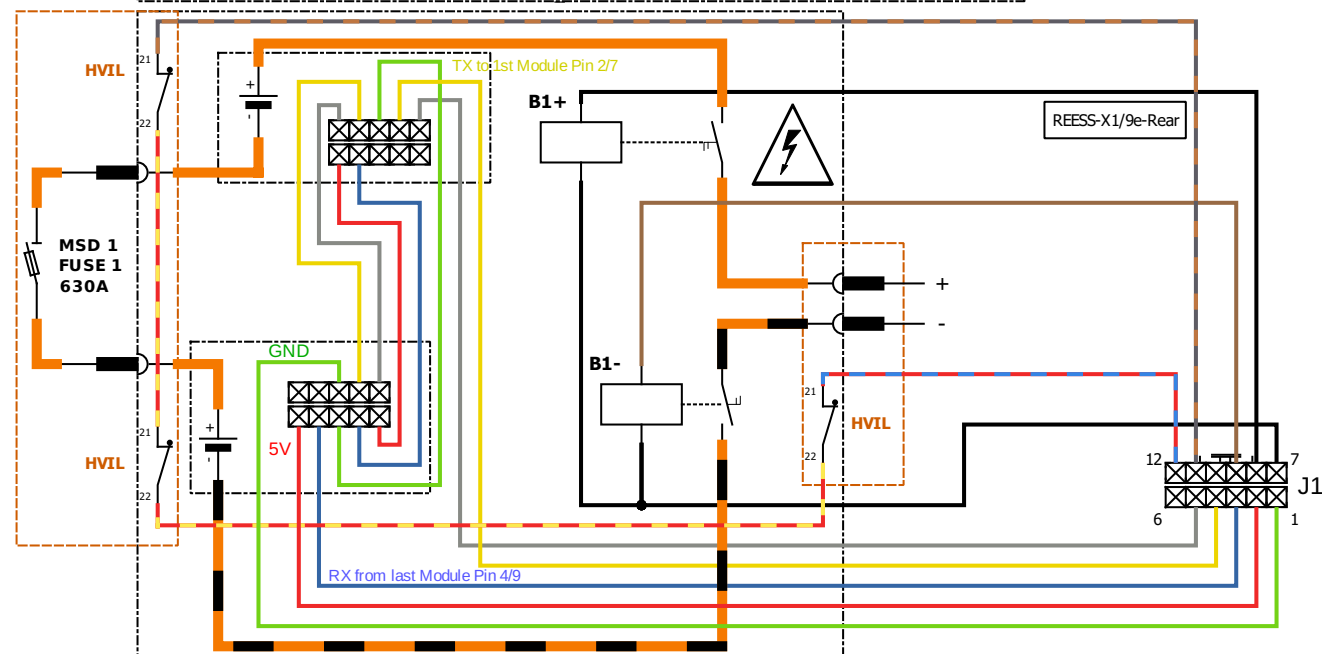

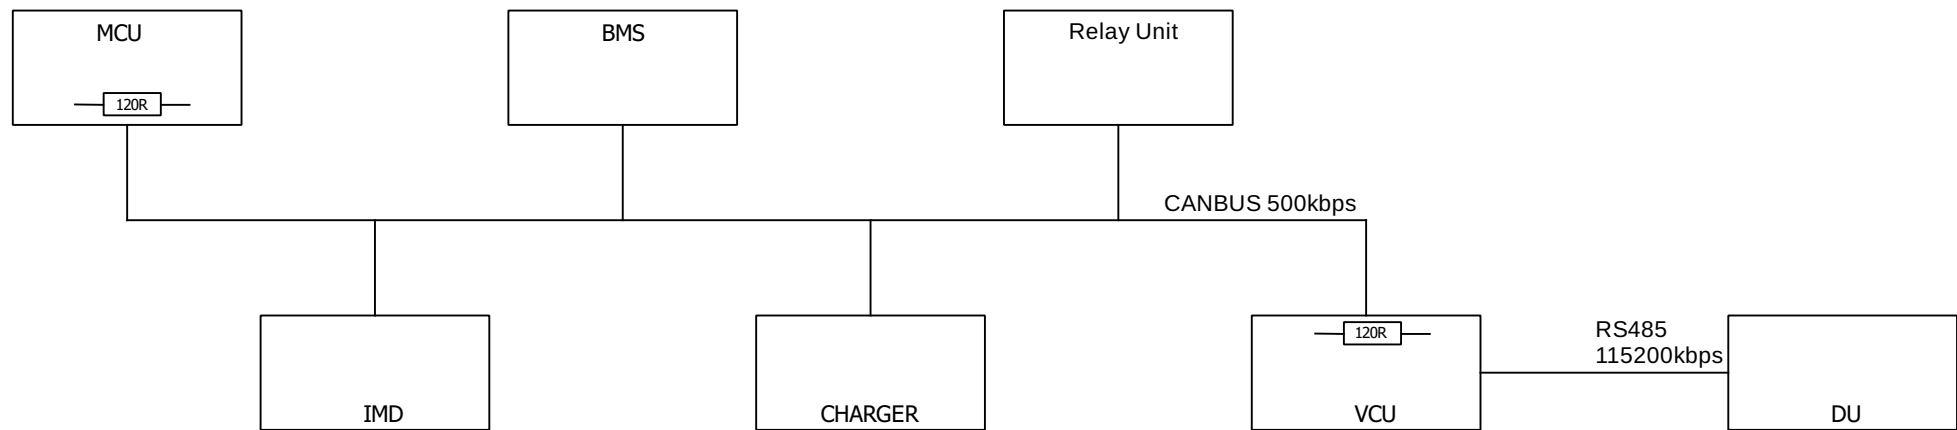Legend: MCU = Motor Control Unit (Inverter), BMS = Battery Management System, VCU = Vehicle Control Unit, DU = Display Unit, IMD = Insulation Monitoring Device

Autor: Frank Hielscher

Datum:

CAN Bus

Datei:

Seite: 7/7