



HOSHIZAKI

For Your Kitchen
2026



NATURAL
REFRIGERANTS

New Generation Refrigerator



CONTENT

ICE MAKER

CUBE ICE	6 - 7
CRESCENT ICE	7 - 8
NUGGET/FLAKE ICE	8 - 9
DICE ICE	10 - 11
SPECIAL ICE	11
ICE DISPENSER	12
STORAGE BIN	13

REFRIGERATION

UPRIGHT CHILLER	15
UPRIGHT FREEZER	17
UPRIGHT COMBO	18
UNDERCOUNTER CHILLER	19
UNDERCOUNTER FREEZER	23
UNDERCOUNTER DOOR + DRAWER	24

SUSHI SHOWCASE	27
DISH WASHER	28



ABOUT



Hoshizaki is a global leading manufacturer of commercial equipment for food and beverage services that was founded in Nagoya, Japan in 1947, and began operations in Toyoake factory in 1956.

We have continually manufactured and offered a wide variety of high-quality products, in order to meet changing needs and demands, since Hoshizaki's establishment. In particular, we provide equipment, such as ice machines, commercial refrigeration, beverage dispensers, and dishwashers.

Hoshizaki has a comprehensive global network with its manufacturing plants in the United States, the United Kingdom, Denmark, Turkey, Mexico, China, India, Australia, and Brazil. We also have sales and after-sales service teams globally, and our products that incorporate creativity and innovation are highly valued, supporting various dining scenes for worldwide customers.






ICE MAKER

Together with the vision to prioritize the customer satisfaction, Hoshizaki has invented the original technology for the Basic Designs of Evaporators. As the result, some Hoshizaki Ice Machine products use the Stainless Steel Evaporator which produce the best quality ice that is already proven melt very slowly (up to 24 hours time) compared to any other ice produced by different ice machines brand.




CUBE STANDARD




MODEL	IM-30CA	IM-45CA	IM-65A
Dimension WxDxH (+ Leg)	398 x 510 x 695 (+150) mm	660 x 570 x 695 (+150) mm	660 x 570 x 800 (+150) mm
Electrical Consumption	250 W	310 W	390 W
Ice Production Per 24h (approx.)	28 kg (AT21°C / WT15°C) 25 kg (AT32°C / WT21°C)	44 kg (AT21°C / WT15°C) 38 kg (AT32°C / WT21°C)	62 kg (AT21°C / WT15°C) 49 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	0.4 kg / 18 pcs	0.67 kg / 30 pcs	0.94 kg / 42 pcs
Storage Capacity (approx.)	12 kg	15 kg	26 kg

CUBE STANDARD




MODEL	IM-100A	IM-100CNS	IM-130A
Dimension WxDxH (+ Leg)	660 x 570 x 1200 (+150) mm	1004 x 600 x 800 mm	660 x 570 x 1200 (+150) mm
Electrical Consumption	680 W	630 W	630 W
Ice Production Per 24h (approx.)	108 kg (AT21°C / WT15°C) 88 kg (AT32°C / WT21°C)	93 kg (AT21°C / WT15°C) 84 kg (AT32°C / WT21°C)	125 kg (AT21°C / WT15°C) 100 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.8 kg / 80 pcs	1.8 kg / 80 pcs	1.8 kg / 80 pcs
Storage Capacity (approx.)	52 kg	38 kg	52 kg


CUBE STANDARD




MODEL	IM-220AA WITH B-301SA	IM-220AA x 2 UNIT WITH B-801SA
Dimension WxDxH	560 x 820 x 1796(+90)mm	1219 x 820 x 1796 (+90) mm
Electrical Consumption	950 W	1900 W
Ice Production Per 24h (approx.)	200 kg (AT21°C / WT15°C) 175 kg (AT32°C / WT21°C)	400 kg (AT21°C / WT15°C) 350 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	3.2 kg / 140 pcs	6.4 kg / 280 pcs
Storage Capacity (approx.)	144k kg	348 kg

CUBE STANDARD



MODEL	IM-240DNS WITH B-801SA	IM-240DNS + IM-240XNS WITH B-801SA
Dimension WxDxH	1219 x 820 x 1521 (+90) mm	1219 x 820 x 2006 (+90) mm
Electrical Consumption	1330 W	2660 W
Ice Production Per 24h (approx.)	220 kg (AT21°C / WT15°C) 200 kg (AT32°C / WT21°C)	460 kg (AT21°C / WT15°C) 420 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	3.2 kg / 140 pcs	6.4 kg / 280 pcs
Storage Capacity (approx.)	348 kg	348 kg

CRESCENT ICE
CRESCENT



MODEL	KM-40C	KM-60C	KM-80C
Dimension WxDxH(+Leg)	452 x 610 x 838 (+150) mm	605 x 610 x 838 (+150) mm	605 x 712 x 838 (+150) mm
Electrical Consumption	250 W	305 W	405 W
Ice Production Per 24h (approx.)	41 kg (AT21°C / WT15°C) 33 kg (AT32°C / WT21°C)	56 kg (AT21°C / WT15°C) 45 kg (AT32°C / WT21°C)	74 kg (AT21°C / WT15°C) 57 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	0.74 kg / 80 pcs	1.00 kg / 110 pcs	1.16 kg / 130 pcs
Storage Capacity (approx.)	16 kg	23 kg	34 kg

CRESCENT


MODEL	KM-130C	KMD-201AB WITH B-301SA	KMD-270AB WITH B-301SA
Dimension WxDxH(+Leg)	630 x 719 x 1194 (+150) mm	560 x 820 x 1631(+90)mm	560 x 820 x 1631(+90)mm
Electrical Consumption	593 W	663 W	984 W
Ice Production Per 24h (approx.)	120 kg (AT21°C / WT15°C) 90 kg (AT32°C / WT21°C)	175 kg (AT21°C / WT15°C) 140 kg (AT32°C / WT21°C)	255 kg (AT21°C / WT15°C) 221 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.86 kg / 208 pcs	3.7kg / 416pcs	5.3kg / 572pcs
Storage Capacity (approx.)	55 kg	144 kg	144 kg

CRESCENT

MODEL
**KMD-201AB x 2 UNIT
WITH B-801SA**
KM-470AJ-B-501SA
**KMD-270AB x 2 UNIT
WITH B-801SA**

Dimension WxDxH (+Leg)	1219 x 820 x 1631(+90)mm	762 x 820 x 1846(+90)mm	1219 x 820 x 1631(+90)mm
Electrical Consumption	1326 W	1850 W	1968 W
Ice Production Per 24h (approx.)	350 kg (AT21°C / WT15°C) 280 kg (AT32°C / WT21°C)	480 kg (AT21°C / WT15°C) 380 kg (AT32°C / WT21°C)	510 kg (AT21°C / WT15°C) 442 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	7.4kg / 832pcs	9.7kg / 960pcs	10.8kg / 1144pcs
Storage Capacity (approx.)	348 kg	217 kg	348 kg

CRESCENT

MODEL
KM-590DJ-B-801SA
KM-590DJ x 2 UNIT WITH B-801SA

Dimension WxDxH (+Leg)	1219 x 820 x 1846(+90)mm	1219 x 820 x 2411(+90)mm
Electrical Consumption	2080 W	4160 W
Ice Production Per 24h (approx.)	590 kg (AT21°C / WT15°C) 500 kg (AT32°C / WT21°C)	1180 kg (AT21°C / WT15°C) 1000 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	12.9kg / 1440pcs	25.8kg / 2880pcs
Storage Capacity (approx.)	348 kg	348kg


NUGGET / FLAKE ICE
 Natural refrigerant R290

FLAKE

MODEL
FM-120KS-HC
FM-120KS-HCN

Dimension WxDxH (+Leg)	640 x 640 x 711(+89)mm	640 x 600 x 711(+89)mm
Electrical Consumption	343 W	349 W
Ice Production Per 24h (approx.)	119 kg (AT21°C / WT15°C) 88 kg (AT32°C / WT21°C)	119 kg (AT21°C / WT15°C) 88 kg (AT32°C / WT21°C)
Refrigerant	R290	R290
Storage Capacity (approx.)	26kg	26kg

NUGGET




NUGGET / FLAKE ICE

Natural refrigerant R290

FLAKE



NUGGET



MODEL

FM-300AKS-HC-SB WITH B-301SA

FM-300AKS-HCN-SB WITH B-301SA

Dimension WxDxH (+Leg)
Electrical Consumption
Ice Production Per 24h (approx.)
Refrigerant
Storage Capacity (approx.)

560 x 820 x 1801(+90)mm
810 W
280 kg (AT21°C / WT15°C)
224 kg (AT32°C / WT21°C)
R404A
144 kg

560 x 820 x 1801(+90)mm
810 W
275 kg (AT21°C / WT15°C)
189 kg (AT32°C / WT21°C)
R404A
144 kg

FLAKE



NUGGET



MODEL

FM-600AKE-SB WITH B-301SA

FM-600AKE-N-SB WITH B-301SA

Dimension WxDxH (+Leg)
Electrical Consumption
Ice Production Per 24h (approx.)
Refrigerant
Storage Capacity (approx.)

560 x 820 x 1801(+90)mm
1900 W
540 kg (AT21°C / WT15°C)
445 kg (AT32°C / WT21°C)
R404A
144kg

560 x 820 x 1801(+90)mm
1900 W
460 kg (AT21°C / WT15°C)
400 kg (AT32°C / WT21°C)
R404A
144kg

FLAKE



NUGGET



MODEL


FM-1000AKE-SB WITH B-501SA

FM-1000AKE-N-SB WITH B-501SA


Dimension WxDxH (+Leg)
Electrical Consumption
Ice Production Per 24h (approx.)
Refrigerant
Storage Capacity (approx.)

762 x 820 x 1801(+90)mm
2490 W
890 kg (AT21°C / WT15°C)
740 kg (AT32°C / WT21°C)
R404A
217kg



762 x 820 x 1801(+90)mm
2490 W
730 kg (AT21°C / WT15°C)
590 kg (AT32°C / WT21°C)
R404A
217kg

DICE




MODEL	SRM-45A	SRM-60A	SRM-80A
Dimension WxDxH (+ Leg)	500 x 580 x 750 mm	660 x 670 x 970 (+80) mm	660 x 670 x 970 (+80) mm
Electrical Consumption	287 W	370 W	450 W
Ice Production Per 24h (approx.)	41 kg (AT21°C / WT15°C) 35 kg (AT32°C / WT21°C)	60 kg (AT21°C / WT15°C) 50 kg (AT32°C / WT21°C)	72 kg (AT21°C / WT15°C) 57 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	0.5kg / 55pcs	0.81kg / 80 pcs	0.81 kg / 80 pcs
Storage Capacity (approx.)	14 kg	31.4 kg	31.4 kg

DICE


MODEL	SRM-105A	SRM-125A	SRM-125UB
Dimension WxDxH (+ Leg)	660 x 670 x 1120 (+80) mm	660 x 670 x 1120 (+80) mm	660 x 670 x 850 mm
Electrical Consumption	480 W	590 W	590 W
Ice Production Per 24h (approx.)	90 kg (AT21°C / WT15°C) 70 kg (AT32°C / WT21°C)	106 kg (AT21°C / WT15°C) 81 kg (AT32°C / WT21°C)	106 kg (AT21°C / WT15°C) 81 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.17kg / 126 pcs	1.17kg / 126 pcs	1.17kg / 126 pcs
Storage Capacity (approx.)	43.6 kg	43.6 kg	24 kg

DICE SRM-200/270AB

HALF DICE SRM-200AB-14


MODEL	SRM-200AB WITH B-301SA	SRM-200AB-14 WITH B-301SA	SRM-270AB WITH B-501SA
Dimension WxDxH (+ Leg)	560 x 820 x 1581(+90)mm	560 x 820 x 1581(+90)mm	762 x 820 x 1581(+90)mm
Electrical Consumption	853 W	804 W	861 W
Ice Production Per 24h (approx.)	174 kg (AT21°C / WT15°C) 130 kg (AT32°C / WT21°C)	180 kg (AT21°C / WT15°C) 140 kg (AT32°C / WT21°C)	225 kg (AT21°C / WT15°C) 180 kg (AT32°C / WT21°C)
Ice Production Per Cycle (approx.)	1.72kg / 182pcs	1.8kg / 220pcs	2.41kg / 260pcs
Storage Capacity (approx.)	144 kg	144 kg	217 kg

DICE SRM-450AB

HALF DICE SRM-270/450AB-14

MODEL
SRM-270AB-14 WITH B-501SA
SRM-450AB-S WITH B-501SA
SRM-450AB-S-14 WITH B-501SA
Dimension WxDxH (+ Leg)

762 x 820 x 1581(+90)mm

762 x 820 x 1781(+90)mm

762 x 820 x 1781(+90)mm

Electrical Consumption

938 W

2095 W

2064 W

Ice Production Per 24h (approx.)

225 kg (AT21°C / WT15°C)

370 kg (AT21°C / WT15°C)

399 kg (AT21°C / WT15°C)

183 kg (AT32°C / WT21°C)

283 kg (AT32°C / WT21°C)

316 kg (AT32°C / WT21°C)

Ice Production Per Cycle (approx.)

2.57kg / 320pcs

4.19kg / 440pcs


4.43kg / 544pcs

Storage Capacity (approx.)

217kg

217kg

217kg

SPECIAL ICE
BALL

MODEL
IM-65NE-Q
Dimension WxDxH (+ Leg)

633 x 506 x 860(+90)mm

Electrical Consumption

390 W

Ice Production Per 24h (approx.)

24 kg (AT21°C / WT15°C)


20 kg (AT32°C / WT21°C)

Ice Production Per Cycle (approx.)

0.67kg / 15pcs

Storage Capacity (approx.)

17kg

BIG CUBE

MODEL
LM-55M-2-LM
IM-65NS-LM
LM-550M-1
Dimension WxDxH (+ Leg)

633 x 525 x 850 mm

633 x 506 x 950-985 mm

700 x 525 x 1200 mm

Electrical Consumption

265 W

400 W

435 W

Ice Production Per 24h (approx.)

32 kg (AT21°C / WT15°C)

33 kg (AT21°C / WT15°C)

63 kg (AT21°C / WT15°C)

28 kg (AT32°C / WT21°C)

25 kg (AT32°C / WT21°C)

52 kg (AT32°C / WT21°C)

Ice Production Per Cycle (approx.)

1.48 kg / 12 pcs

1.44 kg / 12 pcs

2.2 kg / 20 pcs

Storage Capacity (approx.)

17 kg

26 kg

41 kg




ICE DISPENSER

Natural refrigerant R290

Cold drinks are very much favoured especially in casual or self-service environments; operators can lessen the work or manpower with an ice dispersing machine. Hozshizaki's cubelet ice dispensers meet the need with its 2-in-1 function that makes and provides ice to customers through its compact and space saving dispensers.



CUBELET
Compressed Flake Ice



MODEL	DCM-120LS-HC
Dimension WxDxH (+ Leg)	350 x 585 x 765 (+50~65) mm
Electrical Consumption	391 W
Ice Production Per 24h (approx.)	110 kg (AT21°C / WT15°C) 90 kg (AT32°C / WT21°C)
Ice Production 40gm Cup (approx.)	157 cups / 30min (AT21°C / WT15°C) 146 cups / 30min (AT32°C / WT15°C)
Storage Capacity (approx.)	4.0 kg









ICE STORAGE BIN



MODEL	B-301SA	B-501SA	B-801SA
Dimension WxDxH (+ Leg)	558.8 x 820 x 1016 (+90) mm	762 x 820 x 1016 (+90) mm	1219.2 x 820 x 1016 (+90) mm
Door Style	Upward Opening	Upward Opening	Upward Opening
Scoop	1	1	1
Effective Capacity (approx.)	144 kg	217 kg	348 kg
Weight Gross	49 kg	57 kg	86 kg



ICE STORAGE BIN COMPATABILITY

ICE MACHINE \ ICE BIN	IM-220 IM-240A FM-300 FM-600 SRM-200	KMD-201 KMD-270	KM-470 FM-1000 SRM-270 SRM-450	IM-220 x 2 IM-240A x 2 FM-300 x 2 FM-600 x 2 SRM-200 x 2	KMD-201 x 2 KMD-270 x 2	KM-590	IM-240D IM-240X
B-301SA  Top Kit	 No Top Kit	 No Top Kit					
B-501SA  Top Kit	 8D	 8D	 No Top Kit				
B-801SA  Top Kit	 8D + 18D	 8D + 18D	 18D	 4DM	 4DM + 4DR	 No Top Kit	 1MD



REFRIGERATION



As our mission and plan to achieve and maintain optimum your satisfaction, we proudly introduce our technology based on years of researching and innovating for better quality of Chillers and Freezers: A-Fit Technology.

Upright Solid Door Chiller



MODEL	HR-76MA-S	HR-78MC-S 	HR-126MA-S	HR-128MC-S 
Dimension WxDxH	700 x 650 x 2050 mm	700 x 800 x 2050 mm	1200 x 650 x 2050 mm	1200 x 800 x 2050 mm
Electrical Consumption	237 W	2.77 kWh/Day	333 W	4.34 kWh/Day
Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	4	4	8	8
Effective Capacity	467 L	569 L	866 L	1053 L



MODEL	HR-146MA-S	HR-148MC-S 	HR-186MA-S	HR-188MC-S 
Dimension WxDxH	1400 x 650 x 2050 mm	1400 x 800 x 2050 mm	1800 x 650 x 2050 mm	1800 x 800 x 2050 mm
Electrical Consumption	343 W	5.02 kWh/Day	413 W	6.45 kWh/Day
Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	8	8	12	12
Effective Capacity	1021 L	1243 L	1342 L	1632 L

**Available In Long Solid Door*

Upright Pillar-less Chiller



MODEL	HR-128MA-S-ML	HR-148MA-S-ML
Dimension WxDxH	1200 x 800 x 2050 mm	1400 x 800 x 2050 mm
Electrical Consumption	556 W	471 W
Freezer Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	8	8
Effective Capacity	1053 L	1243 L



UPRIGHT GLASS DOOR CHILLER

Upright Heated Swing Glass Door Chiller



MODEL	HR-76MA-SG	HR-78MA-SG	HR-126MA-SG	HR-128MA-SG
Dimension WxDxH	700 x 650 x 2050 mm	700 x 800 x 2050 mm	1200 x 650 x 2050 mm	1200 x 800 x 2050 mm
Electrical Consumption	463 W	463 W	533 W	533 W
Temperature Control	-2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C
Number of Shelves	4	4	8	8
Effective Capacity	467 L	569 L	866 L	1110 L



MODEL	HR-146MA-SG	HR-148MA-SG	HR-188MA-SG
Dimension WxDxH	1400 x 650 x 2050 mm	1400 x 800 x 2050 mm	1800 x 800 x 2050 mm
Electrical Consumption	559 W	559 W	609 W
Temperature Control	-2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C
Number of Shelves	8	8	12
Effective Capacity	1021 L	1310 L	1720 L

Upright Long Glass Door Chiller



MODEL	HR-76MA-SLG	HR-78MA-SLG	HR-126MA-SLG	HR-128MA-SLG
Dimension WxDxH	700 x 650 x 2050 mm	700 x 800 x 2050 mm	1200 x 650 x 2050 mm	1200 x 800 x 2050 mm
Electrical Consumption	463 W	463 W	533 W	533 W
Chiller Temperature Control	-2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C
Number of Shelves	4	4	8	8
Effective Capacity	467 L	569 L	866 L	1053 L

Upright Solid Door Freezer



MODEL	HF-76MA-S	HF-78MC-S 	HF-126MA-S	HF-128MC-S 
Dimension WxDxH	700 x 650 x 2050 mm	700 x 800 x 2050 mm	1200 x 650 x 2050 mm	1200 x 800 x 2050 mm
Electrical Consumption	419 W	6.35 kWh/Day	696 W	11.17 kWh/Day
Temperature Control	-23°C ~ -7°C	-25°C ~ -7°C	-23°C ~ -7°C	-25°C ~ -7°C
Number of Shelves	4	4	8	8
Effective Capacity	467 L	569 L	856 L	1047 L



MODEL	HF-146MA-S	HF-148MC-S 	HF-186MA-S	HF-188MC-S 
Dimension WxDxH	1400 x 650 x 2050 mm	1400 x 800 x 2050 mm	1800 x 650 x 2050 mm	1800 x 800 x 2050 mm
Electrical Consumption	740 W	12.09 kWh/Day	917 W	14.52 kWh/Day
Temperature Control	-23°C ~ -7°C	-25°C ~ -7°C	-23°C ~ -7°C	-25°C ~ -7°C
Number of Shelves	8	8	12	12
Effective Capacity	982 L	1233 L	1342 L	1622 L

**Available In Long Solid Door*

Upright Pillar-less Freezer



MODEL	HF-128MA-S-ML	HF-148MA-S-ML
Dimension WxDxH	1200 x 800 x 2050 mm	1400 x 800 x 2050 mm
Electrical Consumption	836 W	856 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	8	8
Effective Capacity	1047 L	1243 L



UPRIGHT COMBO CHILLER FREEZER


Natural refrigerant R290

Upright Dual Temp.



MODEL

HRF-78MC-S




MODEL

HRF-128MC-S

Dimension WxDxH	700 x 800 x 2050 mm
Electrical Consumption	6.92 kWh/Day
Refrigerator Temperature Control	-2°C ~ 12°C
Freezer Temperature Control	-25°C ~ -11°C
Number of Shelves	4
Effective Capacity	448 L (Refrigerator: 234 L, Freezer: 214 L)

Dimension WxDxH	1200 x 800 x 2050 mm
Electrical Consumption	11.43 kWh/Day
Refrigerator Temperature Control	-6°C ~ 12°C
Freezer Temperature Control	-25°C ~ -7°C
Number of Shelves	8
Effective Capacity	862 L (Refrigerator: 431 L, Freezer: 431 L)



MODEL

HRF-148MC-S



MODEL

HRF-188MC-S

Dimension WxDxH	1400 x 800 x 2050 mm
Electrical Consumption	11.84 kWh/Day
Refrigerator Temperature Control	-6°C ~ 12°C
Freezer Temperature Control	-25°C ~ -7°C
Number of Shelves	8
Effective Capacity	1054 L (Refrigerator: 527 L, Freezer: 527 L)

Dimension WxDxH	1800 x 800 x 2050 mm
Electrical Consumption	12.44 kWh/Day
Refrigerator Temperature Control	-6°C ~ 12°C
Freezer Temperature Control	-25°C ~ -7°C
Number of Shelves	12
Effective Capacity	1452 L (Refrigerator: 980 L, Freezer: 472 L)



UPRIGHT WITH TRAY MODEL

Upright Chiller
Long Door
With Tray



MODEL

HR-78MA-SLD-ST



MODEL

HF-78MA-SLD-ST

Dimension WxDxH	700 x 800 x 2050 mm
Electrical Consumption	237 W
Temperature Control	-6°C ~ 12°C
Pitched (W 400 x D 600)	51mm (Max. upper 10 tiers, lower 13 tiers)
Effective Capacity	546 L

Dimension WxDxH	700 x 800 x 2050 mm
Electrical Consumption	419 W
Temperature Control	-23°C ~ -7°C
Pitched (W 400 x D 600)	51mm (Max. upper 10 tiers, lower 13 tiers) Tiers
Effective Capacity	546 L

Upright Freezer
Long Door
With Tray



UNDER COUNTER CHILLER

Natural refrigerant R290

Undercounter Solid Door Chiller



MODEL	RT-96MC-S	RT-98MC-S	RT-126MC-S	RT-128MC-S
Dimension WxDxH	900 x 600 x 850 mm	900 x 750 x 850 mm	1200 x 600 x 850 mm	1200 x 750 x 850 mm
Electrical Consumption	1.30 kWh/Day	1.34 kWh/Day	1.97 kWh/Day	2.07 kWh/Day
Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	2	2	4	4
Effective Capacity	151 L	199 L	231 L	307 L



MODEL	RT-156MC-S	RT-158MC-S	RT-186MC-S	RT-188MC-S
Dimension WxDxH	1500 x 600 x 850 mm	1500 x 750 x 850 mm	1800 x 600 x 850 mm	1800 x 750 x 850 mm
Electrical Consumption	2.15 kWh/Day	1.80 kWh/Day	2.86 kWh/Day	3.43 kWh/Day
Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	4	4	6	6
Effective Capacity	318 L	420 L	401 L	502 L

Prep Table (Cover + Cutting Board)



MODEL	RT-128MA-S-PRS	RT-158MA-S-PRS	RT-188MA-S-PRS
Dimension WxDxH	1200 x 750 x 1076 mm	1500 x 750 x 1100 mm	1800 x 750 x 1100 mm
Electrical Consumption	245 W	245 W	280 W
Temperature Control	-2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C
Number of Shelves	4	4	6
Effective Capacity	304 L	410 L	517 L



UNDER COUNTER CHILLER

Undercounter Pillar-less Chiller



MODEL	RT-128MA-S-ML	RT-158MA-S-ML	RT-188MA-S-ML
Dimension WxDxH	1200 x 750 x 850 mm	1500 x 750 x 850 mm	1800 x 750 x 850 mm
Electrical Consumption	245 W	260 W	280 W
Chiller Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	4	4	6
Effective Capacity	307 L	420 L	502 L

Pillar-less Chiller



MODEL	RT-126MA-S-ML	RT-156MA-S-ML	RT-186MA-S-ML
Dimension WxDxH	1200 x 600 x 850 mm	1500 x 600 x 850 mm	1800 x 600 x 850 mm
Electrical Consumption	245 W	260 W	280 W
Chiller Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	4	4	6
Effective Capacity	231 L	318 L	401 L



UNDERCOUNTER GLASS DOOR CHILLER

Undercounter Heated Swing Glass Door Chiller



RT-98MA-SG



RT-128MA-SG

MODEL	RT-96MA-SG	RT-98MA-SG	RT-126MA-SG	RT-128MA-SG
Dimension WxDxH	900 x 600 x 850 mm	900 x 750 x 850	1200 x 600 x 850 mm	1200 x 750 x 850 mm
Electrical Consumption	201 W	201 W	229 W	224 W
Temperature Control	-2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C
Number of Shelves	2	2	4	4
Effective Capacity	151 L	199 L	231 L	307 L

UNDERCOUNTER GLASS DOOR CHILLER

Undercounter Heated Swing Glass Door Chiller



MODEL	RT-156MA-SG	RT-158MA-SG	RT-186MA-SG	RT-188MA-SG
Dimension WxDxH	1500 x 600 x 850 mm	1500 x 750 x 850 mm	1800 x 600 x 850 mm	1800 x 750 x 850 mm
Electrical Consumption	241 W	241 W	264 W	264 W
Temperature Control	-2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C
Number of Shelves	4	4	6	6
Effective Capacity	318 L	420 L	401 L	502 L

Undercounter Sliding Glass Door Chiller



MODEL	RT-126MA-SSG	RT-156MA-SSG	RT-186MA-SSG
Dimension WxDxH	1200 x 600 x 850 mm	1500 x 600 x 850 mm	1800 x 600 x 850 mm
Electrical Consumption	295 W	315 W	315 W
Chiller Temperature Control	-2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C
Number of Shelves	4	4	6
Effective Capacity	231 L	318 L	401 L



MODEL	RT-128MA-SSG	RT-158MA-SSG	RT-188MA-SSG
Dimension WxDxH	1200 x 750 x 850 mm	1500 x 750 x 850 mm	1800 x 750 x 850 mm
Electrical Consumption	247 W	260 W	280 W
Chiller Temperature Control	2°C ~ 12°C	-2°C ~ 12°C	-2°C ~ 12°C
Number of Shelves	4	4	6
Effective Capacity	307 L	420 L	502 L

UNDERCOUNTER DRAWER CHILLER

Undercounter Low Drawer Chiller



MODEL	RTL-146MA-SD	RTL-148MA-SD	RTL-186MA-SD	RTL-188MA-SD
Dimension WxDxH	1400 x 600 x 570 mm	1400 x 750 x 570 mm	1820 x 600 x 570 mm	1820 x 750 x 570 mm
Electrical Consumption	250 W	248 W	260 W	257 W
Chiller Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Drawers	4	4	6	6
Effective Capacity	129 L	176 L	198 L	267 L

Undercounter Drawer Chiller



MODEL	RTC-90DDA-GN-2D	RTC-125DDA-GN-4D	RTC-167DDA-GN-6D
Dimension WxDxH	900 x 750 x 850 mm	1250 x 750 x 850 mm	1670 x 750 x 850 mm
Electrical Consumption	220 W	220 W	261 W
Chiller Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Drawers	2	4	6
Effective Capacity	176 L	296 L	443 L

Undercounter Drawer Chiller



MODEL	RTC-90DDA-GN-3D	RTC-125DDA-GN-6D	RTC-167DDA-GN-9D
Dimension WxDxH	900 x 750 x 850 mm	1250 x 750 x 850 mm	1670 x 750 x 850 mm
Electrical Consumption	220 W	261 W	346 W
Chiller Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Drawers	3	6	9
Effective Capacity	176 L	296 L	443 L

**GN-Pans Are Not Included*



Undercounter Solid Door Freezer



MODEL	FT-96MC-S	FT-98MC-S	FT-126MC-S	FT-128MC-S
Dimension WxDxH	900 x 600 x 850 mm	900 x 750 x 850 mm	1200 x 600 x 850 mm	1200 x 750 x 850 mm
Electrical Consumption	3.78 kWh/Day	3.96 kWh/Day	5.13 kWh/Day	5.37 kWh/Day
Temperature Control	-25°C ~ 7°C	-25°C ~ 7°C	-25°C ~ 7°C	-25°C ~ 7°C
Number of Shelves	2	2	4	4
Effective Capacity	151 L	199 L	231 L	307 L



MODEL	FT-156MC-S	FT-158MC-S	FT-186MC-S	FT-188MC-S
Dimension WxDxH	1500 x 600 x 850 mm	1500 x 750 x 850 mm	1800 x 600 x 850 mm	1800 x 750 x 850 mm
Electrical Consumption	5.42 kWh/Day	6.29 kWh/Day	7.07 kWh/Day	6.84 kWh/Day
Temperature Control	-25°C ~ 7°C	-25°C ~ 7°C	-25°C ~ 7°C	-25°C ~ 7°C
Number of Shelves	4	4	6	6
Effective Capacity	318 L	420 L	401 L	502 L

Undercounter Pillar-less Freezer



MODEL	FT-156MA-S-ML	FT-186MA-S-ML
Dimension WxDxH	1500 x 600 x 850 mm	1800 x 600 x 850 mm
Electrical Consumption	415 W	400 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	4	6
Effective Capacity	318 L	401 L

UNDERCOUNTER FREEZER

Undercounter
Pillar-less Freezer



MODEL	FT-128MA-S-ML	FT-158MA-S-ML	FT-188MA-S-ML
Dimension WxDxH	1200 x 750 x 850 mm	1500 x 750 x 850 mm	1800 x 750 x 850 mm
Electrical Consumption	418 W	415 W	400 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	4	4	6
Effective Capacity	307 L	420 L	502 L

UNDERCOUNTER DRAWER FREEZER



MODEL	FTC-167DDA-GN-6D	FTC-167DDA-GN-9D
Dimension WxDxH	1670 X 750 X 850 mm	1670 X 750 X 850 mm
Electrical Consumption	415 W	415 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C
Number of Drawers	6	6
Effective Capacity	443L	443 L

UNDERCOUNTER DOOR + DRAWER

Undercounter
Door + Drawer
Chiller



MODEL	RT-126MA-S-3D	RT-156MA-S-3D	RT-186MA-S-3D
Dimension WxDxH	1200 x 600 x 850 mm	1500 x 600 x 850 mm	1800 x 600 x 850 mm
Electrical Consumption	245 W	245 W	280 W
Chiller Temperature Control	-6°C ~ 12°C	-6°C ~ 12°C	-6°C ~ 12°C
Number of Shelves	2	2	4
Number of Drawers	3	3	3
Effective Capacity	231 L	318 L	401 L



UNDERCOUNTER DOOR + DRAWER

Undercounter
Door + Drawer
Chiller



MODEL	RT-128MA-S-3D	RT-158MA-S-3D	RT-188MA-S-3D
Dimension WxDxH	1200 x 750 x 850 mm	1500 x 750 x 850 mm	1800 x 750 x 850 mm
Electrical Consumption	245 W	245 W	280 W
Chiller Temperature Control	-6°C ~ 12	-6°C ~ 12°C	-6°C ~ 12°C
Number of Drawers	2	2	4
Effective Capacity	307 L	420 L	502 L

Undercounter
Door + Drawer
Freezer



MODEL	FT-156MA-S-3D	FT-186MA-S-3D
Dimension WxDxH	1500 x 600 x 850 mm	1800 x 600 x 850 mm 1
Electrical Consumption	415 W	400 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	2	4
Number of Drawers	3	3
Effective Capacity	318 L	401 L



MODEL	FT-128MA-S-3D	FT-158MA-S-3D	FT-188MA-S-3D
Dimension WxDxH	1200 x 750 x 850 mm	1500 x 750 x 850 mm	1800 x 750 x 850 mm
Electrical Consumption	418 W	415 W	400 W
Freezer Temperature Control	-23°C ~ -7°C	-23°C ~ -7°C	-23°C ~ -7°C
Number of Shelves	2	2	4
Number of Drawers	3	3	3
Effective Capacity	307 L	420 L	502 L



Undercounter Dual Temp



MODEL	RFT-126MC-S 
Dimension WxDxH	1200 x 600 x 850 mm
Electrical Consumption	380 W
Temperature Control	-25°C ~ 7°C
Number of Shelves	4
Effective Capacity	231 L



MODEL	RFT-128MC-S 
Dimension WxDxH	1200 x 750 x 850 mm
Electrical Consumption	380 W
Temperature Control	-25°C ~ 7°C
Number of Shelves	4
Effective Capacity	307 L



MODEL	RFT-156MC-S 
Dimension WxDxH	1500 x 600 x 850 mm
Electrical Consumption	380 W
Temperature Control	-25°C ~ 7°C
Number of Shelves	4
Effective Capacity	318 L



MODEL	RFT-158MC-S 
Dimension WxDxH	1500 x 750 x 850 mm
Electrical Consumption	380 W
Temperature Control	-25°C ~ 7°C
Number of Shelves	4
Effective Capacity	420 L

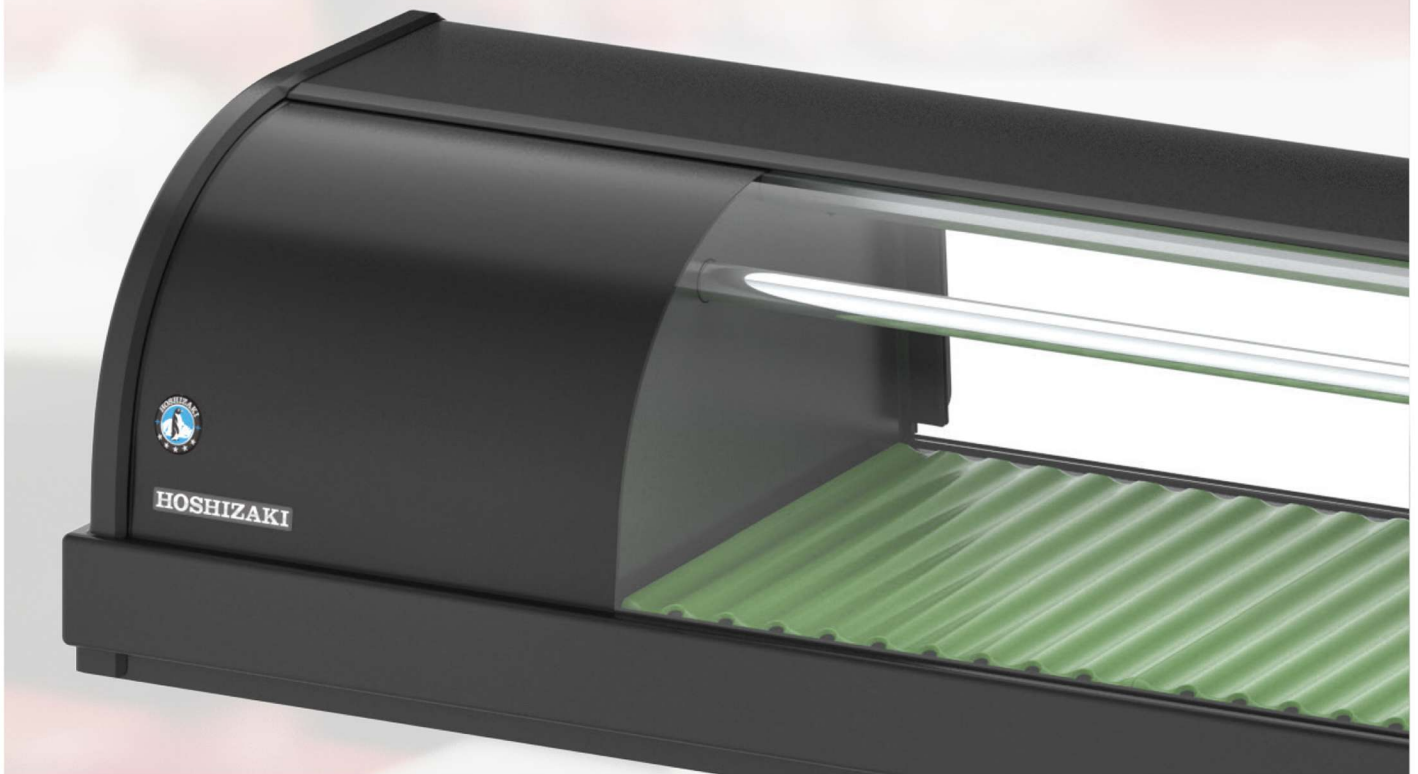


MODEL	RFT-186MC-S 
Dimension WxDxH	1800 x 600 x 850 mm
Electrical Consumption	380 W
Freezer Temperature Control	-25°C ~ 7°C
Number of Shelves	6
Effective Capacity	401 L



MODEL	RFT-188MC-S 
Dimension WxDxH	1800 x 750 x 850 mm
Electrical Consumption	380 W
Freezer Temperature Control	-25°C ~ 7°C
Number of Shelves	6
Effective Capacity	502 L

Refrigerated sushi showcases functions to ensure the freshness of produce and as a point of attraction when placed on the sushi counter. Hoshizaki's sushi showcases are designed with curved glass provide an aesthetic edge while its powerful cooling performance with stable humidity and temperature control keeps sushi fresh without drying it out. Left or right option refrigerant panel ensure flexibility of placement on the counter.



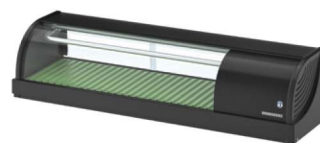


SUSHI SHOWCASE



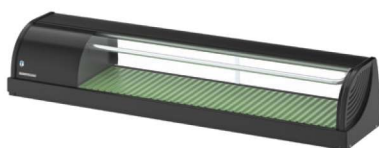
MODEL HNC-120BE-L-B

Dimension WxDxH	1200 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	2 (435 x 172 mm)
Effective Capacity	42 L



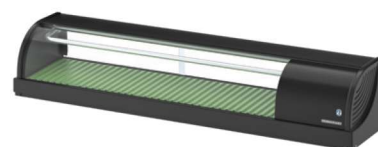
HNC-120BE-R-B

Dimension WxDxH	1200 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	2 (435 x 172 mm)
Effective Capacity	42 L



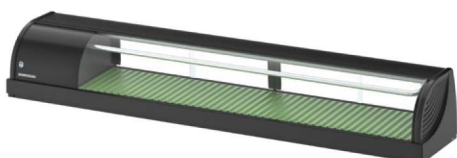
MODEL HNC-150BE-L-B

Dimension WxDxH	1500 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (293 x 172 mm)
Effective Capacity	57 L



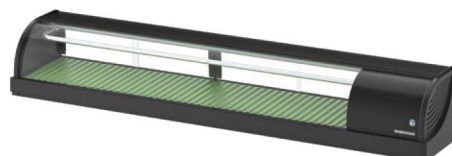
HNC-150BE-R-B

Dimension WxDxH	1200 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (293 x 172 mm)
Effective Capacity	57 L



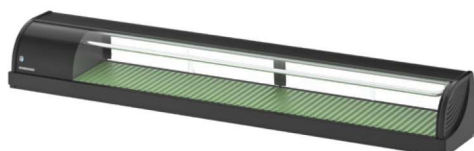
MODEL HNC-180BE-L-B

Dimension WxDxH	1800 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (368 x 172 mm)
Effective Capacity	72 L



HNC-180BE-R-B

Dimension WxDxH	1800 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (368 x 172 mm)
Effective Capacity	72 L



MODEL HNC-210BE-L-B

Dimension WxDxH	2100 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (443 x 172mm)
Effective Capacity	87 L



HNC-210BE-R-B

Dimension WxDxH	2100 x 345 x 270 mm
Electrical Consumption	150 W
Saturation Ambient Temp 27°C	approx. 4°C
Door (Sliding Glass) WxH	4 (443 x 172mm)
Effective Capacity	87 L



DISHWASHER

Hoshizaki introduces the high performance and low water consumption efficient dishwashing solution for your busy kitchen. Simple and compact in size, our dishwasher is designed to take the load off your operations with an easy to operate unit for small to medium size establishments.





DISHWASHER

Hoshizaki Hood Type



MODEL	HW-600B3	HW-600B
Dimension WxDxH (Door Opening)	707 x 779 x 1485 (1948) mm	707 x 779 x 1485 (1948) mm
Electrical Consumption	9.7 - 11.5 kW	3.4 - 4.0 kW
Washing Capacity Racks per Hour	69 / 35 / 27 / 23 / 18	69 / 35 / 27 / 23 / 18
Water Consumption Per Rack	2.3 L	2.3 L
Power supply	3phase 380-415V / 50Hz	1phase 220-240V / 50Hz
Max Noise	67 dBA	67 dBA

Hoshizaki Undercounter Type

Double Wall



Single Wall



MODEL	HW-320B	HW-320B-S
Dimension WxDxH (Door Opening)	600 x 655 x 830 mm	595 x 645 x 830 mm
Electrical Consumption	5.0 - 5.8 kW	5.2 - 6.1 kW
Washing Capacity Racks per Hour	35 / 27 / 23 / 20 / 18	35 / 27 / 23 / 20 / 18
Water Consumption Per Rack	2.3 L	2.3 L
Power supply	1phase 220-240V / 50Hz	1phase 220-240V / 50Hz
Max Noise	65 dBA	70 dBA

Ozti Hood & Undercounter



MODEL	OBM 1080T	OBY 50T
Dimension WxDxH	700 x 785 x 1480 (1960) mm	595 x 645 x 830 mm
Electrical Consumption	9.7 - 11.4 kW	5.3 - 6.1 kW
Washing Capacity Racks per Hour	69 / 35 / 27 / 23 / 18	35 / 27 / 23 / 20 / 18
Water Consumption Per Rack	2.8 L	2.8 L
Power supply	3phase 380-415V / 50Hz	1phase 220-240V / 50Hz
Max Noise	75 dBA	70 dBA

The Pleasure is Ours
to See You Here



Our Service Networks:

- | | |
|---------------|-----------------|
| 1. Jakarta | 10. Palembang |
| 2. Bali | 11. Pekanbaru |
| 3. Surabaya | 12. Batam |
| 4. Medan | 13. Bandung |
| 5. Makassar | 14. Balikpapan |
| 6. Manado | 15. Banjarmasin |
| 7. Semarang | 16. Lampung |
| 8. Solo | 17. Padang |
| 9. Yogyakarta | 18. Samarinda |

MORE SERVICE NETWORK TO COME YOUR CITIES

All Hoshizaki Co., Ltd factories are
ISO9001 and **ISO14001** registered

ISO9001

Hoshizaki Co., Ltd Factories

Registration Number

JET-0205

Registration Date

9th August 1999

ISO14001

Hoshizaki Co., Ltd Factories

Registration Number

E01-204

Registration Date

25th July 2001



The Hoshizaki Group is actively working to preserve the Environment or solve social issue through its Business.

Scan for
more details



HOSHIZAKI

Scan for
more details

