


Inputs

The diagram illustrates the input section of a circuit, featuring several push switches, a rotary encoder, an audio jack, and a transistor-based signal path.

- SW1 SW_Push**: A push switch with terminals connected to GND and a component labeled **MODE**.
- SW2 SW_Push**: A push switch with terminals connected to GND and a component labeled **BP**.
- SW3 SW_Push**: A push switch with terminals connected to GND and a component labeled **BM**.
- SW4 SW_Push**: A push switch with terminals connected to GND and a component labeled **BW**.
- SW5 SW_Push**: A push switch with terminals connected to GND and a component labeled **STEP**.
- SW6 SW_Push**: A push switch with terminals connected to GND and a component labeled **AGC**.
- SW8 RotaryEncoder_Switch**: A rotary encoder with terminals **ENCA**, **ENCB**, and **C** connected to GND. Terminals **S1** and **S2** are connected to **ENC SW** and GND, respectively.
- J17 AudioJack2**: An audio jack with terminals **T** and **S**. Terminal **S** is connected to GND. Terminal **T** is connected to a resistor **R1 100k**.
- Q1 BC847**: A transistor with its base connected to the junction of **R1** and **R4 100k**. The emitter is connected to GND. The collector is connected to a diode **D1 1N4148** and a component labeled **1**. The diode **D1** is also connected to GND.

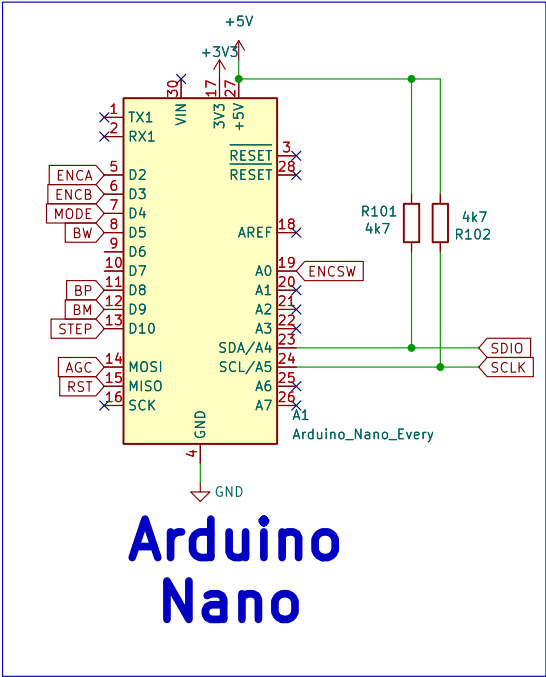

Receiver

Power

The image displays several circuit diagrams for power and signal management:

- Top Left:** A voltage regulator circuit using an L7805 (U6). It takes a +12V input, regulated to +5V, and includes a 10uF capacitor (C6) for input filtering.
- Top Right:** A level shifter circuit using two 1N4148 diodes (D14, D15) and a connector (J1) to interface between a +12V signal and a -12V line.
- Middle Right:** A signal conditioning circuit using a screw terminal (J6) and a diode (D2) to interface a +12V signal with a -12V line.
- Bottom Left:** A precision voltage reference circuit using a TDA1308 (U5C) and a TL072 (U1C) op-amp to generate a stable +5V reference from a -12V supply, with a 1uF capacitor (C103) for filtering.
- Bottom Right:** A signal conditioning circuit using a 1uF capacitor (C101) and two 47k resistors (R6, R13) to interface a +5V signal with a -12V line, with a reference (REF) input.

Display

J7

4 SDIO

3 SCLK

2

1 GND

+3V3

C102
100n

+3V3

GND

Id: 1/1