API Integration

Version: 1.3

Submitted to:

Installation Team

From:

Akash Panda
Telkosh Tech. Pvt. Ltd. Voice :- 9926561799
Email: akash@telkosh.com

TECHNICAL OVERVIEW

High Level Architecture of Two-Way SMS between Mobile Device and Application:

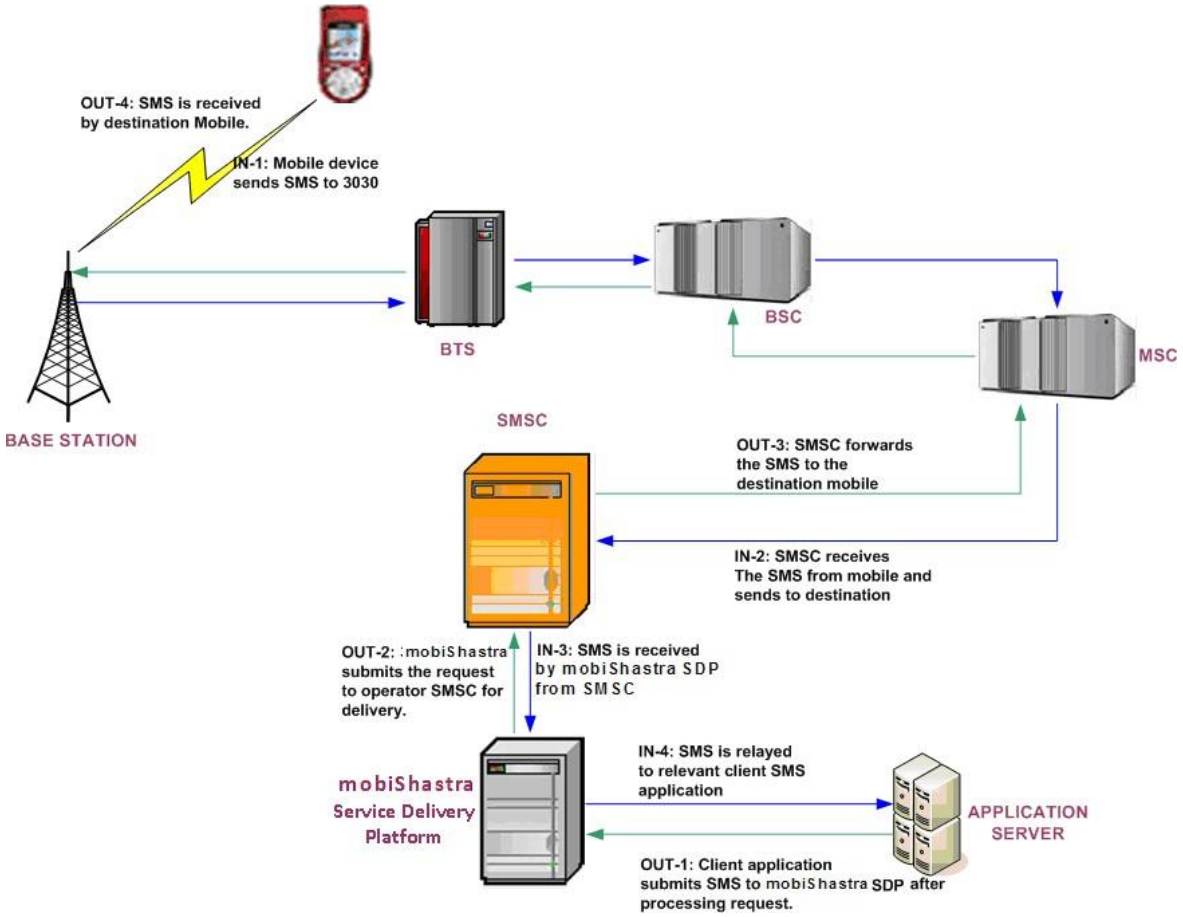


Fig: High level architecture of Two way SMS between Mobile Device & Application

The mobile device can be a regular mobile telephone, or a special device for use in telematics applications.
Inbound SMS are typically delivered in under 3 seconds Outbound SMS are typically delivered in 3-6 seconds.
On **the** diagram the inbound route is indicated by the IN prefix to each stage and shows **receiving SMS. The outbound** route is indicated by the OUT prefix to each stage and shows the

Example DLR API

For using DLR API user has to Call below API with parametres .

Host – http://login.telkosh.com/dlrstatus_api.aspx

Parametres to send with request

1 . user – Profile id of the user.
2. pwd – Password of the user.
3. messageid – Message ID received from our side upon successful submission .

Example –

http://login.telkosh.com/dlrstatus_api.aspx?user=XXXXX&pwd=XXXX&messageid=12345

Upon successful submission you will receive a comma separated string in form of –

Message_id,DLR_Status,DLR_Time