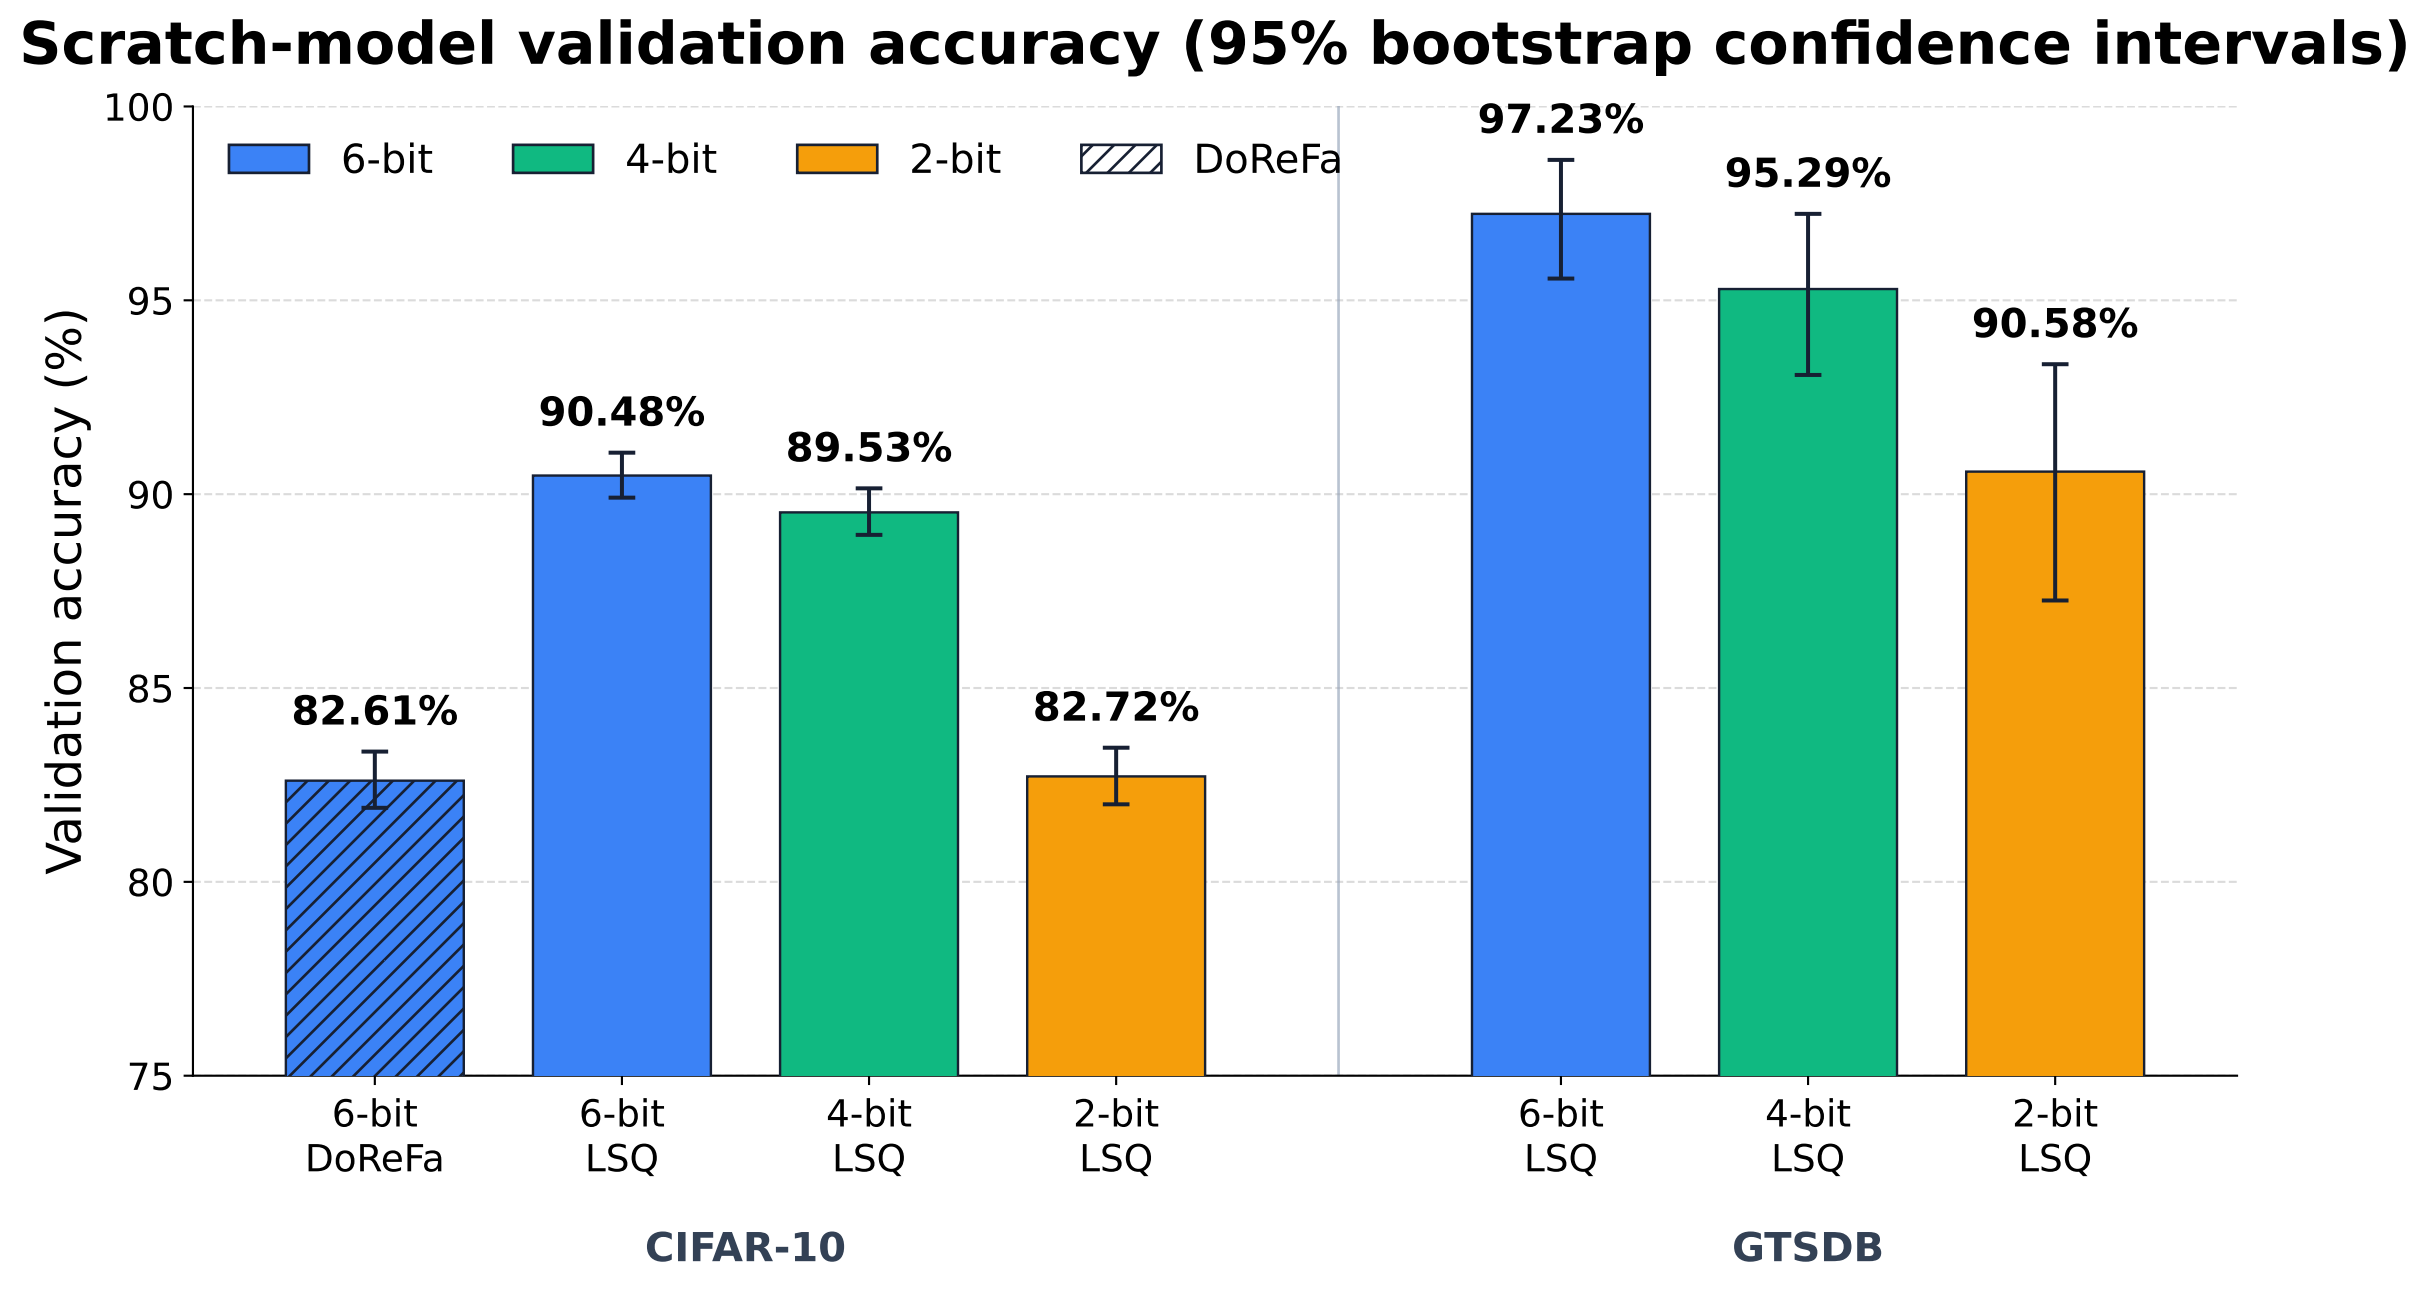
Scratch-model validation accuracy (95% bootstrap confidence intervals)
Validation accuracy (%)
100
95
90
85
80
75
6-bit
4-bit
2-bit
DoReFa
82.61%
90.48%
89.53%
82.72%
97.23%
95.29%
90.58%
6-bit DoReFa
6-bit LSQ
4-bit LSQ
2-bit LSQ
6-bit LSQ
4-bit LSQ
2-bit LSQ
CIFAR-10
GTSDB