


PRODUCT OVERVIEW

- Available in 95%, 99.97%, 99.99%, 99.995% or 99.999% efficiencies
- Standard and High Capacity designs available
- HVAC supply and exhaust application for protection of people, processes, equipment & the environment
 - Health Care
 - Pharmacy
 - Chemical manufacturing
 - Food Processing
 - Laboratories
 - Aerospace
 - Contamination clean-up
 - Gun Ranges
- Available Options
 - Extraction Clips
 - Gel Seal
 - Face Screens

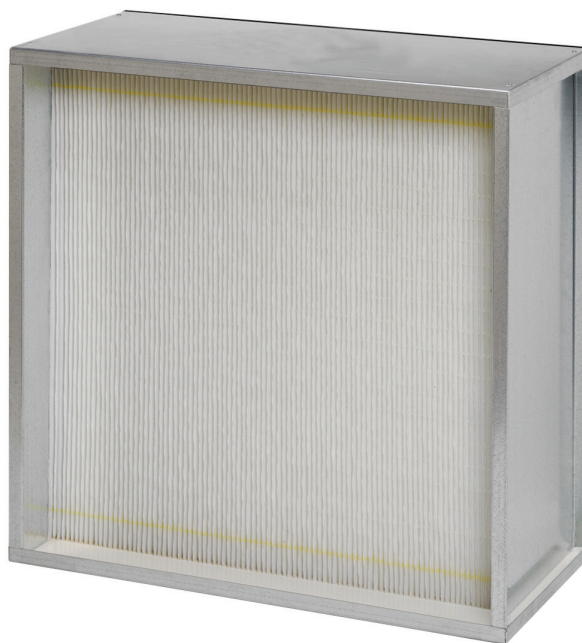


AEROSTAR® M-SERIES HEPA

WHY M-SERIES HEPA?

- The M-Series mini-pleat HEPA is designed for value versatility and performance
- Advanced aerodynamic pleating structure reduces pressure drop and lowers operating costs
- Reduced weight due to mini-pleat bead separators that eliminate the need for the traditional corrugated aluminum separators
- 100% relative humidity and lightweight design
- Maximum temperature - 180°F
- Recessed pack allows for easy handling, installation and reduced media damage
- Rugged 18 gauge galvanized steel for standard box frames and lightweight extruded aluminum for non-standard sizes and gel seal option
- Filters are individually tested and labeled with efficiency, part number, tested CFM and a unique serial number to validate true HEPA efficiency performance
- Filters with efficiencies of 99.99% and higher are scan tested according to IEST-RP-CC034 latest revision
- Filters are constructed in accordance with IEST-RP-CC001 latest revision

Precision machine pleating provides optimal air flow.

Recessed pleat pack eases transportation and installation.

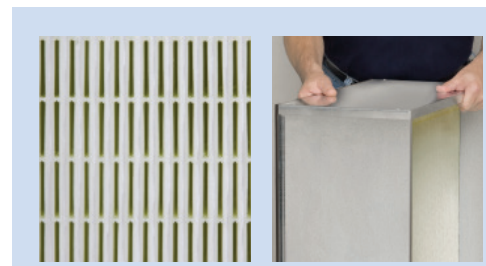




M-SERIES HEPA

PERFORMANCE DATA (24 x 24 x 12)


CAPACITY	EFFICIENCIES	INITIAL RESISTANCE ("w.g.)		FINAL RESISTANCE ("w.g.)
		250 fpm	500 fpm	
Standard	95%	0.50	-	1.0
	99.97%	1.00	-	2.0
	99.99%*	1.00	-	2.0
High	95%	-	1.00	2.0
	99.97%	-	1.45	3.0
	99.99%*	-	1.45	3.0

*Not Scanned

INITIAL RESISTANCE (STANDARD CAPACITY)

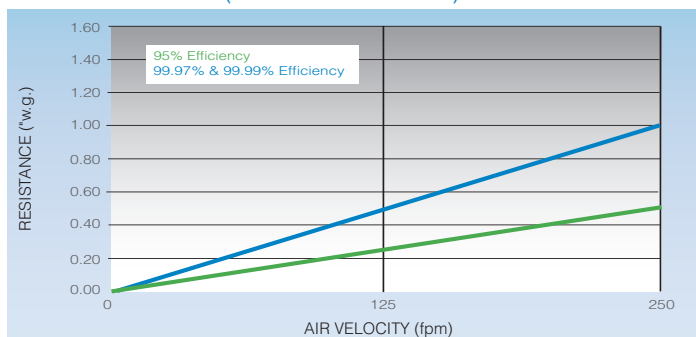

INITIAL RESISTANCE (HIGH CAPACITY)

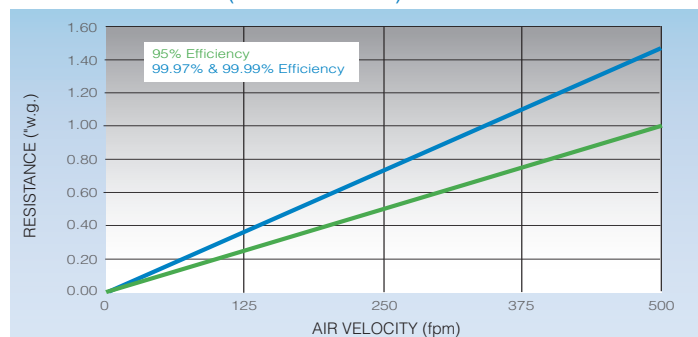

PRODUCT DATA - STANDARD CAPACITY

PART NUMBER					ACTUAL SIZE (H" x W" x D")	APPROX. WEIGHT (LBS.)
95%	99.97%	99.97% DGEL	99.99%	99.99% DGEL		
41896	41638	44878	41859	45691	24 x 24 x 11½	34
41898	41901	44412	41903	45692	23⅜ x 23⅜ x 11½	34

PRODUCT DATA - HIGH CAPACITY

PART NUMBER					ACTUAL SIZE (H" x W" x D")	APPROX. WEIGHT (LBS.)
95%	99.97%	99.97% DGEL	99.99%	99.99% DGEL		
428983HC	41638HC	44332	41859HC	41781	24 x 24 x 11½	34
-	41901HC	42153	41903HC	41780	23⅜ x 23⅜ x 11½	34

ENGINEERING SPECIFICATIONS

1.0 Performance Characteristics

- Filters shall be Aerostar® M-Series HEPA manufactured by Filtration Group. The size of the filter shall be H x W x D". Overall dimensions shall be correct to within +0", - 1/8".
- Each filter shall be tested and certified to have an efficiency of not less than:
 - 95% at 0.3 µm*, or
 - 99.97% at 0.3 µm, or
 - 99.99% at 0.3 µm, or
 - 99.995% at MPPS, or
 - 99.999% at MPPS

*M-Series HEPA's rated at 95% are not individually tested.
- Filters rated at 99.99% efficiency and higher shall be scan tested at the factory and certified in accordance with IEST-RP-CC034 latest revision.
- The clean filter static pressure drop shall be no greater than 1.00" Max for Standard Capacity HEPA's where the air flow is 1000 SCFM on a 24 x 24 x 11.5-inch full size filter. The clean filter static pressure drop shall be no greater than 1.45" Max for High Capacity HEPA's where the air flow is 2000 SCFM on a 24 x 24 x 11.5-inch full size filter. Air flow is determined as the face area x 250 feet per minute face speed for standard capacity and the face area x 500 feet per minute face speed for high capacity.
- Underwriters Laboratories classified to UL 900.

2.0 Filter Performance

- The filter frame shall be manufactured in galvanized steel and the sides of the frame shall be joined together so that any contamination of the filter by metal shavings is prevented. The frame panels are secured with rivets. Sharp edges where the edges are joined together will not be accepted.
- The media pack will consist of HEPA or ULPA Grade media that is pleated and separated using thermo plastic resin beads.
- The media pack shall be sealed on all sides and form a completely leak proof seal with the frame.
- Gasket seal filters shall be provided with a 1/4" x 3/4" closed cell urethane gasket. Gasket joints to use a ball-and-socket joint and filled with adhesive to assure a positive seal.
- Filter labels shall have the following information:
 - Efficiency • Tested air flow • Serial number
 - Initial resistance at tested air flow • Part number

3.0 Quality System

- Manufacturer shall provide documentation from an external certification body that the manufacturing location is ISO 9001 Registered.
- If requested manufacturer shall make available a copy of their Corporate Quality Manual.
- If requested the manufacturer shall make available printed performance test results or Certificate of Test. (letter of compliance).