


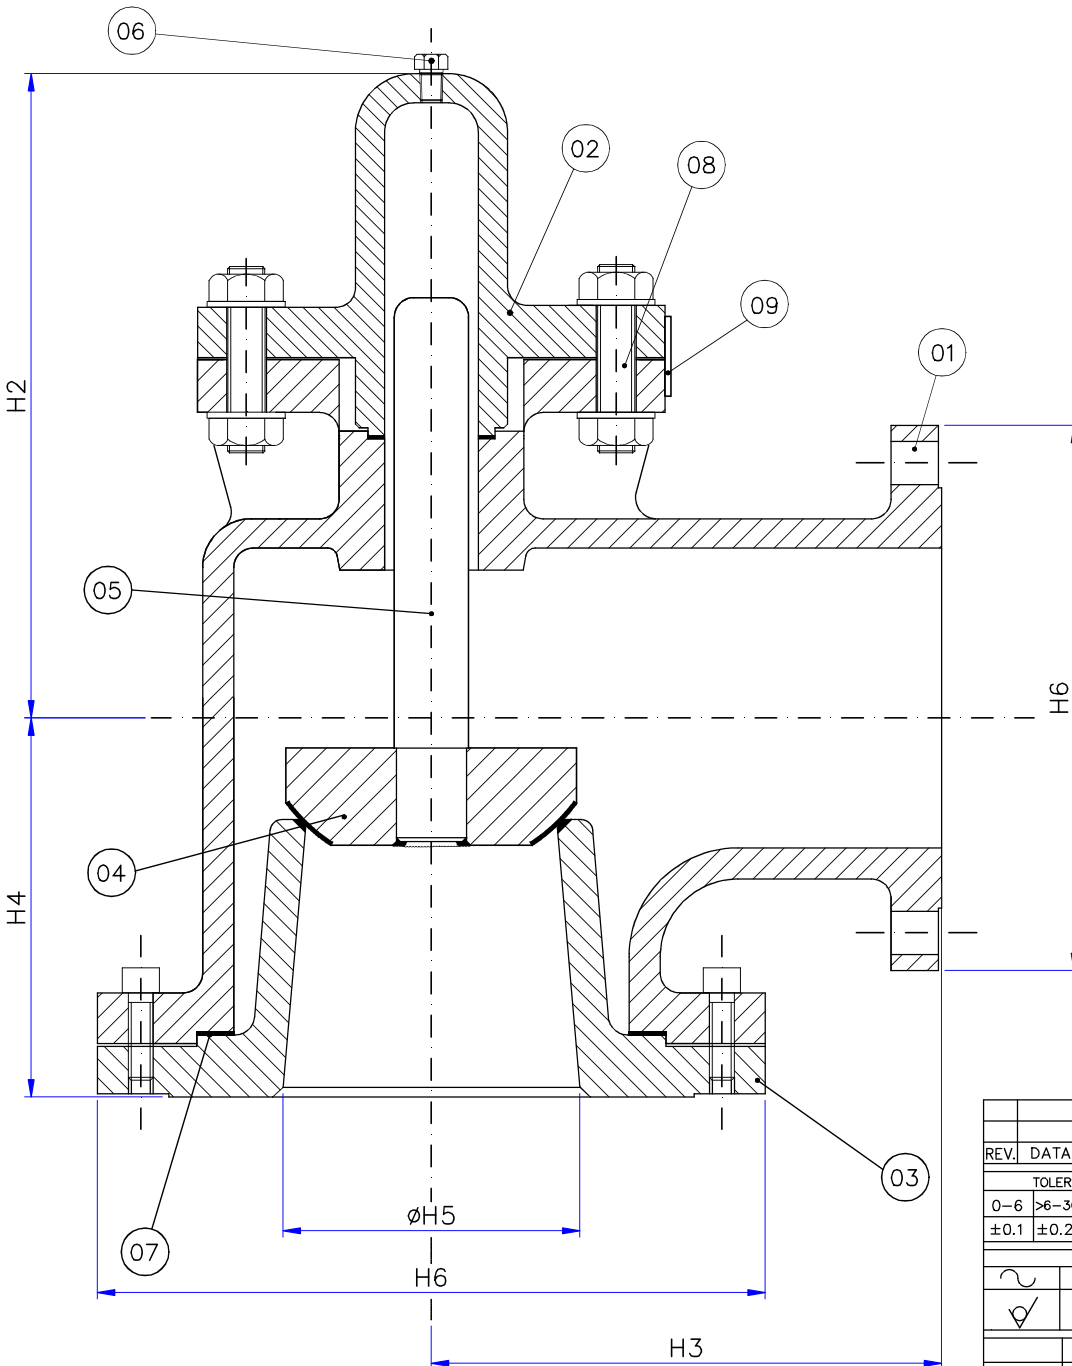

DN	H2	H3	H4	H5	H6
2"	155	114	60	46	152
3"	169	139.7	80	51	190
4"	178	165	126	76	228
6"	232	203	159	102	280
8"	505	262	210	152	345
10"	534	292	242	204	406
12"	557	350	276	254	482
14"	595	368.3	305	285	533
16"	617	381	340	330	597
18"	778	406.4	356	368	635

FLANGES: ANSI B16.5 – Cl. 150

09	PLACA DE IDENTIFICAÇÃO	01	ASTM A 216 WCB
08	PRISIONEIRO/PORCA	06	ASTM A 193-B7/194-2H
07	JUNTA	01	SAE 1020
06	PLUG	01	SAE 1020
05	HASTE	01	SAE 1045
04	DISCO	01	ASTM A 216 WCB C/ STELLITE 6
03	SEDE	01	ASTM A 216 WCB C/ STELLITE 6
02	TAMPA	01	ASTM A 216 WCB
01	CORPO	01	ASTM A 216 WCB
POS	DENOMINAÇÃO	QTD	MATERIAL

VÁLVULA DE RETENÇÃO ANGULAR 90°
CH5 – CLASSE 150lbs

SUBST.:

REV.	DATA	MODIFICAÇÕES	SMP	APROV.
0-6	>6-30	>30-120	>120-400	>400
±0.1	±0.2	±0.5	±0.8	±1.0
±0.2	±0.5	±0.8	±1.0	±0.2
±0.5	±1	±0.5	±1	±0.5
±1	±0.5	±1	±0.5	±1
ACABAMENTO SUPERFICIAL				
~	▽	▽▽	▽▽▽	▽▽▽▽
12/	6.3/	0.8/	0.1/	DIN3141
ISO	ISO	ISO	ISO	ISO
DES.	07.06.21	NOME	REVISÃO	00
CONF.	07.06.21	C.R.T.	ESCALA:	S/E
APROV.	07.06.21	Marcio	CAD.:	C6763.dwg
		Cássio		



DES. N°:
4.CH5.C6763