


RF_Mux16_32Bit_21363904

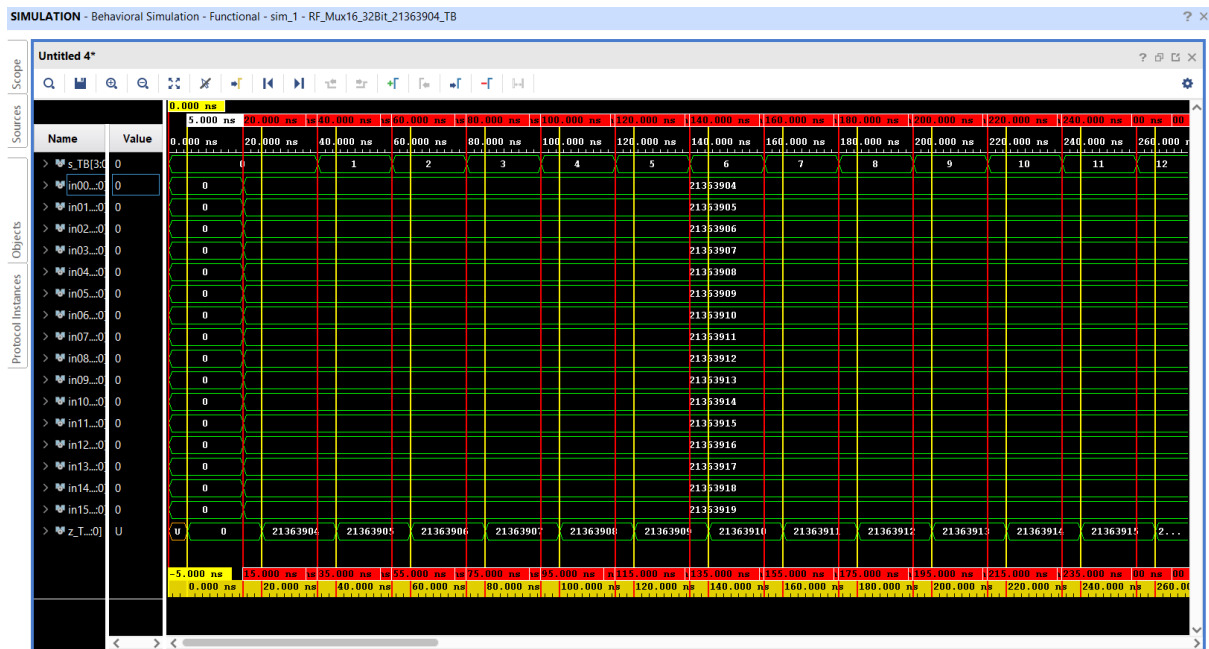

The timing diagram for the 16Bit Multiplexer is shown above. The **red lines** mark where the 4Bit select value changes and the **yellow lines** show when the correct value appears at the output. The distance between the red and yellow lines is the propagation delay (5ns in this case).