

Figure 3-10 Pin distribution of the 2x13 Header

Figure 3-11 shows the connections on the 2x13 header, A/D converter and Cyclone IV device.


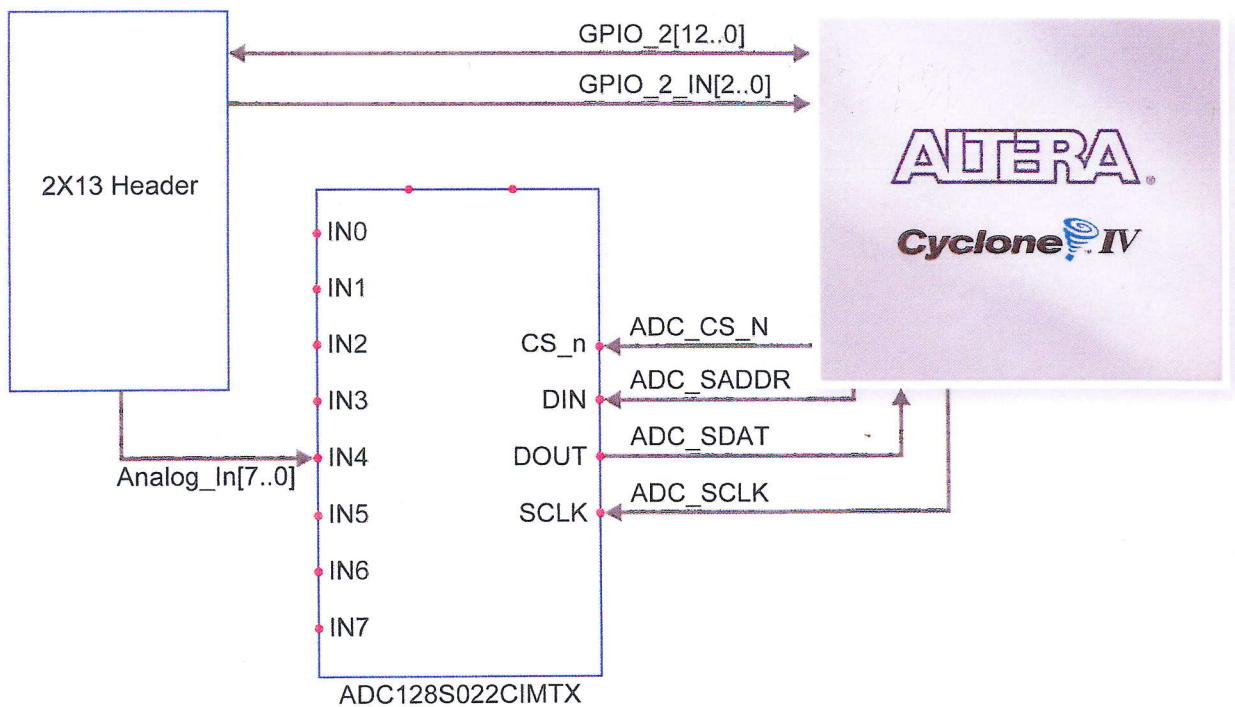


Figure 3-11 Wiring for 2x13 header and A/D converter


The pictures below indicate the pin 1 location of the 2x13 header.

Gespiegelt:




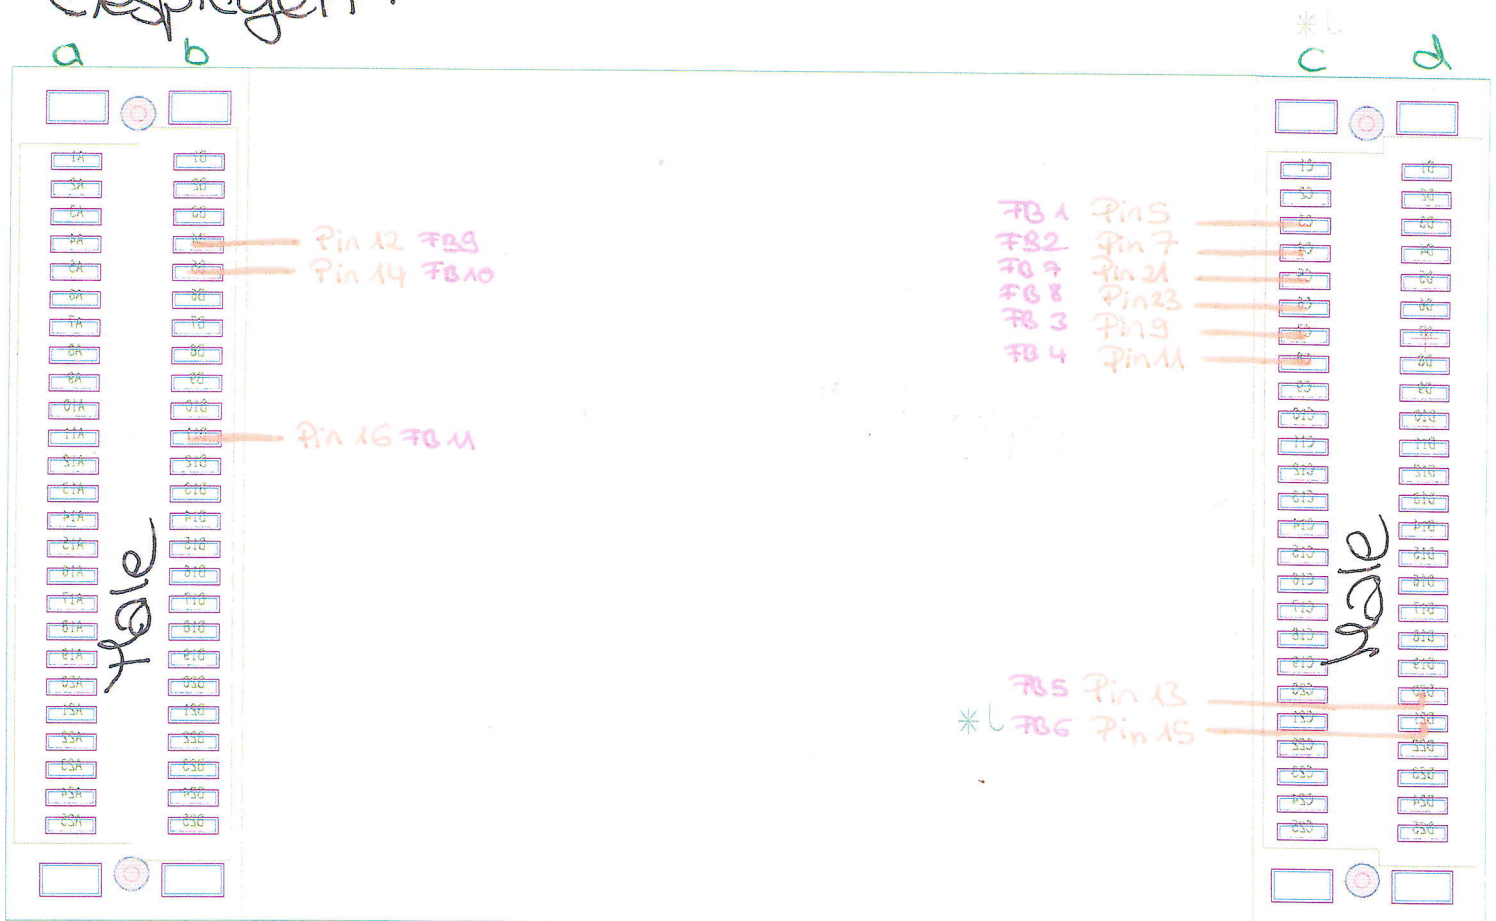


Erni SMC-B Female

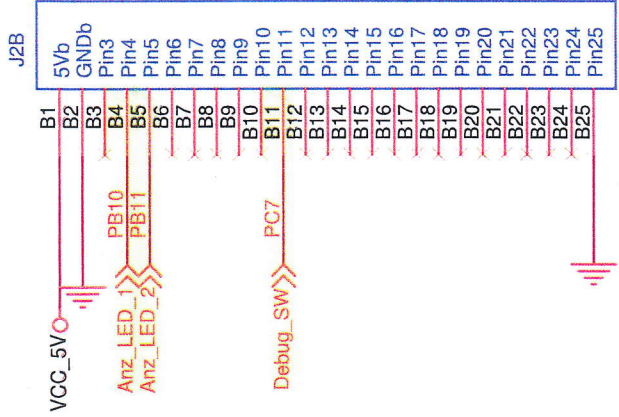

Erni SMC-B Female

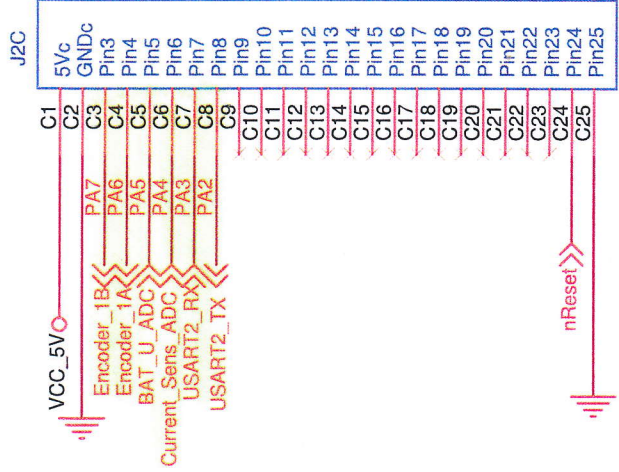

Erni SMC-B Female

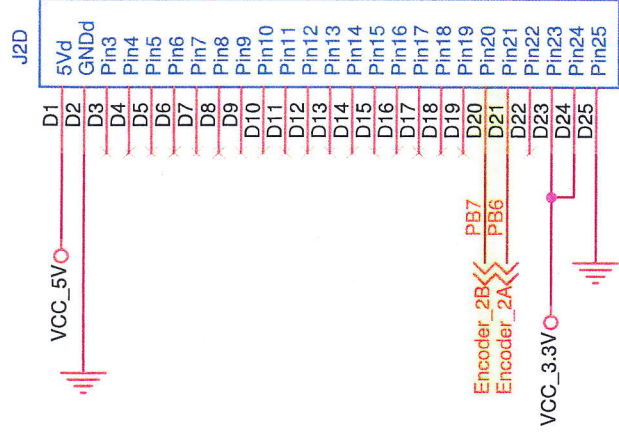

Erni SMC-B Female

Speedy Drive

CPU Interconnect

Version: V1.1
Platinen-Nr.: 12.08

Seite(n): 3 von 7

zuletzt geändert: Monday, August 13, 2012
Bearbeiter: Englberger

Projekt:

Roboter Speedy



hier werden einzeln internernet aufgesteckt
und von unten Flachband angeschlossen.

