

OVERVIEW

8m 27s

AVERAGE SYSTEM TIME

σ = 2m 29s

1.42 p/min

GROSS THROUGHPUT

49 finished parts

1.27 p/min

GOOD THROUGHPUT

44 good parts

0m 27s

AVERAGE INTERARRIVAL TIME

σ = 0m 28s


M5-1

HIGHER EFFECTIVE UTILIZATION


79.8%

SYSTEM TIME AND INTERARRIVAL TIME

System Time — last 100 cycles (min)

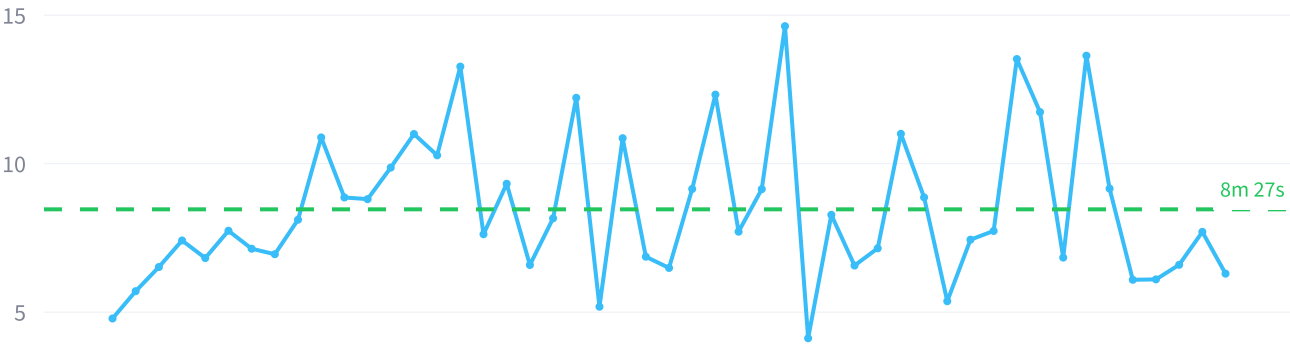

Interarrival Time — last 100 cycles (min)

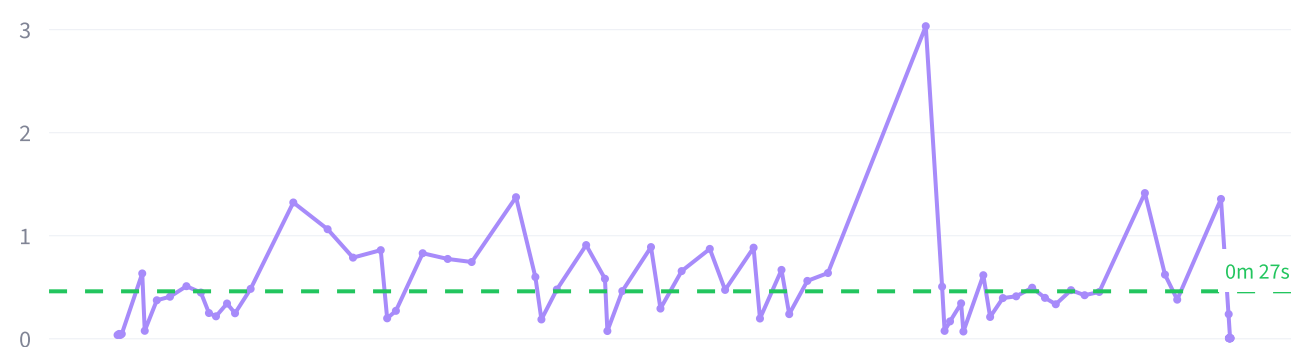

UTILIZATION ANALYSIS

Effective Utilization (busy time + fail time + block time)

M5-1

CURRENT HIGHER EFFECTIVE UTILIZATION

79.8%

- Busy: 71.4%

● Fail: 8.4%

● Block: 0.0%

Highest Effective Utilization Sequence

M1-1 → M2-1 → M5-1

Process Utilization (busy time)

M2-1

CURRENT HIGHER PROCESS UTILIZATION

76.5%


Highest Process Utilization Sequence

M1-1 → M2-1 → M5-2 → M2-1

⚠ Different From Effective

🔒 BLOCK: M3-1: 4


Effective Utilization (busy time + fail time + block time)

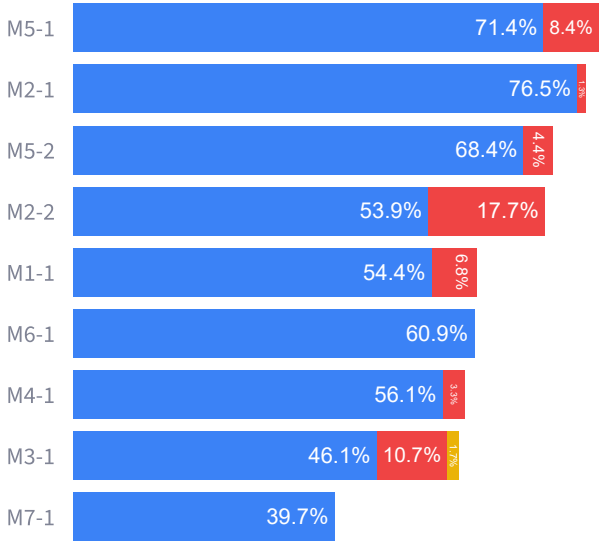

History — Highest Effective Utilization

Machine	Times
M1-1	1
M2-1	1
M5-1	1

Process Utilization (busy time)

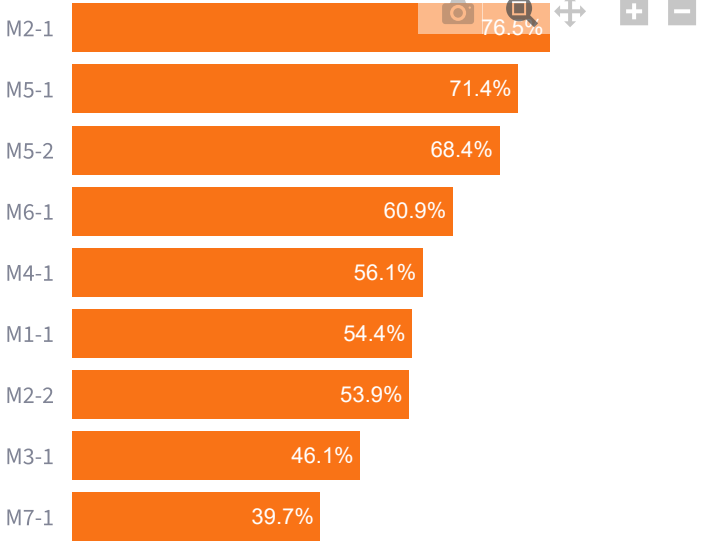

History — Highest Process Utilization

Machine	Times
M2-1	2
M1-1	1
M5-2	1