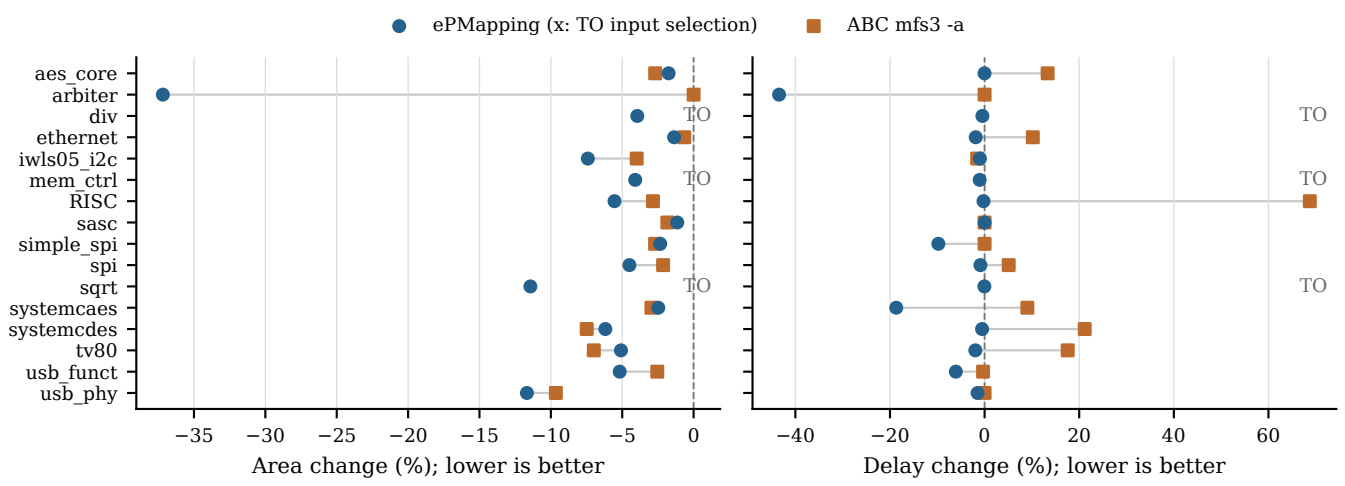
ePMapping (x: TO input selection)
ABC mfs3 -a
aes_core
arbiter
div
ethernet
iwls05_i2c
mem_ctrl
RISC
sasc
simple_spi
spi
sqrt
systemcaes
systemcdes
tv80
usb_funct
usb_phy
TO
TO
TO
TO
TO
TO
−35
−30
−25
−20
−15
−10
−5
0
Area change (%); lower is better
−40
−20
0
20
40
60
Delay change (%); lower is better