# Simple Modeling of Road Traffic.

Gerbaud Florent Fatima Rharrour MAM4

Supervisor:

Didier Auroux

December 13, 2023





## Table of contents

Introduction:

- Introduction:
  - Presentation of the subject
  - Project organization overview
  - Useful definitions
- Study of the discret case:
  - Ordinary Differential Equation
  - Velocity modeling: The linear approach
  - Velocity Modeling: The Newell Approach
  - Simulations
  - Study of Equilibrium and Stability
    - Using linear model:
    - Using the Newell's model
- 3 Study of the continuous model:
  - Euler Explicit Method
  - Lax-Friedrichs method
- Conclusion



## Table of Contents

Introduction:

- Introduction:
  - Presentation of the subject
  - Project organization overview
  - Useful definitions
- - Ordinary Differential Equation
  - Velocity modeling: The linear approach
  - Velocity Modeling: The Newell Approach
  - Simulations
  - Study of Equilibrium and Stability
    - Using linear model:
    - Using the Newell's model
- - Euler Explicit Method
  - Lax-Friedrichs method



# Presentation of the subject:

## What is Road Traffic Modelling?

- Representing complex dynamics of vehicles moving along roads.
- Creating mathematical and computer models for:
  - Understanding vehicle flow.
  - Predicting movement patterns.
  - Analyzing interactions on roads and highways.



Fig. 1: Real-life Road Traffic


# Presentation of the subject:

## Key benefits of Road Traffic Modeling:

- Avoiding traffic jams: Helps find solutions to prevent traffic jams on roads.
- Making Roads Better: Finds ways to improve roads and make them work smoother.
- Understanding how traffic works: Helps figure out how different things affect traffic and predict what might happen.
- Making transportation better: Shows how well transportation works and helps make it even better.
- **Saving time and money:** Aims to reduce time spent waiting in traffic and the money spent on each trip.

# Presentation of the subject

Animation à ajouter ??

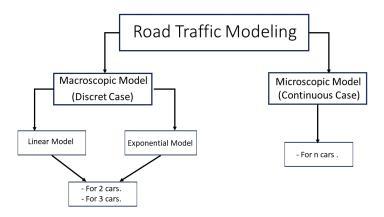

## Useful definitions:

### Microscopic simulation:

Microscopic simulation is a computer-based modeling technique that simulates the behavior of individual entities, such as vehicles or pedestrians, within a system

#### Macroscopic simulation:

Macroscopic simulation models systems at a higher, aggregated level, considering overall behaviors like traffic flow without detailing individual movements.

## Ordinary Differential Equation (ODE):

An ODE is a mathematical equation that relates a function to its derivatives with respect to one or more independent variables.

$$F(x, y, y', \dots, y^{(n-1)}) = y^{(n)}$$

## Table of Contents

- - Presentation of the subject
  - Project organization overview
  - Useful definitions
- Study of the discret case:
  - Ordinary Differential Equation
  - Velocity modeling: The linear approach
  - Velocity Modeling: The Newell Approach
  - Simulations
  - Study of Equilibrium and Stability
    - Using linear model:
    - Using the Newell's model
- - Euler Explicit Method
  - Lax-Friedrichs method



# Ordinary Differential Equation (Theory):




Figure 1: Discret Model.

### ODE to solve

Introduction:

$$y'(t) = f(t, y(t))$$

Euler Explicit method to numerically solve the solutions:

- First step of the resolution:  $|y_0 = y(t_0)|$ .
- Recursive process to find the n-th solution of the ODE:  $y_{n+1} = y_n + hf(t_n, y_n)$

# Velocity modeling: The linear approach

## Each car's movement is governed by the basic equation

$$\dot{x}_i(t) = V_i = \alpha_i(x_{i-1} - x_i)$$

#### Where

 $\dot{x}_i(t)$ : Instantaneous velocity of the i-th car at time t

 $V_i$ : Current velocity of the *i*-th car

Coefficient describing the behavior of the *i*-th car  $\alpha_i$ :

Previous position of the *i*-th car  $X_{i-1}$ : Current position of the *i*-th car  $X_i$ :

# Velocity Modeling: The Linear Approach

### System of Equations for N cars

$$\begin{cases} \dot{x}_1 &= V_1 \\ \dot{x}_2(t) &= \alpha_2(x_1 - x_2) \\ &\vdots \\ \dot{x}_n(t) &= \alpha_n(x_{n-1} - x_n) \end{cases}$$

Study of the continuous model:

## Systems for Positions of N cars

$$\begin{cases} x_1(t+\Delta t) &= x_1(t) + \Delta t \cdot V_1 \\ x_2(t+\Delta t) &= x_2(t) + \Delta t \cdot \alpha_2(x_1 - x_2) \\ &\vdots \\ x_n(t+\Delta t) &= x_n(t) + \Delta t \cdot \alpha_n(x_{n-1} - x_n) \end{cases}$$

# Velocity Modeling: The Newell Approach

### Each car's movement is described by the equation

$$\dot{x_i}(t) = V_i \left(1 - \mathrm{e}^{-rac{\lambda_i}{V_i}(x_{i-1}(t) - x_i(t) - d_i)}
ight)$$

#### Where

the maximum velocity of the ith car  $V_i$ :

the capacity of acceleration/deceleration

safe following distance associated with the ith car

### System of Equations for N cars

Introduction:

$$\begin{cases} \dot{x}_1 &= V_1 \\ \dot{x}_2(t) &= V_2(1 - e^{-\frac{\lambda_2}{V_2}(x_1(t) - x_2(t) - d_2}) \\ &\vdots \\ \dot{x}_n(t) &= V_n(1 - e^{-\frac{\lambda_n}{V_n}(x_{n-1}(t) - x_n(t) - d_n}) \end{cases}$$

### Systems for Positions of N cars

$$\begin{cases} x_1(t + \Delta t) &= x_1(t) + \Delta t \cdot V_1 \\ x_2(t + \Delta t) &= x_2(t) + \Delta t \cdot V_2(1 - e^{-\frac{\lambda_2}{V_2}(x_1(t) - x_2(t) - d_2}) \\ &\vdots \\ x_n(t + \Delta t) &= x_n(t) + \Delta t \cdot V_n(1 - e^{-\frac{\lambda_n}{V_n}(x_{n-1}(t) - x_n(t) - d_n}) \end{cases}$$

# Accordion phenomenon




Figure 2: Modelisation of the accordion phenomenon with The Linear Model




Figure 3: Modelisation of the accordion phenomenon with The Newell's Model

We could see the difference of modelisation and realism between the Linear model (figure 2) and the Newell's model (figure 3)

## Drunk drivers




Figure 4: Simulation of Traffic Flow with one drunk driver (Linear Model)

Figure 5: Simulation of Traffic Flow with one drunk driver (Newell's Model)

It is interesting to note that with Newell's Method (Figure 5), the variations are "smoothed and much less significant than in the case of the linear method (4)."




Figure 6: Modelisation of the accordion phenomenon with The Newell's Model

On the figure 6, you can see that when the curves intersect, there is an accident

# **Analytical Solutions**




Figure 7: Stability Analysis for Three Cars





Figure 8: Analytical Solution for Three Cars

# Equilibrium



Vector Field for ODE System with Equilibrium Point 45.0 42.5 40.0 37.5  $d_2(t)$ 35.0 32.5 30.0 27.5 10.0

Figure 9: Field Of Vector for the Newell's Model (Stability)

Figure 10: Field Of Vector for the Linear Model (Stability)

# Table of Contents

- Introduction
  - Presentation of the subject
  - Project organization overview
  - Useful definitions
- Study of the discret case
  - Ordinary Differential Equation
  - Velocity modeling: The linear approach
  - Velocity Modeling: The Newell Approach
  - Simulations
  - Study of Equilibrium and Stability
    - Using linear model:
    - Using the Newell's model
- 3 Study of the continuous model:
  - Euler Explicit Method
  - Lax-Friedrichs method
- 4 Conclusion



# Mathematical Theory

#### Conservation Law

 $ullet \left| \partial_t 
ho + \partial_x \left| 
ho \left( 1 - rac{
ho}{
ho_{\mathsf{max}}} 
ight) \cdot V_{\mathsf{max}} 
ight| = 0$ 

### Initial and Boundary Conditions

- $\rho(x,0) = \rho_0(x), \quad x \in \Omega,$
- $\rho(0, t) = \rho(L, t), \quad t > 0$
- $\Omega := [0, L[,$
- $\rho(x,t)$  represents the traffic density at position x and time t,

Study of the continuous model:

- $F(\rho)$  denotes the traffic flux as a function of density,
- $F(\rho)$  is often represented by a function modeling the relationship between traffic density and traffic velocity,
- $F(\rho) = V(\rho) \cdot \rho$ , where  $V(\rho)$  is the traffic velocity as a function of density.

## Numerical Scheme for the resolution

#### **Numerical Scheme**

$$\bullet \ \rho_i^{n+1} = \rho_i^n - \frac{\Delta t}{\Delta x} \cdot \left( \rho_i^n \cdot v_i^n - \rho_{i-1}^n \cdot v_{i-1}^n \right) = 0$$

• 
$$v_i^n = \left(1 - \frac{\rho_i^n}{\rho_{max}}\right) \times V_{max}$$

enrichir la slide. Peut etre ajouter le modèle dans la théorie et dire que quand on l'applique on obtient ca ou alors mettre une iage qui explique le shéma de Euler explicit ?

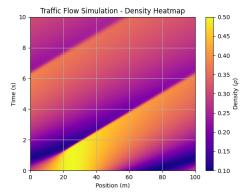


Figure 11: Traffic Flow Simulation With Euler Explicit: This figure illustrates the solution of the PDE at any time and position. Here is the link to the associated animation showing the movement of the traffic flow: Traffic Flow Simulation

## Numerical Scheme for the resolution

#### **Numerical Scheme**

$$\rho_{j}^{t} = \frac{1}{2} \left( \rho_{j+1}^{t-1} + \rho_{j-1}^{t-1} \right) - \frac{\Delta t}{2 \cdot \Delta x} \left( \rho_{j+1}^{t-1} \left( 1 - \frac{\rho_{j+1}^{t-1}}{\rho_{\text{max}}} \right) \cdot V_{\text{max}} \right) - \rho_{j-1}^{t-1} \left( 1 - \frac{\rho_{j-1}^{t-1}}{\rho_{\text{max}}} \right) \cdot V_{\text{max}} \right)$$

enrichir la slide. Peut-être ajouter le modèle dans la théorie et dire que quand on l'applique on obtient ça ou alors mettre une image qui explique le schéma de Euler explicite ?

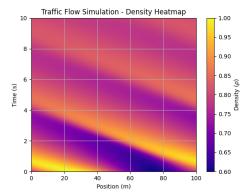


Figure 12: Traffic Flow Simulation With Euler Explicit: This figure illustrates the solution of the PDE at any time and position. Here is the link to the associated animation showing the movement of the traffic flow: Traffic Flow Simulation

# Table of Contents

Introduction:

- - Presentation of the subject
  - Project organization overview
  - Useful definitions
- - Ordinary Differential Equation
  - Velocity modeling: The linear approach
  - Velocity Modeling: The Newell Approach
  - Simulations
  - Study of Equilibrium and Stability
    - Using linear model:
    - Using the Newell's model
- - Euler Explicit Method
  - Lax-Friedrichs method
- Conclusion

