


DISCLAIMER

The entire information in this sheet is subject to change without notice.
No part of the sheet may be copied or reproduced in any form or by any means without the prior written consent of Renesas Electronics Corporation. Renesas Electronics Corporation assumes no responsibility for any errors which may appear in this sheet. Renesas Electronics Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by arising from use of a device described herein or any other liability arising from use of such device.
No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of Renesas Electronics Corporation or others.

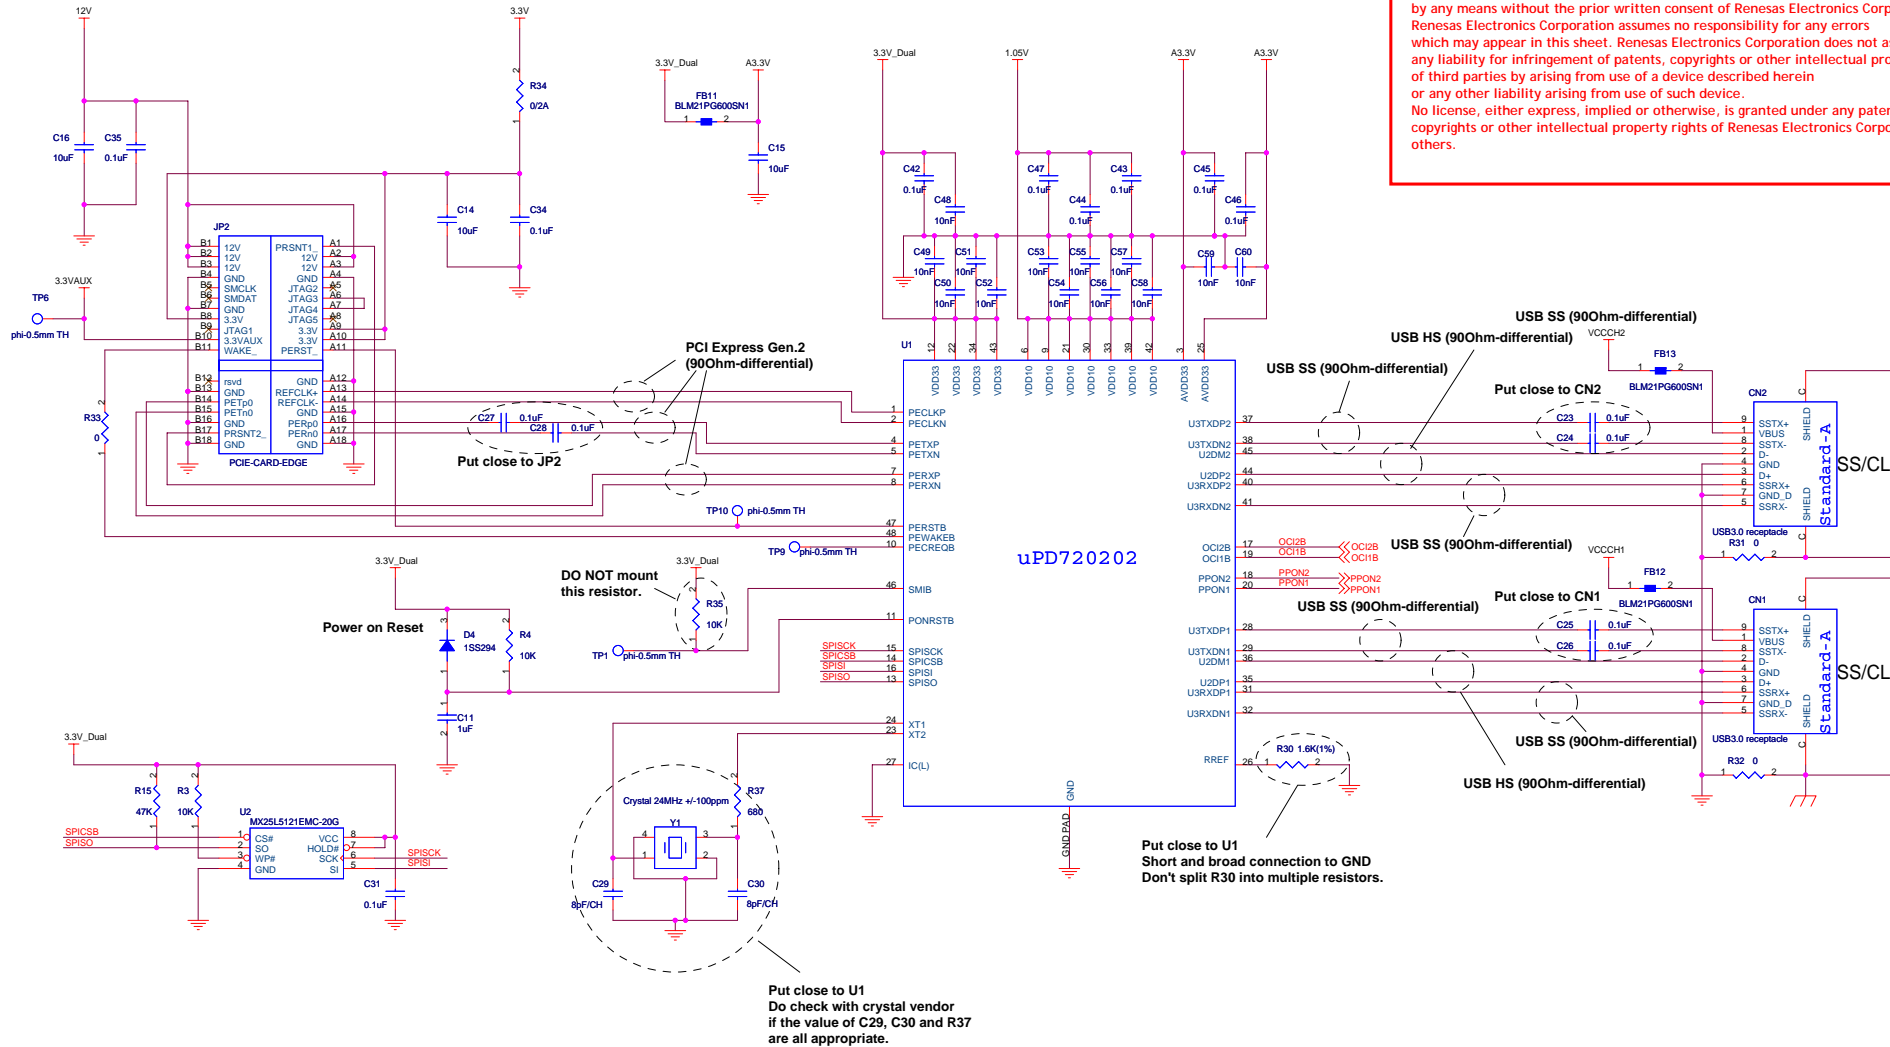

Note:

- Every Power trace (3.3V_Dual, 1.05V, A3.3V, 3.3V, 3.3VAUX, 12V, 5V, VCCCH1-2) should be broad.
- 2nd layer of this entire circuit should be grounded.
- Every high speed signal trace (USB SS/HS, PCI Express) should be wired as shortly as possible.
- Capacitors C49-60 should be located next to U1, and connected to GND tightly -- by tracing shortly and broadly.
- For signal traces, routing priority is as follows;
USB SS > PCI Express > (SATA) > USB HS > (DDR > Ether > PCI, PATA > Other legacy)
- At any crossing for every trace except ground, sufficient area of ground plane between each other should be put.
- Follow the basic of transmission trace pair when routing any signal trace.
> Remove any impairment or discontinuity.
> Keep same length by each other.
> Keep same width and spacing.
- The differential impedance of nominal value is as follows.
> USB 3.0 / 2.0 --- 90ohm
> PCI express Gen 1.(2.5GT/s) --- 100ohm PCI express Gen 2.(5GT/s) --- 85ohm
PCB trace impedance would be a non-continues value by its design rules.
The differential impedance adopt the nearest value that can be manufactured at PCB
For more information please refer to 'USB3.0 Board Design Guide' in design kit.

Renesas Electronics Confidential

Title		
uPD720202 reference design PCI Express 2port add-in board		
Size	Document Number	Rev
C	ISG-NK1-100019	1
Date:	August 25, 2011	Sheet 1 of 2

