



FFF Printing Fundamentals

Part 1: Process

3D Printing is a Process

1) Start with a 3D design.

- Check the license for restrictions when you download.
- *STL*. Approximates shapes with triangles.
- *STEP*. Real geometry. Great for 3D modeling.
- *3MF*. Compressed container, like a zip file.
Multiple objects, slicer settings, multi-color settings, ...

2) Slice and process the design with software.

- Printers do not accept 3D models!
- “Slice” objects into vertically-stacked layers.
- Create G-code file. List of toolpaths and commands that encode:
Coordinates, speeds, temperatures, ...

3D Printing is a Process

3) **Print.**


- Do you need to change the design?
- Change print settings?

4) **Post-process.**

- Remove supports.
- Assemble.
- Glue.
- Sand or file.
- Paint.


Pushing Plastic

- What kind of 3D printing?
- Filament and extrusion-based additive manufacturing.
- **FFF. Fused filament fabrication.**
- FDM™. Fused deposition modeling.
 - Fundamentally the same but owned by Stratasys.
- Toolhead. Moves around and deposits plastic.

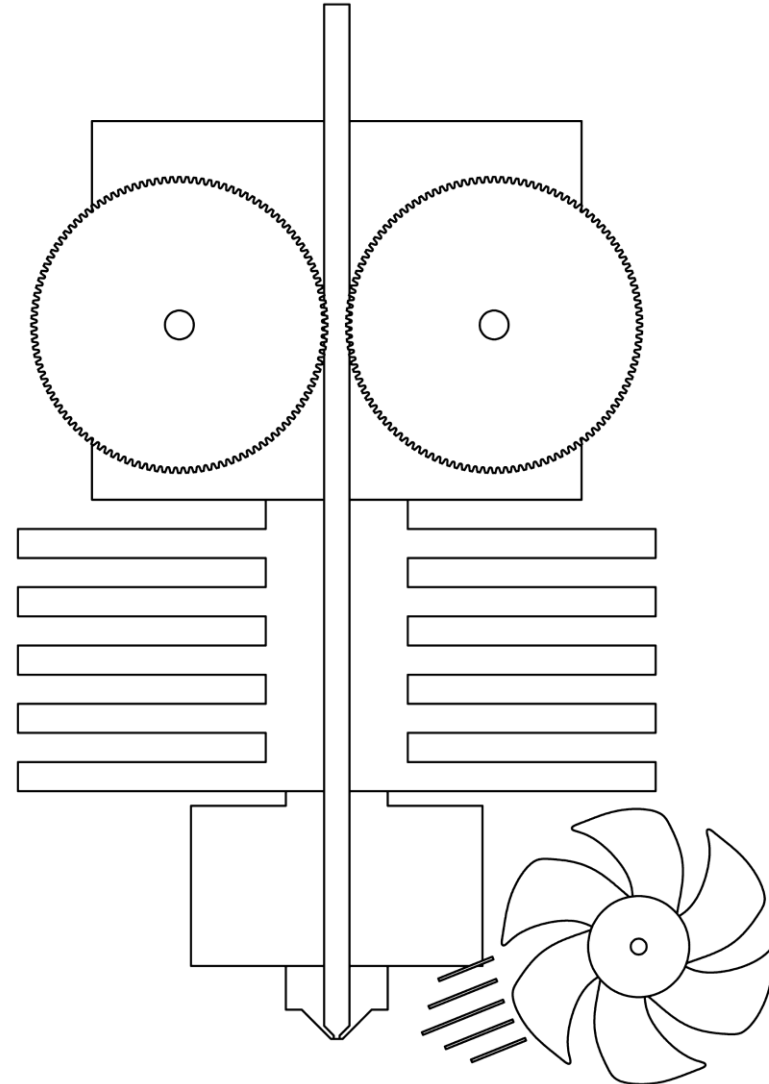


Pushing Plastic

- Filament. Long, continuous plastic rod.
- Motor and gears grab and push filament.
- Heatsink keeps heat in the hotend (heater + nozzle).
- Heater softens filament at the glass transition temperature.
- Nozzle opening shapes plastic.
- Fan cools hot plastic.

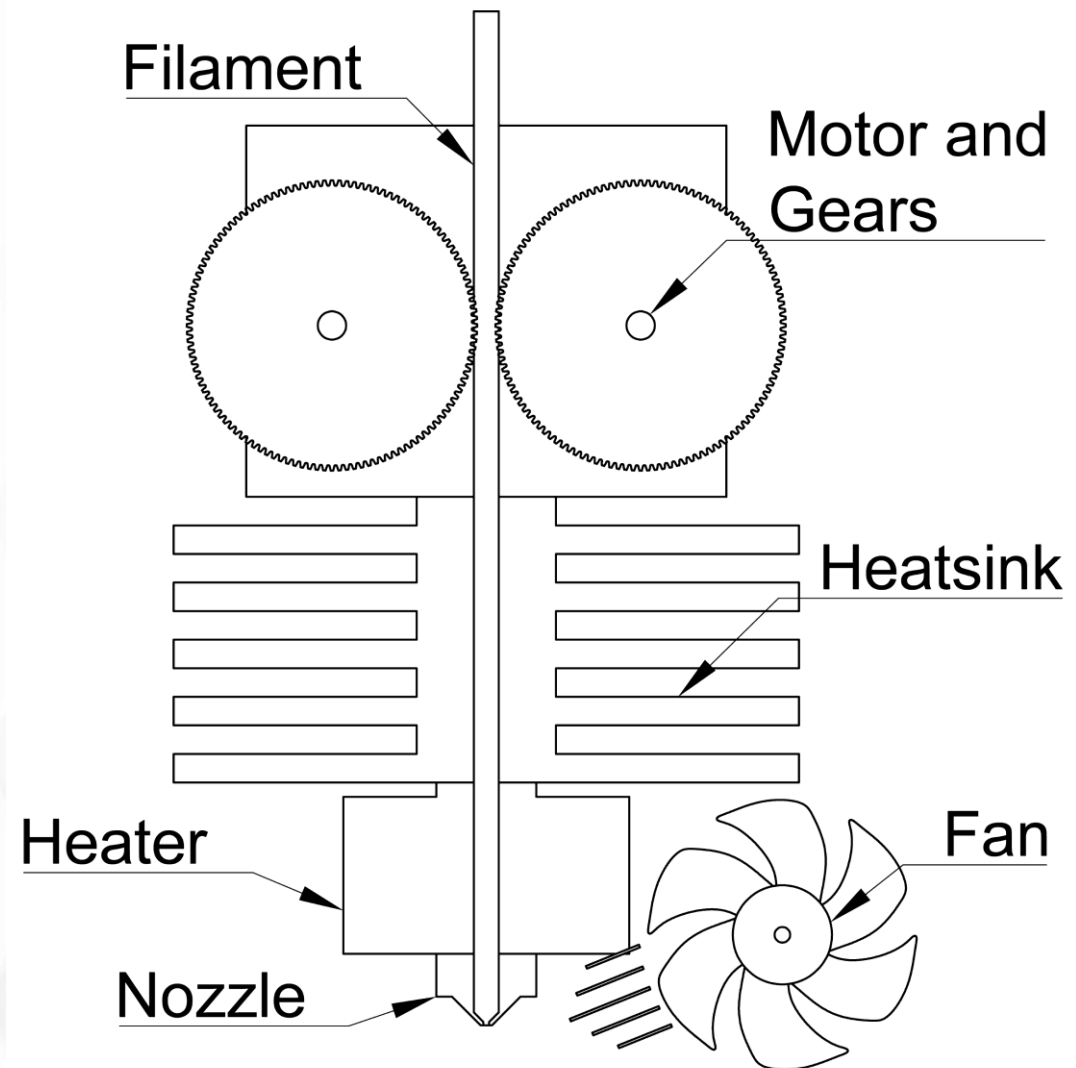


Extrusions

- Toolhead deposits lines called **extrusions**.
- Best to squish extrusions into place.
- Lock in place as they cool.

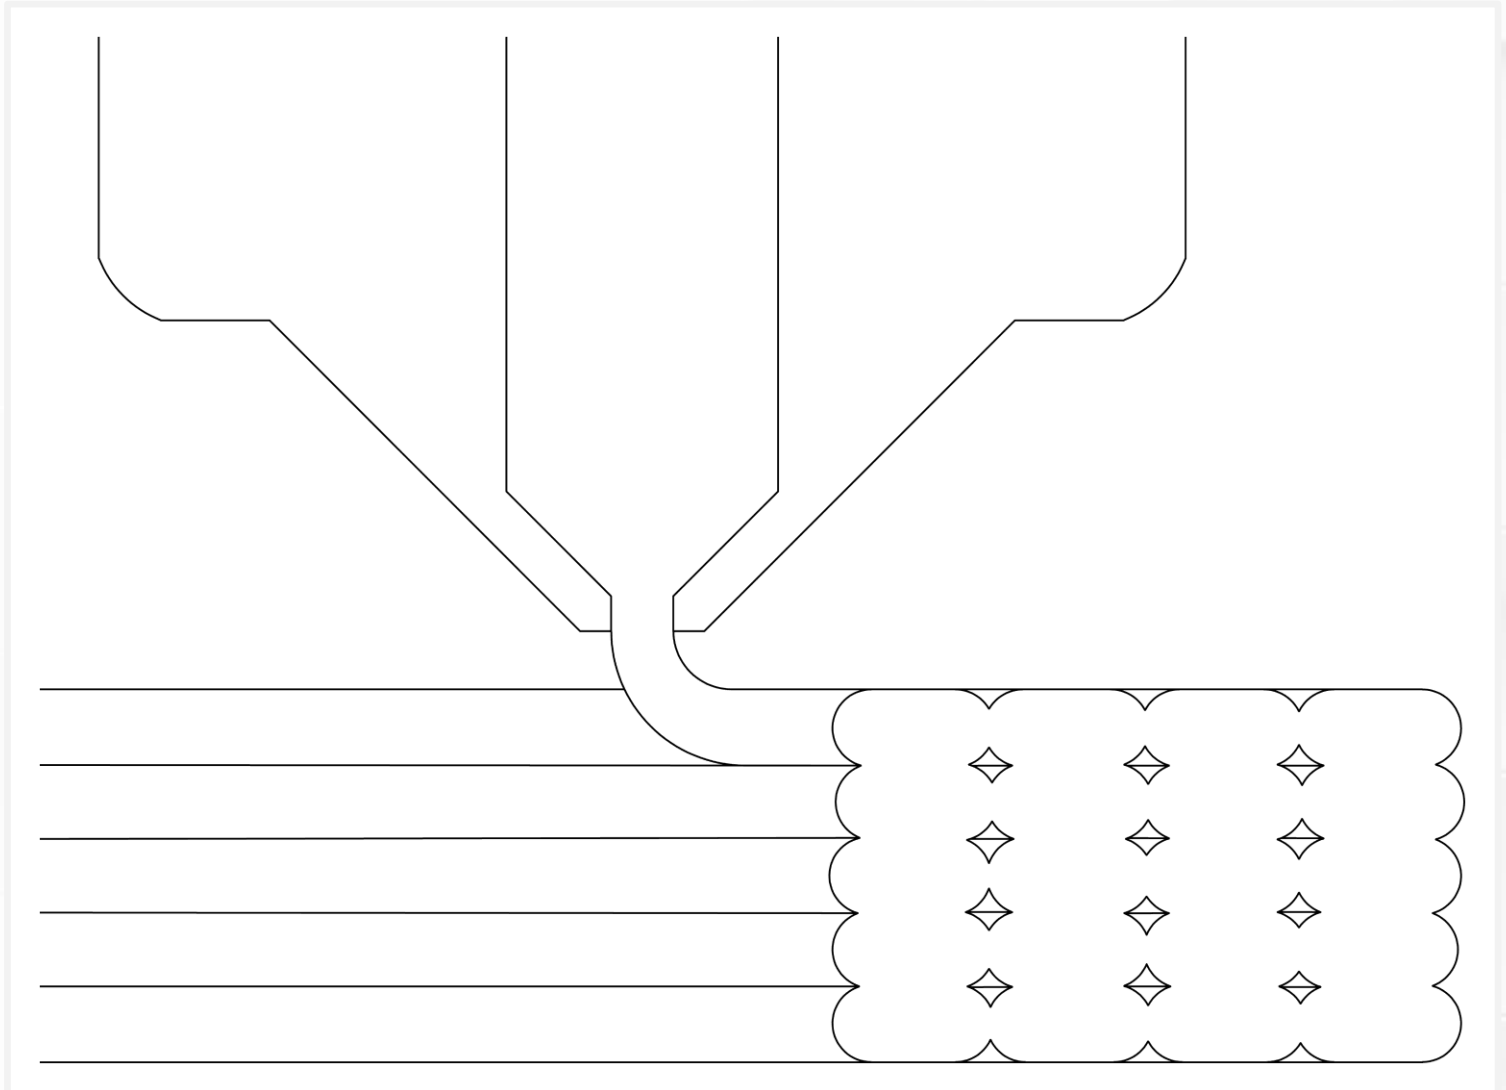


Stacking Layers

- Printers *simulate* 3D shapes by stacking 2D layers.
- You could call it 2.5D printing.

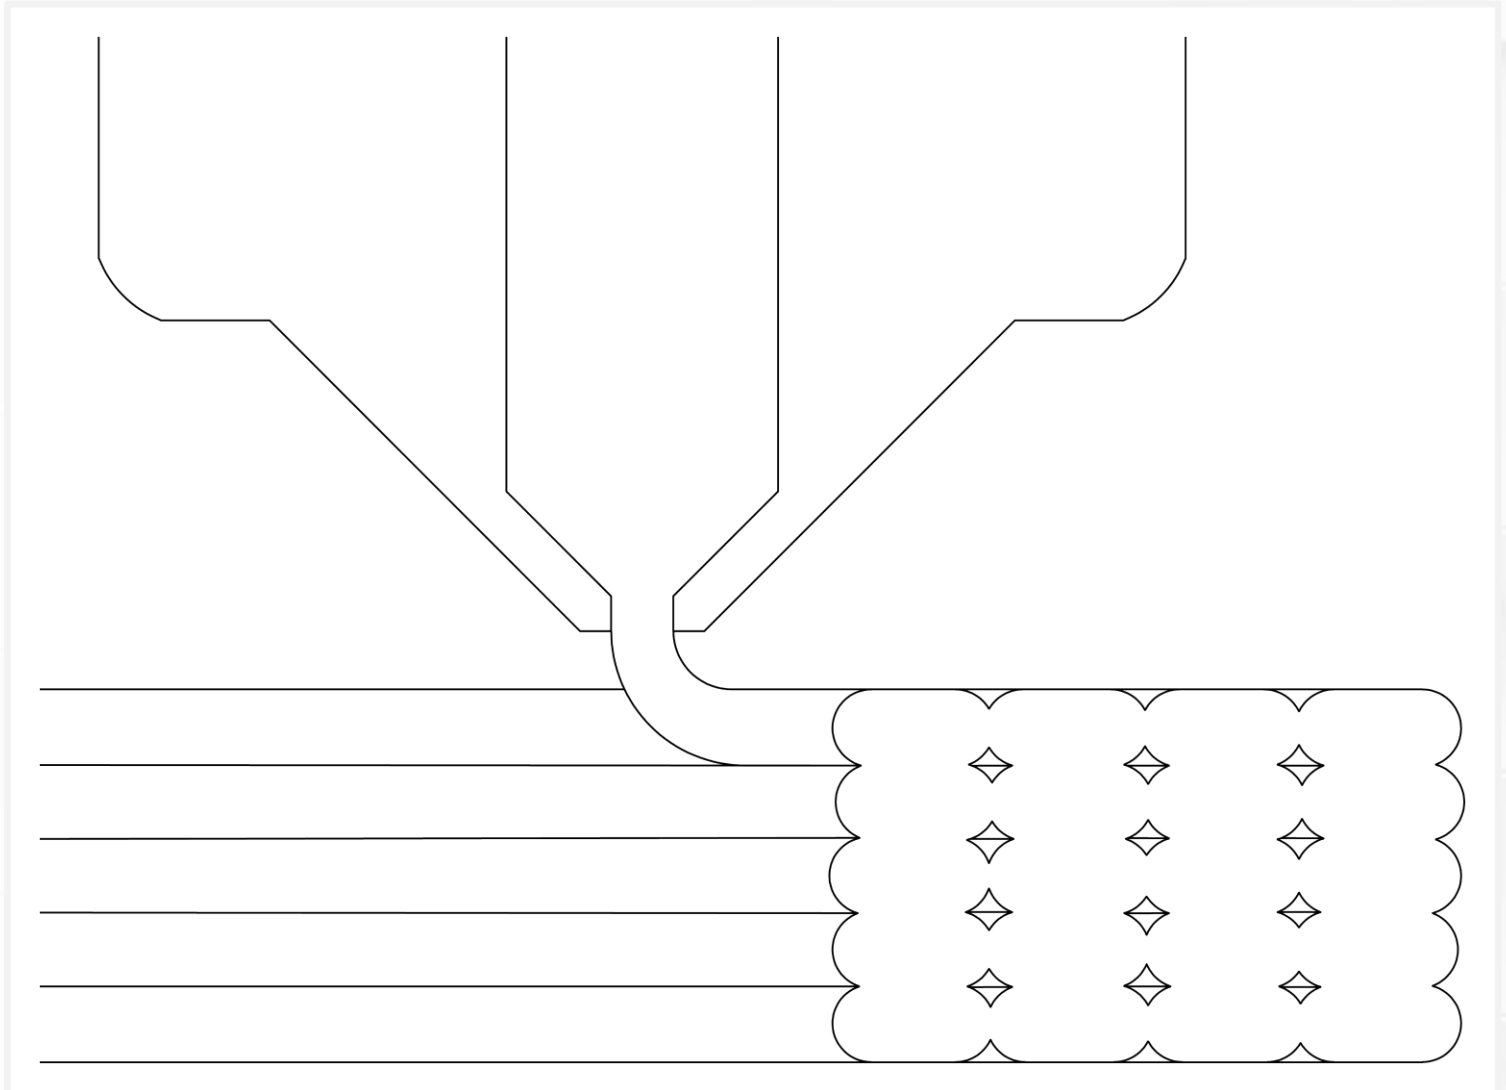

Slicer Layers

Let's see how PrusaSlicer handles layers.

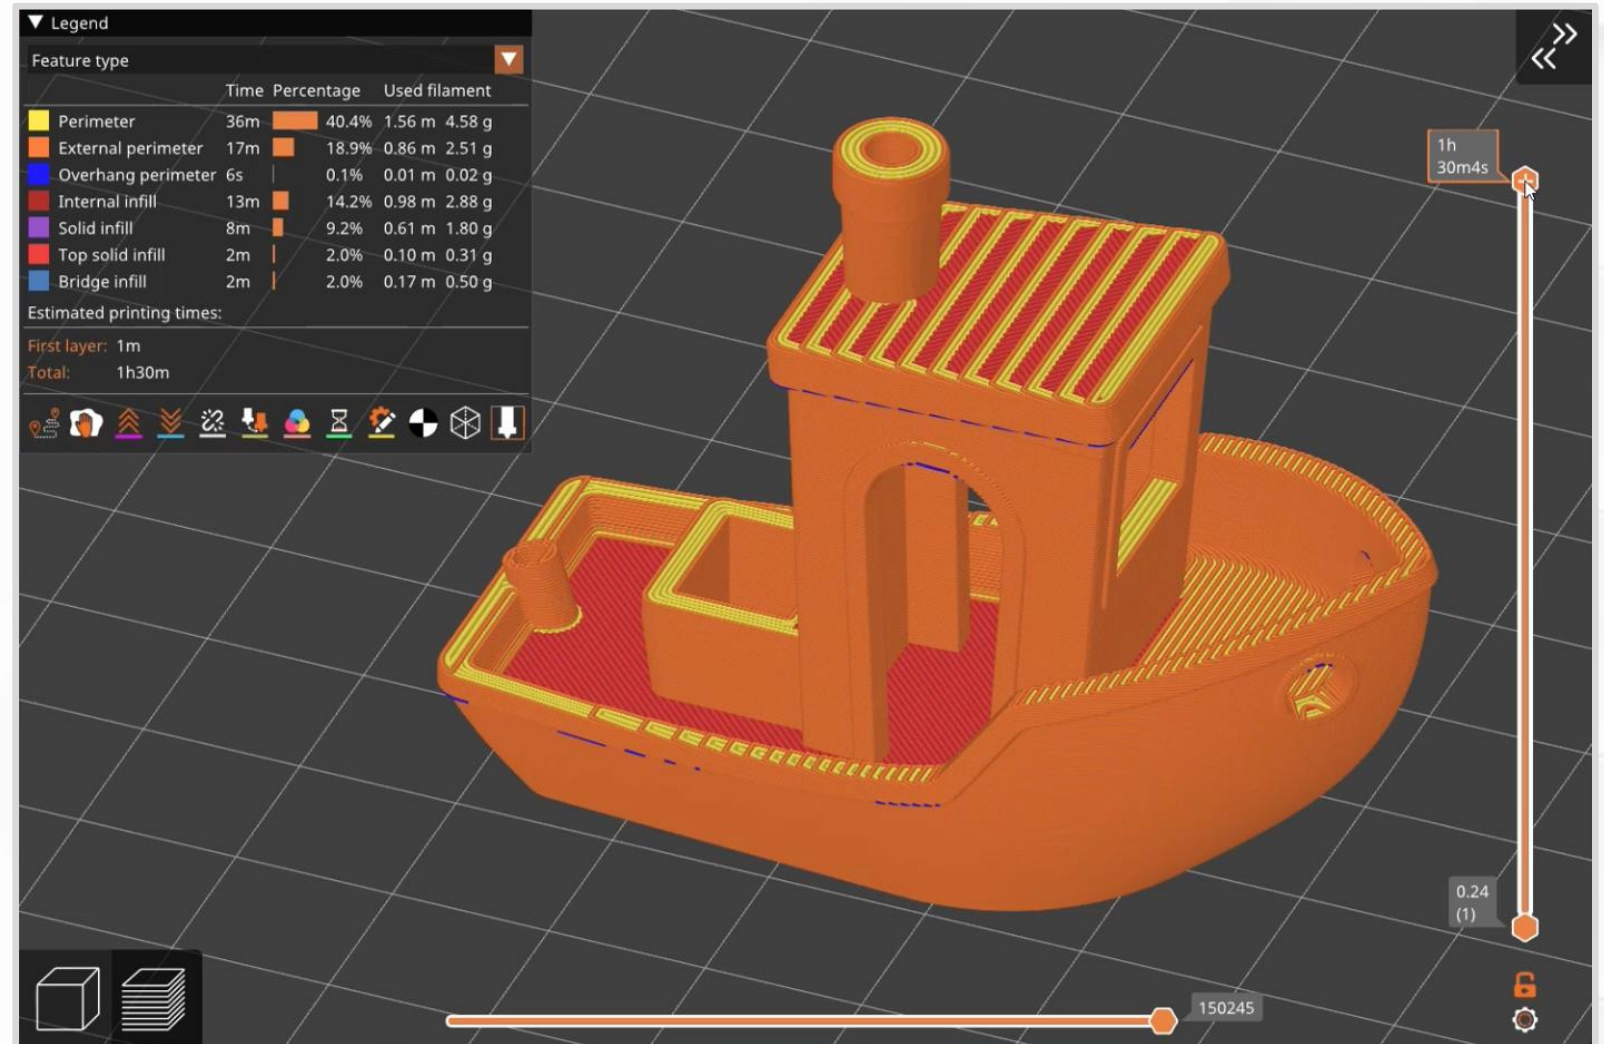

(Animation,
FlyingGyroscope GitHub)

Slicer Layers


- Sort extrusions by shape and geometry.
- Color-coded.
- Adjust settings for each category.

▼ Legend					
Feature type ▼					
		Time	Percentage	Used filament	
	Perimeter	36m	 40.4%	1.56 m	4.58 g
	External perimeter	17m	 18.9%	0.86 m	2.51 g
	Overhang perimeter	6s	 0.1%	0.01 m	0.02 g
	Internal infill	13m	 14.2%	0.98 m	2.88 g
	Solid infill	8m	 9.2%	0.61 m	1.80 g
	Top solid infill	2m	 2.0%	0.10 m	0.31 g
	Bridge infill	2m	 2.0%	0.17 m	0.50 g
Estimated printing times:					
First layer: 1m					
Total: 1h30m					


Slicer Layers

- Single layer preview.
- G-code shows what the printer is actually doing (lower left).
- *G1* = Move. Include X, Y, or Z coordinates.
- *G1 X Y E* = Move and extrude.

(Animation,
FlyingGyroscope GitHub)

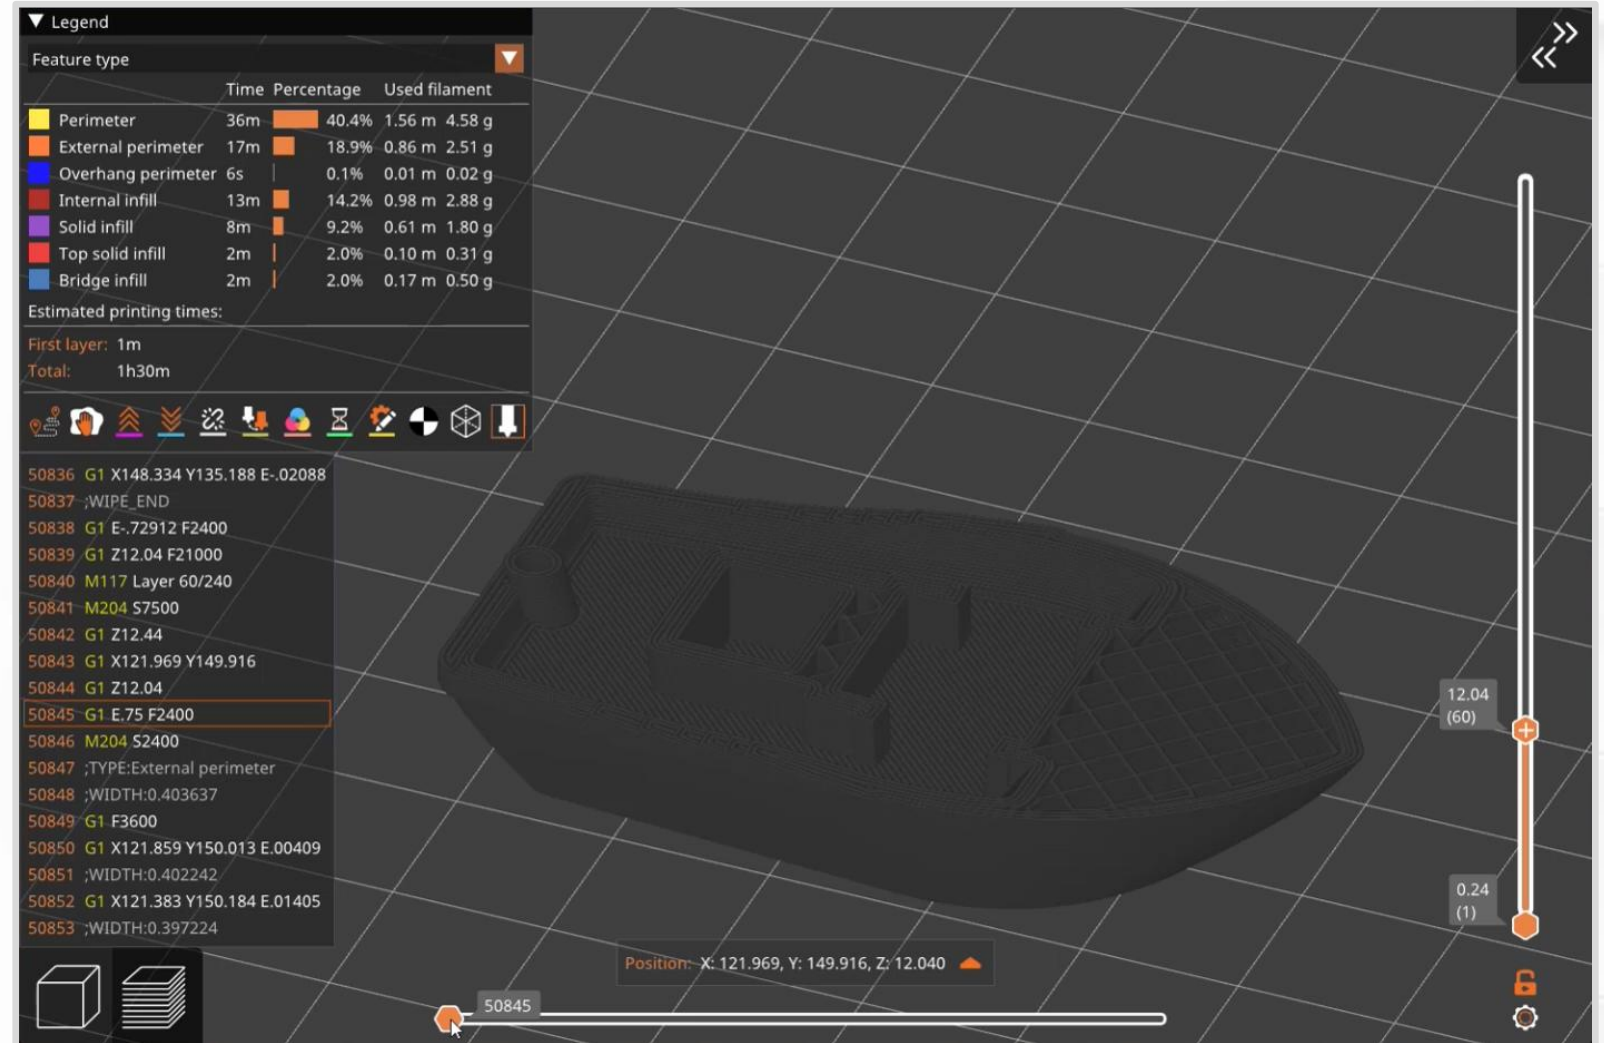

(Animation,
Thermal camera
video by
NeedItMakelt)

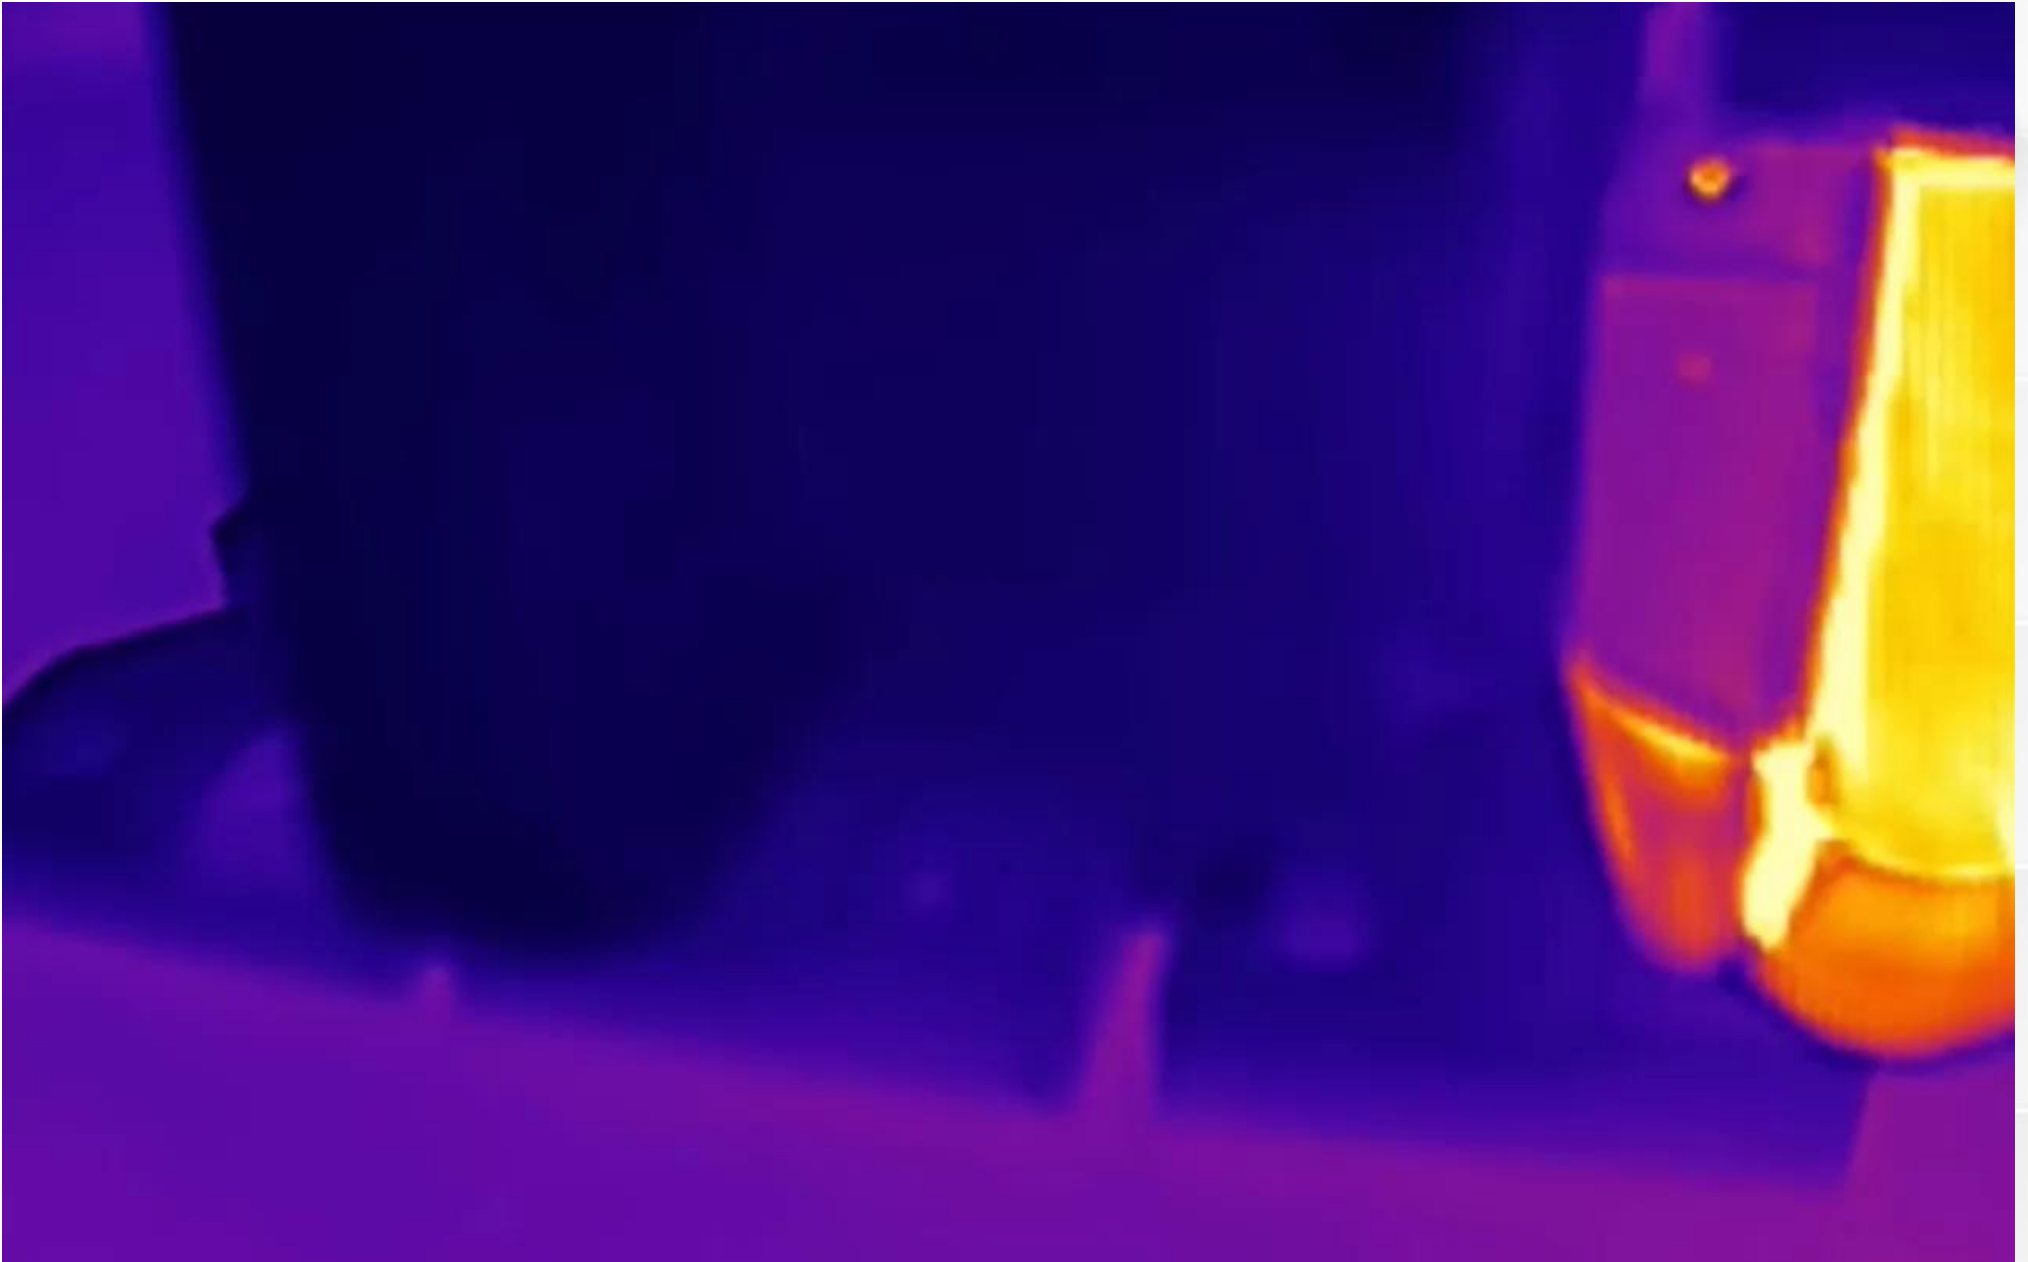

Easy Filaments

- **PLA** (derived from corn starch).
 - General-purpose filament for indoor applications.
 - Excellent bridging.
 - Very stiff.
 - Creeps. Deforms permanently under load.
 - Low temperature resistance. Softens inside a car on a hot summer day.
- **PETG** (plastic water bottles).
 - Pretty good general-purpose filament.
 - Hygroscopic. Needs low-humidity storage.
 - Elastic. Excellent choice for springs.
 - Moderate temperature resistance. Can be used outdoors.

Easy Filaments

- What makes PLA and PETG easy?
 - Low warp. Low shrink.
 - High dimensional accuracy.
 - Room temperature print chamber. Open-air, non-enclosed.

Proper Protocol

Let's review some everyday guidelines.

- Secure the loose end of a spool of filament at all times.
 - Tangles ruin prints and waste time.
- Do not reach into the printer while it is running.
 - Use touchscreen or buttons to pause and resume prints.
- Watch the first layer before you walk away.
- Avoid burns.
 - Read nozzle and print bed temperatures on the display.
 - Never reach near a hot nozzle (210 °C = 410 °F).
- Do not leave fingerprints on print sheets.