FM-1288

High Performance Voice Processor for Automotive Handsfree

Product Data Sheet
(Product Information) version 2.3

PRODUCT INFORMATION

THIS DOCUMENT CONTAINS INFORMATION ON A PREPRODUCTION PRODUCT. SPECIFICATIONS AND PREPRODUCTION INFORMATION HEREIN ARE SUBJECT TO CHANGE WITHOUT NOTICE.

FORTEMEDIA, INC. PRODUCTS ARE NOT INTENDED FOR LIFE SAVING NOR LIFE SUSTAINING APPLICATIONS AND FORTEMEDIA, INC. THUS, ASSUMES NO LIABILITY IN SUCH USAGES. FORTEMEDIA, INC. PRODUCTS MAY ONLY BE USED IN LIFE-SUPPORT DEVICES OR SYSTEMS WITH THE EXPRESS WRITTEN APPROVAL OF FORTEMEDIA, INC., IF A FAILURE OF SUCH COMPONENTS CAN REASONABLY BE EXPECTED TO CAUSE THE FAILURE OF THAT LIFE-SUPPORT DEVICE OR SYSTEM, OR TO AFFECT THE SAFETY OR EFFECTIVENESS OF THAT DEVICE OR SYSTEM. LIFE SUPPORT DEVICES OR SYSTEMS ARE INTENDED TO BE IMPLANTED IN THE HUMAN BODY, OR TO SUPPORT AND/OR MAINTAIN AND SUSTAIN AND/OR PROTECT HUMAN LIFE. IF THEY FAIL, IT IS REASONABLE TO ASSUME THAT THE HEALTH OF THE USER OR OTHER PERSONS MAY BE ENDANGERED.

WE HEREIN DISCLAIM ANY AND ALL WARRANTIES, INCLUDING BUT NOT LIMITED TO WARRANTIES OF NON-INFRINGEMENT, REGARDING CIRCUITS, DESCRIPTIONS AND CHARTS STATED HEREIN.

TABLE OF CONTENT

Status Information

The status of this Product Data Sheet is **Product Information**.

Advance Information

Information for designers concerning Fortemedia product in development. All values specified in the document are the target values of the design. Minimum and maximum values, if specified, are only given as guidance to the final specification limits and must not be considered as the final values.

All detailed specifications including pinouts and electrical specifications may be changed by Fortemedia without notice.

Pre-production Information

Pinout and mechanical dimension specifications finalized. All values specified in the document are the target values of the design. Minimum and maximum values, if specified, are only given as guidance to the final specification limits and must not be considered as the final values.

All electrical specifications may be changed by Fortemedia without notice.

Product Information

Final Data Sheet including the guaranteed minimum and maximum limits for the electrical specifications.

Product Data Sheets supersede all previous document versions.

Note

While every case has been taken to ensure the accuracy of the contents in this Data Sheet, Fortemedia cannot accept responsibility for any errors. Fortemedia reserves the right to make technical changes to its products as part of its development program.

FIGURES

TABLES

Document History

Revision	Date	Description
0.1	Oct 30, 2011	Early Draft, original publication date
0.2	Nov 2, 2011	Editorial updates, 1st draft Advance Information
0.3	Nov 5, 2011	Editorial updates
0.4	Nov 25, 2011	Editorial updates, initial release after 2 mic support added
0.5	Mar 31, 2012	Editorial updates, analog design spec changed on 3/16
0.6	Apr 18, 2012	Editorial update, after reviews in NJ
0.7	Apr 28, 2012	Editorial update, after reviews with digital, analog, software
0.8	June 20,2012	Editorial update, after SQA measurement and updates
0.9	July 04, 2012	O.He, A.Zhang,H.Liu, et al updates and edits
1.0	Sep 30, 2012	O.He, A.Zhang, H.Liu et al revised, updates, and edits
1.1	Dec 27, 2012	Editorial update, after clarification about mic-inputs
1.2	Dec 29, 2012	Editorial update, and clarified some details
1.3	Jan 02, 2013	Updates based on Fab data and testings
1.4	Jan 10, 2013	Updates on current ratings and crystal related
1.5	Mar 31, 2013	FM-1288-GA1-410 and UART format correction
1.6	Apr 05, 2013	Improved top/side view diagrams
1.7	Jun 10, 2013	Editorial corrections on Figure 20 and Table 22
1.8	July 09, 2013	Clarified Figure 22 and expanded into Fig 22a,b,c; corrected Fig. 19 and sec 2.8 ; revised related items
1.9	July 16, 2013	Added Timing Chart for Power Down
2.0	Oct 31, 2013	Corrected, and clarified voltage supply details for FM1288-GA1-400B, FM1288-GE-400B, FM1288-GA1-410, and FM1288-GE-410
2.1	Jun 19, 2014	Corrected and clarified Table 21 AC characteristics
2.2	Jan 06, 2015	Clarified VDD_D and VDD_A , pp. 49
2.3	Jan 29, 2015	I2C max value, pp.49

1. Introduction

FM1288 is the new generation of Fortemedia's system-on-chip (SOC) solution that provides high performance voice processing for automotive hands-free applications. It delivers state of the art single-microphone and dual-microphone noise suppression with acoustic echo cancellation technologies for in-vehicle and personal navigation devices (PND) based hands-free voice communications.

1.1 Overview

Incorporating the latest Fortemedia technologies for removing ambient noise and acoustic echoes, the FM1288 preserves voice naturalness for greater speech intelligibility in a variety of noisy automotive enviroments. Designed to be compatible with a wide range of host processors and blue-tooth devices, the FM1288 voice processor is designed for easy system integration.

The FM1288 provides system designer the flexibilities to customize each processing module and fine-tune the algorithms to the unique needs and acoustic path characteristics of the manufacturer's automotive model cabin or handsfree communication device.

1.2 Key Features

- **Highly integrated SOC**
    - Digital Signal Processor(DSP) with Hardware Accelerators, RAM, and ROM
    - 3 ADC (Analog to Digital Converter)
    - 2 DAC (Digital to Analog Converter)
    - Differential I/O on all analogs to improve noise immunity
    - 2 On-chip analog microphone inputs
    - IIC-Compatible Serial (SHI) and UART control interface to host processor
    - IIS-Compatible and PCM data interface to host or Bluetooth processor
    - Built-in PLL supports highly flexible clocking input
    - Can operate as co-processor or as standalone processor
- **High performance**
    - Advanced algorithms for acoustic echo cancellation and noise reduction
    - Robust full-duplex for in-vehicle applications
    - Preserves voice naturalness and effective in automotive environment
    - Wideband (HD Voice) and narrowband voice processing
    - Bright Voice Enhancement (BVE) for downlink listening improvement
    - Dynamic Range Control (DRC) for range control
    - Equalization (EQL) on uplink and downlink voice paths
    - Line in and Line out signal path Automatic Gain Control (AGC)
    - Configurable processing modules performance
    - Non-invasive run-time performance tuning via UART and IIC-compatible port
    - Run time switching between processing mode and various by-pass modes
    - User-selectable between two microphone inputs (usage - one for front-seat passengers and another for back-seat passengers in vehicle cabins)
- **Available in 48-pin LQFP packages, Automotive Grade**

1.3 Pin Configuration (LQFP)

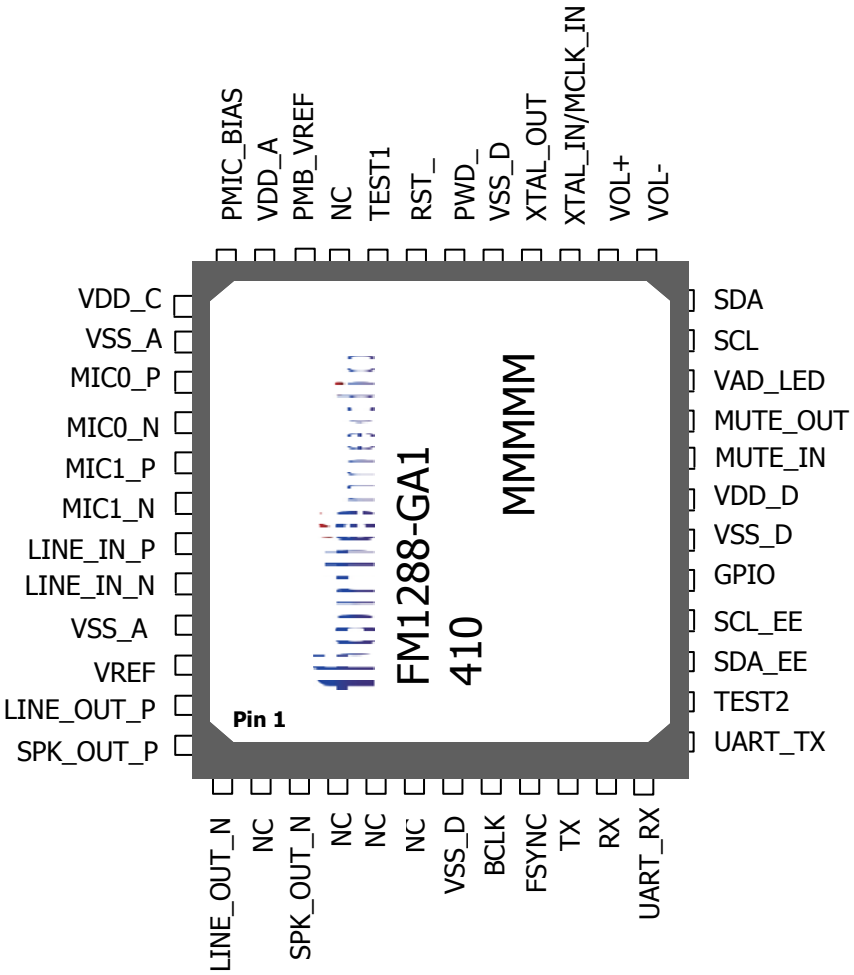

Figure 1: LQFP 48-Pin Configuration -Top View

1.4 Device Terminal Functions

Analog Audio I/O	Lead	Pad Type	Supply Domain	Description
LINE_OUT_N	1	Analogue	VDD_A	Audio LINE OUTPUT (-)
LINE_OUT_P	47	Analogue	VDD_A	Audio LINE OUTPUT (+)
SPK_OUT_N	3	Analogue	VDD_A	Audio SPEAKER OUTPUT (-)
SPK_OUT_P	48	Analogue	VDD_A	Audio SPEAKER OUTPUT (+)
LINE_IN_N	44	Analogue	VDD_A	Audio LINE INPUT (-)
LINE_IN_P	43	Analogue	VDD_A	Audio LINE INPUT (+)
MIC0_N	40	Analogue	VDD_A	Audio MIC INPUT (-)
MIC0_P	39	Analogue	VDD_A	Audio MIC INPUT (+)
MIC1_N	42	Analogue	VDD_A	Audio MIC INPUT (-)
MIC1_P	41	Analogue	VDD_A	Audio MIC INPUT (+)

Oscillator and Clock	Lead	Pad Type	Supply Domain	Description
XTAL_IN/MCLK_IN	27	Digital	VDD_D	For crystal or external clock in
XTAL_OUT/MCLK_OUT	28	Digital	VDD_D	Drive for crystal

Serial EEPROM	Lead	Pad Type	Supply Domain	Description
SDA_EE	15	In/Out	VDD_D	IIC-compatible EEPROM Data
SCL_EE	16	In/Out	VDD_D	IIC-compatible EEPROM Clock

Serial Host Interface (SHI)	Lead	Pad Type	Supply Domain	Description
SDA	24	In/Out	VDD_D	IIC-compatible serial slave data
SCL	23	In/Out	VDD_D	IIC-compatible serial slave clock

UART Interface	Lead	Pad Type	Supply Domain	Description
UART_RX	12	In	VDD_D	UART receive
UART_TX	13	Out	VDD_D	UART transmit

Digital Audio I/O (PCM/IIS)	Lead	Pad Type	Supply Domain	Description
BCLK	8	In/Out	VDD_D	Synchronous data clock
FSYNC	9	In/Out	VDD_D	Synchronous data sync
TX	10	Out	VDD_D	Synchronous data output
RX	11	In	VDD_D	Synchronous data input

Controls	Lead	Pad Type	Supply Domain	Description
TEST2	14	Digital	VDD_D	Voice data by-pass control
GPIO	17	Digital	VDD_D	GPIO, usage currently undefined
MUTE_IN	20	Digital	VDD_D	Input control, mutes Line-Out
MUTE_OUT	21	Digital	VDD_D	Mute speaker indicator output
VAD_LED	22	Digital	VDD_D	Voice activity indicator output
VOL-	25	Digital	VDD_D	Volume decrease control
VOL+	26	Digital	VDD_D	Volume increase control
PWD_	30	Digital	VDD_D	Power down control
RST_	31	Digital	VDD_D	Reset control

Power Supplies	Lead	Description
VDD_A	35	Positive supply for analog circuitry, to 3.3V power supply
VDD_D	19	Positive supply for digital input/output, to 1.8V/3.3V power supply (see **Table 15a/b/c** for details)
VSS_D	7,18,29	Ground Connection – Digital Ground
VSS_A	38,45	Ground Connection – Analog Ground
VDD_C	37	Connect via 1uF capacitor to ground, decoupling capacitor is for internal LDO that generates 1.2V for IC internal circuitry.
PMB_VREF	34	Connect via 0.47uF capacitor to ground, reference voltage for MIC Bias
PMIC_BIAS	36	Microphone Bias output, providing mic bias voltage = 0.9 * VDD_A

1.5 Internal Hardware Block Diagram

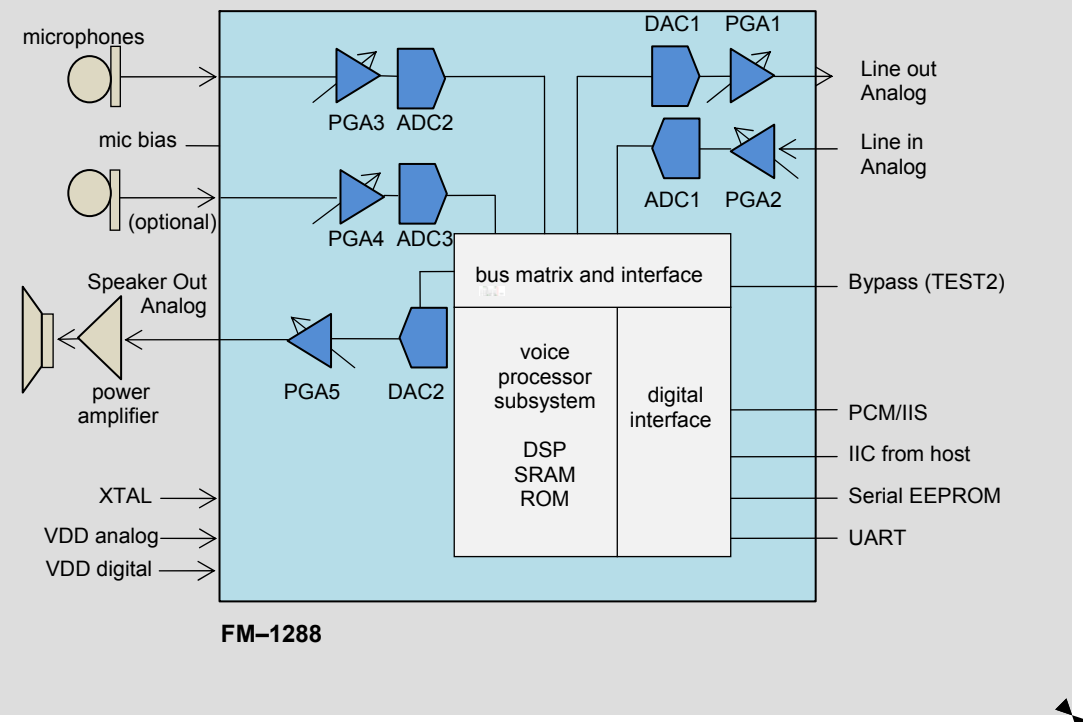

Figure 2: IC Hardware Block Diagram

1.6 System Application Block Diagram

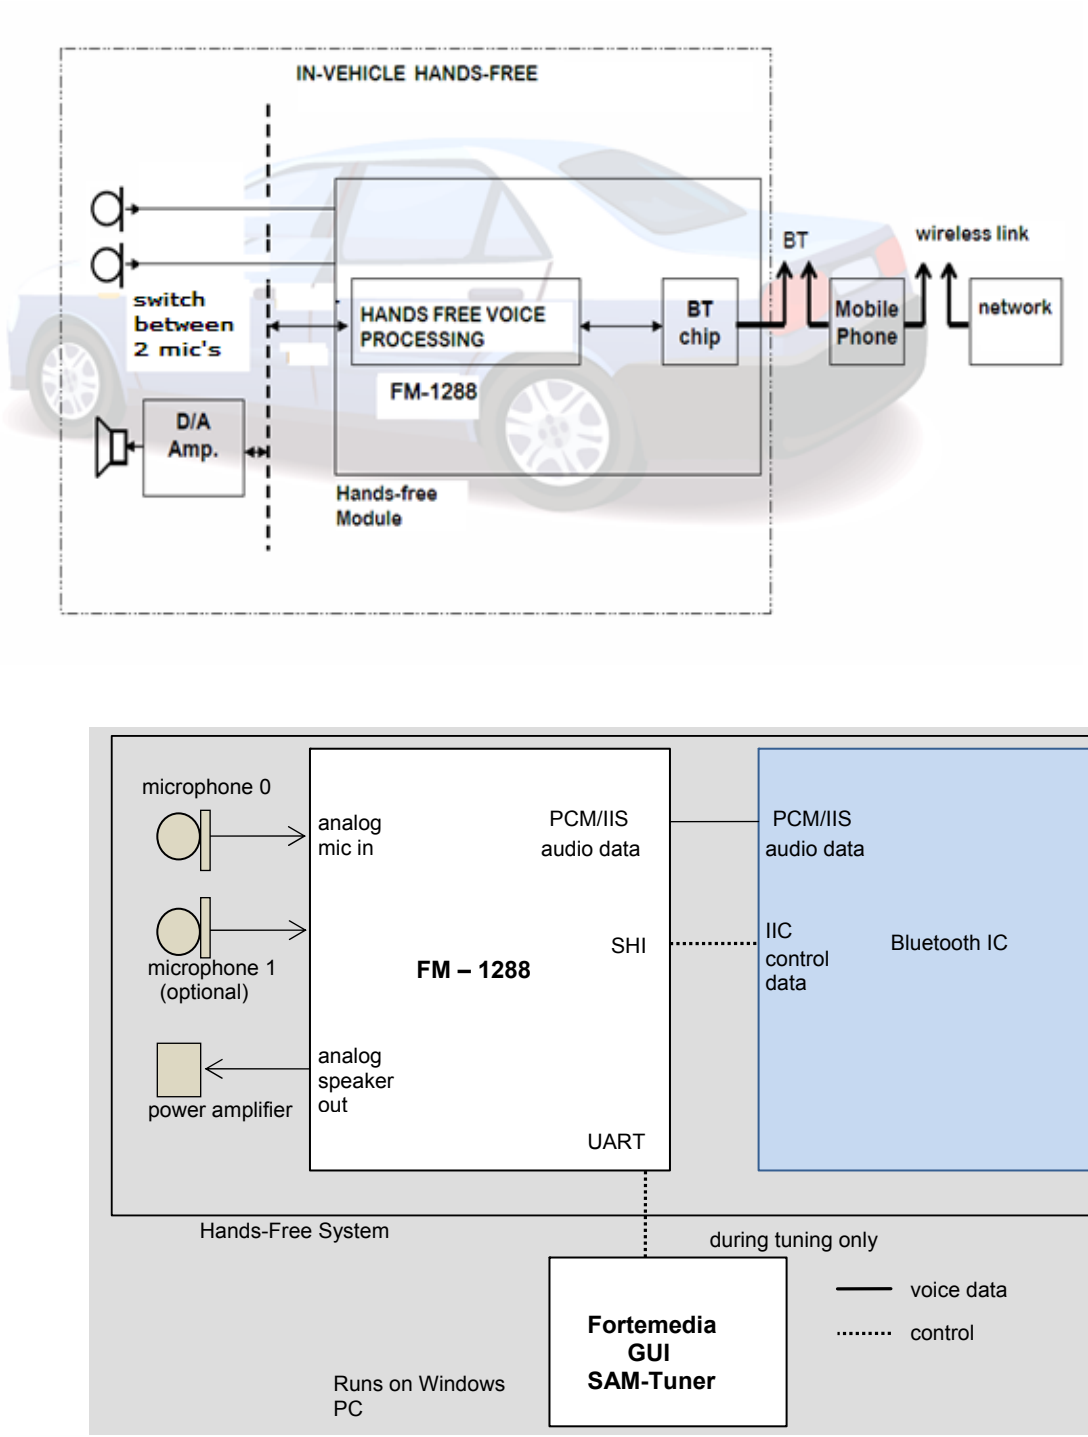

Figure 3: Example Bluetooth Application Block Diagrams

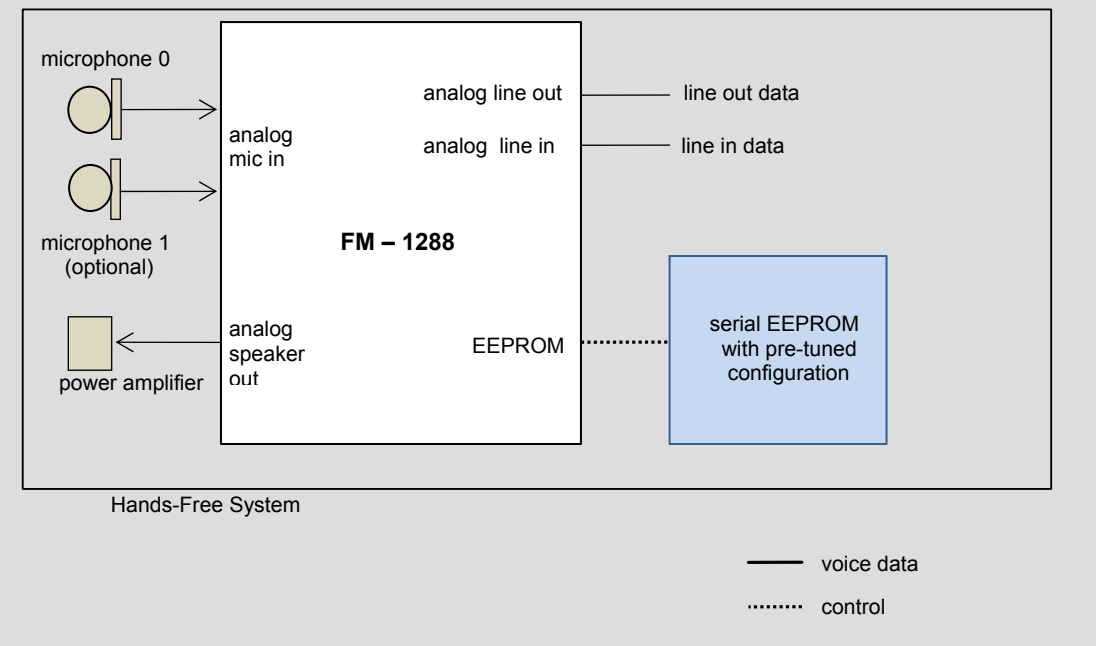

Figure 4: FM-1288 as an example Stand-alone Minimal System

2. Functional Description

2.1 Overview

The FM1288 voice processor digitizes the microphone input of near-end talker signal and performs acoustic echo cancellation and noise suppression on it, further enhancements such as gain adjustment and equalization can also be conducted. The processed signal is sent either through the PCM Serial Port digitally, or through the D/A converter and then via Line_Out pin as analog output. The far-end talker signal enters as the line input signal either digitally from Serial PCM Port, or from the Line_In analog signal pin. This far-end talker signal could be further enhanced by signal processing, such as Bright Voice Enhancement, Equalization, or Dynamic Range Control, before sending out to the analog SPK_Out pin via the D/A.

2.2 Serial EEPROM Interface (Pins 15, 16)

FM1288 supports an optional serial EEPROM boot-up, should the user elect to design the system with it. The serial EEPROM is used for

- Storing the configuration parameters required for system initialization during power-up and reset, should the system designer elect this option, and
- Storing "patch-program" provided by Fortemedia for either functional customizations or bug-fixes

It supports 16Kbit or larger IIC EEPROM devices such as 24c16, 24c32, 24c64, etc.

Upon power-up or reset, the FM-1288 processor will automatically attempt auto-detect via read operations from the serial EEPROM interface. If the system design includes an EEPROM and the EEPROM content conforms to the EEPROM format description below, the FM-1288 will be initialized to the pertinent state and becomes functional.

The EEPROM content are organized into contiguous bytes starting from address zero:

Byte Address	Byte content	Comment
0	Any value	**First byte always a dummy byte**
1	Byte 1 command 1	**Each EEPROM command sequence is 6 bytes**
2	Byte 2 command 1	
3	Byte 3 command 1	
4	Byte 4 command 1	
5	Byte 5 command 1	
6	Byte 6 command 1	
7	Byte 1 command 2	
8	Byte 2 command 2	
.	.	
.	.	N is the last EEPROM command
6N	Byte 5 command N	
6N + 1	Byte 6 command N	
6N + 2	**Must be 0xF0**	**Last byte ends read operation**

When the FM-1288 processor reads from the EEPROM, it interprets the content according to the data organization depicted above, and executes the commands sequentially to perform initialization. Each command is constituted of a 6-byte sequence instructing the processor to perform an initialization to either the data memory (**DM**) space or program memory(**PM**).

The FM-1288 has an on-chip Harvard-architecture Digital Signal Processor (**DSP**) which works with separate on-chip data memory and instruction memory. The data memory is of 16-bit data width and program memory is of 24-bit data width, and each has 16-bit address. The initialization data and on-chip program are stored in on-chip Read-Only Memories (ROM). There is on-chip RAM (Random Access Memory) as well for data manipulation.

The instruction memory space is further divided into ordinary instruction memory on ROM and a small patch-RAM (Random Access Memory). This patch-RAM allows further enhancements or bug-fixes to the on-chip ROM code.

The data memory space are divided into ordinary data memory on the on-chip RAM and a set of memory-mapped control registers.

FM-1288				
Memory Space	**Content**	**Type**	**Data width**	**Can be written to by EEPROM command**
DM	data	RAM	16 bit	yes
	control data	Memory-mapped Control Registers	16 bit	yes
PM	program instruction	ROM	24 bit	no
	Patch RAM	RAM	24 bit	yes

Therefore, each 6-byte instruction residing on the EEPROM belongs to one of the following.

EEPROM Program Memory Space Write Command		
Byte	**Byte content**	**Comment**
1	**0x5C**	Command byte
2	address high byte (bit 8 to 15)	Address to write Program Instruction
3	address low byte (bit 0 to 7)	
4	instruction high byte (bit 16 to 23)	Program Instruction itself
5	instruction middle byte (bit 8 to 15)	
6	instruction low byte (bit 0 to 7)	

EEPROM Data Memory Space Write Command		
Byte	**Byte content**	**Comment**
1	**0x3B**	Command byte
2	address high byte (bit 8 to 15)	Address to write Data
3	address low byte (bit 0 to 7)	
4	data high byte (bit 8 to 15)	Data itself
5	data low middle byte (bit 0 to 7)	
6	0x00	Meaningless dummy byte

Aside from the simple rules of starting with a dummy value at the first byte of the EEPROM and ending with the last byte with a value of 0xF0, the very last EEPROM command must be 6-byte command of writen the value 0x0000 into the DM address 0x22FB.

Lastly, for writing into the Program Memory Space Patch RAM there is a simple rule that the user must adhere to:

1. First must execute an EEPROM write command to the DM memory space address 0x3FCB, value = 0x0010 ;
2. Then do the EEPROM write command into Patch RAM sequentially ; and
3. After all writes into Patch RAM has finished, then do an EEPROM write command to DM memory space address 0x3FCB, value = 0x0000.

When the EEPROM is designed to be the source to initialize the parameters after reset, the FM1288 automatically detects the EEPROM via read attempts, and then retrieves data continuously in burst mode until

- Either the end of transfer byte "0xF0" is detected on the EEPROM,
- Or the DM address 0x22FB is being cleared to 0x0000.

The FM1288 will then enter into the normal operation mode.

Summarizing about EEPROM commands:

- The EEPROM commands can be used for boot-up system initialization.
- Data on EEPROM are contiguous bytes that must be organized into a starting dummy byte at address 0x0000 of the EEPROM, followed by 6-byte EEPROM commands defined above, and then concluded with an ending indicator of 0xF0 to signal termination of EEPROM command operations
- The 6-byte commands are each an initialization write either into DM space or into PM space
- The last EEPROM command should be a 6-byte command of writen the value 0x0000 into the DM address 0x22FB, this is to inform the FM-1288 processor that the last EEPROM command has been executed
- For writes into the Patch RAM area of the PM space, the rule of setting a specific DM memory space location at 0x3FCB first, and then clearing it upon done, was descrbed above and must be followed

System designers using the EEPROM please note the following:

1. Patch RAM initializations are intended for either bug fixes or further functional enhancements to the on-chip program residing already on ROM. Therefore Patch-RAM write comands, if any, will be provided by Fortemedia.
2. Data initialization are intended for either affecting the functional behaviors or for improving the performance via loading specifically tuned parameters over the default ones. Therefore Control Register and Data write commands, if any, are either provided by Fortemedia or supplied by the system designer after performing system tuning to obtain optimal parameters. Please also see "FM-1288 User Configuration Manual" for system tunings.
3. 24C16 is the smallest EEPROM size that the user can use.

The following detail normally does not concern system designer, but it affects the EEPROM size and is therefore included here for completeness. Fortemedia engineers working on the Patch RAM commands and Data Initialization commands on the EEPROM would need to understand these details:

EEPROM - maximum space utilization by commands		
	Maximum Size	**Effect on EEPROM**
PATCH RAM	128	A maximum of 128 x 6 = 768 bytes could be occupied by Patch RAM initializations on the EEPROM
Data space initialization associated with code to reside on PATCH RAM	32	A maximum of 32 x 6 = 192 bytes could be occupied by Data initializations associated with Patch RAM code on the EEPROM

2.3 UART Interface (Pins 12, 13)

FM1288 has an UART interface which could be used to

- Transmit and receive control commands at run-time, and
- Also by the host processor to supply the necessary initialization configuration parameters during reset and power-up, should the system designer elect this option.

To use the UART interface immediately after power up, the clock/crystal frequency supplied to the FM-1288 must be an integer multiple of 18.432 MHz in order for the UART baud rate to communicate to the commonly used baud rate which would be an integer multiple of 9600.

Clock/Crystal Input	UART baud rate after boot up
4.608 MHz	2400 baud
9.216 MHz	4800 baud
18.432 MHz	9600 baud
36.864 MHz	19200 baud

Each UART transfer will have one command byte, one or two address bytes, and up to two data bytes. UART requires two bytes "**0xFC**" and "**0xF3**" to synchronize with each transfer.

The UART port is recommended as the run-time performance optimization interface to access the FM1288 for real-time non-invasive parameter tunings.

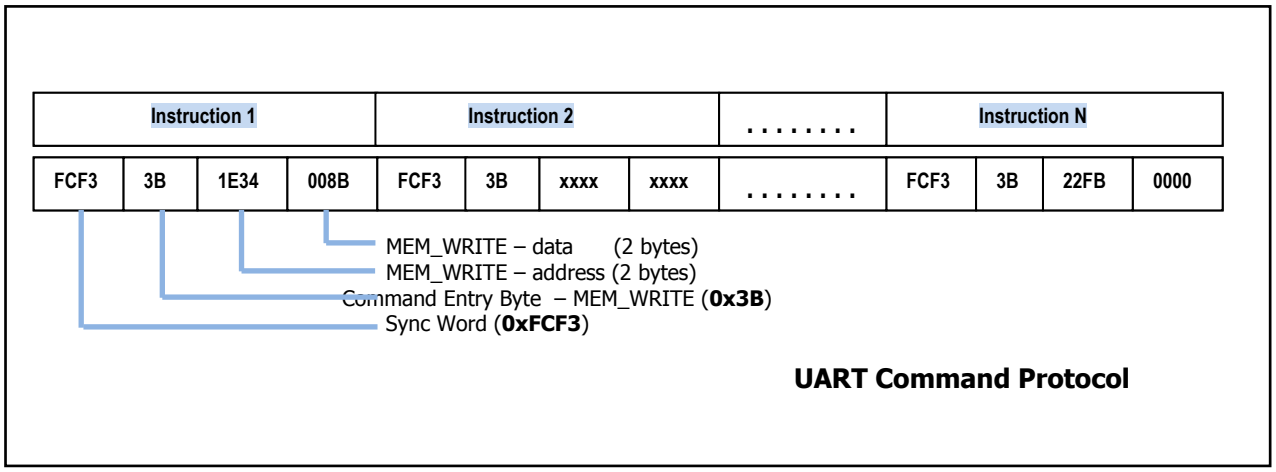

Figure 5: Example UART Command Protocol

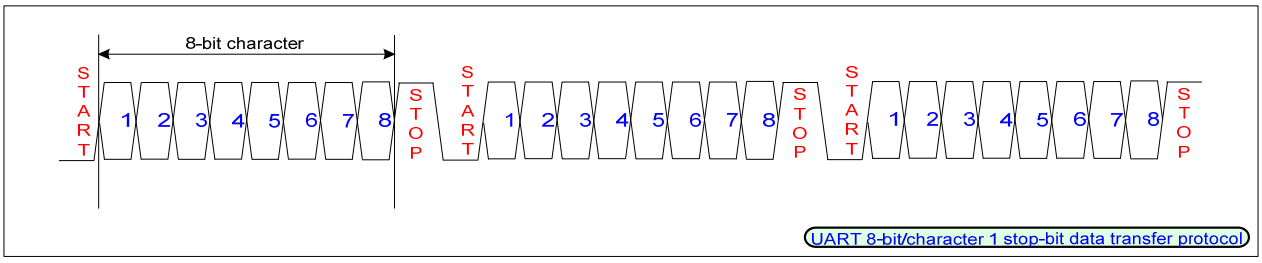

UART_RX and UART_TX pins are normally held high between transfers

Figure 6: UART Data Transfers (TX and RX)

2.4 IIC compatible Serial Host Interface - SHI (Pins 23, 24)

The FM1288 implements a Serial Host Interface (SHI) which is an IIC-compatible serial interface between FM1288 and an external processor. It could be used to

- Transmit and receive control commands at run-time, and
- Also by the host processor to supply the necessary initialization configuration parameters during reset and power-up, should the system designer elect this option.

On this SHI, FM1288 communicates to the processor through a bi-directional serial data line (SDA) and a serial clock line (SCL). The FM-1288 SHI operates as a slave device and its serial clock is driven from the host. The master on the host processor controls SCL clocking, data transfer start bit and stop bit, and also addressing of slave devices. The FM1288 supports 8-bit address and its device address is "**0xC0**".

Depending on master's instruction, the SHI can operate as a transmitter (writing data) or a receiver (reading data). Note that the SHI interface supports the standard clock speed of 100 kHz or up to a maximum speed of 400 kHz (if MCLK is above 10MHz).

The standard byte format of SHI data line (Pin 24) must be 8–bit long in every byte. Each byte consists of 8 bits plus 1 acknowledge bit, and it is one data bit per clock pulse. If operating as a receiver, it will return an acknowledge bit upon each successful byte transfer, otherwise it will return a NOACK signal. There is no restriction on the maximum number of bytes per data transfer. Data transfer can be aborted if the master device generate a STOP condition to terminate a transfer. Each data transfer frame must start with a START or a RESTART symbol and ends by a STOP symbol.

Table 1: SHI START and STOP data transition

S: START	SDA transition from 1 to 0 when SCL=1
P: STOP	SDA transition from 0 to 1 when SCL=1

Within the data transfer frame, multiple command sequences are allowed and there is no restriction on the maximum numbers of bytes per frame. Each command sequence starts with a sync word "0xFCF3", follows by a command entry byte (e.g. 0x3B is MEM_WRITE) and number of bytes per specific command. The following figures and tables summarize the details for the SHI command sequence.

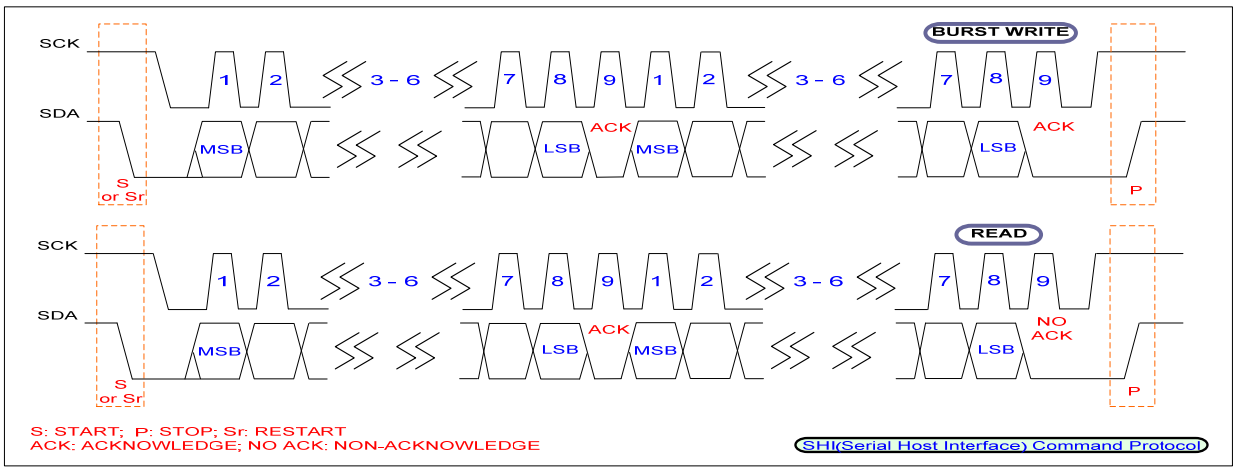

Figure 7: SHI Data Transfer Command Protocol

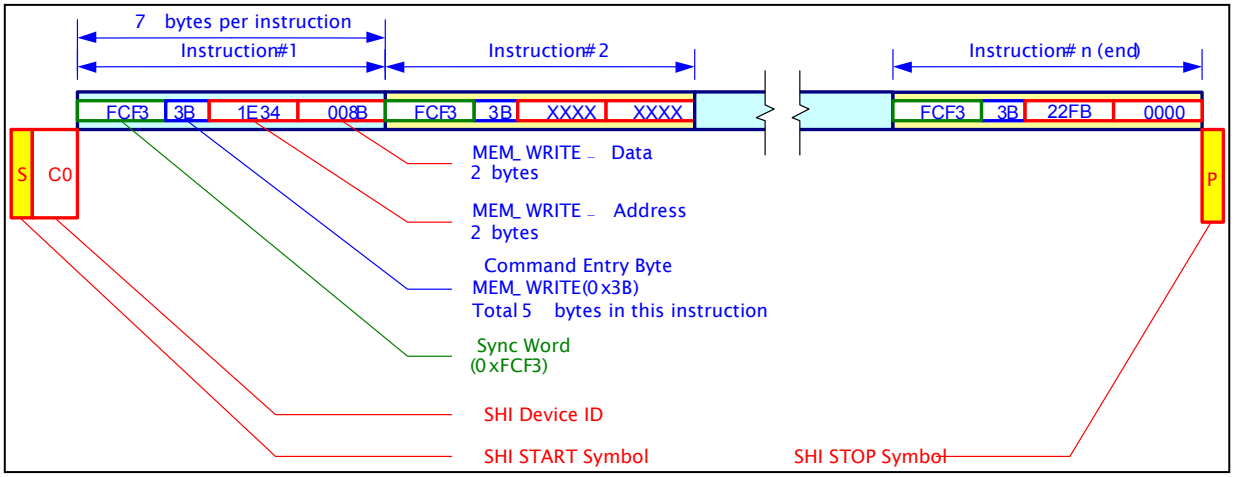

Figure 8: SHI Command Sequence

Table 2: SHI Command Name

Command Entry Name Symbol	Command Entry Byte	Number of the bytes for each functional bytes		
		Address Byte	Data Byte	Total (cmd+address+data)
MEM_WRITE	0x3B	2	2	5
MEM_READ	0x37	2	0	3
REG_READ	0x60	1	0	2

Table 3: SHI Command Byte - format

Serial Command Entry Byte								
Bit	**D7**	**D6**	**D5**	**D4**	**D3**	**D2**	**D1**	**D0**
Description	Access object type				Read /Write	Data byte number		Address byte number
Value Details	Data Memory (0011b) DataPort(0110b)(e.g. register)				R: 0 W: 1	2bytes (01b) 1byte (00b) 0byte (11b)		Two address bytes(1b) Data memory access One address byte(0b) Data port access

0110 0000 0x60 0110 1011 0x6b 01101010 0x6a 011010011 0xd3
0110 1000 0x68 00111000 0x38 00111001 0x39

Table 4: SHI Command Byte – bit definition

Data length	1byte	
Bit	**Pattern**	**Descriptions**
D7 - D4	0011b	For accessing Data Memory
	0110b	For reading the Data ports.
D3	0b	Read
	1b	Write
D2-D1	00b	1 byte data write, or in Data Port Read mode.
	01b	2 bytes data write
	11b	0 byte data (in Data Memory Read mode).
D0	1b	Two address bytes for accessing Data Memory
	0b	One address byte for reading Data Port (Either 0x25 for lower byte or 0x26 for upper byte.

2.5 Digital Voice Data Interfaces (Pins 8, 9, 10,11)

The FM1288 supports PCM/IIS serial interface to an external processor or device for digital voice data transfer of PCM/IIS encoded audio data. The digital voice data interface consists of four pins and these pins are multiplexed to be used as either PCM serial interface or IIS serial interface. The pin definition is described in the following table.

Table 5: Digital Voice Data Interface (Pins 8, 9, 10, 11)

	PIN Name	Usage: PCM mode	Usage: IIS mode
Pin 8	**BCLK**	PCM BCLK	IIS BCLK
Pin 9	**FSYNC**	PCM FSC	IIS LRCK
Pin 10	**TX**	PCM OUT	IIS TxDP
Pin 11	**RX**	PCM IN	IIS RxDP

2.5.1 PCM Interface Master/Slave

The PCM serial port provides an interface to a host processor for digital voice data transfer. It could either operate in master or in slave mode, supporting, respectively, either an internal or an external clock source for the frame sync (FSYNC) and bit clock (BCLK) signals. The FSYNC runs at 8KHz and 16KHz rate, depending on the voice data sampling rate.

The figures below show the PCM timings with two different cycle delays.

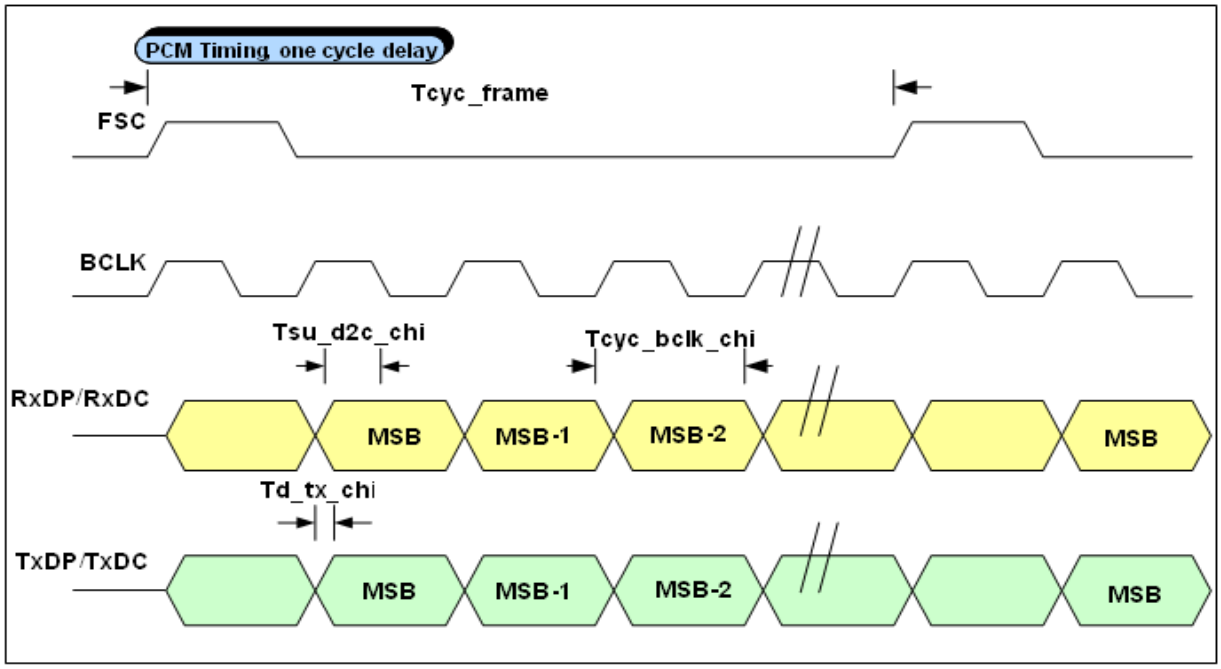

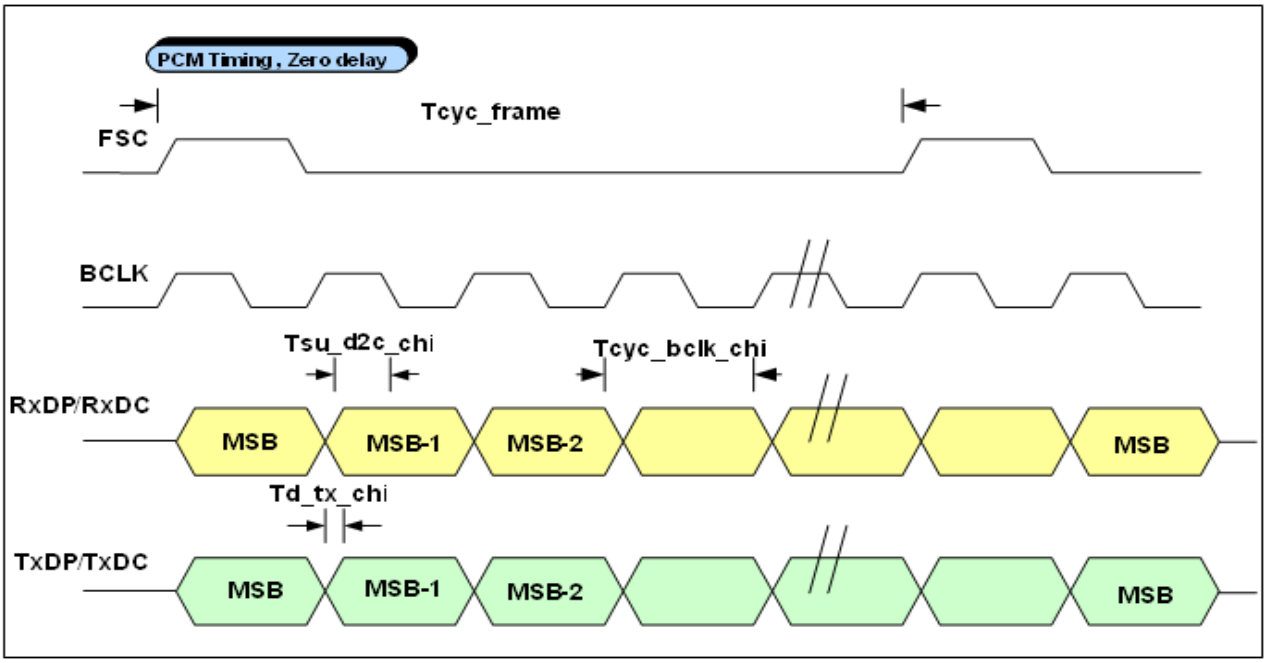
PCM Timing , Zero delay
Tcyc_frame
FSC
BCLK
Tsu_d2c_chi
Tcyc_bclk_chi
RxDP/RxDC
MSB
MSB-1
MSB-2
MSB
Td_tx_chi
TxDP/TxDC
MSB
MSB-1
MSB-2
MSB

2.5.2 IIS Interface

When configured as IIS interface, the master/slave mode, delay and bit width, RxDP latch, and LRCK mapping to the left or right channel are all to be configured appropriately according to the system usage. If it is set to master mode, BCLK and LRCK frequencies are defined by system designer.

The following diagrams illustrate the different types of IIS timings in terms of cycle delay, edge latch and LRCK high for channels.

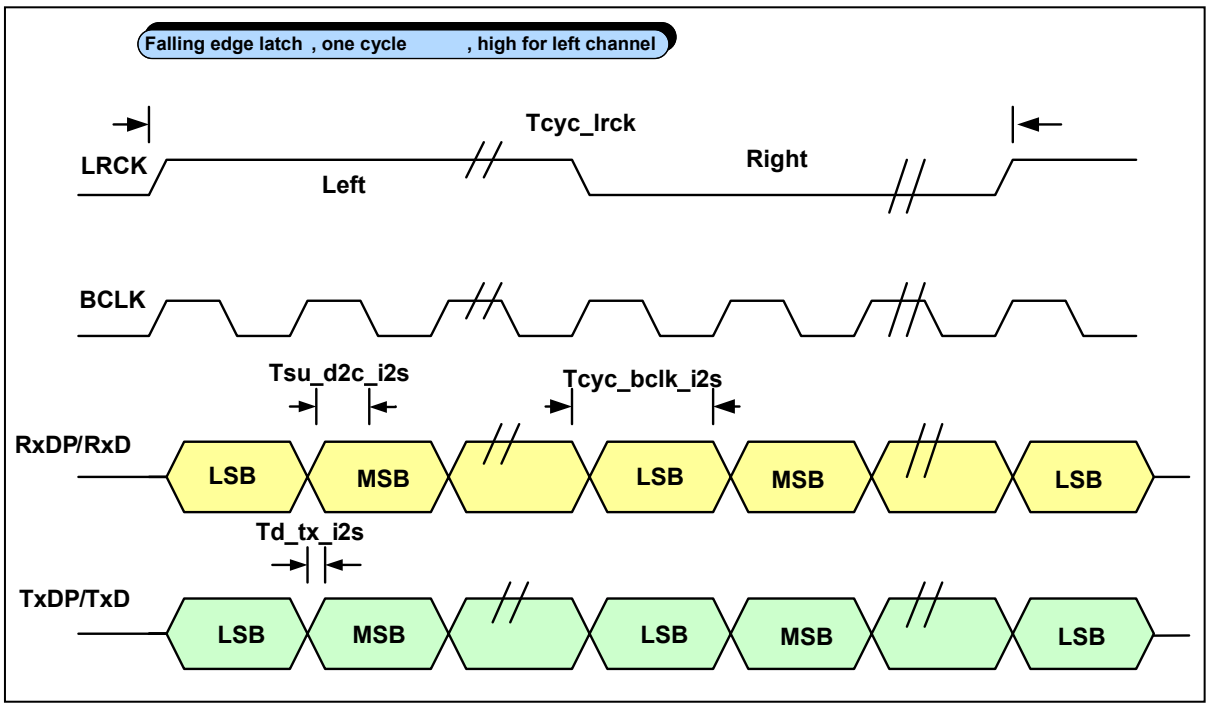

Figure 9: IIS Falling Edge Latch, LRCK High for Left Channel, 1 Cycle Delay

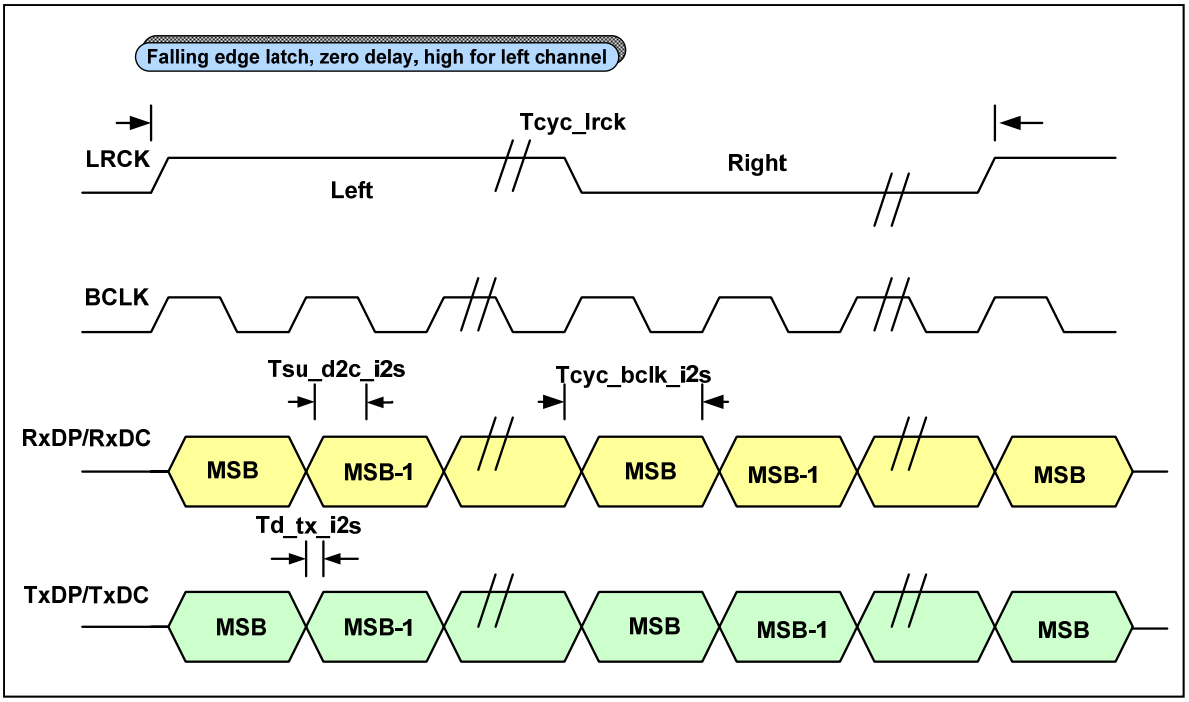

Figure 10: IIS Falling Edge Latch, LRCK High for Left Channel, 0 Cycle Delay

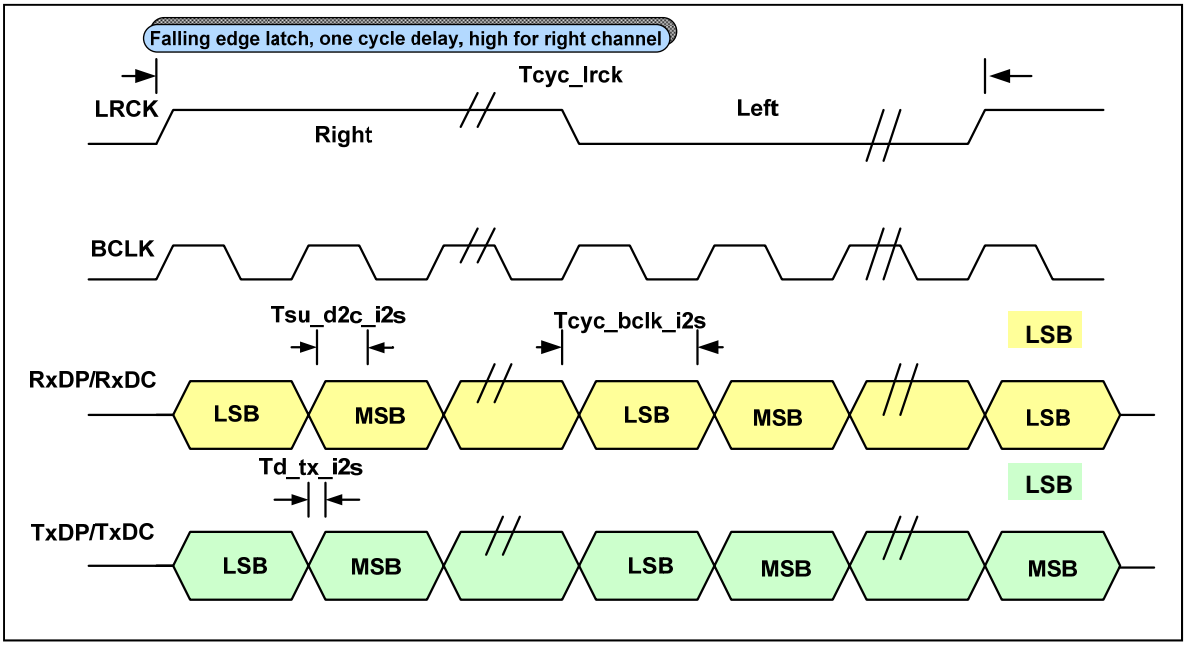

Figure 11: IIS Falling Edge Latch, LRCK High for Right Channel, 1 Cycle Delay

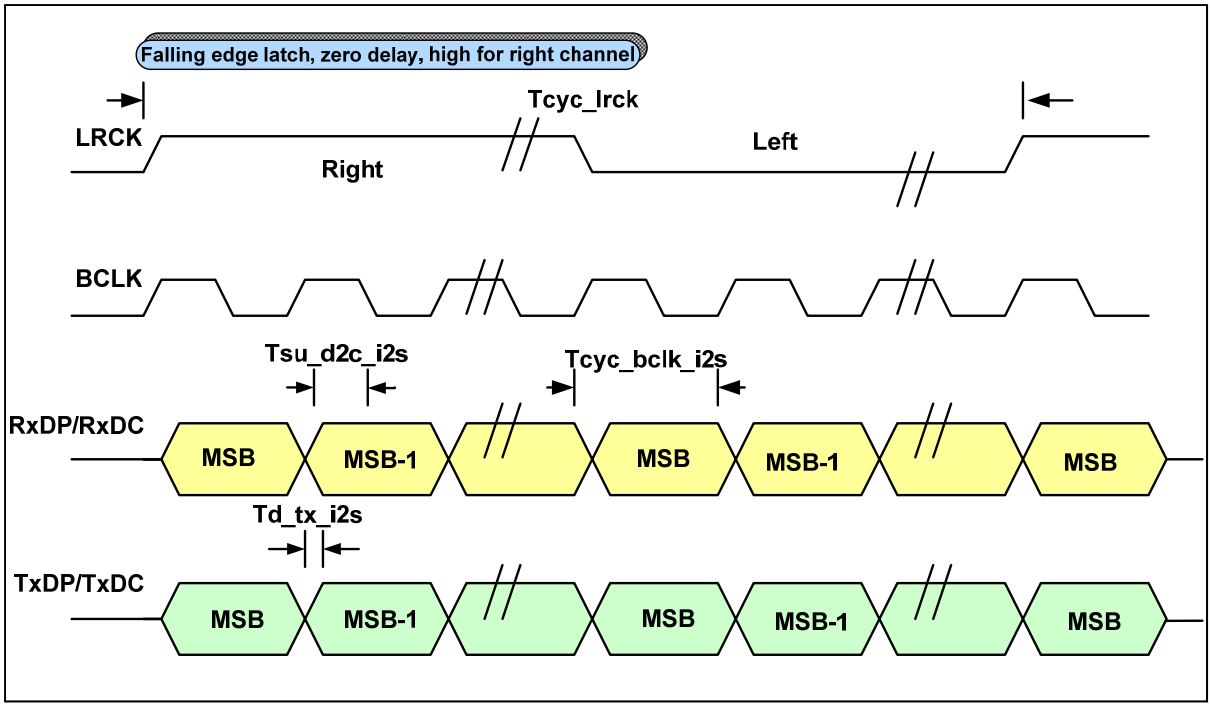

Figure 12: IIS Falling Edge Latch, LRCK High for Right Channel, 0 Cycle Delay

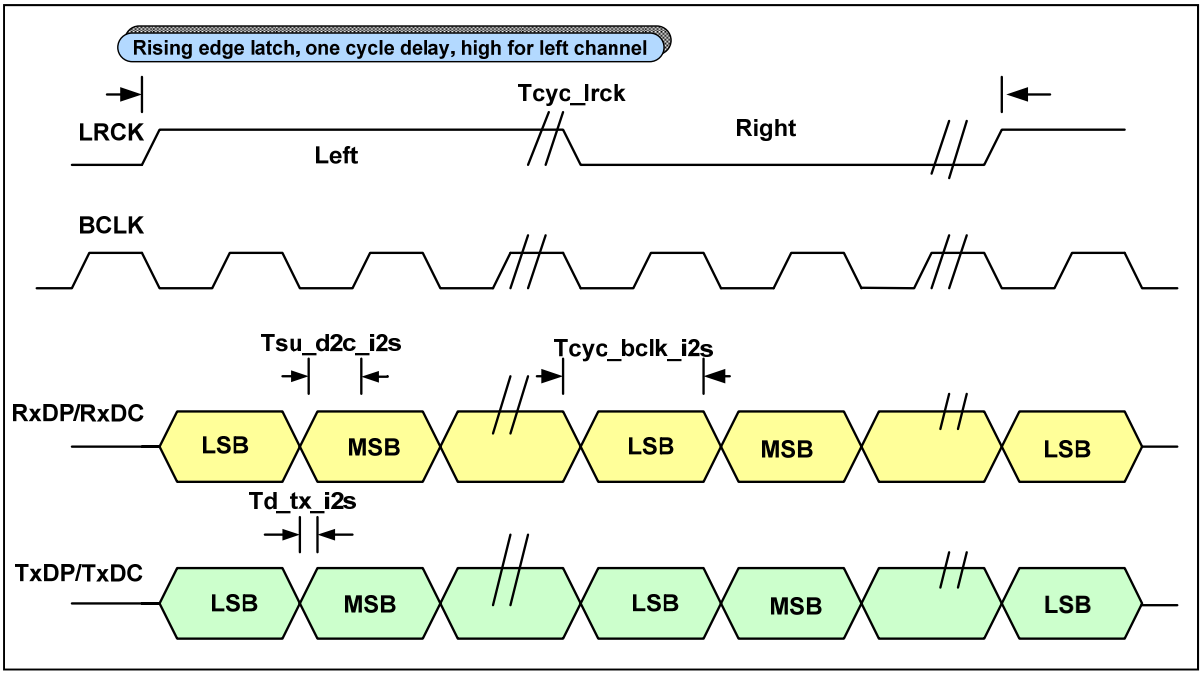

Figure 13: IIS Rising Edge Latch, LRCK High for Left Channel, 1 Cycle Delay

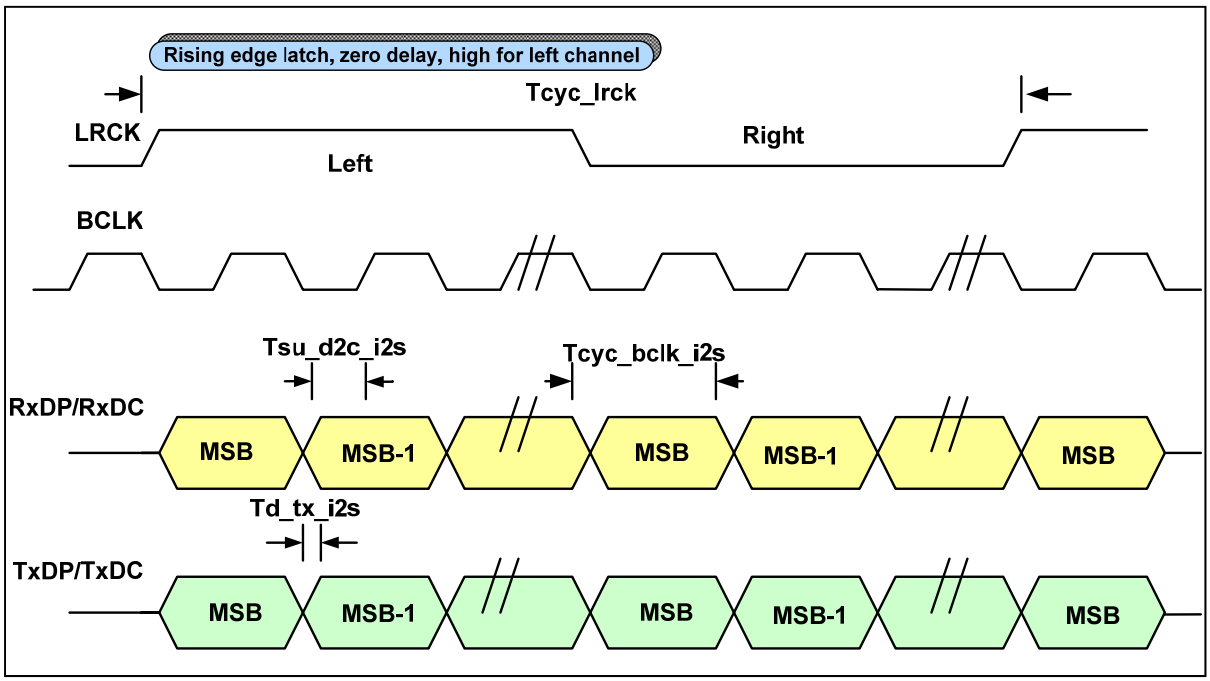

Figure 14: IIS Rising Edge Latch, LRCK High for Left Channel, 0 Cycle Delay

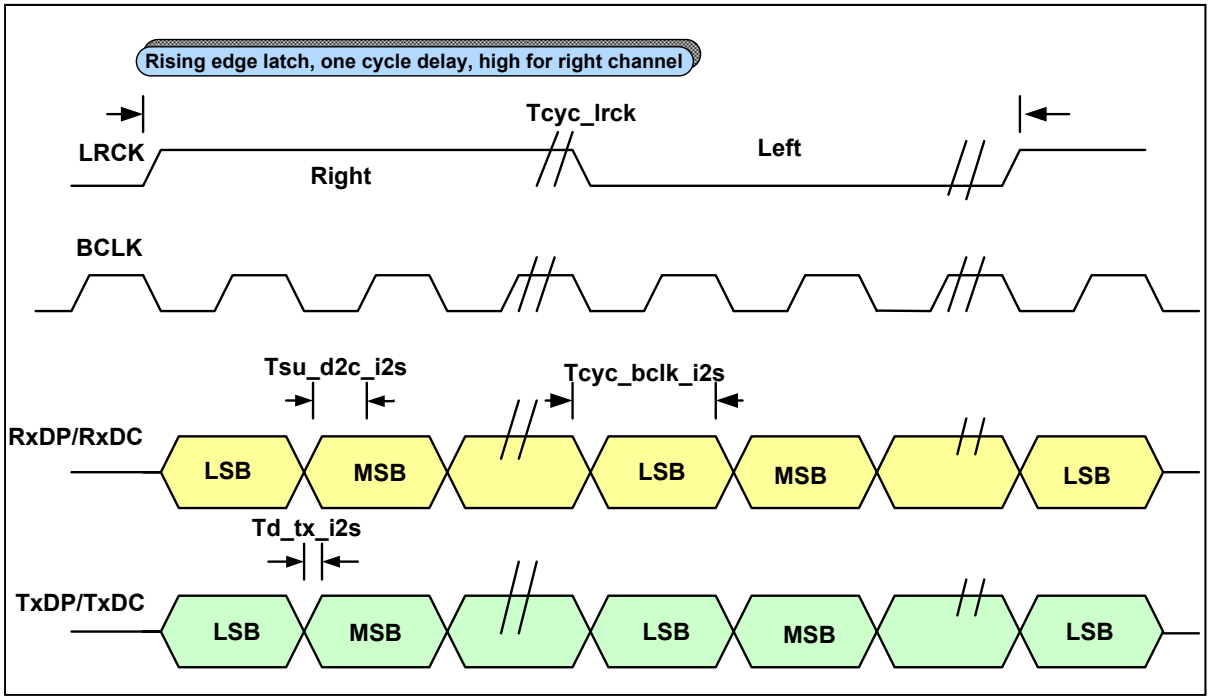

Figure 15: IIS Rising Edge Latch, LRCK High for Right Channel, 1 Cycle Delay

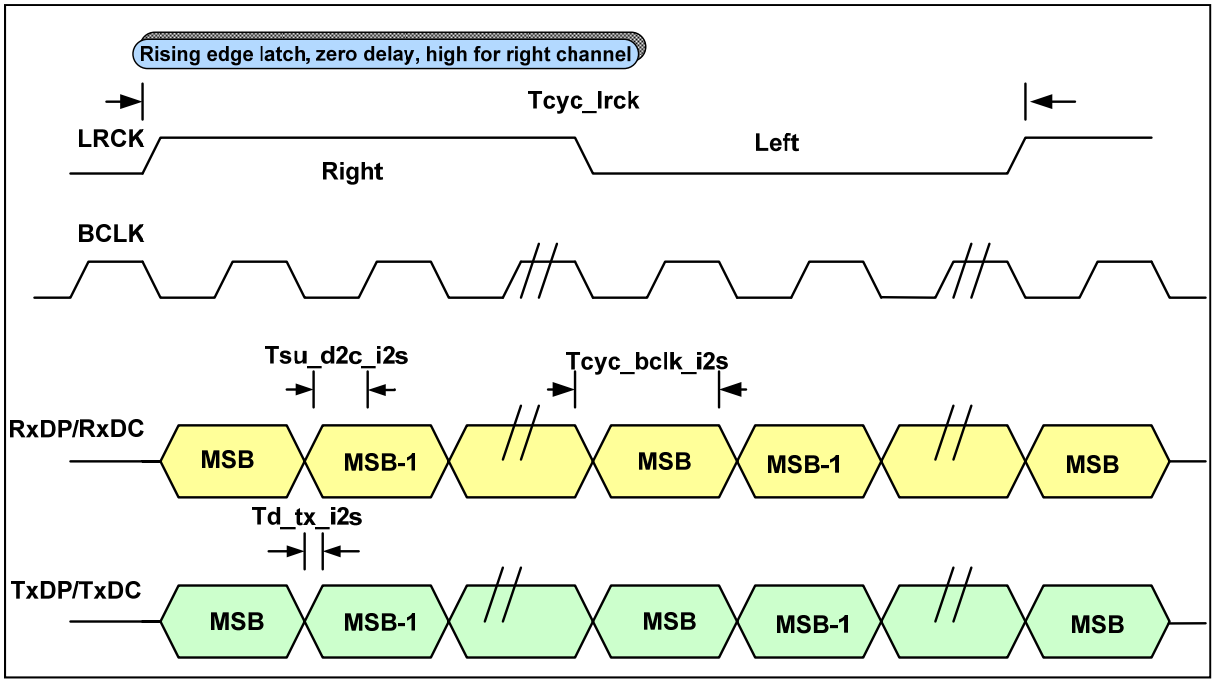

Figure 16: IIS Rising Edge Latch, LRCK High for Right Channel, 0 Cycle Delay

2.6 ADC (Pins 39, 40, 41, 42, 43, 44)

FM1288 includes three analog-to-digital converters (ADC). To the system designers these 16-bit precision Sigma Delta converters support data sampling rate at 16KHz, and all the analog inputs are differential. The MIC0_IN ADC and MIC1_IN ADC are for the primary microphone and secondary microphone inputs respectively, and the LINE_IN ADC is for line level input.

The maximum allowed differential input voltage to each of the microphone ADC's is 2.83 Vpp (at PGA gain selection value 0). The analogue gain stage has a Programmable Gain Adjustment (PGA) selection value of 0 to 15 with the associated ADC gain settings summarized in Table 6. For detailed information regarding how to set the PGA levels for each of the ADC blocks, please refer to the "*FM1288 User Configuration Manual*."

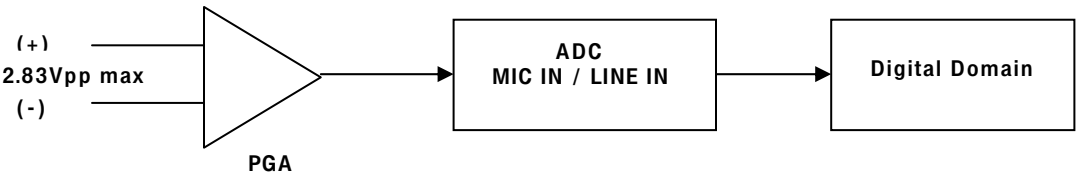

Figure 17: Analog-to-Digital Converter Block Diagram

Table 6: ADC MIC_IN and LINE_IN PGA Controls

Gain Selection Value	PGA Gain Setting (dB)	Differential full scale Input Signal (Vpp)	Bypass Communication Gain (dB)
[0 0 0 0]	0	2.83	-2
[0 0 0 1]	1	2.52	-1
[0 0 1 0]	2	2.25	0
[0 0 1 1]	4	1.78	2
[0 1 0 0]	6	1.42	4
[0 1 0 1]	8	1.13	6
[0 1 1 0]	10	0.89	8
[0 1 1 1]	12	0.71	10
[1 0 0 0]	14	0.56	12
[1 0 0 1]	16	0.45	14
[1 0 1 0]	18	0.36	16
[1 0 1 1]	20	0.28	18
[1 1 0 0]	22	0.22	20
[1 1 0 1]	24	0.18	22
[1 1 1 0]	26	0.14	24
[1 1 1 1]	28	0.11	26

2.7 DAC (Pins 1, 3, 47, 48)

FM1288 includes two digital-to-analog converters (DAC). To the system designer these 16-bit precison Sigma Delta converters support 16KHz data sampling rate, and all the analog outputs are differential. The LINE_OUT DAC is for the processed echo and noise free voice signal going towards the far end, and the SPK_OUT is for the arriving far-end voice signal going towards the near end loudspeaker.

The maximum differential output voltage from each of the DAC's is 3.0Vpp (at PGA gain selection value 0). The analogue gain stage has a Programmable Gain Adjustment (PGA) selection value of 0 to 15 with the associated DAC gain settings summarized in Table 7. For detailed information regarding how to set the analogue PGA levels for each of the DAC blocks, please refer to the "*FM1288 User Configuration Manual*."

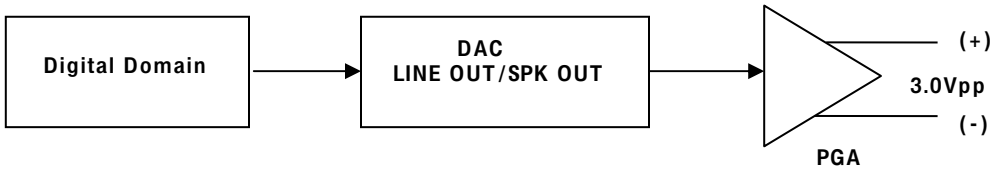

Figure 18: Digital-to-Analog Converter Block Diagram

Table 7: DAC LINE_OUT and SPK_OUT PGA Controls

Gain Selection Value	PGA Gain Setting (dB)	Differential full scale Output Signal (Vpp)	Bypass Communication Gain (dB)
[0 0 0 0]	+2	3.00	0
[0 0 0 1]	0	2.40	-2
[0 0 1 0]	-2	1.91	-4
[0 0 1 1]	-4	1.51	-6
[0 1 0 0]	-6	1.20	-8
[0 1 0 1]	-8	0.95	-10
[0 1 1 0]	-10	0.76	-12
[0 1 1 1]	-12	0.60	-14
[1 0 0 0]	-14	0.48	-16
[1 0 0 1]	-16	0.38	-18
[1 0 1 0]	-18	0.30	-20
[1 0 1 1]	-20	0.24	-22
[1 1 0 0]	-22	0.19	-24
[1 1 0 1]	-24	0.15	-26
[1 1 1 0]	-26	0.12	-28
[1 1 1 1]	-28	0.09	-30

2.8 Modes of Operation

Depending on the condition, the FM1288 operates in one of the following 4 modes.

Hardware Reset Mode 硬件复位 拉低10MS有效 复位

Whenever power is applied or RST_ is low, the processor enters into this mode and remains in it until 10ms (10 milliseconds) after the RST_ pin being pulled high. During that 10ms, the processor waits for the external clock and the internal PLL to stablize. 10ms after the RST_ pin is pulled high, the processor transitions into the Software Reset Mode.

Note that the RST_ pin should not be used as a power-down function, but instead as a power-down wake-up function.

Software Reset Mode

In this mode, the FM-1288 either takes command parameters from an external host through the IIC-compatible SHI, or it actively reads the configuration parameters from an external EEPROM. These commands and parameters are to establish the various operation configuration of the FM-1288. The processor has entered into the Operational Mode when the parameter value at location DM(0x22FB) has been set to 0, which is done by the FM-1288 on-chip DSP processor upon the completion of all parameter configuration.

Operational Mode 运行模式

Entering this mode, the on-chip software sets up the hardware internal registers according to the parameter configuration and then performs a nominal 90 ms software initialization procedure. Afterwards, the FM1288 starts the data transfer from its input, performs processing, and delivers outputs through the analog/digital interfaces. While in the operational mode, whenever PWD_ pin is being asserted low, the processor transitions and enters into the Power Down Mode.

Power Down Mode

While in the Power Down mode, asserting the RST_ pin to high or the PWD_ pin to high will cause the FM-1288 to exit Power Down.

In the Power Down Mode, the on-chip power is switched off to reduce leakage. Also, after PWD_ pin is asserted high, external clock will be turned off after Tsu_pp2clkoff (section 4.5) to reduce leakage current.

In the Power Down Mode, if PWD_ is set to high, then the processor can either return into the Software Reset Mode or into the Operational Mode, depending on the setting of the pwrdwn_set parameter at internal location DM(0x22F1). If it enters into Operational Mode, no parameter setting is required since all the internal register values have been maintained. In order for the processor to exit the Power Down Mode correctly, the processor needs a 13ms internal state-management period before it can accept any new set of parameter download, or re-entering into the Operational Mode. Also please refer to the "FM-1288 Configuration Manual" for related details.

The following figure is a state transition diagram which shows the FM1288 chip transition between these 4 states.

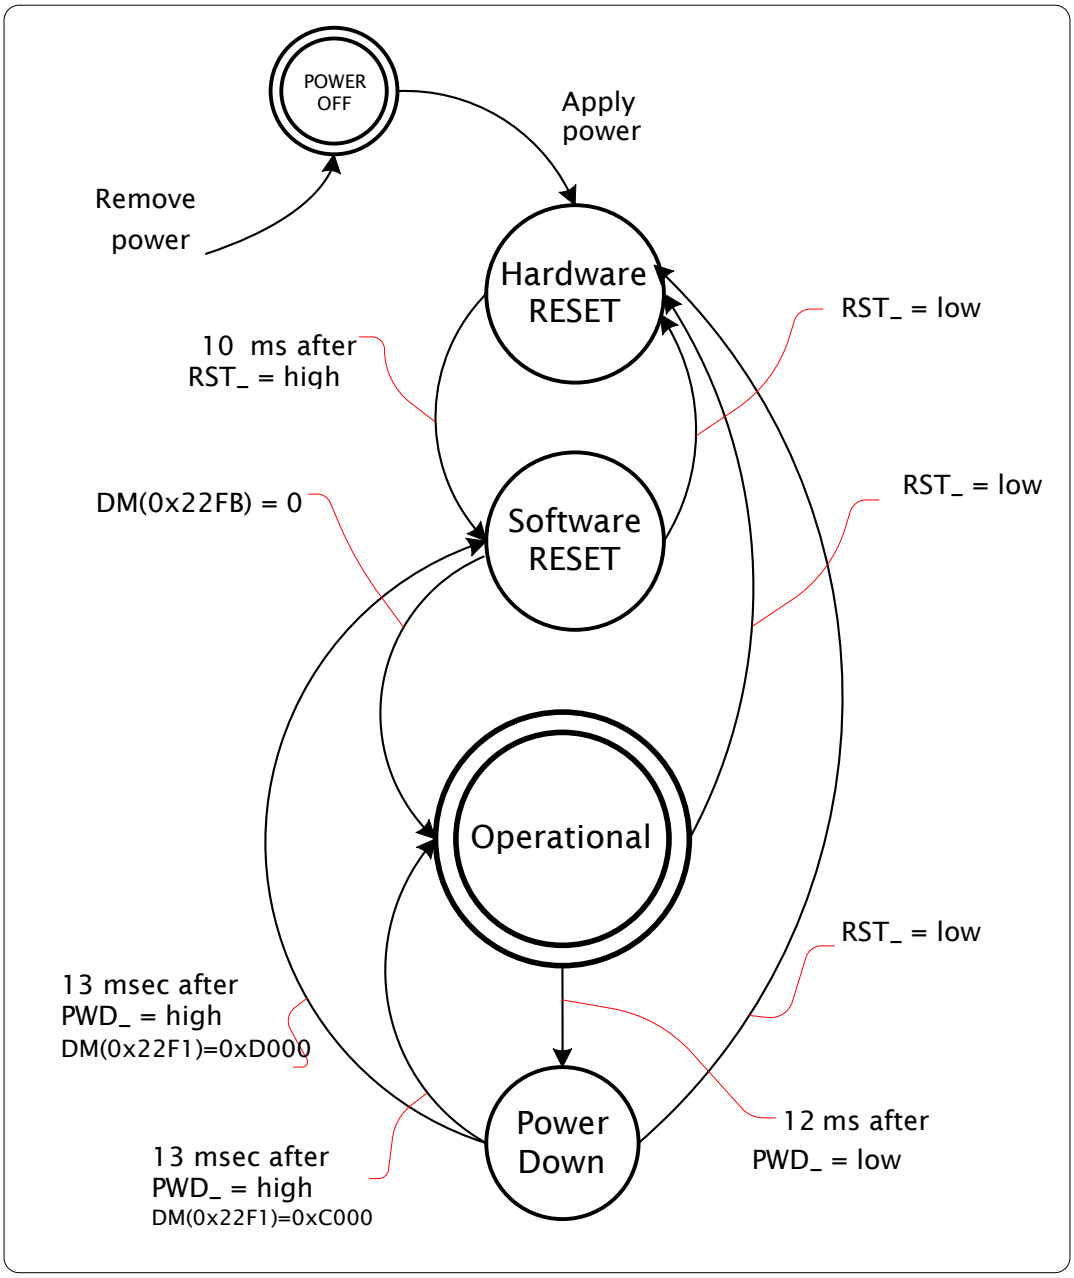

Figure 19: State Transition Diagram

2.9 Power-Up Stap Option (Pin 17)

Strap options are used to determine the desired operation of the chip. All the strap options mentioned below must be pulled high or low using a 100kΩ weak load. If pin left floating, the status will be unknown.

In the software reset mode, the chip samples different strap options, if any, to determine desired operation to decide on system configuration.

Table 8: Strap Option Pins to Select Operation Mode

Mode	Pin 17 (GPIO)
reserved	currently usage is undefined, and no strap option available

2.10 Mute Control and Indication (Pins 20, 21) 静音

Mute control on the downlink voice signal to loudspeaker output can only be controlled via commands issued by UART or SHI. Pin 20 is an output indicator which would be asserted high when loudspeaker output has been switched into muted state. The user can, for example, tied this pin signal to provide an LED indicator. 静音时输出为高 PIN20

Mute control on the uplink voice signal to send out can also be controlled via commands issued by UART or SHI. Alternatively, mute contrl on the uplink can be controlled directly by the Pin 21 input signal.

2.11 Speaker Volume Control (Pins 25, 26) 音量

The speaker volume of FM1288 can be controlled by the Vol- (pin 25) and Vol+ (pin 26) pins. These input signals are level triggered and active high. The FM1288 will increase or decrease the volume by one step once it senses a level high signal on either pin (The minimum length of active high state is 150ms. The minimum length of de-active low state is 100ms). If the level stays high, every one second, it will continue to increase or decrease the volume until it hits the cap. The maximum volume is programmable (see "*FM1288 User Configuration Manual*").

If the pins are not used, they must be pulled low using a weak 100kΩ resistor.

2.11 System Clock Input and Generation (Pins 27, 28)

The FM1288 accepts a wide range of external clock sources, this external clock can be from 3MHz to 32 MHz in 1 MHz increments, or from 4.096MHz to 32.768MHz in 2.048MHz increments. Other popular system clock frequencies – 3.6864, 7.68, 14.4, 15.36, 16.8, 19.2, 19.68, 38.4, and 48 MHz are also supported.

However, if UART interface is to be used immediately after power up, then

- the clock/crystal frequency supplied to the FM-1288 must be an integer multiple of 18.432 MHz in order for the UART baud rate to communicate to the commonly used baud rate which would be an integer multiple of 9600.

Clock/Crystal Input	UART baud rate after boot up
4.608 MHz	2400 baud
9.216 MHz	4800 baud
18.432 MHz	9600 baud
36.864 MHz	19200 baud

A crystal applied to pins 27(XTAL_IN) and 28(XTAL_OUT) will also work. For more information on crystal specifications, please refer to Appendix I.

All FM-1288 internal digital clocks are generated using internal phase locked loops, which are locked to the frequency of the clock source.

2.12 Bypass Mode (Pin 14)

The FM1288 supports a Bypass Communication mode by asserting TEST2 pin to high.

In this Bypass Communication mode, the microphone input signal of MIC0_IN will be routed to LINE_OUT and input signal of LINE_IN to SPK_OUT directly. It bypasses the internal ADC, DSP, and DAC. The PGA gain setting and internal pre-amplifiers are still working with the input and output signal.

The mode can be toggled on and off during runtime by the hardware TEST2 pin.

3. Accessing FM1288 Through EEPROM, UART, SHI

INTERFACE	Power Up/Reset system parameter initialization	Runtime Control and parameter modification
EEPROM	Yes	No
UART	Yes	Yes
SHI	Yes	Yes

Figure 20: Accessing FM1288

Should the initialization of FM1288 need be done through UART/SHI, then the system needs to wait a nominal 12ms after initial power up before commencing the initialization.

During runtime, users can read or write to registers in FM1288 through one of the two interfaces: UART, or SHI. To access the registers in FM1288, designers must use a pre-defined command entry pattern. The UART or SHI interfaces are used if applications require control through an external host.

These interfaces can also be used to perform power up and reset system parameter initialization when they are connected to a host processor. As an option, the content in a supported IIC EEPROM can be automatically loaded into the registers after reset.

Command Byte	Address Byte(s)	Data Byte(s)

Figure 21: Command Entry Data Pattern

The table below shows the available command entries and the associated number of bytes required for each entry.

Table 9: Command Entries

Command Entry	Available for Interface	Command Byte	No. of Address Bytes	No. of Data Bytes	Total No. of Bytes
Mem_write	UART, SHI, EEPROM	0x3B	2	2	5
Mem_read	UART, SHI	0x37	2	0	3
Short_reg_write	UART, SHI	68	1	1	3
Long_reg_write	UART, SHI	6A	1	2	4
reg_read	UART, SHI	60	1	0	2

3.1 Accessing Through EEPROM

Please see Section 2.2(Serial EEPROM Interface) on the rules for EEPROM data organization.

Based on details provided in that section, an example of organizing the EEPROM would be:

Operations	EEPROM content
Starting dummy value for EEPROM	Dummy value at byte 0
Initialize the Patch RAM	EEPROM command, write into 0x3FCB, value = 0x0010, to start Patch RAM initialization EEPROM commands to write into Patch RAM area EEPROM command, write into 0x3FCB, value = 0x0000, to start Patch RAM initialization
Initialize the Control Registers	EEPROM commands to write into DM space and initialize memory mapped registers
Initialize other Parameters	EEPROM commands to write into DM space and initialize memory locations
Terminate EEPROM transfer (Last EEPROM command)	3B 22 FB 00 00 00
Last byte for EEPROM	0xF0

3.2 Examples of Accessing Through EEPROM

The table below provides a few examples of updating parameters in FM1288 through the EEPROM interface. For more details, please refer to the *FM1288 User Configuration Manual*.

operation	EEPROM command example
Set up speaker volume	3B 1E 3E 02 00 00
Set up microphone PGA	3B 1E 34 00 33 00
Terminate EEPROM transfer	3B 22 FB 00 00 00

Table 10: Examples of Accessing through EEPROM

3.3 Accessing Through UART

UART serves as an interface between the FM1288 and a host PC or controller that it can send commands to program the chip's parameters. UART is an asynchronous bi-directional serial interface and the protocol is determined by a start bit, number of character bits, a parity bit and a stop bit.

There are 5 different types of command entries for the FM1288 UART interface. Two synchronize bytes "FC" and "F3" are required before each command entry. Since the speed of the UART interface is much slower than the internal clock of FM1288, it is safe to continue a "write" transfer without checking the status of the data transfer.

There are two access modes: mem_read and reg_read. Mem_read is used to read the memory contents and save the contents in registers 25 and 26 of FM1288. Reg_read then transfers the register contents to the UART interface output pin TXD. The micro-controller host will then receive the register contents by monitoring the TXD pin. No partial command entry is allowed. A partial command entry may cause system mal-function.

3.4 Examples of Accessing Through UART

The table below provides a few examples of updating parameters in FM1288 through the UART interface. For more details, please refer to the "*FM1288 User Configuration Manual*."

Table 11: Examples of Accessing through UART

mem_write transfer	
FC F3 3B 1E 34 00 55	-- write memory 1E34 with 0055
mem_read	
FC F3 37 1E 34	-- read memory contents of 1E34
long_reg_write	
FC F3 6A 2A 00 30	-- software reset of the voice processor
reg_read	
FC F3 60 25	-- read register 25
read out contents of memory location 1E34	
FC F3 37 1E 34	
FC F3 60 26	-- MSB of 1E34 will transmit through TXD
FC F3 60 25	-- LSB of 1E34 will transmit through TXD

3.5 Accessing Through SHI

Examples of Accessing Through SHI

The table below provides a few examples of updating parameters in FM1288 through the SHI interface.

For more details, please refer to the "*FM1288 User Configuration Manual*".

Table 12: SHI Command Symbols

Command Symbol	Definition	Command Symbol	Definition
W	SHI Write Control (Add as SHI ID Bit[0])	*AH*	Address High Byte
R	SHI Read Control (Add as SHI ID Bit[0])	*AL*	Address Low Byte
FC	Command Sync Byte-1	*DH*	Data High Byte Write
F3	Command Sync Byte-2	*DL*	Data Low Byte Write
3B	Memory Write Command Byte	*XX*	Dummy Byte used in Burst Write between W and FC
37	Memory Read Command Byte	RH	Read out Data High Byte
60	Byte Read Command	P	SHI Stop Condition

Note: Command symbols in bold are reserved and must be followed in exact order.

Table 13: Examples of Accessing through SHI

single memory write **S C0 W FC F3 3B** *AH AL DH DL* **P** Example: S C0 W FC F3 3B 1E 41 00 01 P -- writes 0x0001 to memory address 0x1E41
burst mode memory write **S C0 W** XX XX **FC F3 3B** *AH AL DH DL* …… **FC F3 3B** *AH AL DH DL* **P** Example: S C0 W 00 1C FC F3 3B 1E 30 00 02 FC F3 3B 1E 41 00 01 FC F3 3B 1E 51 D0 00 P -- writes 0x0002 to DM 0x1E30, 0x0001 to DM 0x1E41 and 0xD000 to DM 0x1E51 0x00 and 0x1C between **W** and **FC** are dummy bytes, and ignored.
fast memory read **S C0 W FC F3 37** *AH AL* **P** **S C0** R RH RL **P** Examples: S C0 W FC F3 37 1E 41 P -- read memory address 0x1E41 S C0 R 00 01 P -- get value 0x0001.

4. Electrical and Timing Specification

Note that all data in this section are measured at room temperture and in normal operating condition.

4.1 Absolute Maximum Ratings

Table 14: Absolute Maximum Ratings for FM1288-GA1-410

Parameter	Symbol	Condition	Max Rating	Unit
Power Supply Voltage	VDD_D	3.3	3.465	V
Power Supply Voltage	VDD_A	3.3	3.465	V
Storage Temperature	T_{stg}	-	-40 to 150	^{0}C
Junction Temperature	T_J		125	^{0}C
ESD(Human body model)	VESDHBM		2k	V
ESD(Machine model)	VESDMM		200	V

Table 15: Absolute Maximum Ratings for FM1288-GE-410

Parameter	Symbol	Condition	Max Rating	Unit
Power Supply Voltage	VDD_D	3.3	3.465	V
Power Supply Voltage	VDD_A	3.3	3.465	V
Storage Temperature	T_{stg}	-	-40 to 150	^{0}C
Junction Temperature	T_J		125	^{0}C
ESD(Human body model)	VESDHBM		2k	V
ESD(Machine model)	VESDMM		200	V

Table 16: Absolute Maximum Ratings for FM1288-GA1-400B and FM1288-GE-400B

Parameter	Symbol	Condition	Max Rating	Unit
Power Supply Voltage	VDD_D	3.3	3.63	V
Power Supply Voltage	VDD_A	3.3	3.63	V
Storage Temperature	T_{stg}	-	-40 to 150	^{0}C
Junction Temperature	T_J		125	^{0}C
ESD(Human body model)	VESDHBM		2k	V
ESD(Machine model)	VESDMM		200	V

4.2 Recommended Operating Conditions

Table 17: Recommended Operating Conditions for FM1288-GA1-410

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Analog Power Supply Voltage(1)	VDD_A	Supplied externally	3.135	3.3	3.465	V
Digital I/O Supply Voltage	VDD_D	Supplied externally	3.135	3.3	3.465	V
Operating Temperature	T_{amb}	Automotive Grade	-40	25	85	°C

Notes: The power ripple (AC element) has to be limited within 100mV

Table 18: Recommended Operating Conditions for FM1288-GE-410

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Analog Power Supply Voltage(1)	VDD_A	Supplied externally	3.135	3.3	3.465	V
Digital I/O Supply Voltage	VDD_D	Supplied externally	1.71 or 3.135, respectively	1.8 or 3.3	1.89 or 3.465, respectively	V
Operating Temperature	T_{amb}	Extended Grade	-20	25	70	°C

Notes: The power ripple (AC element) has to be limited within 100mV

Table 19: Recommended Operating Conditions for FM1288-GA1-400B and FM1288-GE-400B

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Analog Power Supply Voltage(1)	VDD_A	Supplied externally	2.97	3.3	3.63	V
Digital I/O Supply Voltage	VDD_D	Supplied externally	1.62	1.8/3.3	3.63	V
Operating Temperature	T_{amb}	Automotive Grade FM1288-GA1-400B	-40	25	85	°C
Operating Temperature	T_{amb}	Extended Grade FM1288-GE-410	-20	25	70	°C

Notes: The power ripple (AC element) has to be limited within 100mV

4.3 DC Characteristics

Table 20: DC Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Active Power Supply Current	I_{VDD_D}	Internal LDO enabled		15	25	mA
	I_{VDD_A}	Internal LDO enabled		5	15	mA
Standby Current	I_{VDD_D}	Internal LDO enabled		10	100	µA
	I_{VDD_A}	Internal LDO enabled		2	20	µA
Input Leakage Current	I_{IH}	VDD_D = 1.8V	-1	-	1	µA
	I_{IL}	VDD_D = 0V	-1	-	1	µA
Digital Output Voltage High	V_{OH}	I_{OH} = 1mA	0.9*VDD_D	-	-	V
Digital Output Voltage Low	V_{OL}	I_{OL} = = 1mA	-	-	0.1*VDD_D	V
Digital Input Voltage High	V_{IH}	VDD_D = 1.8V	0.7*VDD_D	-	-	
Digital Input Voltage Low	V_{IL}		-	-	0.45	V
Digital Output Leakage Current	IO				10	µA
Input Capacitance	CIN			2		pF
Power Dissipation	P_{PDN}	T_{amb}=25°C, LDO enabled		25	250	µW
	P_{SYS}			43.5	95	mW

Notes:
VDDC=1.2V, VDD_D=1.8V, VDD_A=3.3V, 25°C, SR=16KHz FM-1288 in normal operating condition, unless otherwise noted

4.4 AC Characteristics

Table 21: AC Characteristics

Parameter	Condition	Min	Typ	Max	Unit
Mic0/Mic1 Input Range (differential)	Mic_In @ 0dB PGA gain		2.83		Vpp
Line_in Input Range (differential)	Line_In @ 0dB PGA gain		2.83		Vpp
Speaker Out Full Scale Output (differential)	SPK_Out @ 0dB PGA gain		2.4		Vpp
Line_out Full Scale Output (differential)	Line_Out @ 0dB PGA gain		2.4		Vpp
SNR for Speaker out (A-weghting)	SPK_OUT @ 0dB PGA Signal 2.4Vpp		90		dB
SNR for Line_out (A-weighting)	LINE_OUT@ 0dB PGA Signal 2.4Vpp		90		dB
THD+Noise at -1 dBFS for Mic0/Mic1 ADC	1KHz sine wave test		-65		dB
THD+Noise at -1 dBFS for Line_in ADC	1KHz sine wave test		-65		dB
THD+Noise at 0dBFS for Line_out and Spk_out DAC	1KHz since wave test		-65		dB
Noise Floor for Mic0/Mic1 ADC	Input = 0Vpp Noise Bandwidth is 22-8KHz A-weighted		-86		dBFS
Noise Floor for Line_in			-86		dBFS
Noise Floor for Line_out and Spk_out DAC	Input=0dBFS Noise Bandwidth is 22-22KHz A-weighted		-91.5		dBV
Power Supply Rejection (PSR) for Mic0/Mic1			-70		dBFS
Power Supply Rejection (PSR) for Line_In			-70		dBFS
CODEC Sampling Frequency (to user)			16		kHz
Input Impedance for Mic0/Mic1 In	PGA at largest setting=[0111]		44.17		kΩ
Input Impedence for Line in	PGA at lowest setting=[0000]		110		kΩ
DAC Output Driving Capabilityfor Line_out / Spk_out		1			kΩ
Microphone Bias Voltage			0.9* VDD_A		V
Microphone Bias Load Current			3		mA
Microphone Bias Output Noise	22 – 22KHz A-weighted		20		uVrms
Microphone Bias PSRR	217Hz, 100mVpp @VDD_A		50		dB

Notes:
VDDC=1.2V, VDD_D=1.8V, VDD_A=3.3V, 25°C, SR=16KHz FM-1288 in normal operating condition, unless otherwise noted

Table 22: ADC PGA (MIC0_IN, MIC1_IN, LINE_IN)

Parameter	Condition	Min	Typ	Max	Unit
Gain Range	-	0	-	28	dB
Step Size	Range: 0dB to 2dB	-	1	-	dB
Step Size	Range: 2dB to 28dB	-	2	-	dB
Step Size Error	Range: 0dB to 2dB	-0.5	-	0.5	dB
Step Size Error	Range: 2dB to 28dB	-1	-	1	dB

Notes:

1. All input pins become high impedance in the power down mode.
2. Refer to the FM1288 Tuning Guide for details on setting the ADC PGA gain.

Table 23: DAC PGA (LINE_OUT, SPK_OUT)

Parameter	Condition	Min	Typ	Max	Unit
Gain Range	-	-28	-	2	dB
Step Size	Range: -28dB to +2dB	-	2	-	dB
Step Size Error	Range: -28dB to +2dB	-0.5	-	0.5	dB

4.5 Timing Characteristics

Table 24: Timing Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
Rise/fall time of input pins except for SCL/SDA		-	-	20	ns
Setup time from Power to master clock	Tsu_vdd2clk		1		ms
VDD_D to VDD_A setup time	Tsu_vdd2vdda	1 (4)			µs
Reset active low time	Trst	120	-	-	µs
Setup time from master clock to rising edge of RST_	Tsu_clk2rst	80	-	-	µs
Reset to parameters programming start setup time	Tsu_rst2pp	2(1)	10	-	ms
Parameters programming to Master clock off hold time	Tsu_pp2clkoff	12	-	-	ms
Master clock frequency	Tcyc	30.5	-	333	ns
Master clock high width	Thigh	45%	-	55%	Tcyc
Master clock low width	Tlow	45%	-	55%	Tcyc
PCM Frame Frequency	Tcyc_frame	8	16	-	kHz
PCM BCLK Frequency	Tcyc_bclk_chi	32 * FSC/LRCK		4096	kHz
PCM RX setup time	Tsu_d2c_chi	20	-	-	ns
PCM TX delay	Td_tx_chi	-	-	20	ns
IIS LRCK Frequency (2)	Tcyc_lrck	-	16	-	kHz
IIS BCLK Frequency(2)	Tcyc_bclk_IIS	32 * FSC/LRCK		4096	kHz
IIS RX setup time to clock edge(2)	Tsu_d2c_IIS	20	-	-	ns
IIS TX delay time(2)	Td_tx-IIS	-	-	20	ns
SCL Frequency	Tf_scl	-	100	400(3)	kHz
Hold time Start condition	Th_sta	-	4	-	µs
SDA Setup time	Tsu_dat	250	-	-	ns
SDA Hold time	Th_dat	0	-	-	
Low period of SCL	Tlow_scl	4.7	-	-	µs
High period of SCL	Thigh_scl	4.0	-	-	µs
Setup time for START	Tsu_sta	4.7	-	-	µs
Rise time of both SDA and SCL	Tr	-	-	1000(5)	ns
Fall time of both SDA and SCL	Tf	-	-	300	ns
Setup time for STOP	Tsu_sto	4	-	-	µs
Bµs free time between STOP and Start	Tbuf	4.7	-	-	µs

Notes:

(1) Minimum timing is 2ms, including HW internal reset and SW reset, inside the DSP processor based on the MCLK being 24.576MHz. Need to raise the timing if MCLK is less than 24.576MHz. 10ms is nominal timing sufficient for all cases.

(2) Reference Figures 10 to 18 for PCM and IIS timing parameters

(3) Master mode supports up to 400kHz, Slave mode has no limitation and depends on the host system's capability.

(4) Please note that 3.3V can be used as the same power source for VDD_D and VDD_A, and the internal design of FM-1288 actually renders Tsu_vdd2vdda timing (even a nominal 1 µs is stated) not critical. User's design can simply power up VDD_D and VDD_A at the same time.

(5) Rise Time for both SDA and SCL is 1000 ns max in Standard Mode(100KHz), and 300 ns max in Fast Mode(400kHz)

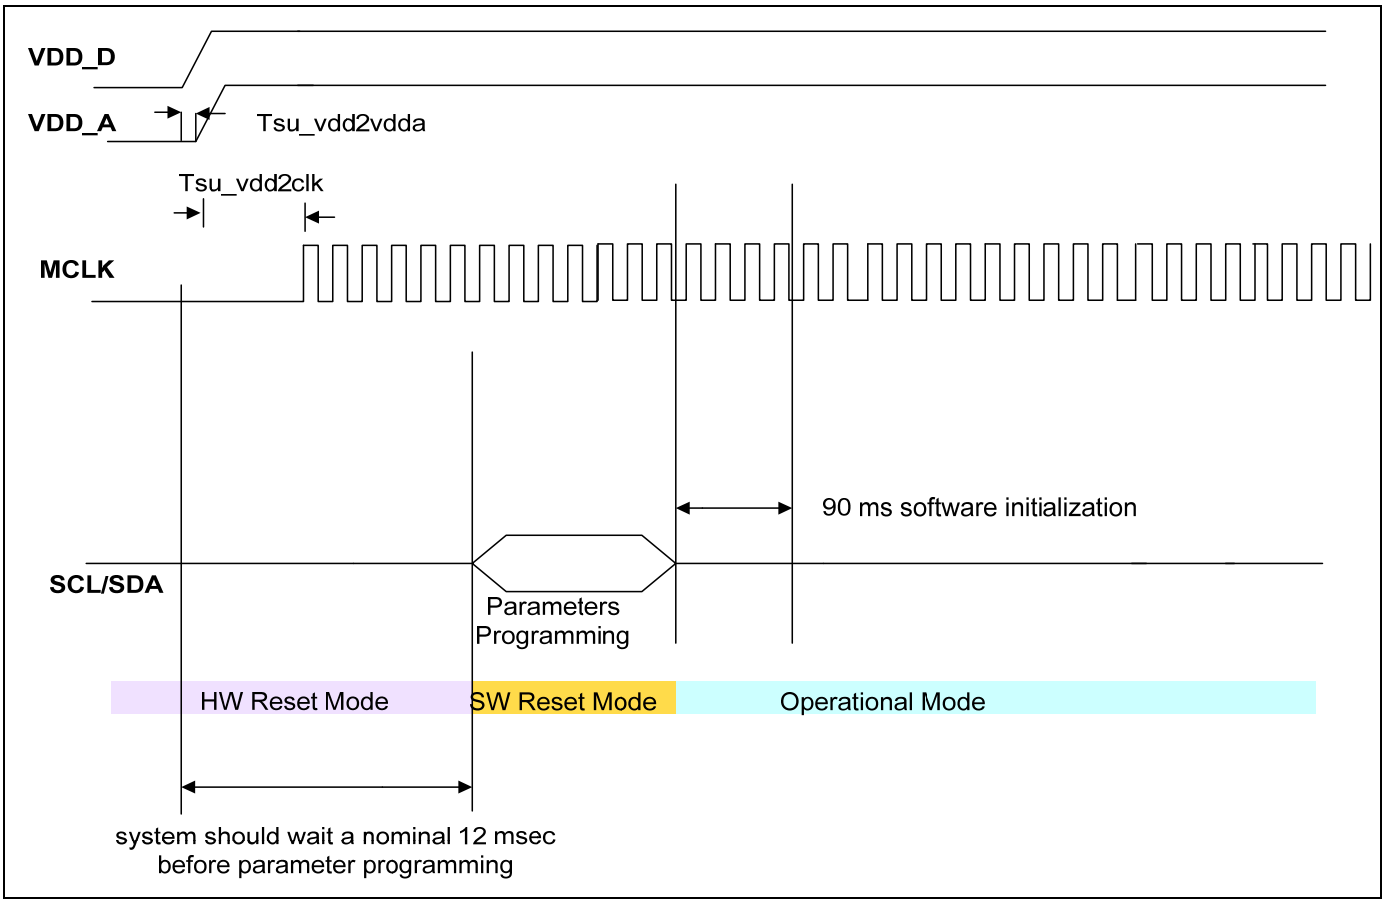

Figure 22: Timing Chart: Normal Power-Up Sequence

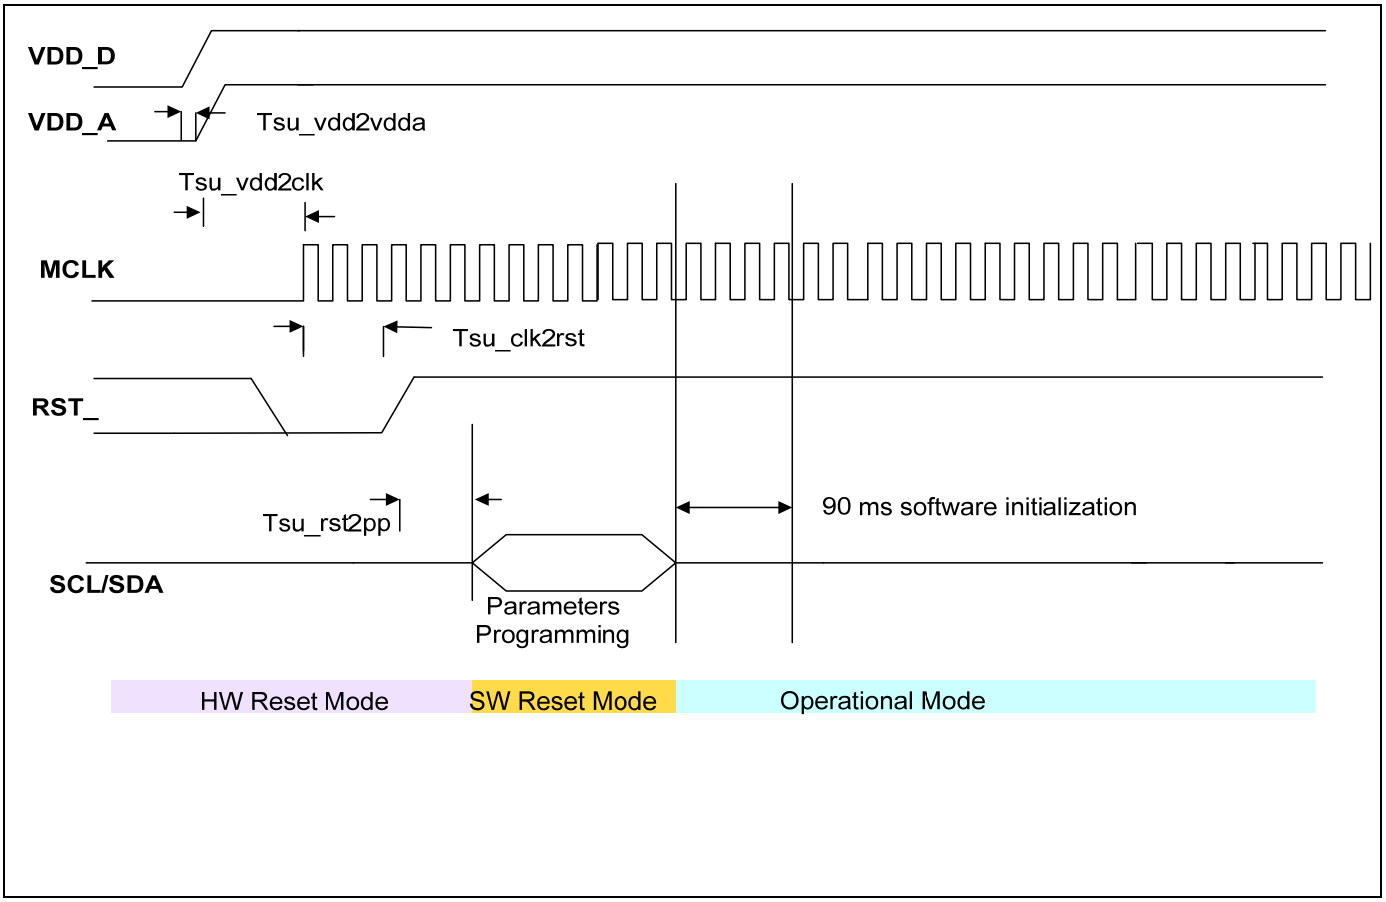

Figure 23: Timing Chart: Reset while in Hardware Reset

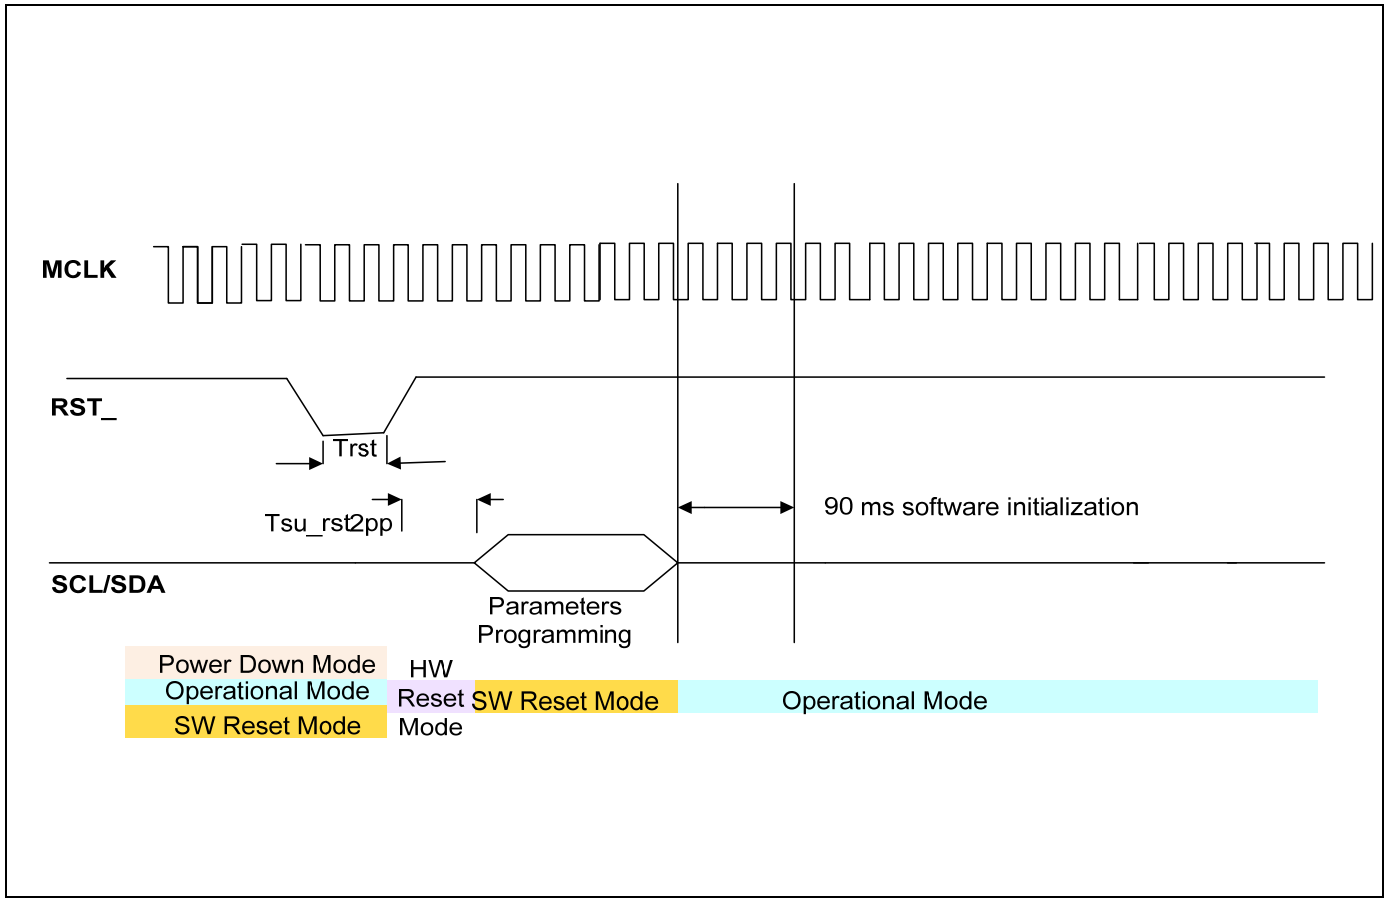

Figure 24: Timing Chart: RESET while in Software Reset, Operational, and Power Down

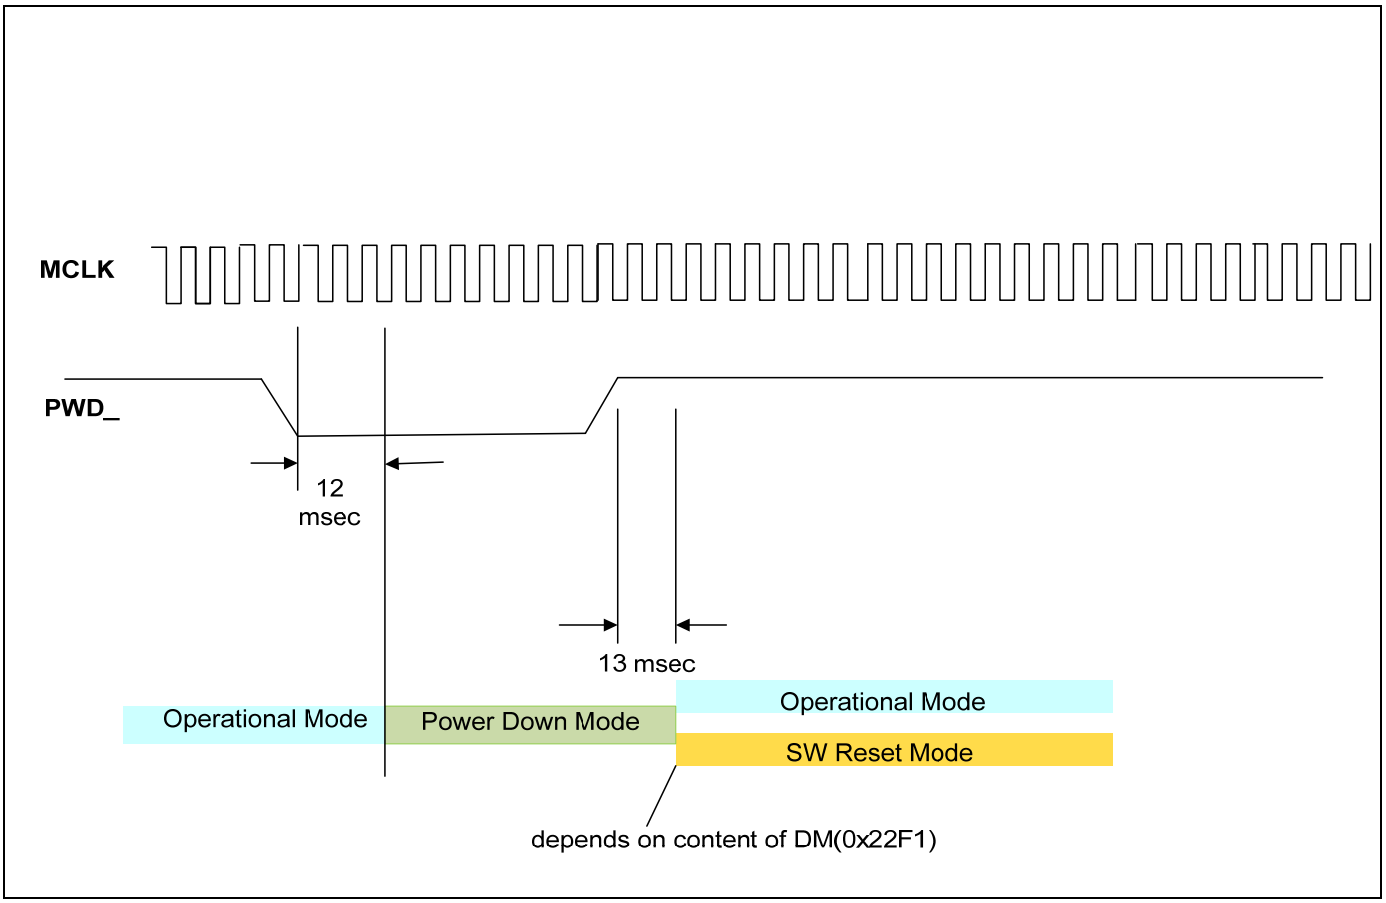

Figure 25: Timing Chart: PWD_ and state transition

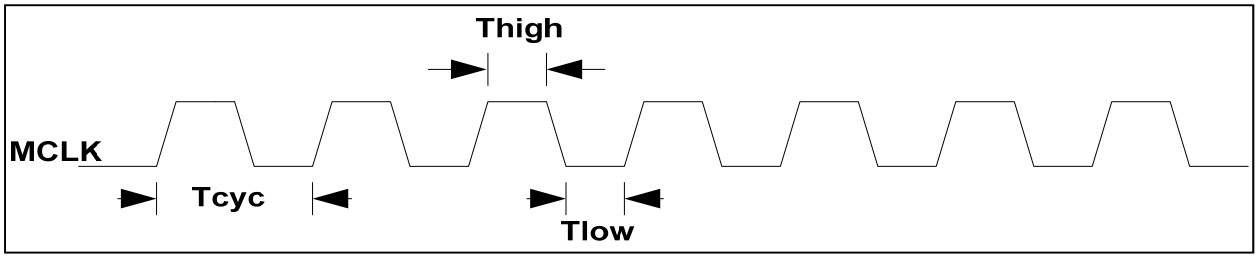

Figure 26: Master Clock (MCLK) Timing

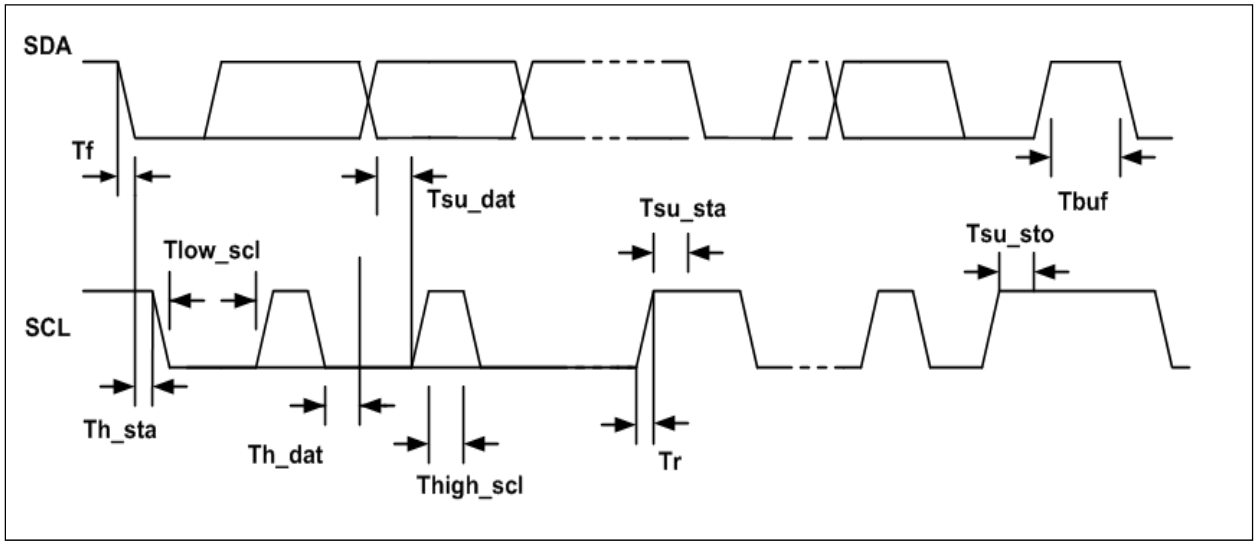

Figure 27: SHI Timing

5. Voice Processor Performance Details

Table 25: Voice Processor Performance Details

Parameter	Condition	Min	Typ	Max	Unit
Acoustic Echo Cancellation	Total ERLE	-	60	-	dB
Acoustic Echo Cancellation Double Talk Performance	Nominal, characterized by VDA Tests		Type 2A	Type 1	
Acoustic Echo Tail Length		-	50	-	ms
Echo Cancellation Convergence	Nominal	-	< 60	-	ms
Stationary Noise Suppression	Nominal	6	12	30	dB
Noise Suppresion Convergence	Nominal	1.6	2.4	3.2	s
Mic_in to Line_out Latency	Algorithm running	-	47	-	ms
Line_in to Speaker_out latency	Algorithm running		46		ms

6. Pin Definition Details

Table 26: Pin Description

Pin	Pin Name	Type	Electrical	Pin Description
1	LINE_OUT_N	Out		Analog Line Out (-)
2	NC	NC	NC	No connect
3	SPK_OUT_N	Out		Analog Speaker output (-) to external power amplifier
4	NC	NC	NC	No connect
5	NC	NC	NC	No connect
6	NC	NC	NC	No connect
7	VSS_D	GND	GND	Digital ground – to PCB Ground Plane
8	BCLK	In/Out	1.8-3.3v I/O tolerance, 2mA	PCM/IIS: bit clock
9	FSYNC	In/Out	In	PCM/IIS: frame sync/word select
10	TX	In/Out	1.8-3.3v I/O tolerance, 6mA	PCM/IIS : data out
11	RX	In	1.8-3.3v I/O tolerance	PCM/IIS : data in
12	UART_RX	In	1.8-3.3v I/O tolerance	UART data in (RX).
13	UART_TX	In/Out	1.8-3.3v I/O tolerance, 2mA	UART data out (TX).
14	TEST2	In	1.8-3.3v I/O tolerance, 2mA	When asserted high, Voice Processor is in bypass mode, and by default analog line in is bypassed to analog speaker out, while analog mic0 in is bypassed to analog line out.(1) Other bypass modes could be further configured during or after power-up initialization.
15	SDA_EE	In/Out	1.8-3.3v I/O tolerance, 2mA	IIC / EEPROM data.
16	SCL _EE	In/Out	1.8-3.3v I/O tolerance, 2mA	IIC / EEPROM clock.
17	GPIO	In/Out	1.8-3.3v I/O tolerance, 2mA	Currently no defined usage.
18	VSS_D	GND	GND	Digital ground. Connect to PCB Ground Plane.
19	VDD_D	POWER	1.8V, 3.3V voltage supply	For FM1288-GE-400B, FM1288-GE-410, and FM1288-GA1-400B From 1.8V/3.3V Power Supply Voltage(2)
			3.3V voltage supply	For FM-1288-GA1-410 From 1.8V/3.3V Power Supply Voltage(2)
20	MUTE_IN	In/Out	1.8-3.3v I/O tolerance, 2mA	Mute SEND_OUT control input pin.
21	MUTE_OUT	In/Out	1.8-3.3v I/O tolerance, 2mA	Muted Loudspeaker Indicator output pin.
22	VAD_LED	In/Out	1.8-3.3v I/O tolerance, 2mA	LED indicator output pin. LED usage to be defined.
23	SCL	In/Out	1.8-3.3v I/O tolerance, 2mA	SHI interface : Serial clock if IIC selected. If not used, pull low using weak 100kΩ resistor.
24	SDA	In/Out	1.8-3.3v I/O tolerance, 2mA	SHI interface : Serial data if IIC selected. If not used, pull low using weak 100kΩ resistor.

25	Vol-	In/Out	1.8-3.3v I/O tolerance, 2mA	Volume Down control input pin. Active high. If not used, pull low using weak 100kΩ resistor.
26	Vol+	In/Out	1.8-3.3v I/O tolerance, 2mA	Volume Up control input pin. Active high. If not used, pull low using weak 100kΩ resistor.
27	XTAL_IN/ MCLK_IN	In		Crystal Oscillator input, or clock from MCU if clock is used.
28	XTAL_OUT	Out		Crystal Oscillator, or ground this pin if clock is used on XTAL_IN.
29	VSS_D	GND	0V	Digital Ground - to PCB Ground Plane.
30	PWD_	In	1.8-3.3v I/O tolerance	Powerdown pin, active low. To/from MCU or power down device.
31	RST_	In	1.8-3.3v I/O tolerance	Reset pin, active low. To/from MCU or reset device.
32	TEST1	In	1.8-3.3v I/O tolerance	Test pin. Connect a 100kΩ resistor to ground.
33	NC	NC		No Connect
34	PMB_VREF			Reference Voltage for MICBIAS. Connect via ~0.47uF capacitor to ground.
35	VDD_A	POWER	3.3V	Analog power supply. Connect to 3.3V power supply.
36	PMIC_BIAS	Out	0.9 * VDD_A	Analog Output Mic Bias Voltage supply.
37	VDD_C	POWER	1.2 V is generated by internal LDO	Connect this pin via 1µF capacitor to ground.
38	VSS_A	GND	0V	Analog Ground for CODEC, to PCB ground plane.
39	MIC0_P	In	2.83 Vpp	Analog Primary Mic (+) input.
40	MIC0_N	In		Analog Primary Mic (-) input.
41	MIC1_P	In	2.83 Vpp	Analog Secondary Mic (+) input.
42	MIC1_N	In		Analog Secondary Mic (-) input.
43	LINE_IN_P	In	2.83 Vpp	Analog Line_in (+) input.
44	LINE_IN_N	In		Analog Line_in (-) input.
45	VSS_A	GND		Analog Ground, connect to PCB ground plane.
46	VREF		Reference Voltage for DAC	Connect a 1µF capacitor to ground.
47	LINE_OUT_P	Out	2.4 Vpp	Analog Analog Line Out (+).
48	SPK_OUT_P	Out	2.4 Vpp	Analog Speaker output (+) – to external power amplifier input.

Notes:

(1) Active high: when Test 2 is "high", Voice Processor will bypass signals and Voice Processor will resume on high to low transition.

(2) This separate voltage source is designed to adapt to the level of the digital I/O interface voltage level; it can either be 1.8V, or 3.3V, depending on the interface logic level depending on the variant of the FM1288

7. Package Dimensions (LQFP)

48 Pin LQFP Package Outline (Top View)
LQFP : 7x7x1.4mm (0.5 pitch pod)

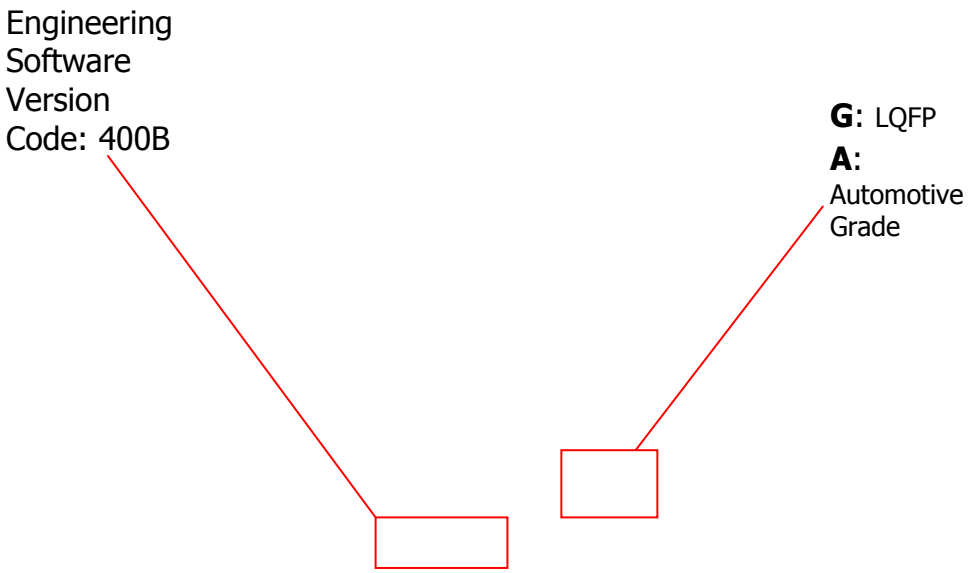

Figure 28: 48-pin LQFP Package Drawing and Dimensions

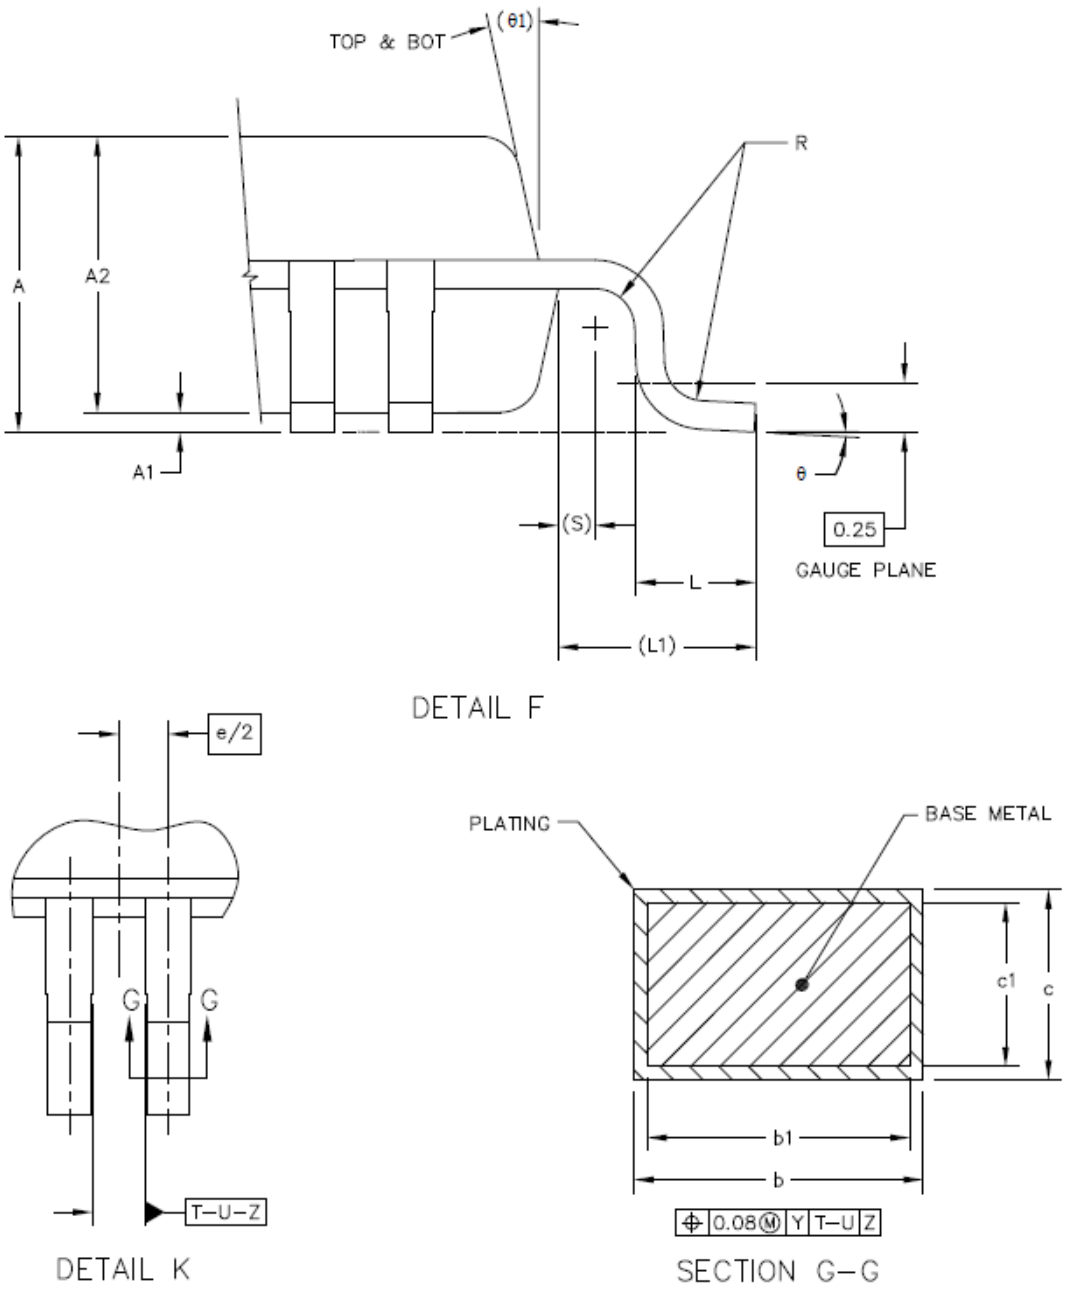

Figure 29: 48-pin LQFP Package Side View

NOTES:

1. DIMENSIONS ARE IN MILLIMETERS.
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M–1994.
3. DATUM PLANE H IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUM T, U AND Z TO BE DETERMINED AT DATUM PLANE H.
5. DIMENSIONS D AND E TO BE DETERMINED AT SEATING PLANE Y.
6. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 PER SIDE. DIMENSIONS D1 AND E1 DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE H.
7. DIMENSION b DOES NOT INCLUDE DAM BAR PROTRUSION. DAM BAR PROTRUSION SHALL NOT CAUSE THE b DIMENSION TO EXCEED 0.35.
8. MINIMUM SOLDER PLATE THICKNESS SHALL BE 0.0076.
9. EXACT SHAPE OF EACH CORNER IS OPTIONAL.

DIM	MIN	MAX	DIM	MIN	MAX	DIM	MIN	MAX
A	1.4	1.6	L1	1 REF				
A1	0.05	0.15	R	0.15	0.25			
A2	1.35	1.45	S	0.2 REF				
b	0.17	0.27	θ	1°	5°			
b1	0.17	0.23	θ1	12° REF				
c	0.09	0.2						
c1	0.09	0.16						
D	9 BSC							
D1	7 BSC							
e	0.5 BSC							
E	9 BSC							
E1	7 BSC							
L	0.5	0.7						

Figure 30: 48-pin LQFP Package on FM-1288

8. Ordering Information

Table 27: Available Packages and Temperature Grade

Package	Green	Temperature Grade	Ordering Code
48-pin LQFP	Yes	Extended	FM1288-GE-400B
48-pin LQFP	Yes	Automotive	FM1288-GA1-400B
48-pin LQFP	Yes	Extended	FM1288-GE-410
48-pin LQFP	Yes	Automotive	FM1288-GA1-410

Note:

Consumer = 0 to 70ºC
Extended = -20 to 70ºC
Automotive = -40 to 85ºC

Note that all new customer orders should be **FM1288-GE-410** or **FM1288-GA1-410** which are the respective updated versions of **FM1288-GE-400B** or **FM1288-GA1-400B**, unless there is a special reason to do otherwise.

Appendix I: Required External Components for Operation

Table 28: External Components Recommendations

Microphone Specification

Parameter	Value
Type	Electret Condenser Microphone
Sensitivity	-44 ~ -47 dB (1V/PA)
Operating Voltage	2V (standard)
Impedance	2.2kΩ maximum

External Loudspeaker Amplifier

Parameter	Value
Input Impedance	~ 20kΩ (preferred)

Crystal/Oscillator Specification

Parameter	Value
Operating Frequency	4.096 MHz to 24.576 MHz
Resonant Mode	Parallel
Frequency Tolerance	+/- 30ppm
Frequency Tolerence TC	+/- 50ppm
Operating Temperature Range	-40 to +85 C
Aging per Year	+/- 5ppm / yr
Operating Mode	Fundamental Mode
Crystal Co	25 pF
Crystal Rs (ESR)	< 150 Ω
R_S (external)	1.8 KΩ
CL (external capacitance)	47 pF
Drive Level	27 µW (1.8V), 96 µW (3.3V)

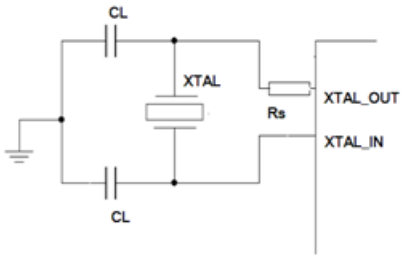

Figure 31: External Crystal/Oscillator as Clock Source

Serial EEPROM (optional)

For standalone application without a host processor, an IIC EEPROM of minimum size 16Kbit (24c16) or larger (24c32, 24c64, etc.) should be used to provide non-volatile storage of reset configuration parameters for the voice processor. The configuration parameters are read by the FM-1288 during power-up or reset boot up.

Please see earlier sections of this document regarding details.

References

I. Terminology

Table 29: Terminology

Term	Definition
ADC	Analog to Digital
AEC	Acoustic Echo Cancellation
Codec	Coder-decoder
DAC	Digital to Analog
DM	Data Memory
DSP	Digital Signal Processor
EEPROM	Electrically Erasable Programmable Read-Only Memory
HFCK	Hands Free Car Kit
IC	Integrated Circuit
IIC	Inter-Integrated Circuit
IIS	Inter-Integrated Circuit Sound
I/O	Input/Output
LQFP	Low Profile Quad Flat Pad
MCU	Micro Controller Unit
MIC	Microphone
MIPS	Million instruction per second
NC	Not Connected
PCM	Pulse Code Modulation
PGA	Programmable Gain Amplification
PM	Program Memory
PND	Portable Navigation Device
RAM	Random Access Memory
ROM	Read Only Memory
SHI	Serial Host Interface
SRAM	Static Random Access Memory
UART	Universal Asynchronous Receiver/ Transmitter
Vpp	Voltage, Peak-to-Peak
XTAL	Crystal

II. Related Documents

Table 30: Related Documents

Fortemedia Technology Documents	Document Location
"FM1288 User Configuration Manual"	Contact Fortemedia Sales