Wired with net labels: labels with the same name are one net. TAPn = connector side of fuse F1nn, CELLn = after it. V− (chip ground) has its own fuse F120.
ADBMS1818 Figure 112, isoSPI filtering per Fig. 104(B). See ../docs/slave−18s−design−basis.md.

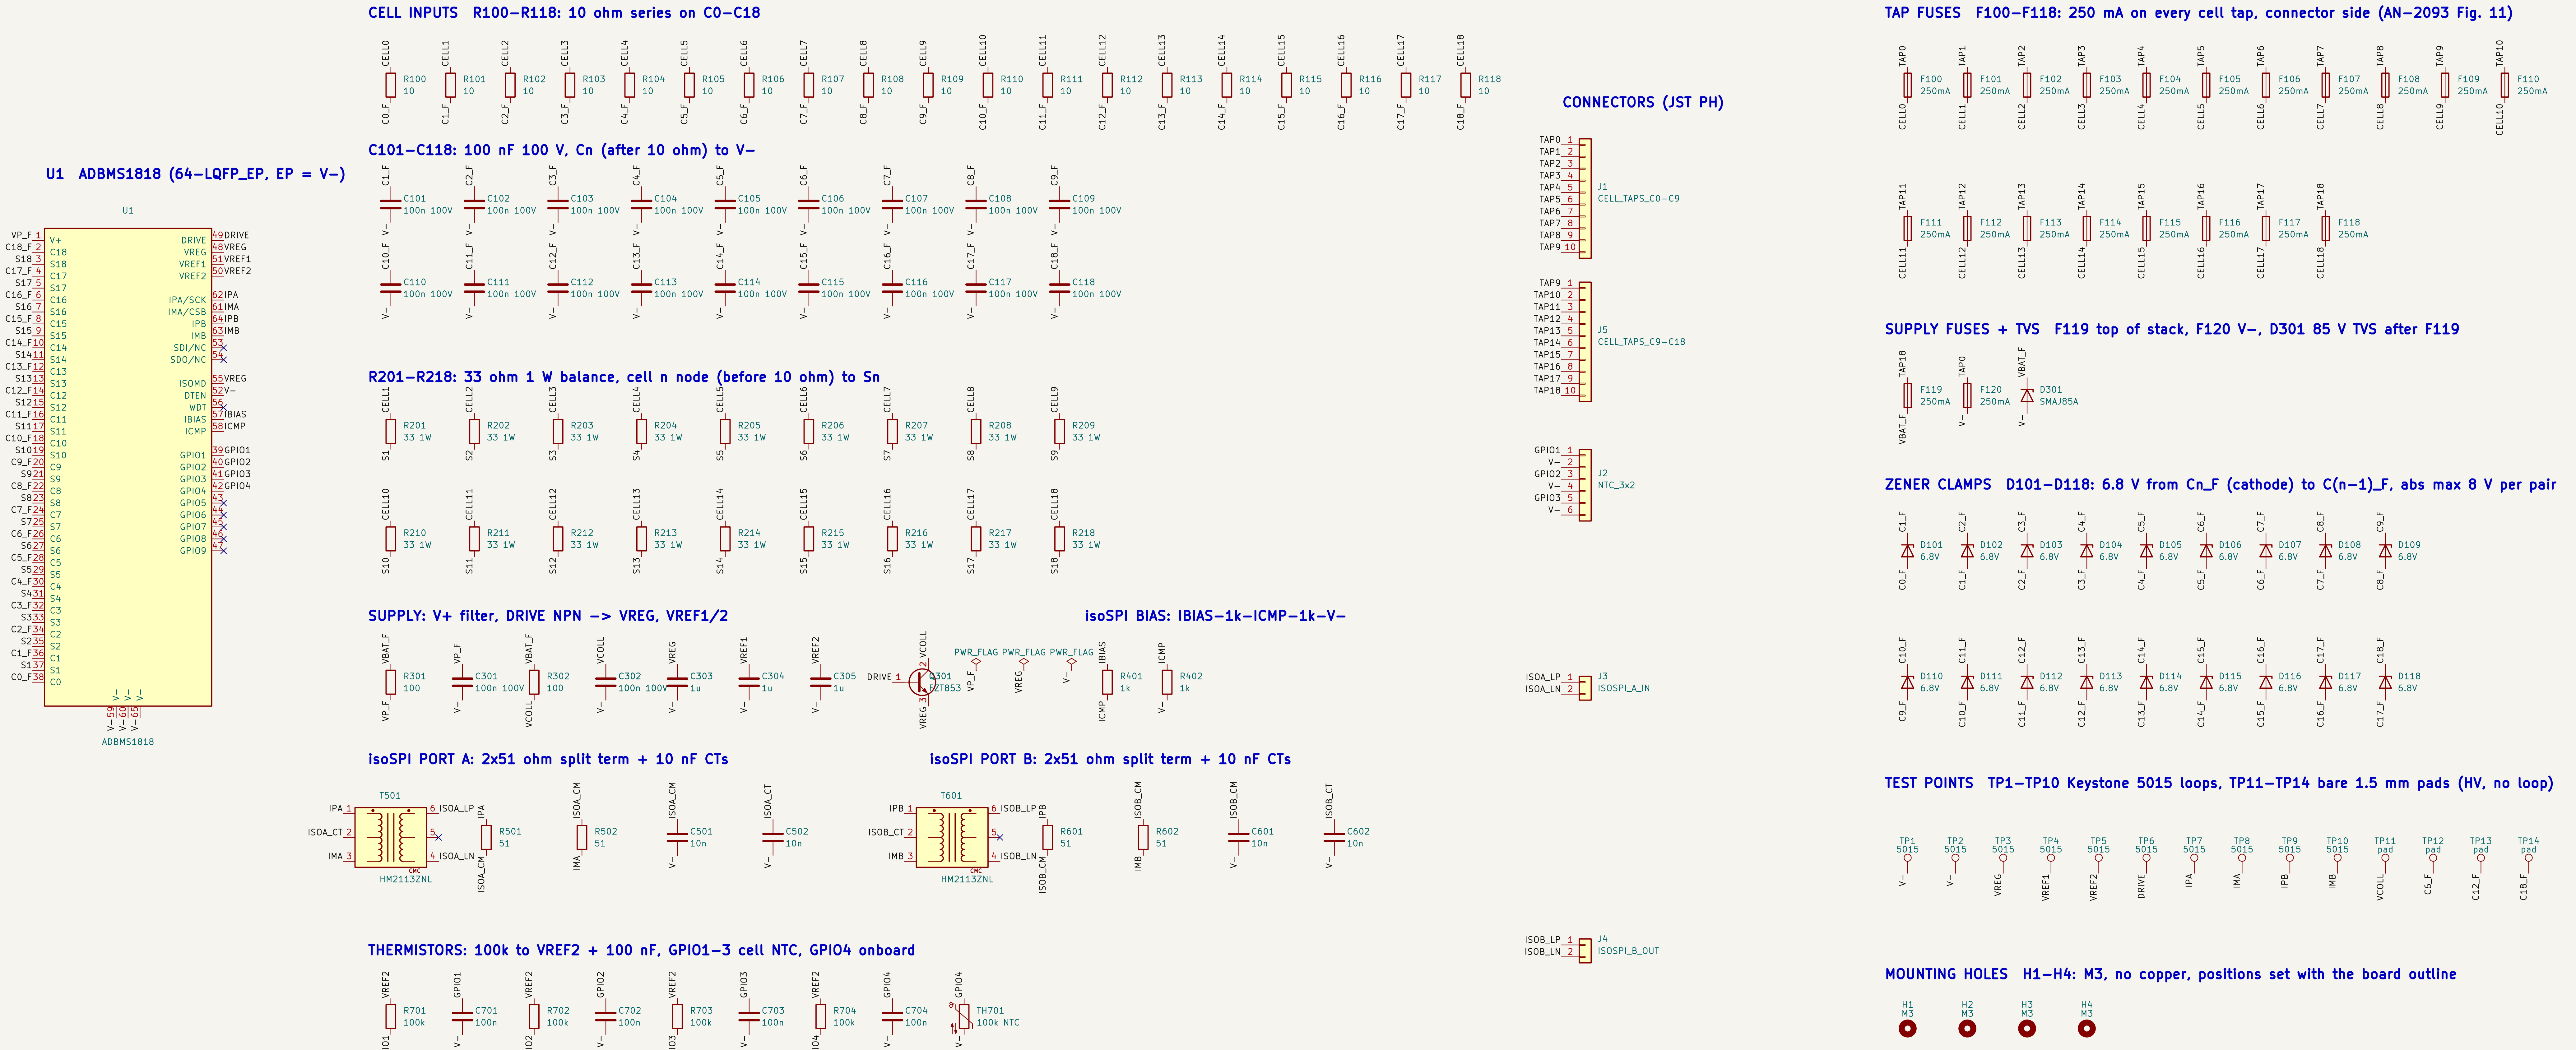

Not for manufacture
Baseline: ADBMS1818 datasheet Figure 112 typical application

Sheet: /
File: adbms1818−slave−18s.kicad_sch

Title: ADBMS1818 18S slave module

Size: User	Date: 2026−11−06	**Rev: 0−draft**
KiCad E.D.A. 10.0.6		Id: 1/1